



Product Manual

TNSR v22.06

© Copyright 2024 Rubicon Communications LLC

Jul 11, 2024

CONTENTS

| | | |
|----------|--|-----------|
| 1 | Introduction | 2 |
| 1.1 | TNSR Secure Networking | 2 |
| 1.2 | TNSR Architecture | 2 |
| 1.3 | Technology Stack | 4 |
| 1.4 | Basic Assumptions | 5 |
| 2 | Supported Platforms | 6 |
| 3 | Installation | 7 |
| 3.1 | Installation Process | 7 |
| 3.2 | Post-Installation Tasks | 11 |
| 4 | Default Behavior | 26 |
| 4.1 | Default Accounts and Passwords | 26 |
| 4.2 | Default TNSR Permissions | 27 |
| 4.3 | Default Allowed Traffic | 27 |
| 4.4 | Default Namespaces | 28 |
| 4.5 | Default Services | 28 |
| 4.6 | Default Routing and VRF Behavior | 28 |
| 5 | Zero-to-Ping: Getting Started | 29 |
| 5.1 | First Login | 29 |
| 5.2 | Interface Configuration | 30 |
| 5.3 | TNSR Interfaces | 32 |
| 5.4 | NAT | 34 |
| 5.5 | DHCP Server | 35 |
| 5.6 | DNS Server | 35 |
| 5.7 | Ping | 36 |
| 5.8 | Save the TNSR Configuration | 37 |
| 5.9 | Next Steps | 38 |
| 6 | Command Line Basics | 39 |
| 6.1 | Working in the TNSR CLI | 39 |
| 6.2 | Finding Help | 40 |
| 6.3 | Starting TNSR | 41 |
| 6.4 | Entering the TNSR CLI | 41 |
| 6.5 | Configuration Database | 43 |
| 6.6 | Configuration Mode | 46 |
| 6.7 | Configuration Backups | 49 |
| 6.8 | Configuration History | 50 |
| 6.9 | Configuration Rollback | 54 |

| | | |
|-----------|--|------------|
| 6.10 | Viewing Status Information | 57 |
| 6.11 | Networking Namespaces | 58 |
| 6.12 | Service Control | 59 |
| 6.13 | Diagnostic Utilities | 61 |
| 6.14 | Basic System Information | 63 |
| 6.15 | Rebooting the Router | 65 |
| 7 | Basic Configuration | 66 |
| 7.1 | Setup Interfaces | 66 |
| 7.2 | Disable Host OS NICs for TNSR | 67 |
| 7.3 | Setup NICs in Dataplane | 68 |
| 7.4 | Setup QAT Compatible Hardware | 72 |
| 7.5 | Remove TNSR NIC for Host Use | 78 |
| 7.6 | Secure Shell (SSH) Server | 81 |
| 8 | Updates and Packages | 82 |
| 8.1 | Generate a Key Pair | 83 |
| 8.2 | Generate a Certificate Signing Request | 83 |
| 8.3 | Submit the Certificate Signing Request | 85 |
| 8.4 | Install the certificate | 87 |
| 8.5 | Package Management | 88 |
| 8.6 | Updating TNSR | 89 |
| 9 | Interfaces | 94 |
| 9.1 | Locate Interfaces | 94 |
| 9.2 | Configure Interfaces | 95 |
| 9.3 | Types of Interfaces | 100 |
| 10 | Static Routing | 126 |
| 10.1 | Virtual Routing and Forwarding | 126 |
| 10.2 | Neighbors | 129 |
| 10.3 | Viewing Routes | 130 |
| 10.4 | Managing Routes | 132 |
| 10.5 | Default Route | 135 |
| 11 | Dynamic Routing | 136 |
| 11.1 | Dynamic Routing Manager | 136 |
| 11.2 | Border Gateway Protocol | 147 |
| 11.3 | Open Shortest Path First v2 (OSPF) | 168 |
| 11.4 | Open Shortest Path First v3 (OSPF6) | 185 |
| 11.5 | Routing Information Protocol (RIP) | 196 |
| 11.6 | Dynamic Routing Protocol Lists | 204 |
| 12 | Virtual Router Redundancy Protocol | 205 |
| 12.1 | VRRP Compatibility | 206 |
| 12.2 | VRRP Example | 208 |
| 12.3 | VRRP Configuration | 212 |
| 12.4 | VRRP Status | 214 |
| 13 | Access Lists | 216 |
| 13.1 | Standard ACLs | 216 |
| 13.2 | MACIP ACLs | 219 |
| 13.3 | Viewing ACL and MACIP Information | 220 |
| 13.4 | ACL and NAT Interaction | 221 |
| 13.5 | Host ACLs | 222 |

| | |
|--|------------|
| 14 IPsec | 227 |
| 14.1 Required Information | 227 |
| 14.2 IPsec Example | 228 |
| 14.3 IPsec Configuration | 230 |
| 14.4 IPsec Status Information | 242 |
| 14.5 IPsec Cryptographic Acceleration | 243 |
| 15 WireGuard | 245 |
| 15.1 Design Considerations | 245 |
| 15.2 Required Information | 246 |
| 15.3 WireGuard Configuration Settings | 248 |
| 15.4 WireGuard Site-to-Site Example | 250 |
| 15.5 WireGuard Status | 253 |
| 15.6 WireGuard Overview | 254 |
| 16 Tunnel Next Hops | 256 |
| 16.1 Tunnel Next Hop Configuration | 256 |
| 16.2 Example | 256 |
| 16.3 Tunnel Next Hop Status | 257 |
| 17 Network Address Translation | 258 |
| 17.1 NAT Modes | 258 |
| 17.2 NAT Global Options | 259 |
| 17.3 NAT Pool Addresses | 262 |
| 17.4 Outbound NAT | 263 |
| 17.5 Static NAT | 264 |
| 17.6 NAT Status | 266 |
| 17.7 NAT Examples | 268 |
| 18 MAP (Mapping of Address and Port) | 273 |
| 18.1 MAP Configuration | 273 |
| 18.2 MAP Parameters | 276 |
| 18.3 MAP Example | 277 |
| 18.4 MAP Types | 279 |
| 19 Dynamic Host Configuration Protocol | 280 |
| 19.1 DHCP Configuration | 280 |
| 19.2 DHCP Logging | 287 |
| 19.3 DHCP Service Control and Status | 289 |
| 19.4 DHCP Service Example | 290 |
| 20 DNS Resolver | 292 |
| 20.1 DNS Resolver Configuration | 292 |
| 20.2 DNS Resolver Service Control and Status | 299 |
| 20.3 DNS Resolver Examples | 300 |
| 21 Network Time Protocol | 302 |
| 21.1 NTP Configuration | 302 |
| 21.2 NTP Service Control and Status | 306 |
| 21.3 NTP Configuration Examples | 308 |
| 21.4 NTP Best Practices | 309 |
| 22 Link Layer Discovery Protocol | 310 |
| 22.1 Configuring the LLDP Service | 310 |
| 22.2 LLDP Status | 311 |

| | | |
|-----------|--|------------|
| 23 | Public Key Infrastructure | 312 |
| 23.1 | Key Management | 312 |
| 23.2 | Certificate Signing Request Management | 314 |
| 23.3 | Certificate Management | 317 |
| 23.4 | Certificate Authority Management | 318 |
| 24 | Bidirectional Forwarding Detection | 322 |
| 24.1 | BFD Sessions | 322 |
| 24.2 | BFD Session Authentication | 324 |
| 24.3 | BFD Example | 326 |
| 25 | User Management | 331 |
| 25.1 | User Configuration | 331 |
| 25.2 | Authentication Methods | 331 |
| 26 | NETCONF Access Control Model (NACM) | 333 |
| 26.1 | NACM Example | 333 |
| 26.2 | NACM Basics | 334 |
| 26.3 | NACM Authorization | 334 |
| 26.4 | Managing NACM Rules | 336 |
| 26.5 | View NACM Configuration | 339 |
| 26.6 | Regaining Access if Locked Out by NACM | 341 |
| 26.7 | NACM Defaults | 342 |
| 27 | RESTCONF Server | 343 |
| 27.1 | RESTCONF Server Configuration | 343 |
| 27.2 | TLS Encryption | 344 |
| 27.3 | Authentication | 345 |
| 28 | Monitoring | 347 |
| 28.1 | Monitoring Interfaces | 347 |
| 28.2 | Simple Network Management Protocol | 351 |
| 28.3 | Prometheus Exporter | 356 |
| 28.4 | IPFIX Exporter | 359 |
| 29 | TNSR Configuration Example Recipes | 363 |
| 29.1 | RESTCONF Service Setup with Certificate-Based Authentication and NACM | 363 |
| 29.2 | TNSR IPsec Hub for pfSense software nodes | 374 |
| 29.3 | Edge Router Speaking eBGP with Static Redistribution for IPv4 And IPv6 | 395 |
| 29.4 | Service Provider Route Reflectors and Client for iBGP IPv4 | 400 |
| 29.5 | LAN + WAN with NAT (Basic SOHO Router Including DHCP and DNS Resolver) | 408 |
| 29.6 | Using Access Control Lists (ACLs) | 411 |
| 29.7 | Inter-VLAN Routing | 414 |
| 29.8 | GRE ERSPAN Example Use Case | 418 |
| 29.9 | OSPF Router with Multiple Areas and Summarization | 420 |
| 29.10 | WireGuard VPN with OSPF Dynamic Routing | 424 |
| 29.11 | TNSR Remote Office With Existing IPsec Hub | 429 |
| 29.12 | VRRP with Outside NAT | 446 |
| 29.13 | Enabling the Serial Console | 450 |
| 29.14 | Changing Credentials and Keys | 451 |
| 30 | Advanced Configuration | 458 |
| 30.1 | Dataplane Configuration | 458 |
| 30.2 | Host Memory Management Configuration | 467 |
| 30.3 | IP Reassembly | 468 |

| | | |
|-----------|--|------------|
| 31 | Troubleshooting | 471 |
| 31.1 | Memory Usage and Tuning | 471 |
| 31.2 | Services do not receive traffic on an interface with NAT enabled | 478 |
| 31.3 | NAT session limits / “Create NAT session failed” error | 478 |
| 31.4 | ACL rules do not match NAT traffic as expected | 478 |
| 31.5 | ACL entries do not have any effect on bridge loopback (BVI) interfaces | 478 |
| 31.6 | Some Traffic to the host OS management interface is dropped | 478 |
| 31.7 | Unrecognized routes in a routing table | 479 |
| 31.8 | OSPF Neighbors Stuck in ExStart State | 479 |
| 31.9 | Large packets fail to pass over IPsec | 479 |
| 31.10 | Associating TNSR Interfaces with Shell Interfaces | 479 |
| 31.11 | Troubleshooting DHCP Client | 480 |
| 31.12 | Locked out by NACM Rules | 480 |
| 31.13 | How to gain access to the root account | 480 |
| 31.14 | IPsec packets are dropped or fail to pass with QAT enabled | 481 |
| 31.15 | Console DMA / PTE Read access Error Messages | 481 |
| 31.16 | Console Messages Obscure Prompts | 481 |
| 31.17 | Console Terminal Size | 481 |
| 31.18 | Dataplane Packet Tracing | 482 |
| 31.19 | Capturing Packets on Dataplane Interfaces | 483 |
| 31.20 | RESTCONF API Errors | 484 |
| 31.21 | Diagnosing Service Issues | 485 |
| 31.22 | Debugging TNSR | 485 |
| 31.23 | Diagnostic Information for Support | 487 |
| 32 | Commands | 488 |
| 32.1 | Mode List | 488 |
| 32.2 | Master Mode Commands | 490 |
| 32.3 | Config Mode Commands | 491 |
| 32.4 | Show Commands in Both Master and Config Modes | 495 |
| 32.5 | Access Control List Modes | 497 |
| 32.6 | MACIP ACL Mode | 498 |
| 32.7 | GRE Mode | 499 |
| 32.8 | Interface Mode | 499 |
| 32.9 | Loopback Mode | 501 |
| 32.10 | Bridge Mode | 501 |
| 32.11 | NAT Commands in Configure Mode | 502 |
| 32.12 | Tap Mode | 502 |
| 32.13 | BFD Key Mode | 503 |
| 32.14 | BFD Mode | 503 |
| 32.15 | Host Interface Mode | 504 |
| 32.16 | IPsec Tunnel Mode | 505 |
| 32.17 | IKE mode | 505 |
| 32.18 | IKE Peer Authentication Mode | 506 |
| 32.19 | IKE Peer Authentication Round Mode | 506 |
| 32.20 | IKE Child SA Mode | 507 |
| 32.21 | IKE Child SA Proposal Mode | 507 |
| 32.22 | IKE Peer Identity Mode | 508 |
| 32.23 | IKE Proposal Mode | 508 |
| 32.24 | Map Mode | 509 |
| 32.25 | Map Parameters Mode | 509 |
| 32.26 | memif Mode | 510 |
| 32.27 | Dynamic Routing Access List Mode | 510 |
| 32.28 | Dynamic Routing Prefix List Mode | 511 |

| | |
|--|-----|
| 32.29 Dynamic Routing Route Map Mode | 511 |
| 32.30 Dynamic Routing BGP Mode | 513 |
| 32.31 Dynamic Routing BGP Server Mode | 514 |
| 32.32 Dynamic Routing BGP Neighbor Mode | 515 |
| 32.33 Dynamic Routing BGP Address Family Mode | 515 |
| 32.34 Dynamic Routing BGP Address Family Neighbor Mode | 517 |
| 32.35 Dynamic Routing BGP Community List Mode | 518 |
| 32.36 Dynamic Routing BGP AS Path Mode | 518 |
| 32.37 Dynamic Routing OSPF Mode | 519 |
| 32.38 Dynamic Routing OSPF Server Mode | 519 |
| 32.39 Dynamic Routing OSPF Interface Mode | 520 |
| 32.40 Dynamic Routing OSPF Area Mode | 521 |
| 32.41 Dynamic Routing OSPF6 Mode | 522 |
| 32.42 Dynamic Routing OSPF6 Server Mode | 522 |
| 32.43 Dynamic Routing OSPF6 Interface Mode | 523 |
| 32.44 Dynamic Routing OSPF6 Area Mode | 524 |
| 32.45 Dynamic Routing RIP Mode | 524 |
| 32.46 Dynamic Routing RIP Server Mode | 524 |
| 32.47 Dynamic Routing RIP Interface Mode | 525 |
| 32.48 Dynamic Routing RIP Key Chain Mode | 526 |
| 32.49 Dynamic Routing Manager Mode | 526 |
| 32.50 Route Table Mode | 527 |
| 32.51 Route Table Next Hop Mode | 527 |
| 32.52 SPAN Mode | 528 |
| 32.53 VXLAN Mode | 528 |
| 32.54 User Authentication Configuration Mode | 529 |
| 32.55 NTP Configuration Mode | 529 |
| 32.56 NTP Restrict Mode | 530 |
| 32.57 NTP Upstream Server Mode | 530 |
| 32.58 NACM Group Mode | 531 |
| 32.59 NACM Rule-list Mode | 531 |
| 32.60 NACM Rule Mode | 532 |
| 32.61 DHCP IPv4 Server Config Mode | 532 |
| 32.62 DHCP4 Subnet4 Mode | 533 |
| 32.63 DHCP4 Subnet4 Pool Mode | 533 |
| 32.64 DHCP4 Subnet4 Reservation Mode | 534 |
| 32.65 Kea DHCP4, Subnet4, Pool, or Reservation Option Mode | 534 |
| 32.66 Kea DHCP4 Option Definition Mode | 535 |
| 32.67 DHCP4 Log Mode | 535 |
| 32.68 DHCP4 Log Output Mode | 536 |
| 32.69 Unbound Server Mode | 536 |
| 32.70 Unbound Forward-Zone Mode | 537 |
| 32.71 Subif Mode | 538 |
| 32.72 Bond Mode | 538 |
| 32.73 Host ACL Mode | 539 |
| 32.74 Host ACL Rule Mode | 539 |
| 32.75 VRRP Mode | 540 |
| 32.76 DNS Resolver Mode | 541 |
| 32.77 IPFIX Exporter Mode | 541 |
| 32.78 IPFIX Observation Point Mode | 542 |
| 32.79 IPFIX Selection Process Mode | 542 |
| 32.80 RESTCONF mode | 543 |
| 32.81 WireGuard Mode | 543 |
| 32.82 WireGuard Peer Mode | 543 |

| | |
|---|------------|
| 32.83 Tunnel Next Hop Mode | 544 |
| 33 API Endpoints | 545 |
| 33.1 YANG Data Models | 545 |
| 33.2 RESTCONF API | 545 |
| 34 Netgate TNSR Releases | 546 |
| 34.1 TNSR 22.06 Release Notes | 547 |
| 34.2 TNSR 22.02 Release Notes | 558 |
| 34.3 TNSR 21.07.1 Release Notes | 571 |
| 34.4 TNSR 21.07 Release Notes | 579 |
| 34.5 TNSR 21.03.1 Release Notes | 588 |
| 34.6 TNSR 21.03 Release Notes | 595 |
| 34.7 TNSR 20.10.1 Release Notes | 605 |
| 34.8 TNSR 20.10 Release Notes | 611 |
| 34.9 TNSR 20.08 Release Notes | 620 |
| 34.10 TNSR 20.02.2 Release Notes | 636 |
| 34.11 TNSR 20.02.1 Release Notes | 636 |
| 34.12 TNSR 20.02 Release Notes | 637 |
| 34.13 TNSR 19.12 Release Notes | 647 |
| 34.14 TNSR 19.08 Release Notes | 657 |
| 34.15 TNSR 19.05 Release Notes | 664 |
| 34.16 TNSR 19.02.1 Release Notes | 671 |
| 34.17 TNSR 19.02 Release Notes | 675 |
| 34.18 TNSR 18.11 Release Notes | 680 |
| 34.19 TNSR 18.08 Release Notes | 684 |
| 34.20 TNSR 18.05 Release Notes | 688 |
| 34.21 TNSR 0.1.0 Release Notes | 690 |
| 35 Licensing | 692 |
| 35.1 Apache 2.0 License | 692 |
| 35.2 BSD 3-Clause License | 696 |
| 35.3 GPLv2.0 License | 697 |
| 35.4 libgit2 GPLv2 License | 703 |
| 35.5 LGPLv2.1 License | 711 |
| 35.6 MIT License | 720 |
| 35.7 Mozilla Public License 2.0 (MPL-2.0) | 721 |
| 35.8 Net SNMP License | 728 |
| 35.9 NTP License | 734 |
| 35.10 Joint OpenSSL and SSLeay License | 735 |
| 36 Glossary of Terms | 739 |
| Index | 742 |

This documentation has all the details needed to fully configure TNSR, from the basics all the way to the complexities of implementing different applications. For quotes, updates, and more information about TNSR, please visit tnsr.com or [contact TNSR sales](#).

INTRODUCTION

TNSR is an open-source based packet processing platform that delivers superior secure networking solution performance, manageability, and services flexibility. TNSR can scale packet processing from 1 to 10 to 100 Gbps, even 1 Tbps and beyond on commercial-off-the-shelf (COTS) hardware - enabling routing, firewall, VPN and other secure networking applications to be delivered for a fraction of the cost of legacy brands. TNSR features a RESTCONF API - enabling multiple instances to be orchestration managed - as well as a CLI for single instance management.

1.1 TNSR Secure Networking

TNSR is a full-featured software solution designed to provide secure networking from 1 Gbps to 400 Gbps. TNSR is a viable option for users with moderate bandwidth needs to the demanding requirements of enterprise and service providers.

Each licensed instance comes bundled with [TNSR Technical Assistance Center](#) (TAC) from the 24/7 world-wide team of support engineers at Netgate.


Visit tnsr.com for details on TNSR availability and pricing.

1.2 TNSR Architecture


TNSR runs on a Linux host operating system. Initial configuration of TNSR includes installing associated services and configuring network interfaces. It is important to note that network interfaces can be managed by the host OS or by TNSR, but not by both. In other words, once a network interface is assigned to TNSR, it is no longer available - or even visible - to the host OS.

A little background. TNSR is the result of Netgate development, using many open source technologies to create a product that can be supported and easily implemented in production environments.

Without TNSR, Linux systems use drivers to plumb the connections from hardware interfaces (NICs) to the OS kernel. The Linux kernel then handles all I/O between these NICs. The kernel also handles all other I/O tasks, as well as memory and process management.

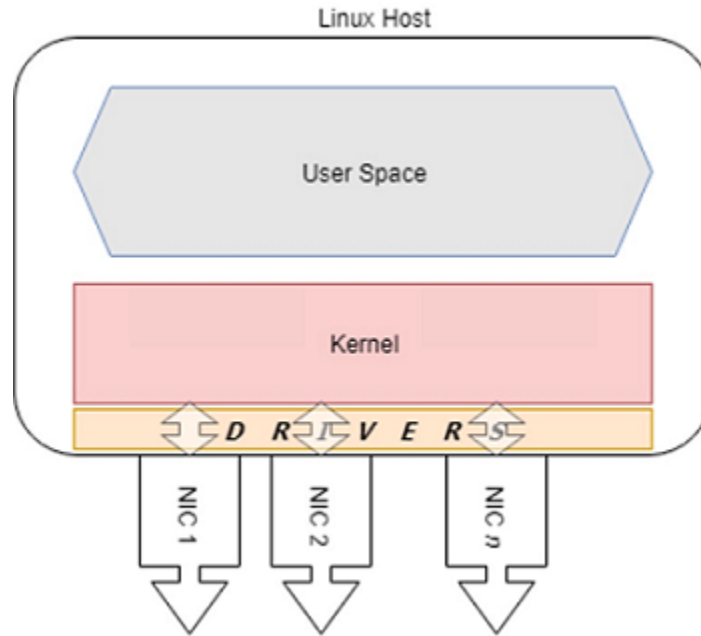

In high I/O situations, the kernel can be tasked with servicing millions of requests per second. TNSR uses two open source technologies to simplify this problem and service terabits of data in user space. Data Plane Development Kit (DPDK) bypasses the kernel, delivering network traffic directly to user space, and Vector Packet Processing (VPP) accelerates traffic processing.

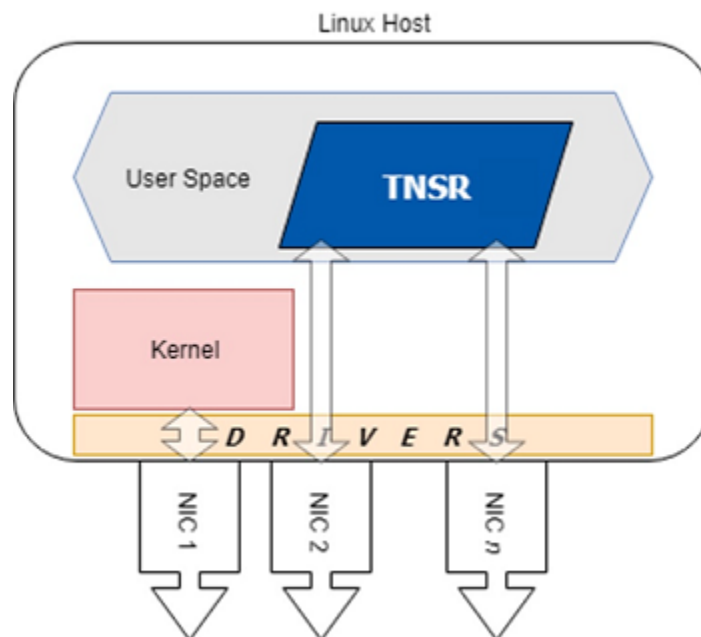

In practical terms, this means that once a NIC is assigned to TNSR, **that NIC is attached to** a fast data plane, but it is no longer available to the host OS. All management - including configuration, troubleshooting and update - of TNSR is performed either at the console or via RESTCONF. In cloud or virtual environments, console access may be available, but the recommended configuration is still to dedicate a host OS interface for RESTCONF API access.

The recommended configuration of a TNSR system includes one host NIC for the host OS and all other NICs assigned to TNSR.

This is important and bears repeating:

- The host OS cannot access NICs assigned to TNSR
- In order to manage TNSR, administrators must be able to connect to the console

The host OS and TNSR use separate network namespaces to isolate their networking functions. Services on TNSR can run in the host OS namespace, the dataplane namespace, or both, depending on the nature of the service.

See also:

See [Networking Namespaces](#) for more details.

Additional isolation is possible inside the dataplane using Virtual Routing and Forwarding (VRF). VRF sets up isolated L3 domains with alternate routing tables for specific interfaces and dynamic routing purposes.

See also:

See [Virtual Routing and Forwarding](#) for more details.

1.3 Technology Stack

TNSR is designed and built from the ground up, using open source software projects including:

- [Vector Packet Processing](#) (VPP)
- [Data Plane Developer Kit](#) (DPDK)
- [YANG](#) for data modeling
- [Clixon](#) for system management
 - Command Line Interface (CLI)
 - [RESTCONF](#) for REST API configuration served by [nginx](#)
- [FRR](#) for routing protocols
- [strongSwan](#) for IPsec key management
- [Kea](#) for DHCP services
- [net-snmp](#) for SNMP
- [ntp.org](#) daemon for NTP
- [Unbound](#) for DNS
- [Ubuntu](#) as the base operating system

See also:

What is Vector Packet Processing? Vector processing handles more than one packet at a time, as opposed to scalar processing which handles packets individually. The vector approach fixes problems that scalar processing has with cache efficiency, read latency, and issues related to stack depth/misses.

For technical details on how VPP accomplishes this feat, see the [VPP Wiki](#).

1.4 Basic Assumptions

This documentation assumes the reader has moderate to advanced networking knowledge and some familiarity with the Ubuntu Linux distribution.

SUPPORTED PLATFORMS

There are multiple types of [Supported Platforms](#) upon which TNSR can operate successfully.

TNSR software is available pre-installed on Netgate hardware or as a Bare Metal Image (BMI) for use on Commercial Off the Shelf (COTS) hardware or in virtual environments. For quotes, updates, and more information about TNSR, please visit tnsr.com or contact [TNSR sales](#).

Documented Platforms

INSTALLATION

Use the following instructions to install TNSR 22.06 from an ISO image. Ensure that the target hardware meets the minimum specifications for a [TNSR Supported Platform](#).

Note: These instructions have changed in TNSR 22.02 as the base OS for new installations is now Ubuntu.

3.1 Installation Process

1. Obtain the TNSR .iso image file from Netgate®.
2. Write the .iso image to bootable media (DVD or USB drive) for hardware installations, or copy the .iso image to a location readable by the hypervisor for virtual machine installations.
3. Connect to the system or VM console.

Note: The installer supports both VGA and serial console output, with VGA as the default.

4. Check the [TNSR Supported Platform](#) documentation for notes about options which must be set before booting, for example in the system BIOS/UEFI, Hypervisor, or VM guest settings.
5. Insert or attach the boot media to the target system.
6. Boot the system using the TNSR image.

Note: If the optical drive or removable media is not set as the primary boot device for the hardware, then use the system boot menu to manually select the boot device.

Warning: The Netgate 5100 must boot the TNSR installation media with UEFI. Use the boot menu to select the UEFI choice for the USB installation media.

7. The installer may display its own boot menu depending on the boot method.
 - Press any key, such as `space`, to stop the automatic boot timer
 - Highlight the **Install TNSR** option and press `Enter`

Note: If the installer does not present this menu, continue ahead to the next step.



Fig. 1: Installation Media Boot Menu

Note: If the console does not display a visual indication of which item is selected, reboot the device and use the BIOS boot selection menu to choose UEFI as the boot method. For example, on the Netgate 5100, press Esc during POST to access this menu, and of the two entries in the menu for the USB drive, choose the line that starts with UEFI:.

8. Wait for the installer to launch. It may take a minute or two for the installer to load and display a selection menu.
9. If the system booted using a serial console, the installer will prompt to continue in either **Rich** or **Basic** mode. The exact choice depends on the serial client (e.g. GNU screen can use rich mode), but when in doubt, **Basic** mode is a safer choice.
10. Once the installer launches it displays a language selection menu
 - Select the language (e.g. **English**) and press Enter
11. Set the keyboard configuration (optional)
 - Select a different **Layout** and/or **Variant** if the default selection is incorrect
 - Select **Done** and press Enter
12. Configure network interfaces

The network setup screen defaults to having all interfaces disabled so TNSR can use them, however, using a host management interface is important so the best practice is to enable one interface for host OS control.

Pick one interface for host management and enable it for host OS control:

- Select the interface
 - Select **Edit IPv4**
 - Set **IPv4 Method** to **Automatic (DHCP)**
 - Alternately, choose **Manual** and enter static address settings
 - Select **Save**
 - Repeat that process for any additional interfaces which should remain under host control
 - Wait for the network configuration to complete (e.g. DHCP may take a few moments to obtain an address on enabled interfaces)
 - Select **Done** and press Enter
 - Enter proxy information if needed, otherwise select **Done** and press Enter
 - Choose an alternate mirror if desired, then select **Done** and press Enter
13. Configure storage
- By default the installer will choose to use the entire disk with **Guided storage configuration**, which is the best practice as it is automated and is the most likely method to result in a correct disk layout.
- Select the appropriate disk (e.g. on Netgate 5100, select the M.2 disk)
 - Adjust other settings if needed
 - Select **Done** and press Enter
 - Review the filesystem layout and make changes if desired
 - Select **Done** and press Enter
 - Select **Continue** and press Enter to confirm overwriting the disk

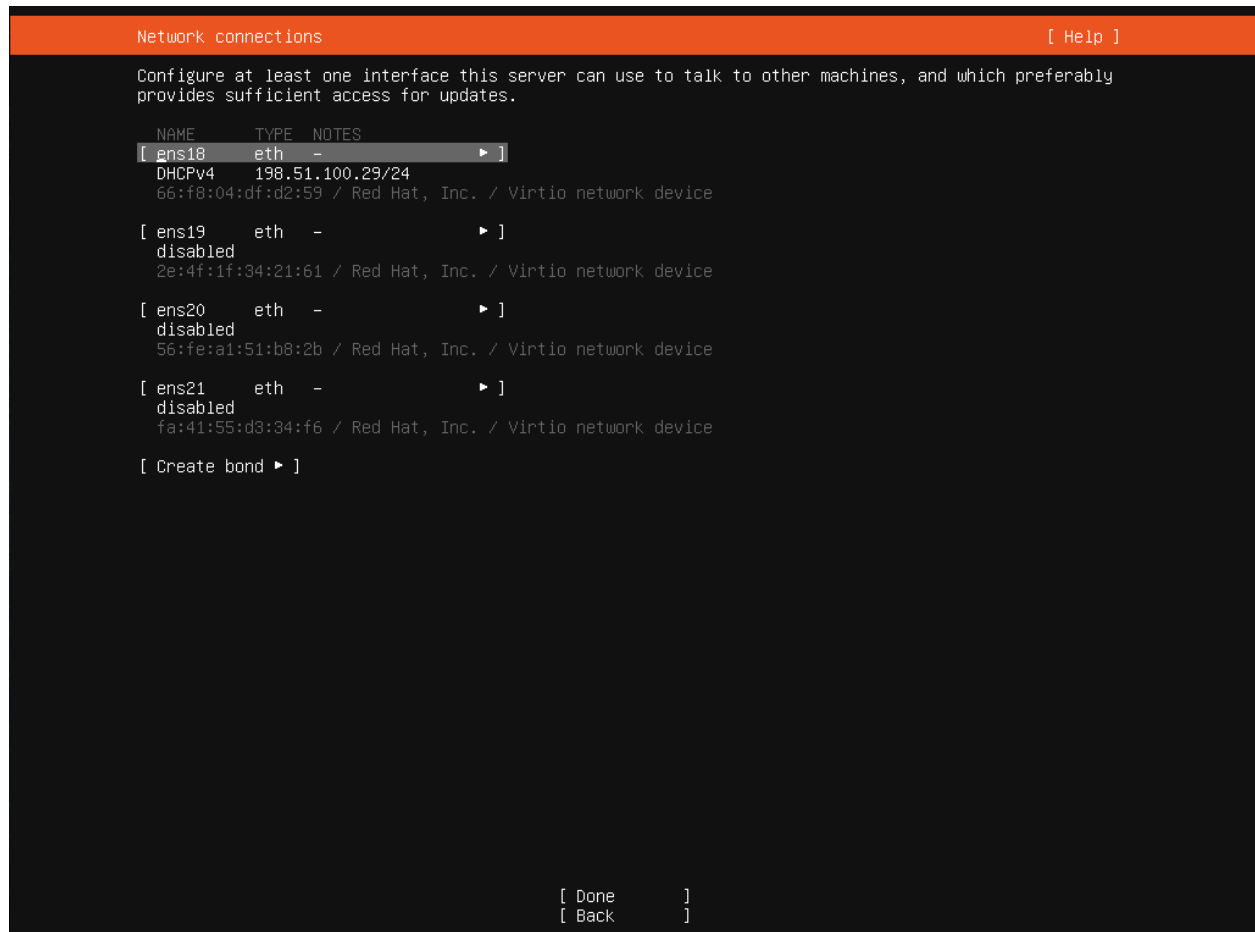


Fig. 2: Network configuration screen with one management interface

See also:

See *Installing TNSR Using Software RAID* for information on installing to multiple disks using software RAID.

14. Profile setup

This screen configures the first user for the system, which is also an administrator. This is used for host management and is separate from the default `tnsr` user. This screen also sets the system hostname (not domain).

- Enter full name for the user
- Enter the **Hostname** for this router (without domain)
- Enter the username
- Enter and confirm the password for the user
- Select **Done** and press **Enter**

15. Wait for the install to finish, which can take some time to complete as the installer attempts to download and apply any pending updates to Ubuntu along the way.

16. Select **Reboot Now** and press **Enter**

17. Remove the installation media

18. Press **Enter**

Note: Some platforms such as the Netgate 5100 will install correctly but may fail to reboot on their own at the end of the installation process. If this happens, reboot the device by holding in the power button until it turns off then press the button again to turn it back on. Alternately, remove and reapply power to the device.

19. After the system finishes rebooting, log in with the user and password chosen during the installation.

Note: The custom user setup in the installer does not have access to TNSR by default. Login as the `tnsr` user directly or use `sudo -u tnsr clixon_cli` to get into the TNSR CLI, then add this user to the `admin` group in NACM (*NETCONF Access Control Model (NACM)*).

3.2 Post-Installation Tasks

3.2.1 Configure Interfaces

Once the system reboots, network interfaces not configured in the installer will be disabled in the operating system. Depending on the hardware, these interfaces may automatically be enabled in TNSR. If TNSR does not see any interfaces, they will need to be manually configured in TNSR.

See also:

See *Setup NICs in Dataplane* for details.

3.2.2 Check for Updates

Once the Host OS is capable of reaching the Internet, check for updates (*Updating TNSR*) before proceeding. This ensures the security and integrity of the router before TNSR interfaces are exposed to the Internet.

3.2.3 Configure the time zone

The Ubuntu installer does not offer to set the time zone, but it is easy to configure from the shell when the system is running.

Login as the user setup during the installation process and run the following command:

```
$ sudo dpkg-reconfigure tzdata
```

This starts the time zone configuration interface:

- Select the geographic area in which this router resides (e.g. **America**)
- Press **Enter**
- Select a city or region in the same time zone as this router (e.g. **Chicago**)
- Press **Enter**

After selecting a zone, the interface prints the new time zone as well as the current date and time in the new zone as well as UTC.

3.2.4 Hardware-Specific Information

Before continuing on, check the next section for hardware-specific installation guidance. Certain hardware may require additional configuration before it is usable by TNSR.

Hardware Installation

This section includes information about known actions required for certain hardware components to function with TNSR. If this TNSR installation does not include any of the hardware listed here, skip ahead to *Default Behavior*.

Mellanox ConnectX-5 Firmware Requirements

Mellanox ConnectX-5 network interface cards (mlx5) in the MT27800 family are currently shipping with firmware revision 16.26.1040 which is not compatible with TNSR.

The incompatible firmware can be identified by errors in the log (e.g. `sudo vppctl show errors`), such as:

```
net_mlx5: probe of PCI device [PCI ID] aborted after encountering an error: Operation_
↪not supported
```

Or:

```
Interface WAN error -12: Unknown error -12
net_mlx5: Failed to query QP using DevX
net_mlx5: Fail to query port 0 Tx queue 0 QP TIS transport domain
net_mlx5: port 0 Tx queue allocation failed: Cannot allocate memory
Device with port_id=0 already stopped
```

Firmware version 16.24.1000 is compatible with TNSR, and can be manually downgraded using the following procedure.

First, identify the first PCI ID of the card in question. This can be found by looking in the boot logs, the output of a utility such as `lspci`, or similar methods. The ID will take the form of `xx:yy.z`, for example `65:00.0`. The ID will be used in the following set of commands.

Next, download and decompress the appropriate firmware:

```
$ curl -LO http://www.mellanox.com/downloads/firmware/fw-ConnectX5-rel-16_24_1000-  
MCX516A-CCA_Ax-UEFI-14.17.11-FlexBoot-3.5.603.bin.zip  
$ unzip fw-ConnectX5-rel-16_24_1000-MCX516A-CCA_Ax-UEFI-14.17.11-FlexBoot-3.5.603.bin.zip
```

Now install the Mellanox firmware tool and perform the firmware downgrade:

```
$ sudo apt install mstflint  
$ sudo mstconfig q > mst.log  
$ sudo mstfwmanager -d <PCI ID> -u -f -i fw-ConnectX5-rel-16_24_1000-MCX516A-CCA_Ax-UEFI-  
14.17.11-FlexBoot-3.5.603.bin
```

Replace `<PCI ID>` in the last command with the first PCI ID of the card.

With the appropriate firmware loaded on the card, it will no longer produce errors and it will be usable by TNSR.

Warning: Reboot after performing the firmware downgrade to ensure the card is fully reinitialized with the appropriate firmware.

Installing TNSR Using Software RAID

This document describes the process of configuring the TNSR installer to use multiple disks via Linux software RAID. Ubuntu implements Linux Software RAID devices through the `md` (Multiple Devices) device driver.

1. Follow the *Installation Process* until the **Configure Storage** step
2. Select **Custom Storage Layout**
3. Select the first disk and **Use As Boot Device**
4. Select the first disk and **Add GPT Partition**
5. Create a new unformatted partition
 - Leave **Size** blank to use the full disk
 - Set **Format** to **Leave Unformatted**
 - Select **Create**
6. Repeat the previous three steps for the second disk (use as boot device, add GPT partition, create a new unformatted partition)

At this point the disks will each have a new partition and either an EFI partition or a BIOS grub spacer:

7. Select **Create software raid (md)**
 - Set **RAID Level** to **1 (mirrored)**
 - Select **partition 2** on each disk
 - Select **Create**

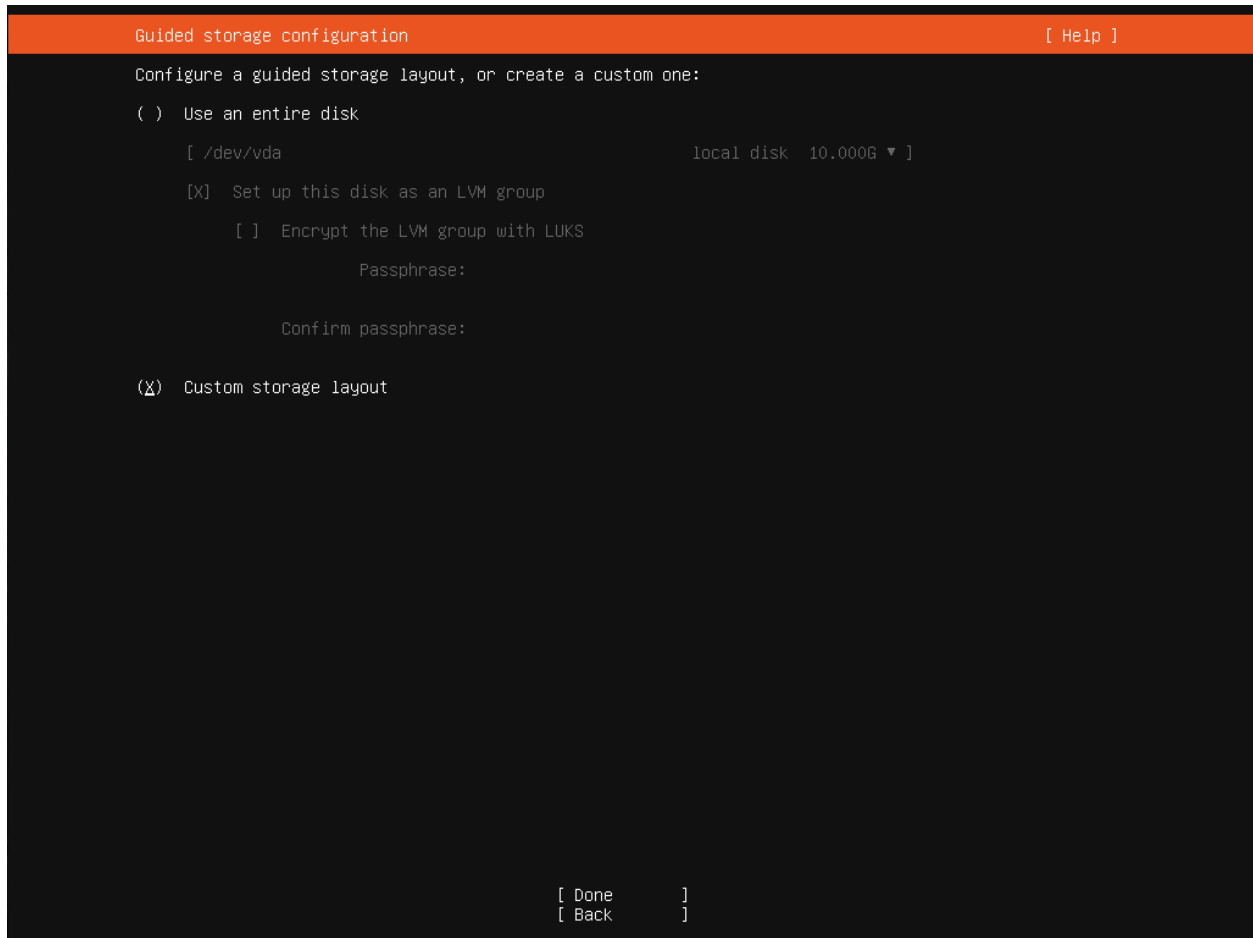


Fig. 3: Custom Storage Layout

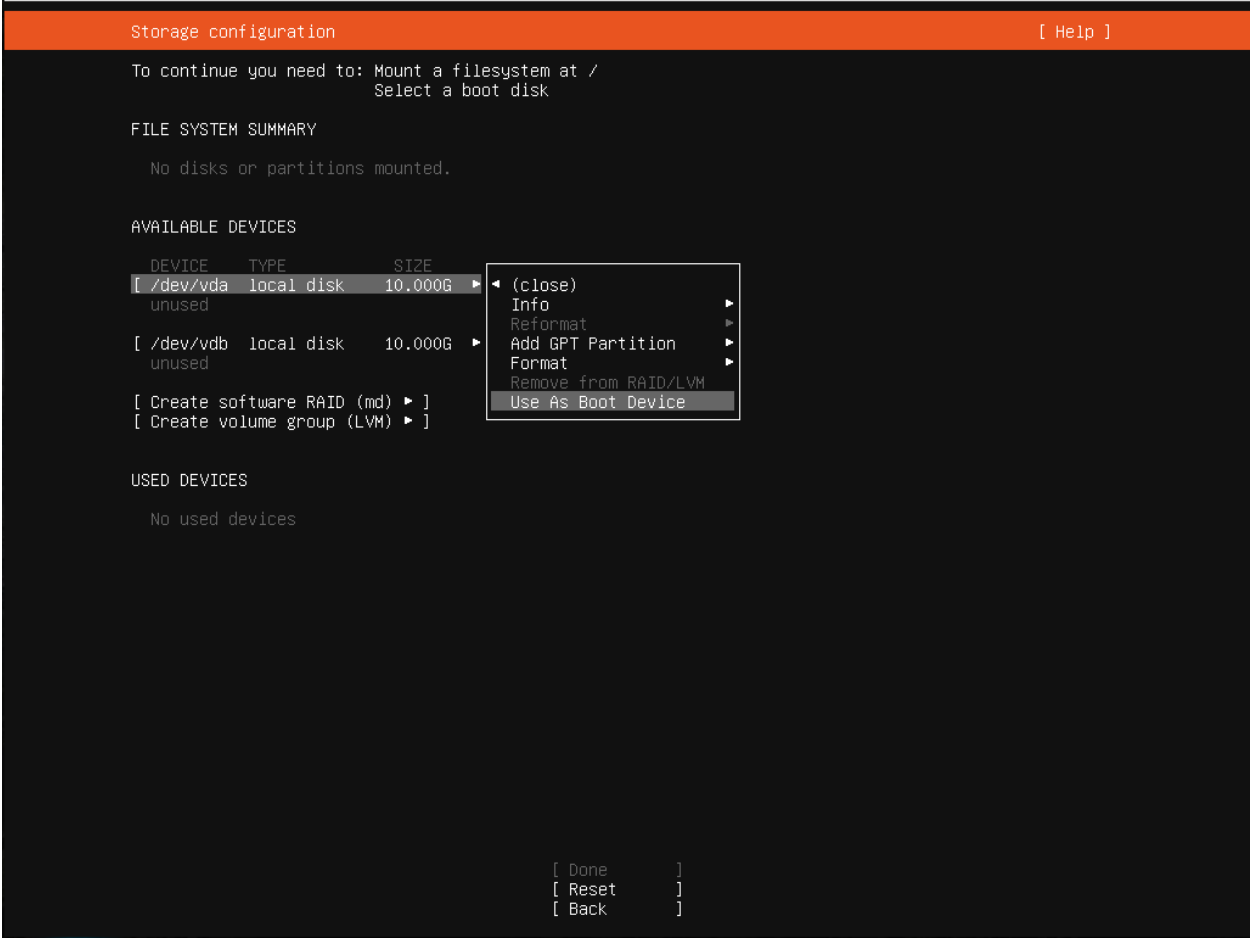


Fig. 4: Use As Boot Device

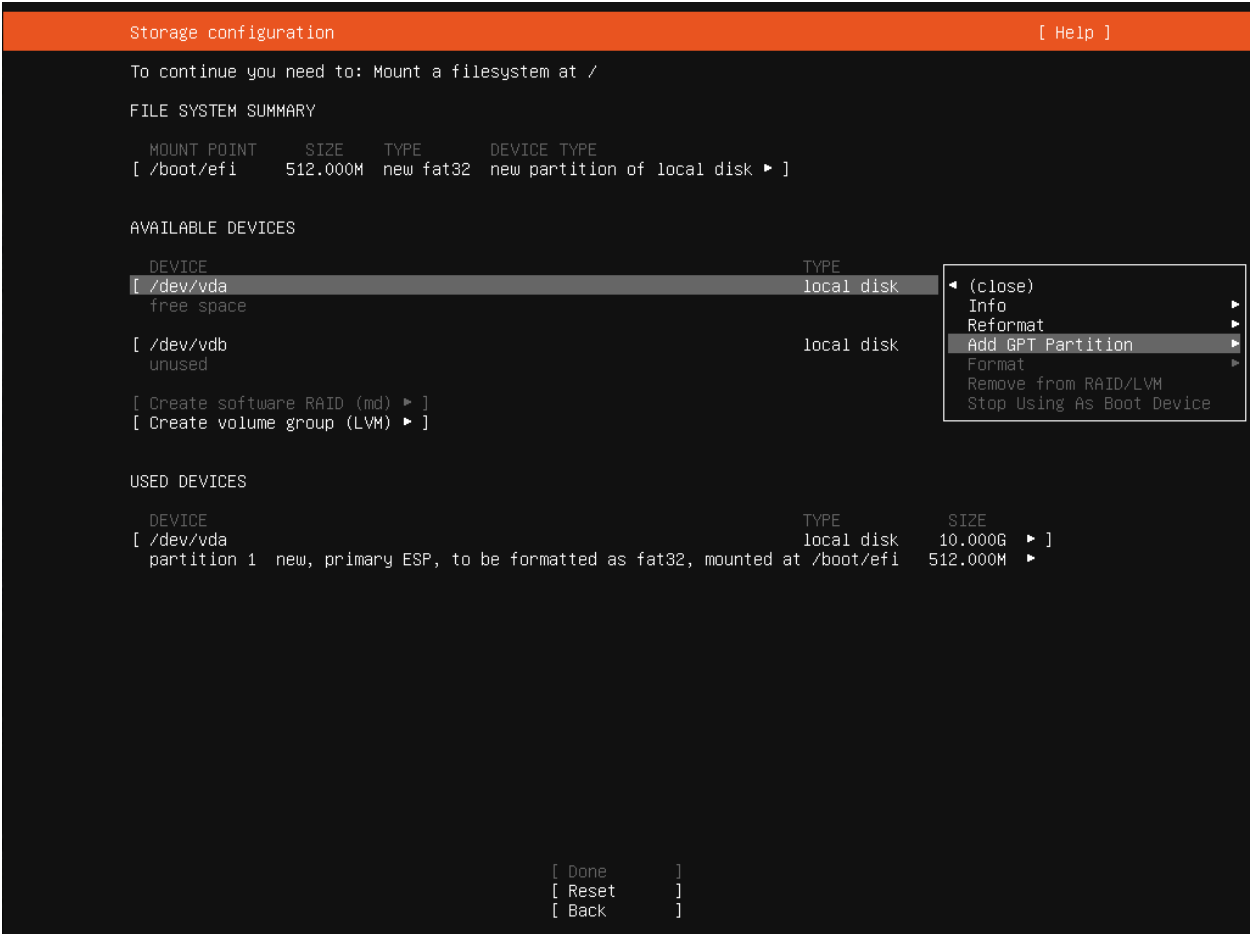


Fig. 5: Add GPT Partition

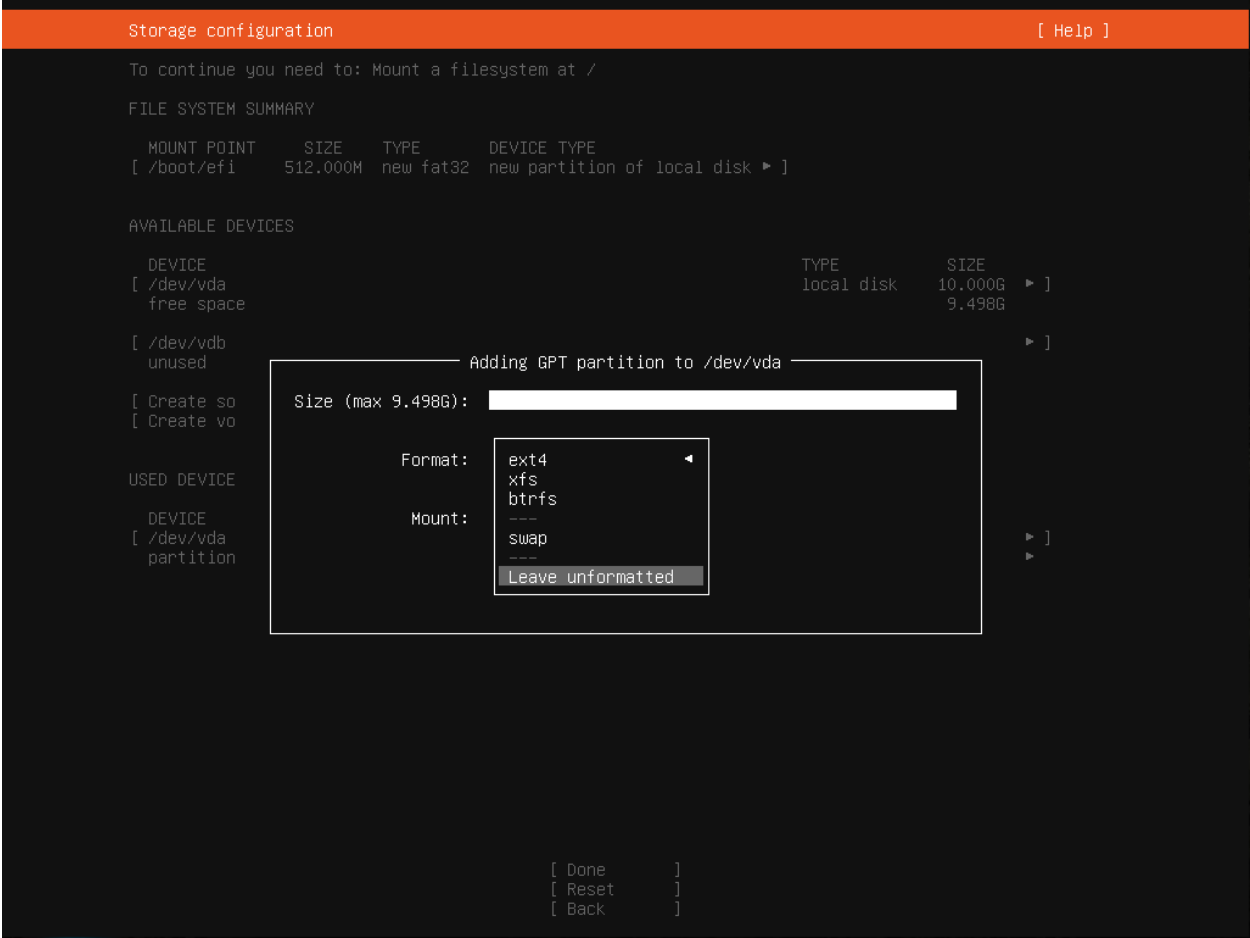


Fig. 6: Create Unformatted Partition

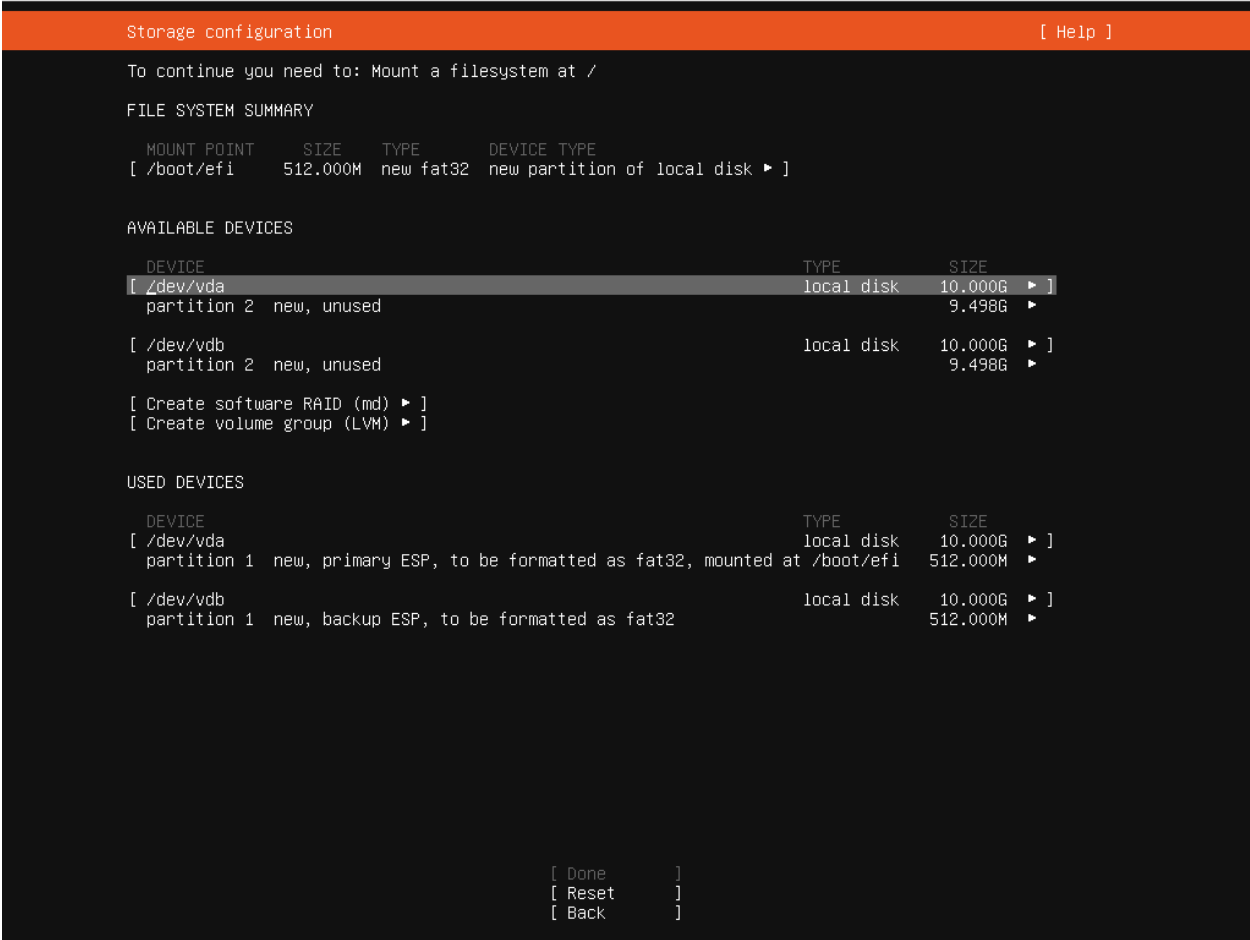


Fig. 7: Basic Partition Layout

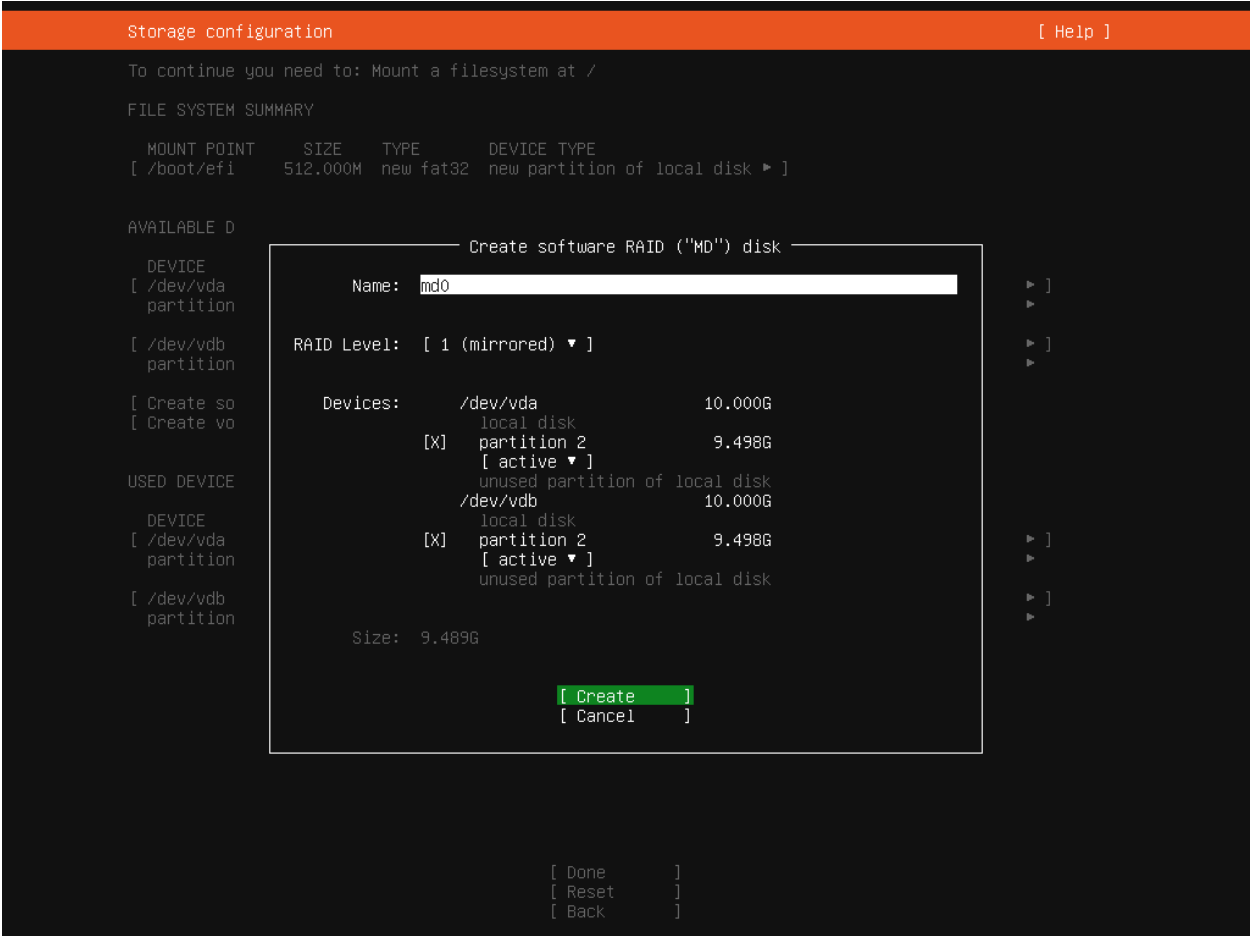


Fig. 8: RAID (MD) Disk Configuration

The result will look like *RAID Device, Ready for Use*:

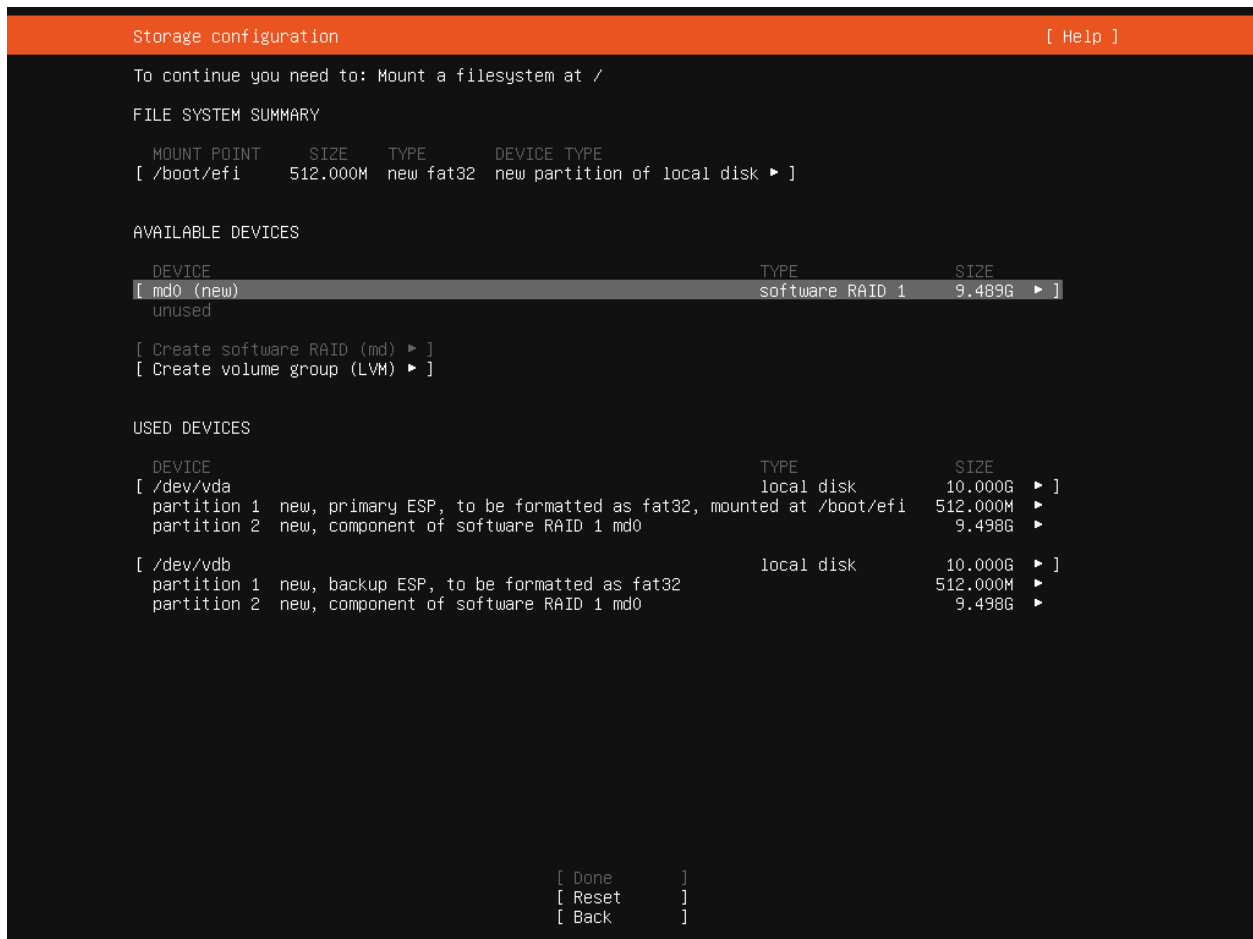


Fig. 9: RAID Device, Ready for Use

8. Create a swap partition

- Select **md0** and **Add GPT Partition**
- Set **Size** to the desired size for a swap partition (e.g. 2G, 4G, etc, based on RAM size and available disk space)
- Set **Format** to **Swap**
- Click **Create**

9. Create root partition

- Select **md0** and **Add GPT Partition**
- Leave **Size** blank to use all remaining disk space
- Set **Format** to an appropriate filesystem type (e.g. **ext4**)
- Set **Mount** to **/**
- Select **Create**

The final disk layout will look like *Final Disk Layout*:

10. Select **Done**

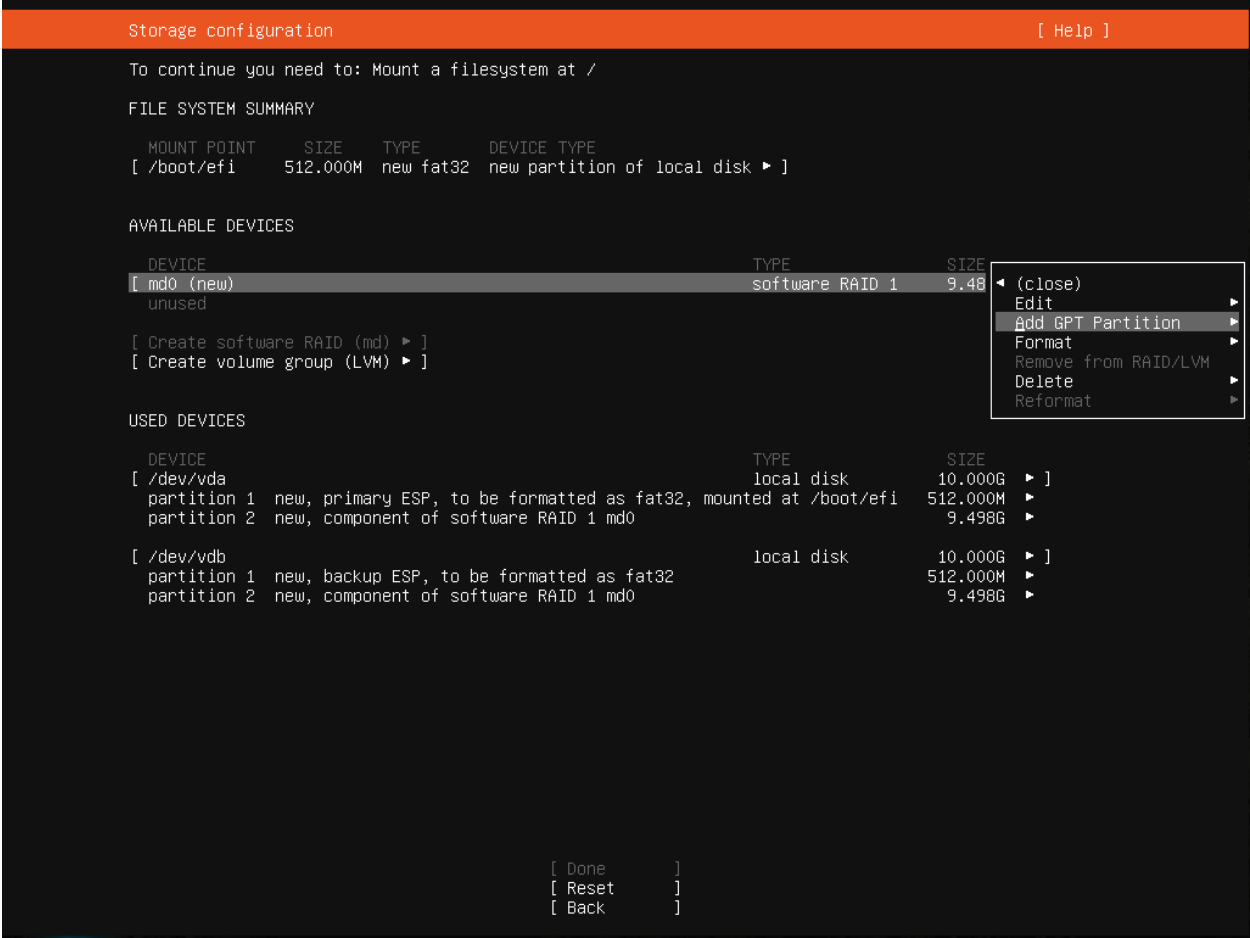


Fig. 10: Add GPT Partition on md0

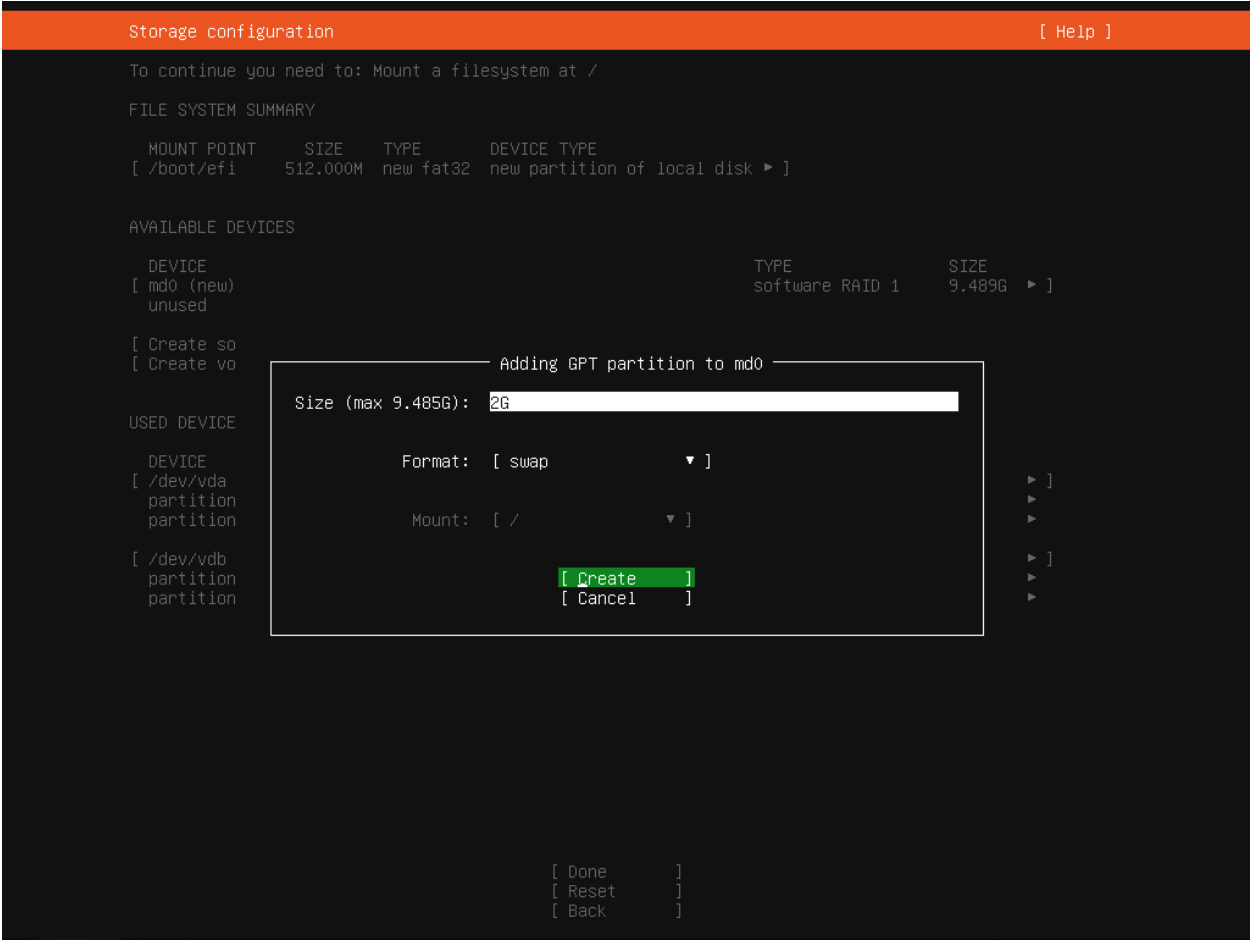


Fig. 11: Create Swap Partition

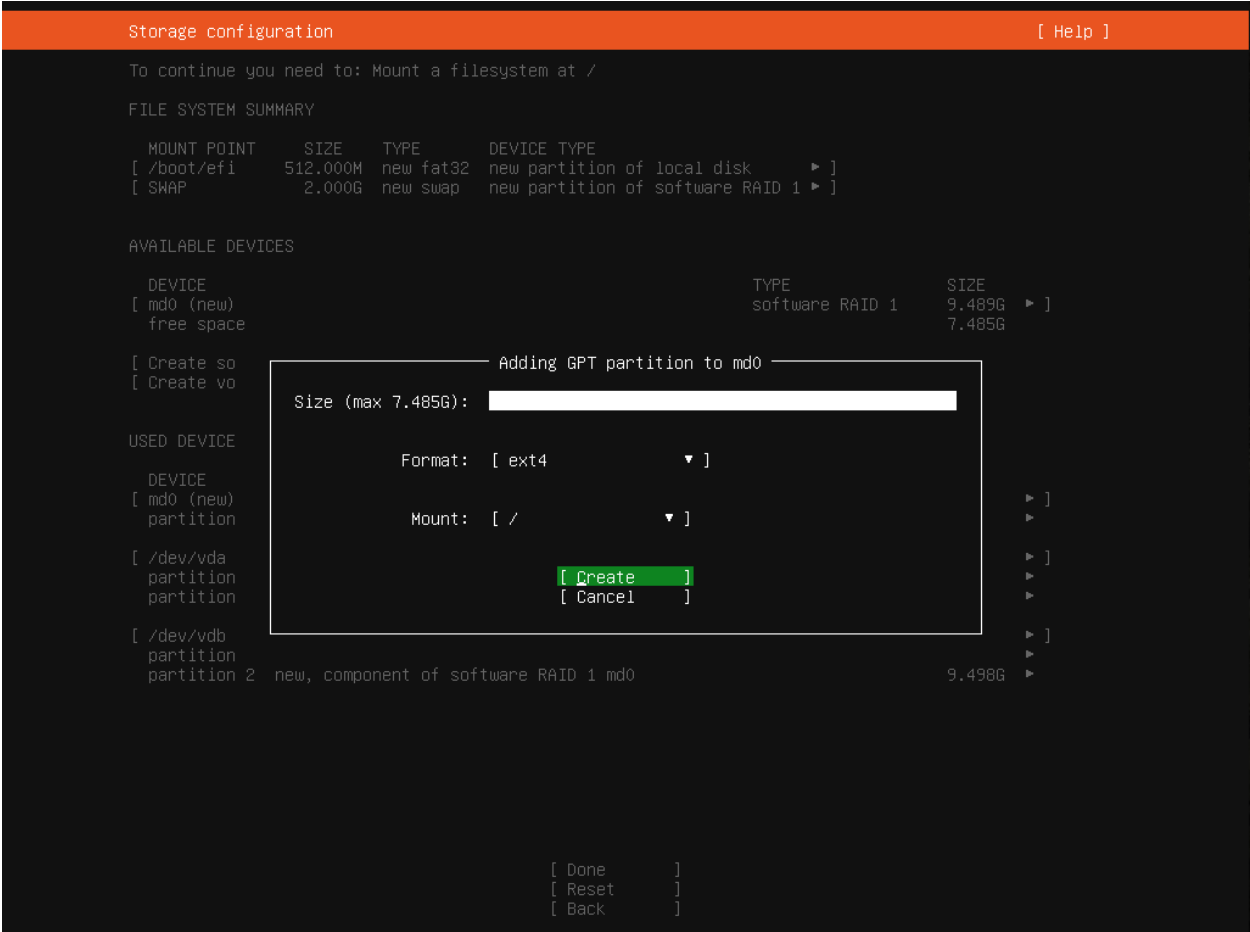


Fig. 12: Create Root Partition

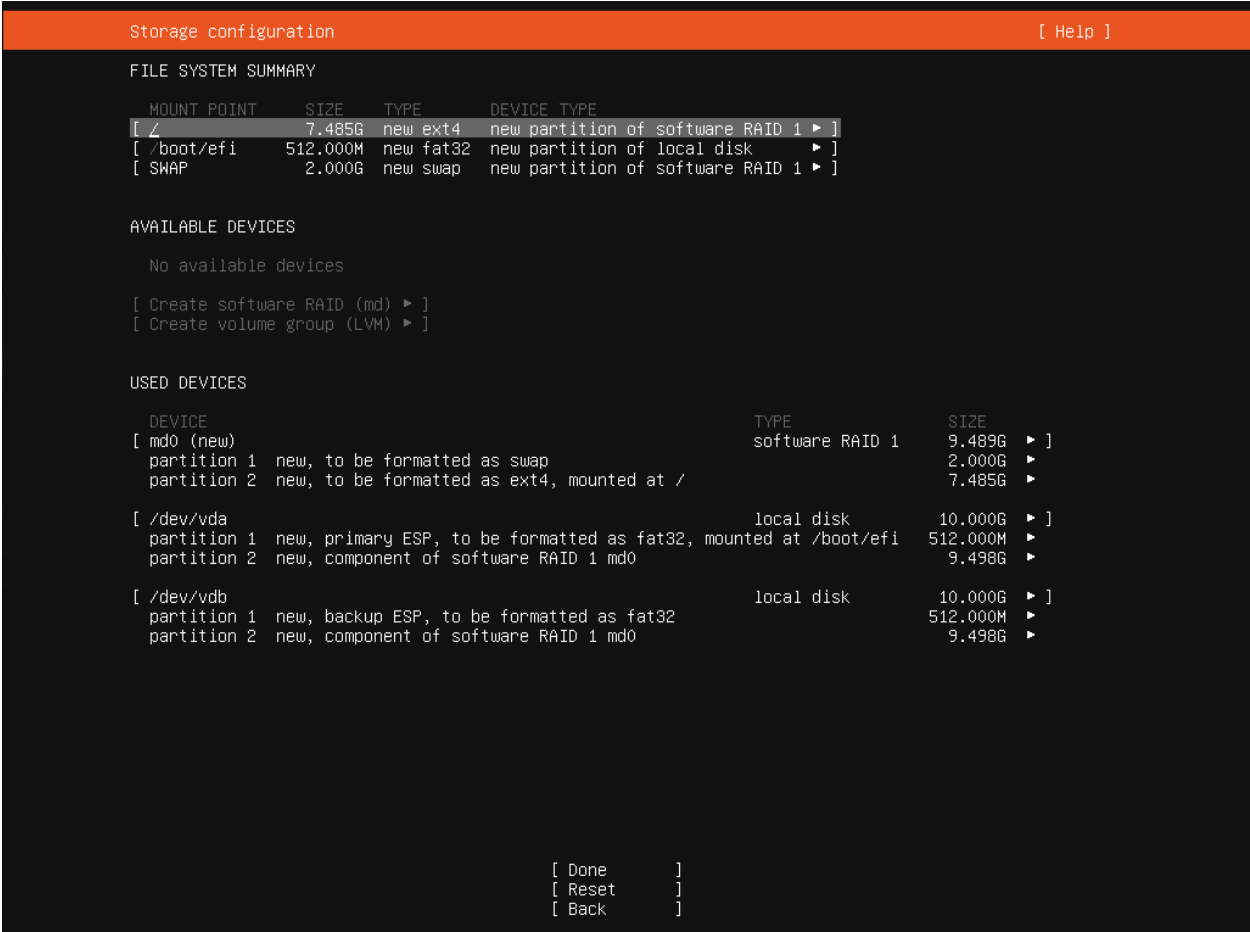


Fig. 13: Final Disk Layout

11. Select **Continue** to format and install

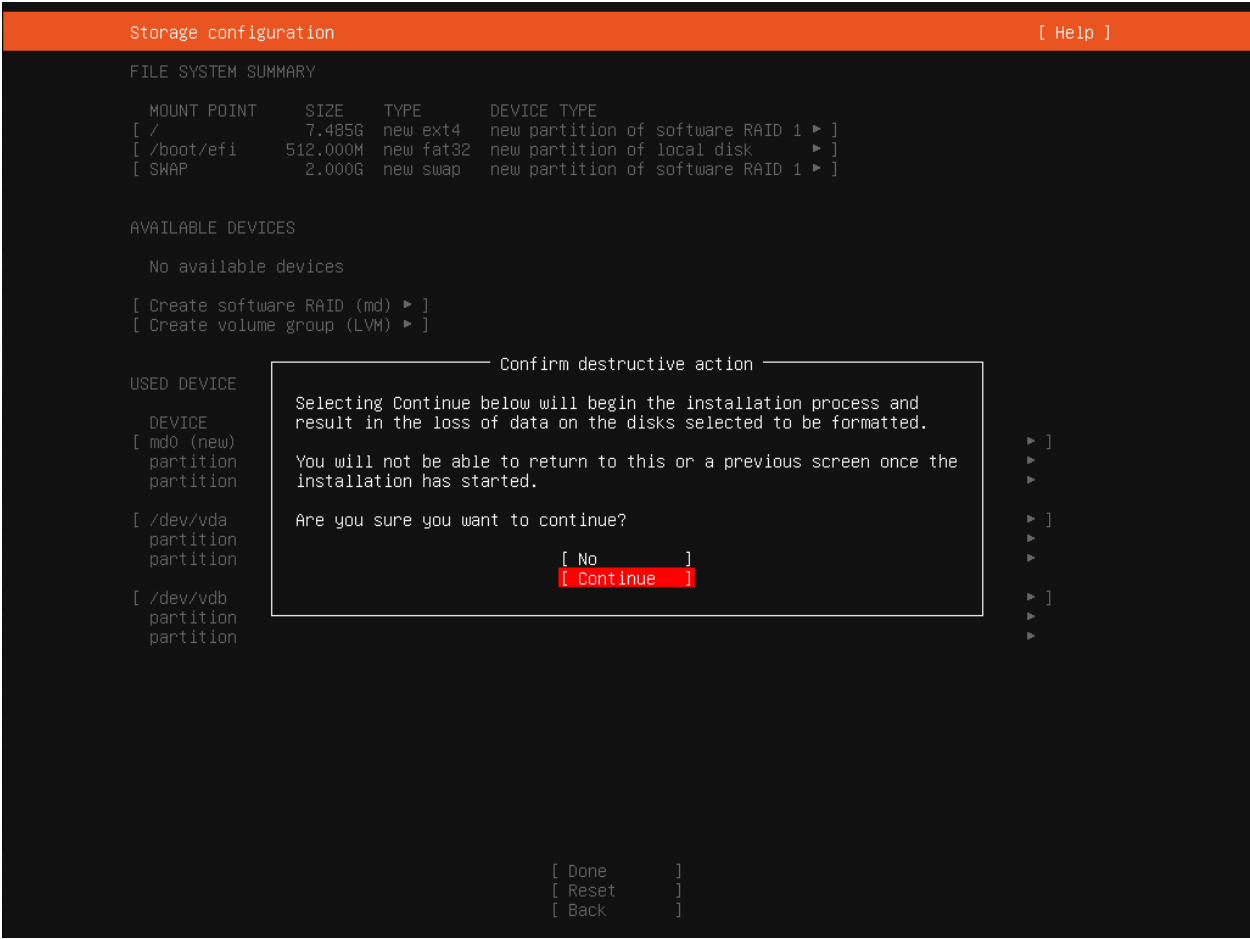


Fig. 14: Confirm Installation

Return to *Installation Process* and continue following the remaining installation instructions.

DEFAULT BEHAVIOR

After the installation completes and TNSR boots for the first time, TNSR has an empty default configuration. This means that TNSR has no pre-configured interfaces, addresses, routing behavior, and so on.

The host OS defaults are set during installation, and depend on the base OS, Ubuntu 20.04.3. For example, host management interfaces may have been configured by the installer.

4.1 Default Accounts and Passwords

By default, the TNSR installation includes host OS accounts for `root` with interactive login disabled, and a `tnsr` account.

For ISO installations, the best practice is to create at least one additional initial administrator account during the installation process. That user is custom created by the person performing the installation, and thus is not a common default that can be listed here.

Warning: When installing TNSR from an ISO image, the installer allows the `root` account to be unlocked and assigned a password. The best practice, however, is to leave the `root` account locked and create at least one additional administrator account using the installer. These additional accounts may use `sudo` to elevate privileges. Any users added to the `wheel` group later may also use `sudo` to execute commands as `root`.

The default behavior of the `tnsr` account varies by platform:

ISO/Bare Metal

The `tnsr` user is available with a default password of `tnsr-default`.

Appliances Shipped with TNSR Pre-installed

The `tnsr` user is available with a default password of `tnsr-default`.

AWS

The `tnsr` account is present but restricted to key-based authentication via SSH, using a key selected when launching the TNSR instance.

Azure

The `tnsr` account is present but restricted to key-based authentication via SSH, using a key selected when launching the TNSR instance.

The password for the `tnsr` account can be reset by any other account with access to the shell and `sudo`. For example, the command `host shell sudo passwd tnsr` run at a TNSR prompt will set and confirm a new password for the `tnsr` user. The same action may also be performed for the `root` account (`host shell sudo passwd root`). As mentioned in the previous warning, it is best to leave interactive logins for `root` disabled.

Warning: Change default passwords, even randomized default passwords or passwords pre-configured when launching a cloud-based instance, after the first login. Do not leave default passwords active!

Note: User authentication is performed by the host OS. Though users may be created inside TNSR (*User Management*), these users are propagated to the host. To control what users may access, see *NETCONF Access Control Model (NACM)*.

4.2 Default TNSR Permissions

Current versions of TNSR include a default set of NACM rules. These rules allow members of group `admin` to have unlimited access and sets the default policies to `deny`. By default this group includes the users `tnsr` and `root`.

See *NETCONF Access Control Model (NACM)* for more information on managing access to TNSR.

4.3 Default Allowed Traffic

For the default behavior of allowed traffic to and from TNSR, there are two separate areas to consider:

- Traffic flowing through TNSR
- Traffic for the host OS management interface

4.3.1 TNSR

There are no access lists (ACLs) in the default TNSR configuration. Thus, once TNSR is able to route traffic, all packets flow freely. See *Access Lists* for information on configuring access lists.

4.3.2 Host OS

The TNSR installation configures a default set of Netfilter rules for the host OS management interface. The following traffic is allowed to pass into and out of the host operating system interfaces:

- ICMP / ICMP6
- SSH (TCP/22)
- HTTP (TCP/80)
- HTTPS (TCP/443)
- NTP (UDP/123, TCP/123)
- SNMP (UDP/161)
- UDP Traceroute (UDP ports 33434-33524 with TTL=1)

To manage host ACLs which can override this behavior, see *Host ACLs*.

Note: Previous versions of TNSR also included Netfilter rules granting access to services run by the dataplane (dynamic routing, IPsec, DNS, DHCP). These are no longer necessary as current versions of TNSR isolate the dataplane

and host OS services using separate network namespaces. Access to dataplane services can be controlled using TNSR ACLs.

4.4 Default Namespaces

Networking Namespaces enable isolated networking environments for the host OS and TNSR.

Network-related services run in the `dataplane` namespace, these are available via interfaces and addresses controlled by TNSR:

- BGP, OSPF, OSPF6, RIP (`frr-dataplane`)
- IKE/IPsec (`strongswan-dataplane`)
- Unbound DNS Resolver (`unbound-dataplane`)
- IPv4 DHCP Server (`kea-dhcp4`)

Management-oriented services run in the `host` namespace by default. As such, these services are only accessible via interfaces controlled by the host itself. These services include:

- Secure Shell (`sshd`)
- RESTCONF API (`nginx`)
- SNMP (`snmpd`)
- NTP (`ntpd`)

Note: When upgrading TNSR from an older version without namespaces, enabled services will also be automatically activated in the `dataplane` namespace.

CLI commands can also support multiple namespaces, as described in *Namespaces in TNSR CLI Commands*. The `ping` and `traceroute` commands default to the `dataplane` namespace.

See *Networking Namespaces* for details on working with TNSR namespaces.

4.5 Default Services

The SSH server (`sshd`) in the `host` namespace is the only service active on TNSR installation by default.

4.6 Default Routing and VRF Behavior

The default VRF used by TNSR is named `default` and has a VRF ID of `0`. The `default` VRF is special in that it has separate route table names for IPv4 (`ipv4-VRF:0`) and IPv6 (`ipv6-VRF:0`).

The `default` VRF is assumed when a VRF is not explicitly specified, for example on an interface with no VRF.

See also:

See *Virtual Routing and Forwarding* for more details.

ZERO-TO-PING: GETTING STARTED

This document is a crash course in getting TNSR up and running quickly after installation. This document covers basic information on getting started with TNSR which guides the user starting from a default configuration until TNSR has upstream connectivity.

The topics included here are covered in more detail throughout the remainder of the documentation. Each section contains a list of additional related resources with more detail in a **See Also** box. Follow these links for more information on each topic.

5.1 First Login

When TNSR boots, it will present a login prompt on the console (video and serial). Login at this prompt using either the default `tnsr` account or an administrator account created during the installation process.

Note: For installations from ISO and for hardware shipped with TNSR preinstalled, the default password for the `tnsr` user is `tnsr-default`. For cloud-based installs such as AWS and Azure, by default the `tnsr` account can only login with key-based ssh authentication. See [Default Accounts and Passwords](#) for more information.

The `tnsr` user automatically enters the TNSR CLI when used to login interactively. Manually created administrative users do not have this behavior, and using them to login interactively will result in a login shell.

Alternately, if the host OS management interface was configured in the installer, login using an SSH client connecting to that interface.

See also:

- [Installation](#)
- [Default Accounts and Passwords](#)

5.1.1 Changing the Password

The password for administrator accounts was set during the installation process, but the default `tnsr` account should have its password reset before making other changes.

Login to the `tnsr` account with the default `tnsr-default` password and change it using the `host shell passwd` command from the TNSR CLI:

```
tnsr# host shell passwd
Changing password for user tnsr.
Changing password for tnsr.
```

(continues on next page)

(continued from previous page)

```
(current) UNIX password:
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
tnsr#
```

Alternately, login in as an administrator and change the password for the default `tnsr` account using `sudo`:

```
tnsr# host shell sudo passwd tnsr
Changing password for user tnsr.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
tnsr#
```

Note: These examples use the TNSR prompt and `host shell` command. The same commands may be used without the `host shell` prefix from a non-TNSR shell prompt.

Warning: Use a strong password for this account as it will be able to make changes to the TNSR configuration, unless restricted by a custom [NACM configuration](#).

See also:

- [Installation](#)
- [Default Accounts and Passwords](#)
- [NETCONF Access Control Model \(NACM\)](#)

5.2 Interface Configuration

There are two types of interfaces on a TNSR system: Host OS interfaces for managing the device and dataplane interfaces which are available for use by TNSR.

5.2.1 Host OS Management Interface

A host management interface may be configured manually in the installer or later in TNSR or in the operating system. See [Installation](#) for the full procedure to configure a host OS management interface during installation, and [Host Interfaces](#) for information on configuring host OS interfaces from within TNSR.

At a minimum, the host OS interface must have an IP address, subnet mask, and a default gateway configured. The default gateway is necessary so that the host OS may retrieve updates as that traffic does not flow through TNSR, but over the management interface. Additionally, other host traffic may flow through the management interface, such as the `ping` command from within the TNSR CLI.

If an interface was not configured for management in the installer, it will need to be manually changed back to host OS control and then configured for network access. See [Remove TNSR NIC for Host Use](#) for instructions on how to return an interface from TNSR back to host OS control so it can be used for management. This procedure will require rebooting the TNSR device.

Consult Ubuntu 20.04.3 documentation for the specifics of network configuration for other environments.

Warning: Once the Host OS is capable of reaching the Internet, check for updates (*Updating TNSR*) before proceeding. This ensures the security and integrity of the router before TNSR interfaces are exposed to the Internet.

See also:

- *Installation*
- *Disable Host OS NICs for TNSR*
- *Host Interfaces*
- *Remove TNSR NIC for Host Use*

5.2.2 Dataplane Interfaces

Interfaces not configured for host OS management control in the installer will be setup in such a way that they are available for use by the dataplane and thus TNSR.

To see a list of available interfaces, start the TNSR CLI (*Entering the TNSR CLI*) and enter `dataplane dpdk dev ?`:

```
tnsr# configure
tnsr(config)# dataplane dpdk dev ?
0000:00:14.0      Ethernet controller: Intel Corporation Ethernet
                  Connection I354 (rev 03)
0000:00:14.1      Ethernet controller: Intel Corporation Ethernet
                  Connection I354 (rev 03)
0000:00:14.2      Ethernet controller: Intel Corporation Ethernet
                  Connection I354 (rev 03)
0000:00:14.3      Ethernet controller: Intel Corporation Ethernet
                  Connection I354 (rev 03)
0000:03:00.0      Ethernet controller: Intel Corporation I211 Gigabit
                  Network Connection (rev 03)
0000:04:00.0      Ethernet controller: Intel Corporation I211 Gigabit
                  Network Connection (rev 03) ( Active Interface enp4s0 )
```

This is an ideal time to set optional custom interface names since they are difficult to change later:

```
tnsr(config)# dataplane dpdk dev 0000:00:14.1 network name WAN
tnsr(config)# dataplane dpdk dev 0000:00:14.2 network name LAN
tnsr(config)# service dataplane restart
tnsr(config)# exit
```

Warning: *Customizing Interface Names* contains important information about limitations on valid interface names. Invalid or conflicting names will be rejected by TNSR.

The custom names set in that example will be used in the remainder of this document.

Note: Without custom names, interfaces are named after the port speed and bus location, such as `GigabitEthernet0/14/1`.

See also:

- [Installation](#)
- [Setup NICs in Dataplane](#)
- [Customizing Interface Names](#)

5.3 TNSR Interfaces

Next, the interfaces inside TNSR must be configured with addresses and routing.

5.3.1 Optional: Access Lists

The best security practice is to filter inbound traffic so that only required traffic is allowed to pass. This step is optional, but the best practice is to at least apply the basic ACLs shown in this section, and then read through [Access Lists](#) for additional details.

First, create an ACL to only allow DHCP client responses, ICMP inbound, and DNS server responses for the DNS resolver configuration later in this document:

```
tnsr# configure terminal
tnsr(config)# acl internet-in
tnsr(config-acl)# rule 10
tnsr(config-acl-rule)# description Allow DHCP responses
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol udp
tnsr(config-acl-rule)# source port 67
tnsr(config-acl-rule)# destination port 68
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 20
tnsr(config-acl-rule)# description Allow ICMP
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol icmp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 30
tnsr(config-acl-rule)# description Allow DNS Responses
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol udp
tnsr(config-acl-rule)# source address 8.8.8.8/32
tnsr(config-acl-rule)# source port 53
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 31
tnsr(config-acl-rule)# description Allow DNS Responses
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# source address 8.8.8.8/32
tnsr(config-acl-rule)# source port 53
tnsr(config-acl-rule)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config-acl)# rule 32
tnsr(config-acl-rule)# description Allow DNS Responses
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol udp
tnsr(config-acl-rule)# source address 8.8.4.4/32
tnsr(config-acl-rule)# source port 53
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 33
tnsr(config-acl-rule)# description Allow DNS Responses
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# source address 8.8.4.4/32
tnsr(config-acl-rule)# source port 53
tnsr(config-acl-rule)# exit
tnsr(config-acl)# exit
```

Next, create an ACL to reflect all outbound connections so return traffic is automatically permitted inbound:

```
tnsr(config)# acl internet-out
tnsr(config-acl)# rule 10
tnsr(config-acl-rule)# description Reflect all Outbound
tnsr(config-acl-rule)# action reflect
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# exit
tnsr(config-acl)# exit
```

Finally, configure these ACLs on the interface connected to the Internet:

```
tnsr(config)# int WAN
tnsr(config-interface)# access-list input acl internet-in sequence 10
tnsr(config-interface)# access-list output acl internet-out sequence 10
tnsr(config-interface)# exit
tnsr(config)# exit
```

See also:

- [Access Lists](#)

5.3.2 WAN DHCP Client

In this example, WAN will be set as a DHCP client:

```
tnsr# configure terminal
tnsr(config)# interface WAN
tnsr(config-interface)# description Internet
tnsr(config-interface)# dhcp client ipv4
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

See also:

- [DHCP Client Example](#)

- [Configure Interfaces](#)

5.3.3 LAN Interface

Next, configure an address for the internal network:

```
tnsr(config)# interface LAN
tnsr(config-interface)# ip address 172.16.1.1/24
tnsr(config-interface)# description Local Network
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

See also:

- [Configure Interfaces](#)

5.4 NAT

The global NAT options must be set first, and then NAT must be explicitly enabled. The configuration for NAT pools and interfaces can only be added once NAT is enabled.

The following commands configure TNSR to use NAT forwarding, endpoint-dependent mode NAT:

```
tnsr(config)# nat global-options nat44 forwarding true
tnsr(config)# nat global-options nat44 endpoint-dependent true
```

With the global options complete for this example, NAT must be enabled before the remaining options can be set:

```
tnsr(config)# nat global-options nat44 enabled true
```

Warning: To make changes to the global NAT options later, NAT must first be disabled, and then re-enabled after the changes are complete.

Now setup a NAT pool using the WAN interface address, and set the interfaces which will participate in NAT. In this example, the WAN interface is the outside NAT interface and the LAN interface is inside:

```
tnsr(config)# nat pool interface WAN
tnsr(config)# interface WAN
tnsr(config-interface)# ip nat outside
tnsr(config-interface)# exit
tnsr(config)# interface LAN
tnsr(config-interface)# ip nat inside
tnsr(config-interface)# exit
```

See also:

- [Network Address Translation](#)
- [NAT Pool Addresses](#)
- [NAT Forwarding](#)

5.5 DHCP Server

Setup a basic DHCP server on the LAN side to hand out addresses, also instruct clients to use TNSR as their gateway and DNS server.

```
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)# description LAN DHCP Server
tnsr(config-kea-dhcp4)# interface listen LAN
tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr(config-kea-dhcp4)# subnet 172.16.1.0/24
tnsr(config-kea-subnet4)# pool 172.16.1.100-172.16.1.245
tnsr(config-kea-subnet4-pool)# exit
tnsr(config-kea-subnet4)# interface LAN
tnsr(config-kea-subnet4)# option domain-name-servers
tnsr(config-kea-subnet4-opt)# data 172.16.1.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 172.16.1.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# exit
tnsr(config-kea-dhcp4)# exit
tnsr(config)# dhcp4 enable
```

See also:

- *Dynamic Host Configuration Protocol*

5.6 DNS Server

Configure TNSR to act as a DNS server for local clients, using upstream forwarding DNS servers of 8.8.8.8 and 8.8.4.4:

```
tnsr# configure
tnsr(config)# unbound server
tnsr(config-unbound)# interface 127.0.0.1
tnsr(config-unbound)# interface 172.16.1.1
tnsr(config-unbound)# access-control 172.16.1.0/24 allow
tnsr(config-unbound)# forward-zone .
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.8.8
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.4.4
tnsr(config-unbound-fwd-zone)# exit
tnsr(config-unbound)# exit
tnsr(config)# unbound enable
```

Configure the DNS Resolver behavior of the TNSR dataplane network namespace to use unbound as its DNS server

```
tnsr(config)# system dns-resolver dataplane
tnsr(config-dns-resolver)# server localhost 127.0.0.1
tnsr(config-dns-resolver)# exit
```

Configure the DNS Resolver behavior of the host operating system to use the chosen upstream forwarding DNS servers directly, since the host namespace cannot access unbound running in the dataplane namespace:

```
tnsr(config)# system dns-resolver host
tnsr(config-dns-resolver)# server g1 8.8.8.8
tnsr(config-dns-resolver)# server g2 8.8.4.4
tnsr(config-dns-resolver)# exit
```

Note: The DNS resolution behavior of both namespaces may be left at the default values which will use the DNS servers provided by DHCP.

See also:

- [DNS Resolver](#)
- [System DNS Resolution Behavior](#)

5.7 Ping

5.7.1 From TNSR

The TNSR CLI includes a `ping` utility which will send an ICMP echo request to a target. This utility can operate in either the `host` or `dataplane` namespace ([Networking Namespaces](#)), and defaults to using the `dataplane` namespace.

```
tnsr# ping 203.0.113.1
PING 203.0.113.1 (203.0.113.1) 56(84) bytes of data.
64 bytes from 203.0.113.1: icmp_seq=1 ttl=64 time=0.700 ms
64 bytes from 203.0.113.1: icmp_seq=2 ttl=64 time=0.353 ms
64 bytes from 203.0.113.1: icmp_seq=3 ttl=64 time=0.590 ms
64 bytes from 203.0.113.1: icmp_seq=4 ttl=64 time=0.261 ms
64 bytes from 203.0.113.1: icmp_seq=5 ttl=64 time=0.395 ms
64 bytes from 203.0.113.1: icmp_seq=6 ttl=64 time=0.598 ms
64 bytes from 203.0.113.1: icmp_seq=7 ttl=64 time=0.490 ms
64 bytes from 203.0.113.1: icmp_seq=8 ttl=64 time=0.790 ms
64 bytes from 203.0.113.1: icmp_seq=9 ttl=64 time=0.155 ms
64 bytes from 203.0.113.1: icmp_seq=10 ttl=64 time=0.430 ms

--- 203.0.113.1 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 9001ms
rtt min/avg/max/mdev = 0.155/0.476/0.790/0.187 ms
```

Note: This is equivalent to `dataplane ping 203.0.113.1` since the `dataplane` namespace is the default.

To ping from the `host` namespace, using the host OS environment and routing, specify the `host` namespace before the command:

```
tnsr# host ping 198.51.100.1
PING 198.51.100.1 (198.51.100.1) 56(84) bytes of data.
64 bytes from 198.51.100.1: icmp_seq=1 ttl=64 time=0.142 ms
64 bytes from 198.51.100.1: icmp_seq=2 ttl=64 time=0.109 ms
64 bytes from 198.51.100.1: icmp_seq=3 ttl=64 time=0.126 ms
64 bytes from 198.51.100.1: icmp_seq=4 ttl=64 time=0.110 ms
```

(continues on next page)

(continued from previous page)

```
64 bytes from 198.51.100.1: icmp_seq=5 ttl=64 time=0.109 ms
64 bytes from 198.51.100.1: icmp_seq=6 ttl=64 time=0.120 ms
64 bytes from 198.51.100.1: icmp_seq=7 ttl=64 time=0.100 ms
64 bytes from 198.51.100.1: icmp_seq=8 ttl=64 time=0.086 ms
64 bytes from 198.51.100.1: icmp_seq=9 ttl=64 time=0.087 ms
64 bytes from 198.51.100.1: icmp_seq=10 ttl=64 time=0.088 ms

--- 198.51.100.1 ping statistics ---
10 packets transmitted, 10 received, 0% packet loss, time 8999ms
rtt min/avg/max/mdev = 0.086/0.107/0.142/0.021 ms
```

See also:

- *Diagnostic Utilities*

5.7.2 From LAN Client

At this stage a LAN client will be able to connect to the network (port or switch) connected to the LAN interface. It can pull an IP address and other configuration via DHCP, resolve domain names via DNS, and reach hosts beyond TNSR using it as a gateway.

A ping executed on a client will flow through TNSR and replies will return.

5.8 Save the TNSR Configuration

TNSR maintains three separate *configuration databases*: startup, candidate, and running. The running copy is the active configuration. TNSR loads the startup copy at boot time.

To ensure the expected configuration is loaded when TNSR is rebooted, copy the running configuration to the startup configuration after making changes:

```
tnsr# configure
tnsr(config)# configuration copy running startup
```

Optionally, create a *backup copy* of the configuration which can be loaded later if necessary:

```
tnsr(config)# configuration save running backup.xml
```

See also:

- *Configuration Database*
- *Configuration Backups*

5.9 Next Steps

From here, click the **Next** button at the bottom of the page to continue on to the next section of the documentation, or choose a topic from the table of contents to the left.

Other suggested next steps include:

- *Configure updates* (Business versions only)
- See *more practical examples*, such as setting up the RESTCONF API
- Configure *IPsec tunnels*
- Configure *time synchronization*

COMMAND LINE BASICS

The TNSR command line interface (CLI) may seem familiar to administrators who are familiar the CLI of other routers or networking equipment. However, the specific behavior and structure of the TNSR CLI differs in several aspects.

Tip: For a full TNSR CLI command reference, visit [Commands](#).

6.1 Working in the TNSR CLI

6.1.1 Command Prompt

The TNSR CLI command prompt has a several components:

```
<hostname> tnsr<(mode)># <user input>
```

These components are:

hostname

The fully qualified hostname of the router.

mode

This section of the prompt changes depending on the current mode to indicate that a different subset of commands is available.

See also:

For a list of modes and prompt strings, see [Mode List](#).

user input

This area is where a user enters commands and other input.

In this brief example, the router hostname is `router`, and the mode section of the prompt is shown changing when a command enters or exits a mode.

```
router tnsr# configure
router tnsr(config)# interface GigabitEthernet3/0/0
router tnsr(config-interface)# description Management
router tnsr(config-interface)# exit
router tnsr(config)# exit
router tnsr#
```

6.1.2 Command History

The TNSR CLI stores the last 300 commands across sessions. This command history is kept in `~/.tnsr_history`.

The command history is accessed by pressing `Ctrl-P` (previous command), `Ctrl-N` (next command), or by using the up and down arrow keys.

The number of commands stored by TNSR can be controlled by the `cli history-config lines <count> command`. To restore the default value, use `no cli history-config lines`.

This behavior may also be disabled by the `cli history-config disable` or `no cli history-config enable` commands. Use `cli history-config enable` to turn it back on.

6.1.3 Autocomplete

The TNSR CLI supports case-sensitive tab expansion and prediction for input to speed up interactive work. For example, the first few letters of a command or entity may be typed, depending on context, and then pressing the tab key will complete a portion or all of the remaining input where possible. Additionally, in cases when there is an existing entry or only one possible choice, pressing tab will automatically insert the entire entry. Commands or entities may also be shortened provided the input is not ambiguous.

Tip: Press `?` to show possible completions of the current command when in the middle of a word, or press it between words to show the next available parameter (*Finding Help*).

6.1.4 Keyboard Shortcuts

The TNSR CLI supports several CLI navigation and editing key combinations, including:

| Command | Keys |
|--------------------------|-----------------------------------|
| Previous History Command | <code>Ctrl-P</code> or up arrow |
| Next History Command | <code>Ctrl-N</code> or down arrow |
| Erase Character | Backspace or <code>Ctrl-H</code> |
| Erase Word | <code>Ctrl-W</code> |
| Cursor to Start of Line | <code>Ctrl-A</code> |
| Cursor to End of Line | <code>Ctrl-E</code> |
| Clear and Redraw Screen | <code>Ctrl-L</code> |
| Exit the CLI | <code>Ctrl-D</code> |
| Context-Sensitive Help | <code>?</code> |

6.2 Finding Help

The CLI includes context-sensitive help. At any point, enter a `?` and TNSR will print a list of available commands or keywords that are valid in the current context. Enter a space before the `?` to ensure correct context.

Additionally, the `help` command can be issued in any mode. There are three variations:

help, help commands

These are equivalent and print a list of available commands in the current mode.

help mode

Prints information about the current mode, including whether or not exiting the mode will cause a commit (*Configuration Database*).

6.3 Starting TNSR

The services required by TNSR to run are enabled by the installer, and they will automatically start at boot time. There is no need to manually stop or start TNSR services during normal operation.

6.3.1 TNSR Service Relationships

TNSR requires the `vpp`, `clixon-backend`, and `clixon-restconf` services.

Note: TNSR may require additional services depending on features enabled by the TNSR configuration. These will be automatically managed as needed.

6.3.2 Manual TNSR Service Operations

Stop TNSR services:

```
$ sudo tnsrctl stop
```

Start TNSR services:

```
$ sudo tnsrctl start
```

Restarting TNSR services if they are already running:

```
$ sudo tnsrctl restart
```

View TNSR service status (can be run as any user):

```
$ tnsrctl status
```

These services are all daemons and not interactive. To configure TNSR, the administrator must initiate the TNSR CLI separately, as described in *Entering the TNSR CLI*.

6.4 Entering the TNSR CLI

The TNSR CLI can be started a few different ways. The command to start the CLI is `/usr/bin/clixon_cli`, but the exact method varies, as discussed in this section.

When started, the TNSR CLI will print the hostname followed by the prompt:

```
tnsr#
```

From that prompt, commands can be entered to view status information or perform other tasks. Throughout this documentation, the router hostname will typically be omitted unless it is required for clarification.

6.4.1 Using the tnsr account

TNSR includes a `tnsr` user by default, and this user will automatically load the TNSR CLI at login. To take advantage of this user, login to it directly using `ssh`, or switch to it using `sudo` or `su` from another account.

The behavior of the `tnsr` account varies by platform, and its password can be reset using any account with access to `sudo` (See [Default Accounts and Passwords](#)).

To switch from another user to the `tnsr` user, use `sudo`:

```
$ sudo su - tnsr
```

Alternately, use `su` and enter the password for the `tnsr` user:

```
$ su - tnsr
Password:
```

6.4.2 Using another account

The TNSR CLI can also be started manually from any user.

This command will start the TNSR CLI as the current user, which is ideal to use in combination with [NACM](#):

```
$ /usr/bin/clixon_cli
```

6.4.3 Using root

This command will start the TNSR CLI as root, which generally should be avoided unless absolutely necessary (for example, recovering from a flawed NACM configuration):

```
$ sudo /usr/bin/clixon_cli
```

6.4.4 Current User

From inside TNSR, check the current user as seen by TNSR with `whoami`:

```
tnsr# whoami
real UID/GID: 996/992
effective UID/GID: 996/992

user name: tnsr
home dir: /var/lib/tnsr
shell: /bin/bash
```

6.4.5 Shell Alias

For convenience, the command to launch the TNSR CLI can be added to an alias in the shell. For example, the following line can be added to `~/.bashrc` to run TNSR as the current user:

```
alias tnsrcli='/usr/bin/clixon_cli'
```

Note: The changes to `~/.bashrc` will not take effect immediately. Either logout and login again, or source the file by running `source ~/.bashrc` or `. ~/.bashrc`.

Then the TNSR CLI may be accessed using the alias from the shell, `tnsrcli`.

6.5 Configuration Database

TNSR maintains three separate configuration databases: startup, candidate, and running. These files are stored as XML in plain text files.

startup

The configuration loaded when the host boots up.

Note: A restart of TNSR services is not the same as a reboot. If, for example, the clixon services are restarted, TNSR will still be using the running database.

candidate

An in-process potential configuration that exists while the TNSR configuration is being actively edited. When committed, this configuration will be accepted as the running configuration by TNSR if it is free of errors.

running

The active running configuration, which reflects the current state of TNSR.

Note: These databases are located in `/var/tnsr/` on the host, but these files are not intended to be accessed outside of TNSR.

The configuration database is managed using the `configuration` command from within `config` mode.

See also:

- [Configuration Backups](#) for information on configuration backups.
- [Configuration History](#) for information on working with the automatic configuration history feature.
- [Configuration Rollback](#) for information on the timed configuration rollback feature.

6.5.1 Saving the Configuration

For changes to persist between reboots of the TNSR host, the running configuration must be copied to the startup configuration as shown in this example:

```
tnsr# configure
tnsr(config)# configuration copy running startup
```

6.5.2 Viewing the Configuration

To view the configuration databases, use the `show configuration` command followed by the database name, for example:

```
tnsr# show configuration running
```

or:

```
tnsr# show conf run
```

The output format can be given after the database name using one of the following names:

xml

XML format. The default output format, and the native format of the configuration databases.

json

JSON format, similar to the data format used by RESTCONF

cli [<section>]

Outputs a set of CLI commands which can be pasted back into a terminal to re-create the current configuration.

Tip: The `cli` format is useful for replicating parts of a configuration on another TNSR instance without restoring a full configuration database.

When using the `cli` format, an optional configuration area name can limit the output to a certain portion of the database. For example, to show only the DHCP server configuration:

```
tnsr# show configuration running cli kea
dhcp4 enable
dhcp4 server
    option domain-name
        data example.com
    exit
description LAN DHCP Server
lease persist true
lease lfc-interval 0
interface listen LAN
interface socket raw
subnet 10.2.0.0/24
    interface LAN
    option domain-name-servers
        data 10.2.0.1
    exit
```

(continues on next page)

(continued from previous page)

```
option routers
    data 10.2.0.1
exit
pool 10.2.0.129-10.2.0.191
exit
exit
exit
```

6.5.3 Reverting to the Startup Configuration

TNSR can also revert to the previously saved startup configuration to remove undesirable changes to the running configuration, should a regression in behavior occur.

For example:

```
tnsr# configure
tnsr(config)# configuration copy startup candidate
tnsr(config)# configuration candidate commit
tnsr(config)# exit
```

Warning: It is not possible to copy the startup configuration directly to the running configuration as that will not result in the settings being active. The configuration must be committed after copying to the candidate.

6.5.4 Configuration Database Commands

These brief examples show other available configuration database management commands.

Delete the candidate database entirely, which if committed will leave TNSR with an empty configuration:

```
tnsr(config)# configuration candidate clear
```

Commit changes made to the candidate database, which if successful will become the running database:

```
tnsr(config)# configuration candidate commit
```

Discard the current candidate database to remove a change that has failed to validate, returning to the running configuration without the attempted changes:

```
tnsr(config)# configuration candidate discard
```

Attempt to validate the current candidate configuration to locate errors:

```
tnsr(config)# configuration candidate validate
```

Load a file from the host into the candidate database. The contents of the file can replace the candidate entirely, or merge a new section into an existing configuration. After loading, the candidate must be committed manually.

```
tnsr(config)# configuration candidate load <filename> [(replace|merge)]
```

Copy the candidate configuration to the startup configuration:

```
tnsr(config)# configuration copy candidate startup
```

Copy the running configuration to either the candidate or startup configuration:

```
tnsr(config)# configuration copy running (candidate|startup)
```

Copy the startup configuration to the candidate configuration:

```
tnsr(config)# configuration copy startup candidate
```

Save either the candidate or running configuration to a file on the host.

```
tnsr(config)# configuration save (candidate|running) <filename>
```

While not a configuration database command directly, the TNSR CLI automatically discards the candidate database if it fails to validate. This behavior can be changed using the following command:

```
tnsr(config)# no cli option auto-discard
```

6.6 Configuration Mode

After starting the TNSR CLI, the administrator is in basic mode and not configuration mode. To enter configuration mode, enter the `configure` command. This command may be abbreviated to `config` and it is also acceptable to write `terminal` after, as a convenience for administrators familiar with IOS who type it out of habit.

All of the following commands are equivalent:

```
tnsr# configure
tnsr# configure terminal
tnsr# config
tnsr# conf t
```

After entering any **one** of the above commands, the prompt changes to reflect the new configuration mode:

```
tnsr# configure
tnsr(config)#
```

After entering other configuration commands, the new configuration is stored in the candidate database (*Configuration Database*). A candidate database may be committed either when all of the required information is present, or when exiting the current context. Some commands are committed immediately.

6.6.1 Navigating Configuration Modes

Certain commands in configuration mode enter other modes, for example, the `interface` command will enter `config-interface` mode when used on an existing interface:

```
tnsr(config)# interface GigabitEthernet3/0/0
tnsr(config-interface)#
```

To leave a mode, use the `exit` command. This will return to the previous, lower mode:

```
tnsr(config-interface)# exit
tnsr(config)#
```

From config mode, using `exit` will return to basic mode:

```
tnsr(config)# exit
tnsr#
```

From any mode, the `exit` command may be repeated until the prompt returns to basic mode.

At that point, if no errors have been encountered by TNSR, all changes will have been committed to the running database. If an error occurs, TNSR will print a message indicating the problem. Solving such problems is covered in *Troubleshooting* later in this section.

6.6.2 Removing Configuration Items

Items are removed or negated using `no`, followed by the option to remove. For example, to remove an interface description:

```
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# no description
```

In this case, since there is only one description, removing the description does not require the existing content of that option. In most cases, the `no` command only requires enough parameters to uniquely identify an entry to be removed or negated.

In certain cases, a partial command may remove multiple items or may be used as a shorthand method of removing a longer entry when the details do not uniquely identify an entry.

For example, this command removes one input ACL from an interface:

```
tnsr(config-interface)# no access-list input acl idsblock
```

Where this shorter version will remove all input ACL entries on an interface:

```
tnsr(config-interface)# no access-list input acl
```

Finally, this form would remove all ACLs of any type from an interface:

```
tnsr(config-interface)# no access-list
```

The `? help` command (*Finding Help*) is useful in determining when these actions are possible. For example, the CLI will show `<cr>` (“carriage return”) as an available keyword when testing a command:

```
tnsr(config-interface)# no access-list ?
<cr>
acl          ACL Rule
input        ACL applies to ingress packets
macip        MACIP Rule
output       ACL applies to egress packets
```

Since the help request printed `<cr>` among the choices, the command may be completed by pressing `Enter`.

Interactive Large Delete Confirmation

When performing a delete operation in sensitive areas, TNSR checks the size of the pending change when exiting a mode or committing configuration changes. This feature prevents accidental removal of significant sections of the router configuration.

If TNSR considers a change too large to happen automatically, such as removing the entire OSPF configuration, then TNSR will prompt for confirmation before proceeding.

This feature is disabled by default, but may be enabled as follows:

```
tnsr# configure
tnsr(config)# cli option check-delete-thresholds
```

To disable the feature, precede it with no:

```
tnsr# configure
tnsr(config)# no cli option check-delete-thresholds
```

For example, with the feature enabled, attempting to make a large change results in a confirmation prompt:

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# no server
Really delete that? [yes/no]: y
tnsr(config-frr-ospf)#
```

6.6.3 Troubleshooting

If a change to the candidate database fails a validation check or application of the change to the system fails for some reason, it is discarded automatically by default. TNSR resets the candidate database to the current contents of the running database to avoid further attempts to apply the faulty configuration contained in the candidate database.

This automatic behavior can be changed, however, in cases where power users want more control to troubleshoot failed configuration transactions:

```
tnsr# configure
tnsr(config)# no cli option auto-discard
```

When auto-discard is disabled, if a configuration commit fails the candidate database retains the faulty configuration data. Further configuration commands may apply additional changes to the candidate database. However, until the configuration data which caused the failure is removed or set to a value which can be successfully applied, no further commit will succeed.

Disabling the auto-discard feature only persists for the duration of the current CLI session in which it was disabled. At the start of a new CLI session, auto-discard will again be enabled by default.

To view the status of the auto-discard option, use `show cli`:

```
tnsr# show cli
Discard erred candidate database: true
```

A faulty candidate can be viewed with the `show configuration candidate` command, as described in [Configuration Database](#)

There are three approaches to rectify this situation:

- Issue alternate commands that directly correct the faulty configuration.

- Abandon the attempted configuration:

```
tnsr# configure
tnsr(config)# configuration candidate discard
```

- Remove the fault from the candidate configuration by reverting to the running configuration:

```
tnsr# configure
tnsr(config)# configuration copy running candidate
tnsr(config)# configuration candidate commit
```

6.7 Configuration Backups

The candidate and running databases can be saved to or loaded from files in the host OS. This can be used to make backups, copy configurations to other routers, or similar purposes.

Warning: This procedure only backs up the configuration database. It does not back up other important files such as PKI entries (Certificate Authorities, Certificates, Keys) from `/etc/pki/tls/tnsr/`. Copy those files, and any other modified files such as custom scripts and shell configuration files, outside of TNSR as described in [Backups Outside of TNSR](#).

The filenames can take an absolute path and filename, or the path may be omitted to save the file in the directory from which the TNSR CLI was invoked by the administrator. When saving, this file must be writable by the TNSR backend daemon. When loading, this file must be readable by the TNSR backend daemon.

Tip: The best practice is to store backup configuration files in a secure location to prevent unauthorized access to sensitive information.

Saving the running configuration as a backup:

```
tnsr# config
tnsr(config)# configuration save running backup.xml
```

Loading a configuration file from a backup:

```
tnsr# config
tnsr(config)# configuration candidate load backup.xml
tnsr(config)# configuration candidate commit
```

See also:

[Configuration History](#)

6.7.1 Backups Outside of TNSR

The previous procedure creates and restores the configuration from within the TNSR CLI. In certain cases that method may not be viable, such as when the configuration from an older version of TNSR must be updated (*Updating the Configuration Database*).

In these cases, the TNSR configuration database files in `/var/tnsr` may be accessed directly.

Warning: Unlike operations performed within TNSR, these actions must be performed with elevated privileges, either by the root account or using `sudo`.

Warning: This procedure only backs up the configuration database. It does not back up other important files such as PKI entries (Certificate Authorities, Certificates, Keys) from `/etc/pki/tls/tnsr/`. Copy those files, and any other modified files such as custom scripts and shell configuration files, using the same method described here.

To make a configuration backup of the running database:

```
$ sudo cp -p /var/tnsr/running_db ~/backup.xml
```

Warning: The configuration database files may be read while TNSR is running, but TNSR must be stopped when making changes.

To restore a backup to the running and startup databases:

```
$ sudo tnsrctl stop
$ sudo cp -p ~/backup.xml /var/tnsr/running_db
$ sudo cp -p /var/tnsr/running_db /var/tnsr/startup_db
$ sudo tnsrctl start
```

6.8 Configuration History

TNSR software version 21.07 and later includes an optional configuration history which uses [Git](#) to track changes. This history can be used in either a manual or automated manner, depending on user preference. Stored versions can be manually loaded to roll back to earlier configurations as needed.

Warning: Though this feature automates management of local backups, it is not a substitute for periodic backups kept off the router in a safe and secure location. See *Configuration Backups* for details.

6.8.1 Overview

The *Configuration Database* files are held in `/var/tnsr` which is now initialized as a Git repository. There are two ways TNSR retains information about changes:

- The version list, which contains manually saved entries and periodic automatic entries *depending on the configuration*.
- The log, which contains information about every configuration change.

Configuration versions can then be *loaded* to go back to an earlier point as needed.

6.8.2 Enabling Configuration History

To have TNSR automatically create configuration history versions which can later be restored, TNSR must know how frequently to create these versions. When *viewing versions*, these are prefixed with `auto-` and contain a timestamp corresponding to when the change was made.

This is accomplished via the following command in `config` mode:

```
tnsr(config)# configuration history enable
tnsr(config)# configuration history autosave-period 1
```

The value after `autosave-period` controls how often new version entries are created by TNSR. The possible values and their behavior are:

- 0**
Disables automatic transaction storage. Manual entries are still possible. This is the default value.
- 1**
Creates a new version for every change to the configuration. This is the most comprehensive method of tracking, but over time will create a large number of entries in the version list, which may be undesirable.
- >1**
Creates a new version every N number of configuration changes. For example, when set to 2, then every second change will result in a new version. When set to 5 then a new version is created after every fifth change, and so on.

To view the current history configuration:

```
tnsr# show configuration history config
Configuration history
=====
Enable: true
Version autosave period: 1
```

To disable history tracking:

```
tnsr(config)# configuration history disable
```

Note: Disabling configuration history does not remove data from the history. See *Managing Configuration History*.

To disable the feature and reset the autosave period to 0 in one step, use:

```
tnsr(config)# no configuration history
```

6.8.3 Saving a Configuration Version

A manual version can be created at any time by the following command:

```
tnsr(config)# configuration history version save <version-name>
```

The format of the name is strict. The name must adhere to the [same guidelines as a Git reference](#), which has numerous restrictions on its contents. Put simply, it must be a single printable ASCII word without spaces. Some punctuation values are OK, such as `-` and `_`, while others have restrictions, such as `.` can be used so long as it is not at the end of the name, and the name cannot contain `...` Follow the link earlier in this paragraph for details.

6.8.4 Viewing Configuration History

As mentioned in [Overview](#) the history is separated into two areas, the version list and the log.

Configuration Version List

To view the list of manual and automatic versions which can be loaded, use:

```
tnsr# show configuration history versions
auto-2021-06-24_08-03-34
auto-2021-06-24_08-06-10
auto-2021-06-24_08-45-41
myversion
```

Among the entries in this list example are:

- A *manually saved version* named `myversion`.
- Automatically stored entries from configuration changes, named `auto-<timestamp>`.

The version list is presented in alphabetical order, which naturally sorts the automatic versions of each type in ascending order.

Configuration Version Differences

The configuration history can also show differences in the configuration database between two versions in the history. The difference is shown in unified diff format.

Compare two versions using the following command:

```
tnsr# show configuration history version-diff <old-version> <new-version>
```

For example, using entries from the list above, to view what changed between the entry named `myversion` and the `auto-2021-06-24_08-45-41` entry, use the following command:

```
tnsr# show configuration history version-diff myversion auto-2021-06-24_08-45-41
```

Configuration Log

The log contains more detail than the version list. The log tracks every change even if a version restore point is not created.

To view the log:

```
tnsr# show configuration history log
user-2021-06-24_16-44-42
startup-2021-06-24_16-42-22
startup-2021-06-24_16-41-31
Initial-2021-06-24_16-13-00
```

Among the entries in this list example are:

- Automatically stored entries from configuration changes, named `user-<timestamp>`.
- Automatically stored entries from TNSR startup, named `startup-<timestamp>`.
- The initial state of the repository when it was created, named `Initial-<timestamp>`.

The log is presented in chronological order with the most recent entry printed first.

To view the details of a log entry which shows configuration changes between entries, use:

```
tnsr# show configuration history log <version-name>
```

6.8.5 Loading Configuration History Entries

Entries from the version list may be restored by the following command:

```
tnsr(config)# configuration history version load <version-name>
```

The name may be any entry in the version list (`show configuration history versions`), and pressing `?` at the end of the command will make the CLI print a list of available version names.

Settings from the loaded configuration are immediately committed. If the older configuration contained changes to TNSR services (e.g. IPsec, DHCP) or the dataplane, restarting the affected services is required. TNSR does not perform those steps automatically since they are potentially disruptive.

```
tnsr(config)# configuration history version load myversion
TNSR services or dataplane restart could be required!
```

Tip: The safest way to ensure all settings are applied as desired is to load the configuration and then restart TNSR. Copy the running configuration database to startup before restarting TNSR.

6.8.6 Managing Configuration History

Over time the number of entries in the version history will grow. Individual entries may be removed if desired, for example to keep the list short or to remove a known bad configuration state so that others cannot load it accidentally.

To remove a single entry from the version list, use the following command:

```
tnsr(config)# no configuration history version <version-name>
```

The entire history may be cleared using the following command, which includes all manual versions, automatic versions, and log entries may be cleared:

```
tnsr(config)# no configuration history storage
```

Note: This removes the entire history, but it does not disable history tracking. The existing settings remain in place. See *Enabling Configuration History*.

6.9 Configuration Rollback

TNSR software version 22.02 and later includes a configuration rollback feature which uses a timer to revert configuration changes that may be disruptive. This fail-safe measure can be useful, for example, to make a batch of changes which may break connectivity to a remote TNSR instance.

If an administrator does not cancel the rollback timer before it expires, TNSR restores and commits a copy of the configuration from when the timer started.

6.9.1 Start the Rollback Timer

The first step in using the rollback feature is to start a timer.

The command to start a timer is `configuration rollback timer start`, for example:

```
tnsr(config)# configuration rollback timer start minutes 10 config-source running
```

The timer starts immediately when the command is entered. After starting the timer, proceed to make any necessary changes. If the changes are working as expected, then cancel the timer with `configuration rollback cancel`.

This command requires the following parameters:

minutes

The amount of time, in minutes, after which the timer will expire and TNSR will rollback the configuration if the timer is not canceled.

The value can be between 1 and 120 minutes.

Tip: The timer should be long enough to not only make the configuration changes but also to properly evaluate the changes before they are reverted by the rollback process.

For example, if it takes 5 minutes to make all of the changes, then another 5 minutes to know for sure if the changes are working properly, then the timer should be at least 10 minutes.

config-source

The configuration that TNSR will restore when the timer expires if the timer was not canceled. The rollback process copies the specified configuration source when creating the timer.

running

Use a copy of the current running configuration database.

startup

Use a copy of the startup configuration database.

<filename>

The full path to a copy of a configuration in XML format.

Note: A rollback timer is only active while TNSR is running and a timer does not persist between TNSR restarts. For example, the timer will no longer be active if the TNSR router reboots, the TNSR services are stopped and started, or if there is a crash.

6.9.2 View the Rollback Timer

To view information about the most recent timer, use the following command:

```
tnsr(config)# show configuration rollback timer
```

For example:

```
tnsr(config)# show configuration rollback timer
Started: yes
Expires in 9 minute(s) 6 second(s)
Configuration source: running
Initiator: tnsr
```

The output includes the following information:

Started

Whether the timer is currently running. If this is **no**, then there is no other information in the output.

Expires in

The amount of time remaining before the timer expires.

Configuration Source

The configuration copied by the rollback timer process.

Initiator

The TNSR administrator who initiated or restarted the rollback timer.

6.9.3 Change a Running Timer

The amount of time remaining before the timer expires can be changed to give administrators more time to complete their work and evaluation, or to expire sooner if it will take less time to complete the work than planned.

This command resets the timer to the new expiration time:

```
tnsr(config)# configuration rollback timer restart minutes <minutes>
```

The `minutes <minutes>` parameter works the same as when starting a new timer.

Note: The timer is *set* to the given value, the given value is not added to the existing timer. In other words, this is an absolute value, not a relative amount of time.

For example, start a timer for 10 minutes and then change it to 15 minutes:

```
tnsr(config)# configuration rollback timer start minutes 10 config-source running
tnsr(config)# show configuration rollback timer
Started: yes
Expires in 9 minute(s) 55 second(s)
Configuration source: running
Initiator: tnsr

tnsr(config)# configuration rollback timer restart minutes 15
tnsr(config)# show configuration rollback timer
Started: yes
Expires in 14 minute(s) 58 second(s)
Configuration source: running
Initiator: tnsr
```

6.9.4 Trigger the Rollback Timer

It is also possible to trigger the rollback manually:

```
tnsr(config)# configuration rollback trigger
```

This can be useful if an administrator still has connectivity to TNSR but the changes made are not working properly. Rather than undo the changes manually or wait for the timer to expire, triggering the rollback will undo all of the changes immediately.

6.9.5 Cancel the Rollback Timer

The last step in the process is to cancel the timer if the changes are working properly. This stops the timer and prevents the rollback from being executed.

```
tnsr(config)# configuration rollback cancel
```

6.9.6 Example

This example demonstrates how the timer commands would be used for a set of changes.

First, start a new timer based on the running configuration:

```
tnsr(config)# configuration rollback timer start minutes 10 config-source running
```

Next, make some potentially disruptive changes:


```
tnsr(config)# ipsec tunnel 0
tnsr(config-ipsec-tunnel)# remote-address 203.0.113.25
tnsr(config-ipsec-tunnel)# exit
tnsr(config)#
```

In this case, that would make the tunnel fail as the remote identifier was not updated. If the user was connecting to TNSR over that IPsec tunnel they may have been cut off.

Wait for the timer to expire and the configuration will roll back as directed, after which connectivity will be restored.

Now log back in, start a fresh timer, and make the complete set of correct configuration changes:

```
tnsr(config)# configuration rollback timer start minutes 10 config-source running
tnsr(config)# ipsec tunnel 0
tnsr(config-ipsec-tunnel)# remote-address 203.0.113.25
tnsr(config-ipsec-tunnel)# crypto ike
tnsr(config-ipsec-crypto-ike)# identity remote
tnsr(config-ike-identity)# value 203.0.113.25
tnsr(config-ike-identity)# exit
tnsr(config-ipsec-crypto-ike)# exit
tnsr(config-ipsec-tunnel)# exit
tnsr(config)#
```

In this example, now the changes are working properly, so it is safe for the administrator to cancel the timer:

```
tnsr(config)# configuration rollback cancel
```

6.10 Viewing Status Information

Status information can be viewed using the `show` command from either basic or configuration mode.

For a full list of possible `show` commands, enter `show ?`:

```
tnsr# show ?
acl                Access Control Lists
bfd                Bidirectional Forwarding Detection
cli                State of per-session CLI options
clock              Show the current system date and time
configuration      Config DB configuration state
dataplane          Dataplane
documentation      Documentation URLs
gre                GRE tunnels
history-config     Show history configuration
host               Host information
interface          Interface details
ip                 Internet protocol
ipsec              IPsec
kea                Kea/DHCP
macip              MACIP Access Control Lists
map                MAP-E/MAP-T
nacm               NACM data
nat                Network Address Translation
neighbor           Neighbors (ARP/NDP)
```

(continues on next page)

(continued from previous page)

| | |
|--|-------------------------------------|
| ntp | NTP |
| packet-counters | Packet statistic and error counters |
| prometheus | |
| route | Show routing information |
| span | SPAN mirrors |
| sysctl | Sysctl parameters |
| system | System information |
| trace | Packet trace |
| unbound | Unbound DNS |
| version | Show version of system components |
| vlan | VXLAN tunnels |
| tnsr# show version | |
| Version: tnsr-v21.03-2 | |
| Build timestamp: Thu Mar 4 10:24:34 2021 CST | |

6.11 Networking Namespaces

The host OS and TNSR use separate network namespaces to isolate their networking functions, as covered in [TNSR Architecture](#). These are the dataplane namespace and the host namespace. The dataplane namespace is for the networking environment managed by TNSR, and the host namespace is for the networking environment managed by the host operating system. These two namespaces are isolated from one another and cannot communicate directly without manually creating a link or routing between them.

6.11.1 TNSR Service Namespaces

Services on TNSR can run in the host namespace, the dataplane namespace, or both, depending on the nature of the service.

Network-related services such as dynamic routing daemons (BGP, OSPF, OSPF6, RIP), Unbound, DHCP Server, and IPsec run only in the dataplane namespace.

Management-oriented services such as SSH, the RESTCONF API, and SNMP run in the host namespace by default, but these services are capable of running in both namespaces at the same time using separate instances.

The NTP daemon can run in either namespace, but cannot be active in both at once.

See also:

See [Service Control](#) for information on controlling services in multiple namespaces, and [Default Namespaces](#) for a full list of default namespaces used by TNSR services.

6.11.2 Namespaces in TNSR CLI Commands

TNSR commands which can operate in multiple namespaces will support a namespace parameter (Either `host` or `dataplane`) prefixed before the command. To see a list of these commands, enter the namespace name followed by `?` from master mode:

```
tnsr# host ?
ping          Send ICMP echo
shell         Invoke shell or run a command
traceroute    Determine path to destination
tnsr# dataplane ?
ping          Send ICMP echo
shell         Invoke shell or run a command
traceroute    Determine path to destination
```

The remainder of the command parameters are the same.

Note: The `ping` and `traceroute` commands default to the `dataplane` namespace if the parameter is omitted.

Configuration commands for items which support multiple namespaces are called out throughout the documentation where appropriate. Typically these will have either a namespace parameter or command, depending on the service and mode.

6.11.3 Namespaces in Shell Commands

When operating in a shell on the TNSR device, commands can be run in the current namespace or another namespace. Outside of TNSR, the shell defaults to the `host` namespace.

From the TNSR CLI, a shell must be started in a specific namespace as mentioned previously in [Namespaces in TNSR CLI Commands](#). For example, using `dataplane shell` starts a shell where all commands are executed in the `dataplane` namespace, and `host shell` uses the `host` namespace.

When using a `host` namespace shell, specific commands may be executed in the `dataplane` namespace in two ways.

sudo ip netns exec dataplane <command>

This method requires elevated privileges using `sudo` or to be run from a shell as `root`.

dp-exec <command>

TNSR includes a convenience launcher program, `dp-exec`, which may be run by any user and executes the given command in the `dataplane` namespace as the current user.

When using a `dataplane` namespace shell, commands may be executed in the `host` namespace by using `sudo nsenter -t 1 -n -- <command>`. This requires elevated privileges using `sudo` or to be run from a shell as `root`.

6.12 Service Control

Services controlled directly by TNSR can be restarted from within the TNSR CLI in configuration mode.

To control a service, use the `service` command as follows:

```
tnsr# configure
tnsr(config)# service (backend|bgp|dataplane|dhcp4|ike|ospf|ospf6|restconf|rip|unbound)
```

(continues on next page)

(continued from previous page)

```
↪<action>
tnsr(config)# service (http|ntp|prometheus|snmp|ssh) <namespace> <action>
```

name

The name of the service to configure. Must be one of:

backend

Configuration backend (clixon_backend)

bgp

BGP routing (bgpd, zebra)

dataplane

Dataplane (vpp)

dhcp4

IPv4 DHCP (kea)

http

HTTP for RESTCONF API (nginx)

ike

IKE daemon for IPsec (charon)

ntp

Time service (ntpd)

ospf

OSPF Routing (ospfd, zebra)

ospf6

OSPF6 Routing (ospf6d, zebra)

prometheus

Prometheus exporter (vpp_prometheus_export)

restconf

RESTCONF API (clixon_restconf)

rip

RIP Routing (ripd, zebra)

snmp

SNMP Server (snmpd)

ssh

Secure Shell server (sshd)

unbound

DNS Resolver (unbound)

namespace

Services which are capable of running in more than one namespace (*Networking Namespaces*) take the namespace as a second parameter. The namespace can be:

dataplane

Control the service instance running in the dataplane namespace. This service will be reachable on interfaces and addresses managed by TNSR.

host

Control the service instance running in the host OS namespace. This service will be reachable on interfaces and addresses managed by the host OS.

action

The action to take on the service. Must be one of:

start

Start the service if it is not already running.

stop

Stop the service if it is currently running.

restart

Stop and restart the service, or start the service if it is not running. This action is not available for the *dhcp4* service.

reload

Reload the service configuration without restarting. This action is available for the *dhcp4* and *unbound* services.

status

Show the current status of the service daemon(s) and the last few log entries.

coredump (enable|disable)

Enable or disable core dumps, which are generated if the service encounters a problem. See *Diagnosing Service Issues*.

6.13 Diagnostic Utilities

The TNSR CLI includes convenience utilities for testing connectivity.

6.13.1 Diagnostic Routing Behavior

The utilities in this section behave the same with regard to routing. They can operate in either the *host* or *dataplane* namespace (*Networking Namespaces*), and default to using the *dataplane* namespace so the tests will run using the same networking environment as TNSR.

Test packets will follow the routing table available in the namespace.

6.13.2 Ping

To perform a basic ICMP echo request, use the `ping` command:

```
tnsr# ping <destination host>
```

TNSR will send 10 ICMP echo requests to the destination host using the *dataplane* namespace, waiting a maximum of 12 seconds for a reply.

The ping command supports a number of additional parameters which alter its behavior:

```
tnsr# [(host|dataplane)] ping (<dest-host>|<dest-ip>) [ipv4|ipv6]
      [interface <if-name>] [source <src-addr>] [count <count>]
      [packet-size <bytes>] [ttl <ttl-hops>] [timeout <wait-sec>]
      [buffered] [interval <seconds:0.000001-6000>]
```

host|dataplane

The namespace (*Networking Namespaces*) in which the command will run.

dest-host|dest-ip

The target of the ICMP echo request. This may be a hostname, IPv4 IP address, or IPv6 IP address.

ipv4|ipv6

When a hostname is used for the destination, this parameter controls the address family used for the ICMP echo request when the DNS response for the hostname contains both IPv4 (A) and IPv6 (AAAA) records.

interface

The TNSR interface from which the ICMP echo requests will originate.

source

The source IP address for the ICMP echo requests. If omitted, an address will be automatically selected on the interface through which the packet will exit toward the target.

count

The number of ICMP echo requests to send. Default value is 10.

packet-size

The size of the ICMP echo request payload, not counting header information. Default value is 56.

ttl

The Time To Live/Hop Limit value for ICMP echo requests, which can limit how far they may travel across the network. Default value is 121 hops.

timeout

The total time to wait for the command to complete.

buffered

Execute the command in the backend and only display the results when the test completes. Otherwise the command is run through the terminal and the CLI displays the results live.

interval

The amount of time in seconds to wait between ICMP echo requests. Fractional seconds are allowed. Value must be in the range 0.000001-6000.

6.13.3 Traceroute

To perform a network routing trace to a destination host, use the **traceroute** command:

```
tnsr# traceroute <destination host>
```

As with the **ping** command, there several additional parameters to change the behavior of the trace:

```
tnsr# [(host|dataplane)] traceroute (<dest-host>|<dest-ip>) [ipv4|ipv6]
      [interface <if-name>] [source <src-addr>] [packet-size <bytes>]
      [no-dns] [ttl <ttl-hos>] [waittime <wait-sec>] [buffered]
```

Most parameters are the same as those found in **ping** (*Ping*). Only the items that differ are as follows:

no-dns

Do not attempt to use DNS to reverse resolve hosts that respond to probes.

waittime

Amount of time the command will wait for individual probe responses to return.

Warning: The **traceroute** command requires `/usr/bin/traceroute` to be present in the base operating system. The TNSR package set includes a dependency which will automatically install a package for traceroute.

6.14 Basic System Information

The TNSR CLI can set several basic elements about the system itself, which also serves as a good introduction to making changes on TNSR. These settings are made in `config` mode.

Tip: These values are also propagated to SNMP, if configured. See *Simple Network Management Protocol* for information on setting up SNMP.

The following parameters are available:

system contact <text>

System contact information, such as an e-mail address or telephone number (sysContact in SNMP).

system description <text>

A brief description of this TNSR instance, for example its role or other identifying information (sysDescr in SNMP).

system location <text>

The location of this TNSR instance, for example a physical location such as a building name, room number, rack number/position, or VM host (sysLocation in SNMP).

system name <text>

The hostname of this TNSR instance (sysName in SNMP).

Warning: This setting also changes the hostname in the host operating system to match, replacing any previously configured hostname.

This example shows how to set the above parameters, starting from `master` mode:

```
gw tnsr# configure
gw tnsr(config)# system contact support@example.com
gw tnsr(config)# system description TNSR Lab Router
gw tnsr(config)# system location HQ MDF/Rack 2 Top
gw tnsr(config)# system name labrtr01
labrtr01 tnsr(config)# exit
```

To view the values of these parameters, along with uptime and memory usage, use the `show system` command from either `master` or `config` mode:

```
labrtr01 tnsr# show system
description: TNSR Lab Router
contact: support@example.com
name: labrtr01
location: HQ MDF/Rack 2 Top
System Parameters:
object-id: 1.3.6.1.4.1.13644
uptime: 1303615 seconds
total-ram: 8004488 KiB
free-ram: 3236820 KiB
total-swap: 2932732 KiB
free-swap: 2932732 KiB
```

Platform:

(continues on next page)

(continued from previous page)

```
os-name: Linux
os-release: 5.4.0-91-generic
os-version: Ubuntu 20.04.3 LTS
machine: x86_64
```

Product:

```
product-vendor: Netgate
product-name: TNSR
product-model: x
product-serial: 0
```

6.14.1 System DNS Resolution Behavior

The way TNSR and the host OS resolve hostnames via DNS can be fine-tuned if necessary. DNS resolution behavior has a separate configuration for each namespace (*Networking Namespaces*).

The default behavior in each namespace depends on the interface configuration. For example, if an interface is configured for DHCP, the DNS server supplied by the DHCP server will be used automatically.

DNS resolution behavior is configured using the `system dns-resolver <namespace>` command, which enters `config-dns-resolver` mode. In that mode, the following commands are available:

server <name> <ip-addr>

Configures a DNS server IP address to be used as a forwarding DNS server in this namespace. This command may be repeated multiple times to configure multiple servers. The name parameter is for reference only.

search <domain>

Configures a search domain, which is appended to hostnames without a domain name if a result is not found. This command may be repeated multiple times to configure multiple search domains.

DNS Resolution Examples

If *Unbound* is active and allows queries from 127.0.0.1, then the dataplane can be configured to use it as a DNS server:

```
tnsr(config)# system dns-resolver dataplane
tnsr(config-dns-resolver)# server localhost 127.0.0.1
tnsr(config-dns-resolver)# exit
```

Since the host namespace cannot access `unbound` running in the `dataplane` namespace, it must use a different external DNS server. Configure the host operating system namespace to use specific forwarding DNS servers directly as follows:

```
tnsr(config)# system dns-resolver host
tnsr(config-dns-resolver)# server g1 8.8.8.8
tnsr(config-dns-resolver)# server g2 8.8.4.4
tnsr(config-dns-resolver)# exit
```


6.15 Rebooting the Router

The `reboot` command, available in `config` mode, initiates an operating system reboot. This is equivalent to using the `shutdown -r` command from a shell prompt.

Warning: This action will cause an outage until the system fully restarts.

The general form of the `reboot` command is:

```
tnsr(config)# reboot (now|<minutes>) [force]
tnsr(config)# reboot cancel
```

The command has a few available options to control its behavior:

now

Prompts for confirmation and then immediately initiates a reboot.

<minutes>

Prompts for confirmation and then schedules a reboot for the given number of minutes in the future.

force

Modifies either the `now` or `<minutes>` format commands to run without confirmation.

cancel

Cancels a previously scheduled reboot.

BASIC CONFIGURATION

Now that TNSR is installed, it needs additional manual setup.

Note: This section assumes TNSR was installed as described in *Installation*. Devices pre-loaded with TNSR by Netgate do not require these extra steps.

This section contains information for a manual setup of interfaces. It can also serve as a reference for activating additional hardware added to an existing installation.

7.1 Setup Interfaces

TNSR requires complete control of the network interfaces that it will use. This means that the host operating system must not be attempting to use or control them in any way. The device ID of the interface(s) also must be obtained to inform VPP and TNSR what interfaces to use. The interface link can be tuned through VPP and configured through TNSR.

Warning: The host management interface must remain under the control of the host operating system. It must not be configured as an interface to be controlled by TNSR.

Network interfaces not configured in the installer will be disabled in the operating system during the installation process. The interfaces will need to be re-enabled in TNSR. For a fresh installation of TNSR, skip ahead to *Setup NICs in Dataplane*.

Interfaces added to the TNSR instance after the initial setup will need to be disabled using the following procedure.

7.1.1 Identify NICs to use with TNSR

To start, locate the network interfaces in use by the host operating system. View a list of network interfaces known to the host OS with this command:

```
$ ip link
```

To determine if a network interface is in use by the host OS, run the following command:

```
$ ip link show up
```

If an interface shows in that list, and its name does not start with `vpp`, then it is under control of the host.

Note: The TNSR installer will automatically mark any interface not configured in the installer for use by TNSR.

Make a note of the network interfaces and their purpose. Note which interface will be used for host management, and which interfaces will be used by TNSR. The host management interface will be left under the control of the operating system, while the remaining interfaces may be used by TNSR. In this example, the host contains four network interfaces: `enp0s20f0`, `enp0s20f1`, `enp0s20f2`, and `enp0s20f3` and TNSR will use `enp0s20f1` and `enp0s20f2`.

7.2 Disable Host OS NICs for TNSR

In order for TNSR to control network interfaces they must be disabled in the host OS. In most cases this is not necessary as network interfaces not configured during the installation process will be automatically disabled by the installer. For a fresh installation of TNSR, skip ahead to [Setup NICs in Dataplane](#). This section remains to explain how to change interfaces added after initial installation, or for installations which do not contain whitelisted network interfaces.

Note: To change an interface from being usable by TNSR to back under host OS control, see [Remove TNSR NIC for Host Use](#).

This is a two-step process. First, the interface link must be forced down. Then the network interface must be disabled in the operating system configuration.

Warning: The host management interface must remain under the control of the host operating system. It must not be configured as an interface to be controlled by TNSR. Do not disable the management interface during this step.

For each of the interfaces noted in the last section, manually force the link down:

```
$ sudo ip link set <interface name> down
```

For example:

```
$ sudo ip link set enp0s20f1 down
$ sudo ip link set enp0s20f2 down
```

Disable these network interfaces in netplan. Edit the netplan configuration file:

```
$ sudo vi /etc/netplan/00-installer-config.yaml
```

In this file, locate the configuration blocks for the interfaces (`enp0s20f1`, `enp0s20f2`) and remove them.

Starting example:

```
network:
  ethernets:
    enp3s0:
      dhcp4: true
    enp0s20f1:
      dhcp4: true
    enp0s20f2:
```

(continues on next page)

(continued from previous page)

```
dhcp4: true
version: 2
```

Edited file:

```
network:
  ethernet:
    enp3s0:
      dhcp4: true
      version: 2
```

Save the changes and then apply the new configuration with netplan:

```
$ sudo netplan apply
```

Next, restart TNSR so it can pick up the interfaces:

```
$ sudo tnsrctl restart
```

Warning: This command will stop TNSR and all traffic processing!

7.3 Setup NICs in Dataplane

Next, determine the device ID for the interfaces. Start the CLI (*Entering the TNSR CLI*) and run the following command to output the device IDs as seen by the dataplane:

```
tnsr# configure
tnsr(config)# dataplane dpdk dev ?
0000:02:01.0      Ethernet controller: Intel Corporation 82545EM Gigabit Ethernet
                  Controller (Copper) (rev 01) ( Active Interface eth0 )
0000:02:02.0      Ethernet controller: Intel Corporation 82545EM Gigabit Ethernet
                  Controller (Copper) (rev 01)
0000:02:03.0      Ethernet controller: Intel Corporation 82545EM Gigabit Ethernet
                  Controller (Copper) (rev 01)
```

Interfaces under host control will be noted in the output with **Active Interface**. Other listed interfaces are usable by TNSR.

For a fresh installation of TNSR, skip ahead to *Configuring Interfaces for TNSR*, otherwise continue on to identify host interfaces added after TNSR was installed.

7.3.1 Host Interface Name to Dataplane ID Mapping

The output of the dataplane `dpdk dev ?` command includes the device IDs in the first column. The device IDs will map to the network cards in a way that is typically easy to determine. For example:

Table 1: Interface Identifiers

| Interface | Identifier |
|-----------|--------------|
| enp0s20f0 | 0000:00:14.0 |
| enp0s20f1 | 0000:00:14.1 |
| enp0s20f2 | 0000:00:14.2 |
| enp0s20f3 | 0000:00:14.3 |
| enp3s0 | 0000:03:00.0 |
| enp4s0 | 0000:04:00.0 |

The host OS interface name and VPP identifiers contain the same information represented in different ways. They both reference the PCI bus number, slot number, and function number. The Interface name contains the values in decimal while the identifier shown in VPP uses hexadecimal.

Deconstructing the first interface name, it contains the following:

Table 2: Interface Name Components

| Component | Interface Value | VPP ID Value |
|-------------|-----------------|------------------------|
| Device Type | en (Ethernet) | n/a |
| PCI Bus | p0 | 00 |
| Bus Slot | s20 | 14 (Decimal 20 in Hex) |
| Function | f0 | .0 |

Using this pattern, make a note of the VPP identifiers for the next step. In this example, since `enp0s20f1` and `enp0s20f2` are the interfaces to use, the corresponding VPP IDs are `0000:00:14.1` and `0000:00:14.2`.

7.3.2 Configuring Interfaces for TNSR

Next, edit the dataplane configuration. Start the CLI (*Entering the TNSR CLI*) and enter configuration mode:

```
tnsr# configure
tnsr(config)#
```

Add the device IDs of the interfaces to be used by the VPP dataplane, determined above:

```
tnsr(config)# dataplane dpdk dev 0000:00:14.1 network
tnsr(config)# dataplane dpdk dev 0000:00:14.2 network
```

Then commit the configuration:

```
tnsr(config)# configuration candidate commit
```

Restart the VPP dataplane:

```
tnsr(config)# service dataplane restart
tnsr(config)# exit
```

The interfaces will now be available for TNSR. Start the CLI again and run `show interface` and verify that the interfaces appear in the output. The output example below has been shortened for brevity:

```
tnsr# show interface
Interface: GigabitEthernet0/14/1
[...]
Interface: GigabitEthernet0/14/2
[...]
Interface: local0
[...]
```

The TNSR interface name also reflects the type, followed by the PCI Bus/Slot/Function ID of each interface, using the same hexadecimal notation as VPP.

Note: The dataplane uses hexadecimal values by default but can use decimal values instead by setting `dataplane dpdk decimal-interface-names`. See [DPDK Configuration](#) for details.

Note: Once TNSR attaches to interfaces in this way, they will no longer be shown as devices in the host OS. To return a network interface back to host OS control, see [Remove TNSR NIC for Host Use](#).

One exception to this behavior is Mellanox network interfaces as they use the same driver for both host OS and DPDK, they still appear in the host OS.

See also:

The dataplane supports several additional per-device parameters which can fine-tune behavior. See [DPDK Configuration](#) for details.

Customizing Interface Names

The default interface names, such as `GigabitEthernet0/14/1`, may be customized by an administrator. To customize the names, the PCI ID of the device must be known. The custom names can be used anywhere that an interface name is necessary in TNSR.

Note: Only dataplane hardware interface names may be customized in this way. Interfaces from virtual sources such as loopback, IPsec, and GRE cannot be renamed.

The command to rename interfaces is `dataplane dpdk dev <pci-id> network name <name>`. To activate the change, the dataplane must be restarted after making the name change.

Warning: Custom interface names cannot conflict with reserved keywords in the dataplane. TNSR will return a warning and prevent use of a conflicting name. Conflicting names include items such as dataplane graph node names both directly and indirectly. New nodes are created based on interface names with suffixes such as `<name>-tx` and `<name>-output` so TNSR checks for potential collisions there as well.

This example changes the name of `GigabitEthernet0/14/1`, PCI ID `0000:00:14.1`, to `DMZ`:

First, look at the list of interfaces. Note that the interface is in the list with its original name:

```
tnsr# show interface
Interface: GigabitEthernet0/14/1
[...]
Interface: GigabitEthernet0/14/2
[...]
Interface: local0
[...]
```

Next, remove any references to the interface from TNSR, and then remove the interface configuration entirely:

```
tnsr(config)# no interface GigabitEthernet0/14/1
```

Now set the name of the device, then restart the dataplane:

```
tnsr(config)# dataplane dpdk dev 0000:00:14.1 network name DMZ
tnsr(config)# service dataplane restart
```

After the dataplane restarts, the interface will appear in the list with its new name:

```
tnsr# show interface
Interface: DMZ
[...]
Interface: GigabitEthernet0/14/2
[...]
Interface: local0
[...]
```

To change the name back at a later time, all references to the interface must first be removed, and then the name can be reset:

```
tnsr(config)# no interface DMZ
tnsr(config)# no dataplane dpdk dev 0000:00:14.1 name
tnsr(config)# service dataplane restart
```

7.3.3 Troubleshooting

If the interfaces do not appear in the `show interface` output, the default driver did not attach to those interfaces and they may require a different driver instead. To see a list of available drivers, use the following command from `config` mode:

```
tnsr(config)# dataplane dpdk uio-driver ?
  igb_uio          UIO igb driver
  uio_pci_generic  Generic UIO driver
  vfio-pci         VFIO driver
```

To enable a different driver, complete the command using the chosen driver name, then commit the configuration and restart the dataplane.

Note: Ethernet 700 Series Network Adapters based on the Intel Ethernet Controller X710/XL710/XXV710 and Intel Ethernet Connection X722 are not compatible with the `uio_pci_generic` DPDK driver. For these devices, use the `igb_uio` driver instead.

Note: Mellanox devices use [RDMA](#) and not UIO, so changing this driver will not have any effect on their behavior. If a Mellanox device does not appear automatically, TNSR may not support that device.

```
tnsr(config)# dataplane dpdk uio-driver igb_uio
tnsr(config)# configuration candidate commit
tnsr(config)# service dataplane restart
tnsr(config)# exit
```

Then attempt to view the interfaces with `show interface` again. If they are listed, then the correct driver is now active.

Warning: When using the `vfio-pci` driver, the DPDK IOVA mode must be explicitly set to `pa`. See [DPDK Configuration](#) for more details.

Warning: When the `uio-driver` is set to `vfio-pci` TNSR automatically configures the driver with `noiommu` mode for compatibility with QAT and other functions. Some may consider `noiommu` mode unsafe as it provides the user full access to a DMA capable device without the security of I/O management. Take this into consideration when choosing the `vfio-pci` driver.

7.4 Setup QAT Compatible Hardware

TNSR Supports hardware compatible with Intel® QuickAssist Technology, also known as QAT, for accelerating cryptographic and compression operations.

This hardware can be found in CPIC cards as well as many C3000 and Skylake Xeon systems. Netgate [XG-1541](#) and [XG-1537](#) hardware has an add-on option for a CPIC card.

7.4.1 Setup Process

Enable SR-IOV in the BIOS

SR-IOV is required for QAT to function in TNSR. SR-IOV enables Virtual Functions which are required for binding by crypto devices.

The procedure to enable SR-IOV varies by platform. Generally this involves rebooting the hardware and entering the BIOS setup, making the change, and then saving and rebooting. The exact location of the SR-IOV option also varies in different BIOS implementations.

Note: Netgate devices which ship with a CPIC card preinstalled will have this step completed at the factory, but double check the BIOS to ensure it is set as expected.

VT-d/IOMMU

From here there are two compatible combinations of settings in the BIOS for QAT. The user can choose one or the other of:

- VT-d and IOMMU both disabled
- VT-d and IOMMU both enabled

Either of these choices is sufficient to allow the dataplane to utilize QAT.

Disable VT-d in the BIOS

Certain combinations of hardware may experience problems with QAT when VT-d is enabled in the BIOS. As such, the best practice is to disable VT-t in the BIOS for the best possible experience with QAT. Netgate [XG-1537](#) and [XG-1541](#) devices with a DH895xcc QAT CPIC card installed are known to have this limitation.

Some hardware also requires disabling IOMMU and may function better with VT-d disabled. For example, hardware requiring the `vfio-pci` PMD which runs with `noiommu` mode internally.

The procedure to disable VT-d varies by platform. The setting is typically located under **Advanced > Chipset Configuration > North Bridge > IIO > VT-d** or along a similar path.

If VT-d and QAT are incompatible, the problem can manifest in different ways, including:

- IPsec tunnels may come up but drop packets or otherwise fail to pass traffic.
- Errors may appear on the console when the dataplane tries to send buffers to the QAT device:

```
[110772.063766] DMAR: [DMA Read] Request device [04:01.0] fault addr 406482000
↪[fault
   reason 06] PTE Read access is not set
[110773.059440] DMAR: DRHD: handling fault status reg 102
```

Enable IOMMU in grub

If VT-d is enabled in the BIOS, IOMMU (Input–Output Memory Management Unit) must also be enabled in grub for QAT to function. It functions similar to PCI passthrough, allowing the dataplane to access the QAT device.

To enable IOMMU in grub:

- Open `/etc/default/grub` in a text editor (as root or with `sudo`)
- Locate the line starting with `GRUB_CMDLINE_LINUX`
- Check if that line includes `intel_iommu=on iommu=pt`
- If those parameters are not included on the line, append them to the end, before the end quote.
- Save and exit the text editor
- Run one following commands (depending on how the device boots):
 - Ubuntu Legacy: `sudo grub2-mkconfig -o /boot/grub/grub.cfg`
 - Ubuntu UEFI: `sudo grub2-mkconfig -o /boot/efi/EFI/ubuntu/grub.cfg`
- Reboot the device

Change the uio driver

Next, change the TNSR dataplane uio driver to one which supports QAT. Currently this includes the `igb_uio` and `vfio-pci` drivers:

```
tnsr# configure
tnsr(config)# dataplane dpdk uio-driver igb_uio
```

Note: As of TNSR 20.02, `igb_uio` is the default driver.

Configure the QAT PCI device in TNSR

Next, configure the QAT device in TNSR.

To configure this device, first locate its PCI ID. TNSR will print the PCI ID when viewing possible parameters for dataplane devices

```
tnsr(config)# dataplane dpdk dev ?
0000:03:00.0      Ethernet controller: Intel Corporation Ethernet Connection X552_
↳ 10 GbE SFP+
0000:03:00.1      Ethernet controller: Intel Corporation Ethernet Connection X552_
↳ 10 GbE SFP+
0000:04:00.0      Co-processor: Intel Corporation DH895XCC Series QAT
0000:05:00.0      Ethernet controller: Intel Corporation I350 Gigabit Network_
↳ Connection (rev 01) ( Active Interface eno1 )
0000:05:00.1      Ethernet controller: Intel Corporation I350 Gigabit Network_
↳ Connection (rev 01)
```

In this instance, the following line from the output is for the QAT device:

```
0000:04:00.0 Co-processor: Intel Corporation DH895XCC Series QAT
```

The first value printed on the line is the PCI ID, `0000:04:00.0`.

This varies by hardware, and may appear with a slightly different string, such as:

```
0000:01:00.0      Co-processor: Intel Corporation Atom Processor C3000 Series_
↳ QuickAssist Technology (rev 11)
```

Now, tell TNSR the device at that address is a crypto device:

```
tnsr(config)# dataplane dpdk dev 0000:04:00.0 crypto
```

If TNSR is running in a virtual machine and the QAT device is passed through from the hypervisor host system using SR-IOV, use `crypto-vf` at the end of the command instead. When the device is defined with `crypto-vf`, the dataplane uses the Virtual Function (VF) instead of the Physical Function (PF), since the PF is not directly available in a virtual machine.

Note: Typically a VF can be identified by the string `Virtual Function` printed in the device description listed by `dataplane dpdk dev ?`. Some platforms may not make this distinction visible to TNSR, so the general guideline is to use `crypto-vf` when running in a virtual machine and `crypto` otherwise.

Note: TNSR will only display device types which are usable by the dataplane. This means:

- If a PF is available, it is usable by the dataplane and will appear in the device list.
 - If a VF is available without a corresponding PF, the VF is usable by the dataplane and will appear in the device list.
 - If both a VF and corresponding PF are available, only the PF is usable by the dataplane and thus only the PF will appear in the device list.
-

Activate and check the settings

When viewing the XML configuration with `show configuration running`, it will contain settings similar to the following example. Note that if other dataplane options are present in the configuration, those will also be visible. Here is how it looks once configured:

```
<dataplane-config>
  <dpdk>
    <dev>
      <id>0000:04:00.0</id>
      <device-type>crypto</device-type>
    </dev>
    <uio-driver>igb_uio</uio-driver>
  </dpdk>
</dataplane-config>
```

After configuring the `crypto` device and `uio` driver, TNSR will commit the settings to the dataplane configuration.

To activate the new settings, restart the dataplane.

```
tnsr(config)# service dataplane restart
tnsr(config)# exit
tnsr#
```

Lastly, using the `dataplane shell` command, verify that VPP can see the `crypto` device, and that it is being used to handle cryptographic operations:

```
tnsr# dataplane shell sudo vppctl show crypto engines
[...]
dpdk_cryptodev      100      DPKD Cryptodev Engine
tnsr# dataplane shell sudo vppctl show crypto async handlers
Algo                Type                Handler
aes-128-gcm-aad8    async-encrypt      sw_scheduler dpdk_cryptodev*
                   async-decrypt      sw_scheduler dpdk_cryptodev*
[...]
```

The output of those commands may vary slightly depending on hardware and TNSR version. In both commands, look for the presence of `dpdk_cryptodev`.

7.4.2 Troubleshooting

If the QAT device does not appear in the `show crypto async handlers` output, then VPP can not see the crypto device. To correct this, first verify the QAT drivers are loaded, VFs exist for the QAT device, and grub `BOOT_IMAGE` is passing the necessary `iommu` parameters.

Verify IOMMU parameters:

```
$ dmesg | grep iommu
```

The following parameters should appear somewhere on the `BOOT_IMAGE` line in the `dmesg` output:

```
intel_iommu=on iommu=pt
```

Verify that the QAT drivers are loaded in the operating system:

```
$ lsmod | grep qat
qat_dh895xccvf      13281  0
qat_dh895xcc        13510  0
intel_qat           141755  2 qat_dh895xccvf,qat_dh895xcc
dh_generic          13286  1 intel_qat
rsa_generic         18819  1 intel_qat
authenc             17776  1 intel_qat
```

Verify Virtual Functions (VFs) exist for the QAT device:

```
$ sudo lspci | grep -i 'co-processor'
```

The number of listings are dependent on how many threads VPP uses to process packets. At minimum there will be at least three entries, but there may be many more. The lines will look similar to this example:

```
04:00.0 Co-processor: Intel Corporation DH895XCC Series QAT
04:01.0 Co-processor: Intel Corporation DH895XCC Series QAT Virtual Function
04:01.1 Co-processor: Intel Corporation DH895XCC Series QAT Virtual Function
```

Note: Some platforms expand the QAT acronym to QuickAssist Technology. If `lspci` does not recognize the specific chipset, the list may include a device ID such as 19e3, 18ef, or 37c9 instead of the string QAT Virtual Function. Refer to the [list of QAT device IDs from DPDK](#) to see if one matches.

TNSR stores the device Physical Function (PF), 04:00.0 for example, in its configuration because the VFs do not yet exist at boot time. They are created by `clixon-backend` when it processes the `crypto` device. Then, the allocated VFs on the PF have their addresses written to `startup.conf`.

The VFs are bound to `igb_uio` because `igb_uio` is a driver which allows a userspace process to do [RDMA](#) on buffers that are used by a PCI device.

If the drivers are loaded and the VFs show under `lspci`, then verify `/etc/vpp/startup.conf` has the appropriate `dpdk` settings. The `igb_uio` driver must be present and the PCI IDs of TNSR interfaces along with one of the VFs for the QAT device:

```
dpdk {
    uio-driver igb_uio
    dev 0000:04:01.0
    dev 0000:05:00.1
```

(continues on next page)

(continued from previous page)

```
dev 0000:03:00.0
dev 0000:03:00.1
}
```

If that looks correct, verify `igb_uio` is being used by the QAT VF and interfaces:

```
$ sudo vppctl show pci all | grep igb_uio
0000:03:00.0 0 8086:15ac 2.5 GT/s x1 igb_uio
0000:03:00.1 0 8086:15ac 2.5 GT/s x1 igb_uio
0000:04:01.0 0 8086:0443 unknown igb_uio
0000:05:00.1 0 8086:1521 5.0 GT/s x4 igb_uio
```

Physical TNSR interfaces may also be present in that output in addition to the QAT VF ID, which matches the QAT VF ID configured for `dpdk` in `/etc/vpp/startup.conf`.

Note: As with `lspci`, not every QAT VF device is recognized by name, so match up the devices by PCI ID. Additionally, some PF devices will not show `igb_uio` but the device-appropriate QAT driver instead.

For example, the following QAT PF and VF devices are present on a properly working C3XXX system with QAT:

```
0000:01:00.0 0 8086:19e2 5.0 GT/s x16 c3xxx
0000:01:01.0 0 8086:19e3 unknown igb_uio
0000:01:01.1 0 8086:19e3 unknown c3xxxvf
```

If any of those tests do not provide the expected output, then reboot the system and check again. Ensure the TNSR services and VPP are running, and then check the VPP QAT status again.

```
$ sudo vppctl show crypto engines
$ sudo vppctl show crypto async handlers
```

If there is still no `dpdk_cryptodev` shown in the output of either command, verify the PCI ID for the crypto device specified in TNSR is accurate. It must be the first PCI ID displayed by `sudo lspci | grep -i 'co-processor'`. Then verify the PCI ID of the next listing in that output (first VF device) is specified in `/etc/vpp/startup.conf` properly and also the same PCI ID seen by VPP when running:

```
$ sudo vppctl show pci all
```

7.5 Remove TNSR NIC for Host Use

If TNSR is controlling a network interface that should be used by the host OS, it can be returned to host OS control in a few steps.

7.5.1 Locate the Interface

First, identify the interface in question. The PCI ID and Linux interface name are required to proceed, and *Host Interface Name to Dataplane ID Mapping* explains the relationship between these interface names and IDs.

In this example, the TNSR interface `GigabitEthernet0/14/3` will be returned to the host OS. Based on the name, the PCI ID is `0000:00:14.3`, and converting from hexadecimal to decimal yields the Linux interface name `enp0s20f3`. This is determined based on PCI bus 0, Bus slot 20 (decimal), function 3.

7.5.2 Remove the Interface from TNSR

First, remove any configuration items using the interface. The interface could be present in several places, so inspect the entire running configuration for references to this interface and then remove them.

Next, remove the interface configuration itself:

```
tnsr# configure
tnsr(config)# no interface GigabitEthernet0/14/3
```

If the interface was manually specified in the dataplane by PCI ID as mentioned in *Configuring Interfaces for TNSR*, that must be also be removed. This will be present in the running configuration inside the `<dataplane>` section, if one exists. To remove the configuration, follow this example using the correct PCI ID:

```
tnsr(config)# no dataplane dpdk dev 0000:00:14.3
```

Save the configuration after making these changes, as the next steps will involve actions that may result in the startup configuration being used by TNSR:

```
tnsr(config)# configuration copy running startup
```

Exit the TNSR CLI.

7.5.3 Edit the Host Interface Configuration

The netplan interface configuration file is located at `/etc/netplan/00-installer-config.yaml`. The file name may vary slightly, and may not exist if the installer did not setup at host management interfaces. If it does not exist, create it.

From a shell on the host OS, edit the file for this interface using `sudo`, for example:

```
$ sudo vi /etc/netplan/00-installer-config.yaml
```

Inside that file add a configuration block for the interface:

```
network:
  ethernets:
    enp3s0:
```

(continues on next page)

(continued from previous page)

```
    dhcp4: true
    enp0s20f3:
        dhcp4: true
version: 2
```

Warning: Indentation is critical in this file! Each block indent level must be two (2) spaces.

This example contains interface configurations which indicate that `enp3s0` and `enp0s20f3` should both be controlled by the host OS with addresses obtained from DHCP.

For a static address, the configuration can be a bit more involved:

```
network:
  ethernets:
    enp3s0:
      dhcp4: true
    enp0s20f3:
      addresses: [172.19.10.2/24]
      gateway4: 172.19.10.1
      nameservers:
        addresses: [1.1.1.1, 8.8.8.8]
version: 2
```

Warning: Indentation is critical in this file! Each block indent level must be two (2) spaces.

This configures the `enp3s0` interface for DHCP but uses a static IP address configuration for `enp0s20f3`.

See also:

For more information on the format of this file, see the [Netplan site](#).

After making changes, apply them with `netplan`:

```
$ sudo netplan apply
```

Note: The interface may not be available for control by `netplan` until the device reboots.

7.5.4 Reactivate the Host Interface

At this point, the interface is ready to return to host OS control. There are two methods to complete the process: Reboot the host, or manually reactivate the interface.

Reboot

The fastest and easiest option is to **reboot the host**. This will allow the host to naturally locate and resume control of the device.

Warning: All traffic processing by TNSR will stop while the host is rebooting!

Reboot the host from the shell as follows:

```
$ sudo shutdown -r
```

Manually Reactivate

Warning: The following procedure is advanced and the best practice is to reboot and not follow this method. This should only be attempted in cases where the device cannot be rebooted.

There is also a manual method which may be used if a reboot is not feasible.

First, stop TNSR and related services:

Warning: This command will stop TNSR and all traffic processing!

```
$ sudo tnsrctl stop
```

Next, start a root shell and unbind the device from the current driver (TNSR):

```
$ sudo -s  
# echo '0000:00:14.3' > '/sys/bus/pci/devices/0000:00:14.3/driver/unbind'
```

Warning: Note the use of the PCI ID in both locations in the command, and the use of quotes around parameters.

That leaves the device unbound. Now it must be returned to a host kernel driver. The name of this driver depends on the hardware. For most Netgate TNSR devices this will be `igb`, as in the following example.

Still using the root shell from the previous command, bind the interface to the driver as follows:

```
# echo '0000:00:14.3' > '/sys/bus/pci/drivers/igb/bind'
```

Lastly, start the dataplane and related services:

```
$ sudo tnsrctl start
```


7.5.5 Check the Host Interface

At this point the interface is now under host OS control and will be listed in the output of `ip` and similar commands.

```
$ ip addr show dev enp0s20f3
5: enp0s20f3: <NO-CARRIER,BROADCAST,MULTICAST,UP> mtu 1500 qdisc mq state DOWN group_
↪default qlen 1000
    link/ether 00:08:a2:09:95:b4 brd ff:ff:ff:ff:ff:ff
```

7.6 Secure Shell (SSH) Server

The Secure Shell (SSH) service, `sshd`, is always enabled in the `host` namespace (*Networking Namespaces*) by default. The SSH service can also run in the `dataplane` namespace, and may be active in both namespaces at the same time. The `dataplane` namespace instance of SSH is configured using the `ssh dataplane (enable|disable)` command.

Warning: Though the SSH service is capable of running in the `dataplane` namespace, it should not be exposed to insecure networks. Brute force and other attacks against SSH servers are common on the Internet, and exposing TNSR to such attacks reduces its overall security. At a minimum, access to the service should be restricted to specific remote hosts or networks by ACLs.

The best practice is to only run SSH in the `host` namespace.

To enable the SSH service for the `dataplane` namespace:

```
tnsr(config)# ssh dataplane enable
```

To disable the SSH service for the `dataplane` namespace:

```
tnsr(config)# ssh dataplane disable
```

7.6.1 Control the SSH Service

The SSH service is controlled by the `service ssh (host|dataplane) (start|stop|restart|status)` command.

In most cases manual control of the service is unnecessary as the server will start and stop as needed based on the configuration.

UPDATES AND PACKAGES

TNSR software updates are available to download over the Internet using Linux package management tools (RPM, yum). The settings required to communicate with the software repository containing TNSR updates are preconfigured on TNSR. Connections to the Netgate TNSR repository must be authenticated using a valid signed client certificate.

Warning: TNSR Home+Lab installations can be updated in-place by purchasing a [TNSR Business subscription](#) and installing a signed *update certificate*.

If a subscription isn't necessary at this time, install the newest version of TNSR Home+Lab software after [registering for the newest version of TNSR software](#), and then [migrate any configuration settings](#).

Note: All versions of TNSR, including Home+Lab, can update the operating system even without the TNSR update certificate in place. Only TNSR-related packages require authentication to update.

This guide explains how to obtain and install the required client certificate on a TNSR instance.

Warning: Portions of this process are not final and may change.

Commands must be executed on the TNSR instance to generate an X.509 certificate signing request. The request must then be submitted to Netgate for signing. Once the request has been signed and a certificate has been generated, the certificate must be downloaded and installed in TNSR.

Note: While it is possible to create the certificate outside of TNSR and import it afterward, this guide only demonstrates using TNSR directly. See [Public Key Infrastructure](#) for more details about creating and importing certificates.

At a high level, the steps involved in the process can be summarized as:

8.1 Generate a Key Pair

This guide uses the TNSR CLI `pki` commands documented in *Public Key Infrastructure* to generate cryptographic keys that can be used for secure communications and authentication.

Warning: When creating keys and certificates for updates, the name of each component **must** be `tnsr-updates`, which is the name required by the software repository configuration.

The first step is to generate a set of cryptographic keys:

```
tnsr# pki private-key tnsr-updates generate
-----BEGIN PRIVATE KEY-----
[...]
-----END PRIVATE KEY-----
tnsr#
```

Note: This command can be run only once successfully as TNSR will not overwrite an existing key. To generate a new key, *remove the existing key* first.

This new `tnsr-updates` key object contains the private key, which is secret, and a public key, which is included in the certificate.

The same key pair can be used as the basis for multiple certificate signing requests. If a certificate expires, is accidentally deleted, or needs to be replaced for any other reason other than the keys being compromised, generate a new signing request using the existing key pair.

8.2 Generate a Certificate Signing Request

The Certificate Signing Request (CSR) contains a public key derived from the key pair generated in the previous step, plus attributes that uniquely identify the requester. A CSR is signed by a Certificate Authority to generate a certificate.

To generate a CSR, first set values which identify this TNSR instance:

```
tnsr# pki signing-request settings clear
tnsr# pki signing-request set common-name tnsr-example.netgate.com
tnsr# pki signing-request set subject-alt-names add hostname tnsr-example.netgate.com
tnsr# pki signing-request set country US
tnsr# pki signing-request set state Texas
tnsr# pki signing-request set city Austin
tnsr# pki signing-request set org Netgate
tnsr# pki signing-request set org-unit Engineering Testing 1 2 3
```

For the **Common Name**, the best practice is to enter the fully qualified domain name or IP address of the TNSR instance.

Note: This does not have to be a valid public hostname or IP address, but ideally it should uniquely identify this TNSR installation.

For the other fields, enter information about the name and location of the organization controlling this TNSR instance.

A **Digest Algorithm** is also required to sign the request:

```
tnsr# pki signing-request set digest sha256
```

View the values that have been set before generating the request:

```
tnsr# pki signing-request settings show
Certificate signing request fields:
  common-name: tnsr-example.netgate.com
  country: US
  state: Texas
  city: Austin
  org: Netgate
  org-unit: Engineering Testing 1 2 3
  digest: sha256
subject-alt-names:
  hostname: tnsr-example.netgate.com
```

Any typos can be corrected by re-running the appropriate set commands.

When all values are correct, generate the request:

Warning: As with the key pair, the request must have the name `tnsr-updates`.

```
tnsr# pki signing-request tnsr-updates generate
-----BEGIN CERTIFICATE REQUEST-----
MIICzTCCAbUCAQAwYcxITAfBgNVBAMMGHRuc3ItZXhhbXBsZS5uZXRNyXRlLmNv
bTELMakGA1UEBhMCVVMxMjEAMBgNVBAgMBVRleGFzMQ8wDQYDVQQHDAZBdXN0aW4x
EDA0BgNVBAoMB05ldGdhbGUxIjAgBgNVBAsMGUVuZ2luZWVyaW5nIFRlc3Rpbmcg
MSAyIDMwgGEiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQAUAxpX5KYNNu1t
7xIKV5ES6kPMDtBHqXB7d2fywtqfI/UVvV9+LhCHLL0z8ovqg/GcHioddCBQH63a
+Uqh0cMIZVowRQhe7eYM03GmHMyuxz6P5eW03E9d/3sT0rL+fUDH8CVWwjmwX0tC
ldP3PADH4ennxqaWk0+lHga0Dm93hrErX5crzJMyZpGZ/BXfDY0+0uxktZOHIIsSb
9gDtEN2534I2wk0hm6mFashDWxmYpcb8ventcVwtEOQGABYnsCg8z3VwcPQY6x9k
YIKFuQM3U8hZ2y6oEj jPqfsc+GnZ6b+7bWnck7tITqz6FQwnSW3sKvXkwsyeDnEa
3eyIjSrFagMBAAgGADANBgkqhkiG9w0BAQsFAA0CAQEAAet jRqn6IoekxZErrPvZf
encbvedPUTLSEbGF923PMpmH5KBA0e4QMT2wEA7dWd5Geu0EA5+6/QlvQh3kl1yU
bzDqRASjl67cKFxp6fL2iDkvoaGf+PusLGM3eQthGzF6t7q6cHl500ANVbrLZws2
qu09evqHgPCJk0hcmPLXSGgitMJwH7EBSmySsZPuEyUCsozA8YLsDLM0dxU5PQnX
XesDhG0AMcFhu34nmsUrCqJwi3CM4ruLT1YseVVyZDyjhTEWuCP9lZf7jzRl2qEF
afis853CjtURIEkfzeKIqqacr1Y0XXt119DtKDz19Z4sWu3C1PsdciOgalCnSVHh
5g==
-----END CERTIFICATE REQUEST-----
```

TNSR will print the CSR data to the terminal, as shown above. Copy the text, including the lines containing `BEGIN CERTIFICATE REQUEST` and `END CERTIFICATE REQUEST`, and save it to a file.

8.3 Submit the Certificate Signing Request

To generate a signed certificate, the signing request must be submitted to Netgate. Netgate will sign the request with a Certificate Authority key trusted by the TNSR update repository servers.

8.3.1 Required Customer Information

The certificate signing request must be accompanied by information Netgate can use to identify the customer and validate the request. This information varies by platform.

TNSR Device or ISO Install

For customers using a device preloaded with TNSR or installing TNSR from an ISO image, the certificate signing support request must be accompanied by information that Netgate can use to validate the request. Netgate must be able to determine that the request is being sent from an authorized user on an account that has an appropriate TNSR purchase.

For example, send the support request from the same e-mail address which was used when making the TNSR purchase and include an order number and other relevant information in the support request when submitting the CSR.

TNSR in AWS

For AWS customers, two additional pieces of information are necessary to validate the status of customer accounts before Netgate can sign a certificate:

- The **AWS Customer ID**
- The **AWS Instance ID**

Note: When registering a TNSR instance to obtain a client certificate, Netgate must be able to prove that this instance of TNSR is a valid instance of the currently published AWS image. To do this, Netgate utilizes the AWS API that indicates which TNSR image the specified instance ID is an instance of. This is the only use of the customer instance ID, which is not stored or retained in any way.

The **AWS Customer ID** can be found using the instructions at <https://docs.aws.amazon.com/general/latest/gr/acct-identifiers.html>

The **AWS Instance ID** can be retrieved from the EC2 Web Console:

1. Navigate to <https://console.aws.amazon.com/ec2/>
2. Click **Instances**
3. Click the box next to the TNSR instance to select it
4. The **AWS Instance ID** is displayed at the bottom of the page under the **Description** tab

8.3.2 Create a Support Request for the CSR

Using the CSR and customer information, submit a request on the Netgate Support Portal.

Warning: The following steps are still under design and development and may change at any time.

1. Navigate to the [Netgate TAC Support Request](#) page
2. Log in with an existing account using an email address and password, or register a new account using the **Sign Up** button and following the prompts
3. Create a new support request with the following properties:

Department

Select Netgate Global Support

Software Product

Select the matching purchased TNSR product, either TNSR Business or TNSR Enterprise

Platform

Choose the value that matches where TNSR is running, for example TNSR in AWS, Netgate XG-1541 1U, or Whitebox / Other

General Problem Description

Select TNSR Certificate Authorization

Support Level

Choose the support level that matches the purchased TNSR product, TNSR Business, TNSR Business Plus, or TNSR Enterprise

AWS Instance ID

For TNSR on AWS customers only, The ID for this TNSR instance located previously

AWS Customer ID

For TNSR on AWS customers only, the AWS Customer ID located previously

Order Number

For device and ISO customers, the order number of the TNSR purchase for this device

4. Include any other necessary identifying information in the **Description** field
5. Click **Attach file** and attach the file containing the CSR text
6. Submit the support request

8.3.3 Retrieve the signed certificate

Warning: The following steps are still under design and development and may change at any time.

Once the certificate signing request has been signed by Netgate, support representatives will respond back to the e-mail address used to submit the request with the signed certificate.

For those with a login to the support system, the status of the support request will be updated to reflect that the certificate is ready.

When this occurs, download the signed certificate:

1. Navigate to the [Netgate TAC Support Portal](#) page

2. Locate the support request
3. Download the attached signed certificate file

8.4 Install the certificate

With the signed certificate in hand, it can now be installed on the TNSR instance:

Warning: As with the key and CSR, the name of the certificate must be `tnsr-updates`.

```
tnsr# pki certificate tnsr-updates enter
Type or paste a PEM-encoded certificate.
Include the lines containing 'BEGIN CERTIFICATE' and 'END CERTIFICATE'
-----BEGIN CERTIFICATE-----
MIIE7DCCAtSgAwIBAgIJANbZBxsCVDpvMA0GCSqGSIb3DQEBCwUAMHoxCzAJBgNV
BAYTA1VTMQ4wDAYDVQQIDAUVUZXhhczEPMA0GA1UEBwwGQXVzdGluMRAwDgYDVQK
DAdOZXRNyYXRlMRgwFgYDVQQLDA90ZXRNyYXRlIFR0U1Igc0ExGDAwBgNVBAMMD05l
dGdhZGUgVE5TU1BDQTAeFw0xODA0MzAxNTE1MDFaFw0xODA1MzAxNTE1MDFaMIGH
MSEwHwYDVQQDBh0bnNyLWV4YW1wbGUubmV0Z2F0ZS5jb20xCzAJBgNVBAYTA1VT
MQ4wDAYDVQQIDAUVUZXhhczEPMA0GA1UEBwwGQXVzdGluMRAwDgYDVQKDA0ZXRN
YXRlMSIwIAYDVQQLDBlFbmdpbmVlcmluZyBUZXN0aW5nIDEgMiaAzMIIBIjANBgkq
hkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAFMaV+SmdZ7tbe8SCLeREupDzA7QR6lw
e3dn8sLanyP1Fb1ffi4Qhy9M/KL6qvxnB4qHXQgUB+t2v1KodHDCGVTsEUIXu3m
DDtxphzMrsc+j+XlJtxPXf97E9Ky/n1Ax/AlVsI5sF9LQpXT9zwAx+Hp58amlpNP
pR4GtA5vd4axK1+XK8yTMmaRmfV3w2KPtLsZLWThyLEm/YA7RDdud+CNSJNIZup
hWRIQ1sZmKXG/L3p7XFCLRDkBgAcjbAoPM91cHD0G0sfZGCChbkDN1PIWdsuqBI4
z6n7HPhp2em/u21p3J07SE6s+hUMJ0lt7Cr15MLMng5xGt3siI0qxQIDAQAB020w
azAJBgNVHRMEAjaAMBEGCWCsAGG+EIBAQQEAFoDAdBgNVHQ4EFgQUXp0sedA8
QS34KxEmzZJInKwJZKQwHwYDVROjBBgwFoAU8CpQYHQBg9CuwnHWU0lUnf7WE50w
CwYDVROpBAQDAgXgMA0GCSqGSIb3DQEBCwUAA4ICAQC+6M81sTW9c/NL1LSs1ziQ
LWWd0L3qc7Q1R6r+HdouU2R//+gP2ylHJelCM9kjCqHSQos5y+BDJ1/cbrV5JR5U
cnA2s54uePzGZGk89vZHCcUkuXD IgloU8q+p6e7pIyLoJxRU99psj8gT4nUBcczD
W+Vb7x4fotekPwXNWohsRsAXSPqEKbwuf03H4ntfmXMLHSq/qWmv1/g2nH79DRRN
M+A1sEyKL1XwGljY4mjb1s0V8PY42LAjnSf7x+LZXnLSYL+9jZGt1A3U8FnQn4Wd
cSEUDDPE5yAj7xye96AAE7ayHtrBLKqbrVQXzVUX8xYQKroXyt1WabMnTdHzXu7K
ZM92H20glSW2V01ABjzBIIPPJ2pvCZWvt4XM1krmyTJEsem+U3oByY/wGp93DN0e
S0sM7GMBEj8+aYNgEYIrVcX63VKy3dCLWjZpldwH1v8BNwJn/npWP0MbIh0EIE7/
WeqGTJu86UVKzuezi1sPkUjqP0cdGJHMrGB8Q8uJ4ReHdRLs7Rs6CK00F2v68iQ
MyILSwy3cnlsxDnsM3JGIhXkm5aVckLhBV0EM8GXJtW49ftP9ts0DKM3DWLLe82p
CG4IiLHO/nlVME0Hn5xE05r+GjYy8vDLJvAukDaet9li3ZaPAOFHZZgLnNhWaPF5
jiSpPvRjiAlsJCv6Fy2FvA==
-----END CERTIFICATE-----
tnsr#
```

After successfully installing the certificate, TNSR can now download software updates from the repository.

8.4.1 Certificate File Permissions

For updates to succeed the certificate files must be owned by the `_apt` user. TNSR software version 22.06 and later automatically manages these permissions, but some older installations may need manual adjustment.

The owner can be set from a shell prompt as follows:

```
$ sudo chown _apt:root /etc/pki/tls/tnsr/certs/tnsr-updates.crt
$ sudo chown _apt:root /etc/pki/tls/tnsr/private/tnsr-updates.key
```

8.5 Package Management

The package management commands allow the operator to install new software packages as well as discover and perform updates for installed packages.

8.5.1 Package Information Commands

There are three commands which query the package database.

A `<pkg-glob>` is a simple regular expression. It consists of a string of alphanumeric characters which is optionally prefixed or suffixed with a `*` character. The `*` character indicates zero or more characters.

Table 1: Package Glob Examples

| | |
|--------------------|---|
| <code>abc</code> | matches only the package <code>abc</code> and would not match <code>abcd</code> . |
| <code>*abc</code> | matches <code>abc</code> or <code>zabc</code> and would not match <code>abcz</code> . |
| <code>abc*</code> | matches <code>abc</code> or <code>abcz</code> and would not match <code>zabc</code> . |
| <code>*abc*</code> | matches any package with <code>abc</code> contained anywhere in its name. |
| <code>*</code> | matches any package. |

Tip: Do not escape or quote the glob as would typically be required by a Unix shell. The glob `abc*` is **not** the same as `abc*`.

The first two commands have qualifiers that limit the scope of the packages to all, installed, or updatable packages. These limitations are optional, and if not specified then it defaults to all packages in the database.

To display detailed information on packages:

```
tnsr# package info [ available | installed | updates ] <pkg-glob>
```

Warning: package information is limited to the first 25 packages found. If a query returns more items, a more specific `pkg-glob` must be used to narrow the search.

To display a simple listing of package names and versions for all matching packages:

```
tnsr# package list [ available | installed | updates ] <pkg-glob>
```

The search command searches for a string in either the package name or description. The output includes the package name and description of the package. The search term is literal, it is not a regular expression or glob:


```
tnsr# package search <term>
```

8.5.2 Package Installation

Warning: Recommended procedure is to reboot the router after any package install, remove, or upgrade operation.

To install a package and its required dependencies:

```
package install <pkg-glob>
```

To reinstall a package which is already present on TNSR:

```
package reinstall <pkg-glob>
```

To remove a package:

```
package remove <pkg-glob>
```

To upgrade a package:

```
package upgrade [ <pkg-glob> ]
```

To clean up cached downloaded copies of package files:

```
package cache-clean
```

8.6 Updating TNSR

With a signed client certificate from Netgate in place, TNSR has access to the Netgate software repositories which contain important updates to TNSR. These updates can be retrieved using the `package` command in the TNSR CLI, or in the host OS shell.

Note: Updating TNSR also updates the operating system. Even when there are no TNSR updates available, it is a good practice to periodically perform an update to obtain important operating system updates such as security vulnerability mitigations.

See also:

Most of this document covers in-place updates. For information on updating by redeploying/reinstalling, see [Upgrading by Redeploying TNSR](#).

Warning: There is no method to upgrade in-place from a CentOS-based TNSR installation to an Ubuntu-based TNSR installation. The only way to migrate to Ubuntu is by backing up, reinstalling, and then restoring the old configuration.

8.6.1 Pre-Upgrade Tasks

Before updating TNSR, perform the following tasks:

- Read through the *Netgate TNSR Releases* release notes for the new version to identify relevant changes in behavior which may require special actions before or after the upgrade
- Make sure the signed certificate is in place (*Install the certificate*)
- Check the ownership and permissions of the update certificate. The files must be owned by the `_apt` user. See *Certificate File Permissions* for details.
- Make sure the TNSR instance has working Internet connectivity
- Have installation media ready for the new version of TNSR software. Problems during an in-place update may require reinstallation of TNSR software.
- Take a backup of the running and startup configurations, plus other important files such as the signed certificate and keys (*Configuration Backups*)
- Save a configuration history version, if enabled:

```
tnsr# configure
tnsr(config)# configuration history version save before-upgrade-xx.yy
```

Replace `xx.yy` with the new TNSR version.

- If TNSR is running as a virtual machine, take a snapshot

Tip: Though it is optional, best practices for updating include a pre-upgrade reboot. This reboot ensures that the hardware and installation are functional before attempting the upgrade. This can help identify potential hardware and other issues, such as storage failures, so they do not present themselves unexpectedly during the upgrade.

8.6.2 Updating TNSR In-place

These methods may be used to upgrade to later versions of TNSR as well as to obtain regular updates for the operating system.

Note: This only updates TNSR and the current operating system version, it cannot change to a different operating system base.

Updates via the TNSR CLI

The easiest way to update TNSR is from within the TNSR CLI itself.

```
tnsr# package upgrade
```

That command will download and apply all available updates. Afterward, exit the CLI and start it again.

Note: There will be no output from this command until the process completely finishes, which may take a few minutes for larger updates.

Updating via the shell

TNSR can also be updated from the command line using the host OS package management commands:

Updating Ubuntu

```
$ sudo apt update
$ sudo apt full-upgrade -y
```

Note: The upgrade process may prompt to replace existing configuration files for TNSR service daemons such as Kea, VPP, and others. These files are managed by TNSR itself, and TNSR will overwrite them as needed. If prompted, the best practice is to answer N to keep the existing configuration files. Either way, once TNSR is restarted it will replace them with its own configuration data.

Update Script

The following shell script may be used to keep TNSR and the operating system (Ubuntu) updated. In addition to the updates it also makes a local backup before performing the update.

Listing 1: Download: updatetnsr.sh

```
1  #!/bin/sh
2
3  # Time to make the backups
4  mkdir -p ~/tnsr-config-backup
5  sudo cp -p /var/tnsr/running_db ~/tnsr-config-backup/running_db-`date +%Y%m%d%H%M%S`.xml
6  sudo cp -p /var/tnsr/startup_db ~/tnsr-config-backup/startup_db-`date +%Y%m%d%H%M%S`.xml
7
8  # Check OS type to determine upgrade method
9  . /etc/os-release
10
11 case "${ID}" in
12 ubuntu)
13     # Update via APT
14     echo "Upgrading TNSR on Ubuntu"
15     sudo apt update
16     sudo apt full-upgrade -y
17     ;;
18 *)
19     echo "Unrecognized Operating System"
20     exit 1
21     ;;
22 esac
23
24 # Start services
25 sudo tnsrctl restart
```

8.6.3 Post-Upgrade Reboot

TNSR upgrades include kernel updates, driver updates, and other operating system component updates. As such, the best practice is to reboot after upgrading these to ensure the device is running the proper kernel and is using a consistent set of updated system components.

The reboot procedure is covered in *Rebooting the Router*.

8.6.4 Updating the Configuration Database

Automatic Configuration Update

TNSR has its own automatic configuration upgrade procedures which accommodate changes made to the configuration database structure between versions.

Warning: The TNSR configuration upgrade only alters the running configuration database and not the startup database. After starting TNSR the first time post-upgrade, validate the running configuration. If the running configuration is OK, copy it to the startup configuration:

```
tnsr# config
tnsr(config)# configuration copy running startup
```

Manual Configuration Update

Any errors which could not be corrected by the automatic configuration upgrade process must be corrected by hand. Alternately, the configuration databases may be erased and recreated from scratch.

To attempt manual corrections, check the system logs after attempting to start TNSR for information about which configuration entries are causing the failure. View the logs with `sudo systemctl status clixon-backend.service`, `sudo journalctl -xlu clixon-backend.service` and `sudo journalctl -xe`.

A log entry for a configuration problem could look like the following example:

```
clixon_backend: startup_failsafe: 297: Database error: Startup failed and no
  Failsafe database found, exiting
clixon_backend: <rpc-reply><rpc-error>
  <error-type>application</error-type>
  <error-tag>unknown-element</error-tag><error-info>
  <bad-element>someinvalidtag</bad-element></error-info>
  <error-severity>error</error-severity>
  <error-message>namespace is: urn:ietf:params:xml:ns:netconf:base:1.0</error-message>
</rpc-error></rpc-reply>
```

To correct such problems, stop TNSR, edit the configuration in `/var/tnsr/running_db` (e.g. `sudo vi /var/tnsr/running_db`), erase or adjust the offending tag or configuration section, copy the repaired configuration to `/var/tnsr/startup_db`, and attempt to start TNSR again. Repeat until no errors are reported and TNSR starts normally.

To erase the configuration database, remove its files from `/var/tnsr`:

```
$ sudo rm /var/tnsr/*_db
```

After removing the configuration and starting TNSR, the TNSR configuration will need to be created again manually from scratch using the CLI or RESTCONF. Open the contents of a configuration backup in a text editor to use as a guide.

8.6.5 Additional Reboot / Update Verification

After performing a TNSR update and updating the configuration, administrators may wish to perform a reboot of the router to ensure it starts up correctly with the expected configuration.

This practice ensures that the router performs as expected at startup during an upgrade maintenance window.

Once the upgrade has been validated as working, create a new configuration history version, if enabled:

```
tnsr# configure
tnsr(config)# configuration history version save after-upgrade-xx.yy
```

Replace `xx.yy` with the new TNSR version.

8.6.6 Upgrading by Redeploying TNSR

Rather than performing an in-place update of a TNSR installation, administrators may instead choose to deploy a fresh instance of TNSR using the new version. This practice is typical of environments such as cloud providers or virtual machines, but may be performed for ISO installations and others as well.

In those cases, follow this general procedure:

- Take a backup of the configuration and other important files (e.g. PKI data)
- Deploy a new instance of TNSR using the installation instructions for the chosen platform
- Restore the configuration and other files
- Update the configuration (*Updating the Configuration Database*)

See *Configuration Backups* for details on saving and restoring configuration backups, and review *Updating the Configuration Database* for important information about updating the configuration for a new version of TNSR.

INTERFACES

An interface must exist in TNSR before it is available for configuration. For hardware interfaces this is handled by the procedure in *Setup Interfaces*. To create additional types of interfaces, see *Types of Interfaces* later in this chapter.

Once interfaces are present in TNSR, they can be configured to perform routing and other related tasks.

See also:

For information on interface status, see *Monitoring Interfaces*.

9.1 Locate Interfaces

The next step is to decide the purpose for which TNSR will use each interface.

First, look at the list of interfaces:

```
tnsr# show interface
Interface: GigabitEthernet0/14/1
[...]
Interface: GigabitEthernet0/14/2
[...]
Interface: local0
[...]
```

In the above shortened output, there are two viable interfaces, `GigabitEthernet0/14/1` and `GigabitEthernet0/14/2`. These can be used for any purpose, so map them as needed for the design of the network for which TNSR will be routing.

The example configuration for this network is:

Table 1: Example Configuration

| Interface | Function | IP Address | Gateway |
|-----------------------|----------|---------------------------------|-----------------|
| GigabitEthernet0/14/1 | WAN | 203.0.113.2/24 | 203.0.113.1 |
| | | 2001:db8:0:2::2/64 | 2001:db8:0:2::1 |
| GigabitEthernet0/14/2 | LAN | 10.2.0.1/24 2001:db8:1::1/64 | n/a |

Connect the interfaces on the router hardware to the appropriate networks at layer 1 and layer 2, for example by plugging the WAN into an Internet circuit and the LAN into a local switch. If TNSR is plugged into a managed switch, ensure that its ports are configured for the appropriate VLANs.

Tip: These interface names can be set to custom values. See [Customizing Interface Names](#) for details.

9.2 Configure Interfaces

With the configuration data in hand, it is now possible to configure TNSR interfaces for basic IP level connectivity.

From within the TNSR CLI ([Entering the TNSR CLI](#)), enter configuration mode and setup the interfaces using this example as a guide:

```
tnsr# configure terminal
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# description WAN
tnsr(config-interface)# ip address 203.0.113.2/24
tnsr(config-interface)# ipv6 address 2001:db8:0:2::2/64
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# interface GigabitEthernet0/14/2
tnsr(config-interface)# description LAN
tnsr(config-interface)# ip address 10.2.0.1/24
tnsr(config-interface)# ipv6 address 2001:db8:1::1/64
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
tnsr#
```

In this sample session, both interfaces were configured with an appropriate description for reference purposes, an IP address/subnet mask, and then placed into an enabled state.

If other hosts are present and active on the connected interfaces, it will now be possible to ping to/from TNSR to these networks.

Tip: After making changes, don't forget to save them to ensure they persist for the next startup by issuing the configuration `copy running startup` command from within config mode. See [Saving the Configuration](#) for more information.

9.2.1 Interface Command

The `interface` command can configure existing interfaces and create new interfaces.

Configure an existing interface:

```
tnsr(config)# interface <name>
tnsr(config-interface)#
```

This command enters `config-interface` mode

Note: The maximum interface name length is 63 characters.

Create a new interface:

```
tnsr(config)# interface <type> <options>
```

The mode entered by this command depends upon the type of interface it creates. For more information on interface types and how to configure them, see [Types of Interfaces](#).

Print a list of available interfaces and types:

```
tnsr(config)# interface ?
```

9.2.2 Interface Configuration Options

The following commands are available when configuring an interface (config-interface mode):

access-list (input|output) acl <acl-name> sequence <seq>

Access Control Lists which apply to packets on this interface in the given direction ([Standard ACLs](#)).

access-list macip <macip-name>

MACIP Access Control Lists which apply to packets on this interface ([MACIP ACLs](#)).

bond <id>

Set this interface as a part of the given bonding group ([Bonding Interfaces](#)).

bridge domain <id>

Set this interface as a member of the given bridge domain ([Bridge Interfaces](#)).

description

Set the interface description.

detailed-stats (enable|disable)

Enable or disable the collection of detailed packet statistics which individually track received and transmitted unicast, multicast, and broadcast packets. Disabled by default. Disabling these counters for an interface will not clear the values, it only stops new data collection.

dhcp client [ipv4]

Configures this interface to obtain its IPv4 address using Dynamic Host Configuration Protocol.

Warning: If this interface contains an input ACL, it must allow DHCP responses. These responses cannot be passed via reflect on an outbound ACL. The inbound ACL must pass IPv4 UDP from any source address on port 67 to any destination address on port 68.

Tip: The DHCP client runs in the dataplane namespace and can be controlled as a systemd service. See [Troubleshooting DHCP Client](#) for details.

dhcp client ipv4 hostname <host-name>

Sets the hostname sent with DHCP client requests.

disable

Disable interface administratively.

enable

Enable interface administratively.

ip address <ip-address>

Sets the IPv4 address for this interface. May be repeated to add multiple addresses to an interface.

Note: TNSR 19.08 and later support multiple IP addresses in the same prefix. Older versions only allowed a single address per prefix.

ip nat (inside|outside|none)

Configures this interface to be an inside or outside NAT interface (*Network Address Translation*). To stop an interface from participating in NAT, use either `no ip nat` or `ip nat none`.

ip reassembly enable

Enables *IP Reassembly* for IPv4.

ip reassembly type (full|virtual)

Sets the *type of IP Reassembly* to perform on this interface for IPv4 fragments.

ipv6 address <ip6-address>

Sets the IPv6 address for this interface. May be repeated to add multiple addresses to an interface.

Note: TNSR 19.08 and later support multiple IP addresses in the same prefix. Older versions only allowed a single address per prefix.

ipv6 reassembly enable

Enables *IP Reassembly* for IPv6.

ipv6 reassembly type (full|virtual)

Sets the *type of IP Reassembly* to perform on this interface for IPv6 fragments.

lldp

LLDP options for this interface (*Link Layer Discovery Protocol*).

mac-address

Configures an alternative MAC address for this interface.

Warning: Changing the MAC address on an active interface will result in unpredictable behavior. Packets already in transit addressed to the old MAC will be dropped, and it may take some time for other hosts and equipment on directly connected networks to update their ARP tables with the new MAC address.

The best practice is to set an interface administratively down (`disable`) before changing the MAC address, and then enable it again afterward.

map

MAP-E/T options for this interface (*MAP (Mapping of Address and Port)*).

mtu <size>

Sets the interface Layer 2 (L2) Maximum Transmission Unit (MTU) size, in bytes. This would reflect the capability of the link or underlying medium and applies to all traffic on the interface.

When configuring interfaces which are encapsulated, such as IPsec `ipip` interfaces, this MTU must account for the overhead incurred by the protocols involved. See *IPsec Interface MTU* for IPsec-specific information.

Warning: Any interface that will contain an IPv6 address **must** have an MTU of 1280 or higher. This includes both the default MTU and MTU values set on interfaces directly.

(ip|ipv6) mtu <size>

Sets a Layer 3 (L3) MTU specifically for IPv4 or IPv6 packets, which may have different upstream link limitations.

(ip|ipv6) tcp mss <mss-value> (Tx|Rx|TxRx)

Sets the TCP Maximum Segment Size (MSS) value in TCP packets on this interface in the given direction to the specified value. This value informs hosts of the maximum data length (in Bytes) which can be sent or received in a single TCP segment.

This setting can help avoid fragmentation by using an MSS value which is less than the link MTU, after factoring in TCP and IP headers and any other overhead. On typical Ethernet interfaces the maximum MSS for IPv4 is 40 bytes less than the MTU, and for IPv6 the value is 60 bytes less than the MTU.

Tip: The value should be set as close as possible to the link MTU. Setting this value too low will lead to lower performance due to increased overhead from sending a larger volume of packets.

Some interface types, such as IPsec, involve additional encapsulation will require lower MSS values due to the additional overhead. The exact amount of overhead varies depending on the type of encapsulation, protocols, and settings involved.

Note: For IPsec, the minimum extra overhead is 54 bytes with AES-GCM or 58 bytes with AES-CBC+HMAC-SHA1. Overhead may be higher depending the presence of NAT-T, padding, and other factors. It is not uncommon to see MSS values of around 1300 for IPv4 IPsec to ensure packets do not get fragmented under any circumstances as numerous devices have difficulty processing fragmented IPsec packets.

rx-queue <queue_num> cpu <core-id>

Pin a specific receive queue for this interface to a specific CPU core. Both the queue number and core ID must be valid and within range for the configured number of queues and cores as set with either `corelist-workers` or `coremask-workers`.

See also:

For more information on configuring interface queue sizes, see [DPDK Configuration](#). To configure CPU core usage see [CPU Workers and Affinity](#).

Warning: This option requires a list of cores configured for dataplane use by the either the `corelist-workers` or `coremask-workers` methods. RX queue core pinning is incompatible with the `workers` and `skip-list` methods of defining CPU cores available for use by the dataplane.

The only exception to this is when no additional workers are configured, an `rx-queue` may use the core defined by `dataplane cpu main-core`. The `main-core` is core 1 by default, but may be changed.

vlan tag-rewrite disable

Disable tag rewriting for this interface

vlan tag-rewrite pop-1

Remove one level of VLAN tags from packets on this interface.

vlan tag-rewrite pop-2

Remove two level of VLAN tags from packets on this interface.

vlan tag-rewrite push-1 (dot1ad|dot1q) <tag 1>

Add a new layer of VLAN tagging to frames on this interface using the provided VLAN tag.

vlan tag-rewrite push-2 (dot1ad|dot1q) <tag 1> <tag 2>

Add two new layers of VLAN tagging to frames on this interface using the provided VLAN tags.

vlan tag-rewrite translate-1-1 (dot1ad|dot1q) <tag 1>

Replace one layer of VLAN tags with the a different VLAN ID.

vlan tag-rewrite translate-1-2 (dot1ad|dot1q) <tag 1> <tag 2>

Replace one layer of VLAN tags with two layers of tagging using the provided VLAN IDs.

vlan tag-rewrite translate-2-1 (dot1ad|dot1q) <tag 1>

Replace two layers of VLAN tags with one layer of tagging using the provided VLAN ID.

vlan tag-rewrite translate-2-2 (dot1ad|dot1q) <tag 1> <tag 2>

Replace two layers of VLAN tags with two different layers of tagging using the provided VLAN IDs.

vrf <vrf-name>

Specifies a Virtual Routing and Forwarding instance used by route lookups for traffic entering this interface. See *Virtual Routing and Forwarding* for details.

9.2.3 Remove Interface Configuration

To remove an interface and all of its configuration settings, use `no interface <if-name>`.

For example, to remove the `ipip2` interface:

```
tnsr(config)# no interface ipip2
```

Warning: Static routes utilizing the interface must be removed before an interface can be deleted.

9.2.4 DHCP Client Example

The previous example was for a static IP address deployment.

To configure a TNSR interface to obtain its IP address via DHCP as a client, follow this example instead:

```
tnsr# configure terminal
tnsr(config)# interface GigabitEthernet3/0/0
tnsr(config-interface)# dhcp client ipv4
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
```

9.3 Types of Interfaces

Regular Interfaces

Typically these are hardware interfaces on the host, or virtualized by the hypervisor in a virtual machine environment. These are made available to TNSR through VPP, as described in [Setup Interfaces](#).

VLAN Subinterfaces

VLAN interfaces are configured on top of regular interfaces. They send and receive traffic tagged with 802.1q VLAN identifiers, allowing multiple discrete networks to be used when connected to a managed switch performing VLAN trunking or tagging.

memif

Shared memory packet interfaces ([memif](#)) are virtual interfaces which connect between TNSR and other applications on the same host.

tap

Virtual network TAP interfaces which are available for use by host applications.

ipip

Interfaces created and used by [IPsec](#) tunnels.

Loopback

Local loopback interfaces used for a variety of reasons, including management and routing so that the address on the interface is always available, no matter the status of a physical interface.

GRE

Generic Routing Encapsulation, an unencrypted tunneling interface which can be used to route traffic to remote hosts over a virtual point-to-point interface connection.

SPAN

Switch Port Analyzer, copies packets from one interface to another for traffic analysis.

Bond

Bonded interfaces, aggregate links to switches or other devices employing a load balancing or failover protocol such as LACP.

Bridge

Bridges connect interfaces together bidirectionally, linking the networks on bridge members together into a single bridge domain. The net effect is similar to the members being connected to the same layer 2 or switch.

VXLAN Interfaces

Virtual Extensible LAN (VXLAN) is a similar concept to VLANs, but it encapsulates Layer 2 traffic in UDP, which can be transported across other IP networks. This enables L2 connectivity between physically separated networks in a scalable fashion.

Host Interfaces

Host interfaces exist outside TNSR, in the operating system. These are used primarily for host OS management.

9.3.1 VLAN Subinterfaces

VLANs enable a device to carry multiple discrete broadcast domains, allowing a single switch to function as if it were multiple switches. VLANs are commonly used for network segmentation in the same way that multiple switches can be used: To place hosts on a specific segment, isolated from other segments. Where trunking is employed between switches, devices on the same segment need not reside on the same switch. Devices that support trunking can also communicate on multiple VLANs through a single physical port.

TNSR supports VLANs primarily through subinterfaces, though a variety of VLAN tag rewriting options are available directly on interfaces (*Configure Interfaces*). Using subinterfaces, TNSR can send and receive VLAN tagged traffic on one or more interfaces. The device to which TNSR is connected must also tag traffic in the same way as TNSR.

TNSR also supports multiple levels of VLAN tagged subinterfaces, commonly known as QinQ or 802.1ad. This is used to transport multiple VLANs inside another VLAN-tagged outer frame. Intermediate equipment only sees the outer tag, and the receiving end can pop off the outer tag and use the multiple networks inside independently as if it had a direct layer 2 connection to those networks. In this way, providers can isolate multiple tenants on the same equipment, allowing each tenant to use whichever VLAN tags they require, or achieve other goals such as using greater than the default limit of 4096 VLANs.

VLAN Subinterface Configuration

A few pieces of information are necessary to create a VLAN subinterface (“subif”):

- The parent interface which will carry the tagged traffic, e.g. `GigabitEthernet3/0/0`
- The subinterface ID number, which is a positive integer that uniquely identifies this subif on the parent interface. It is commonly set to the same value as the VLAN tag
- The VLAN tag used by the subif to tag outgoing traffic, and to use for identifying incoming traffic bound for this subif. This is an integer in the range 1–4095, inclusive. This VLAN must also be tagged on the corresponding switch configuration for the port used by the parent interface.

Creating a VLAN Subinterface

The `interface subif <parent> <subinterface id>` command creates a new subif object with the given identifier. This command enters `config-subif` mode. That mode contains the following commands:

default

Default subinterface, will match any traffic that does not match another subinterface on the same parent interface.

exact-match

Specifies whether to exactly match the VLAN ID and the number of defined VLAN IDs. When this is not set, frames with more VLAN tags will also be matched.

Warning: VLAN subinterfaces with IP addresses must use `exact-match`; it is optional for unrouted/L2 interfaces.

dot1q (<vlan-id>|any)

The VLAN tag to match for this subinterface.

inner-dot1q (<vlan-id>|any)

An inner 802.1q VLAN tag for use with QinQ

outer-dot1ad (<vlan-id>|any)

An outer 802.1ad VLAN tag for use with QinQ

outer-dot1q (<vlan-id>|any)

An outer 802.1q VLAN tag for use with QinQ

vlan <vlan-id>

VLAN ID for tag rewriting

Note: Where multiple similar options are present, generally this is for compatibility with other equipment that requires using those specific options. Consult the documentation for the peer device to find out which options it prefers.

After creating the interface, it will be available in TNSR. The name of this interface is composed of the parent interface name and the subif id, joined by a .. For example, `TenGigabitEthernet6/0/0.70`.

VLAN Subinterface Examples

See also:

To see a complete example scenario of using VLAN subinterfaces to forward network traffic from one VLAN to another VLAN, see the [Inter-VLAN Routing](#) recipe.

VLAN Example

First, create a new subif object. In this example, both the subif id and the 802.1q VLAN tag are the same, 70:

```
tnsr(config)# interface subif TenGigabitEthernet6/0/0 70
tnsr(config-subif)# dot1q 70
tnsr(config-subif)# exact-match
tnsr(config-subif)# exit
```

Upon commit, this creates a corresponding subif interface which appears with the parent interface name and the subif id, joined by a ..

```
tnsr(config)# interface TenGigabitEthernet6/0/0.70
tnsr(config-interface)#
```

At this point, it behaves identically to regular interface in that it may have an IP address, routing, and so on.

When viewing interface configuration, the VLAN subinterface attributes are also printed, and may optionally be filtered:

```
tnsr# show interface TenGigabitEthernet6/0/0.70 subif
Interface: TenGigabitEthernet6/0/0.70
  Subif/VLAN: 70
    number of tags: 1
    outer-vlan-id: 70
    flags: exact-match
```

QinQ Example

This example creates a QinQ subinterface with an inner tag of 100 and an outer tag of 200. The subinterface ID number can be any arbitrary unsigned 32-bit integer, but in this case it makes the purpose more clear to have it match the outer and inner VLAN tags of the subinterface:

```
tnsr(config)# interface subif GigabitEthernet0/b/0 200100
tnsr(config-subif)# inner-dot1q 100
tnsr(config-subif)# outer-dot1q 200
tnsr(config-subif)# exit
tnsr(config)# exit
```

9.3.2 Shared Memory Packet Interfaces (memif)

A Shared Memory Packet Interface ([memif](#)) has two components: A socket and an interface. A memif also requires a role, either *server* or *client*. In most TNSR applications, it will be the server and the other endpoint will be a client. A single socket may only be associated with one role type.

Memif Configuration

The `interface memif socket` command has two forms, both of which are required in most cases. The first creates an association between a socket ID and a filename. The second creates a memif interface using a specific socket.

Creating a memif Socket

To create the socket-filename association, use: `interface memif socket <socket-id> filename <socket-filename>`.

Note: An exception to this is socket 0 which is special and locked to `/run/vpp/memif.sock`. It cannot be changed to another file. This entry is always present and does not need to be manually configured.

When defining a filename for a socket, the available parameters are:

socket-id

A required identifier unique to this memif instance. This is an integer in the range 1..4294967294.

socket-filename

The full path to a socket file used for establishing memif connections. A socket can be used for either server or client interfaces, but not both. A socket can have more than one server, or it can have more than one client.

Warning: Sockets cannot be edited or deleted if they are in use by a memif. To change or remove a socket, first remove the associated memif.

Creating a memif interface

Next, the interface `memif socket <socket-id> interface <if-id>` command creates a memif object. This command requires its own interface identifier, and it must be tied to the socket using the same ID from the previous command. This results in a new TNSR interface named `memif<socket-id>/<if-id>`.

Note: The combination of socket ID and interface ID must be unique, but multiple sockets may use the same interface ID. For example, `memif0/0` and `memif1/0`.

Warning: Each socket can only be used by a single memif.

This command enters `config-memif` mode, where the following commands are available:

buffer-size <size>

The size of the buffer allocated for each ring entry. Default 2048.

mac-address <mac>

MAC address for the memif interface.

mode <mode>

Sets the mode for the memif interface. Mode must be one of:

ethernet

Ethernet (L2) mode.

Note: When `ethernet` mode is active and a `mac-address` is not set, TNSR will generate a random MAC for the interface.

ip

IP (L3) mode.

punt/inject

Reserved for future use. Not yet implemented.

ring-size <size>

Number of entries in receive and transmit rings. Value is 8 . . 32 and is used as a power of 2. Default value is 10 for 1024 (2^{10}) entries.

role <role> [<options>]

Sets the role of the memif interface. The default role is `server` and this is the most common role for TNSR. The following modes and options are available:

server

Server role. The server does not expose its memory to the client peer.

client [(rx-queues|tx-queues) <num-queues>]

Client role. Allocates and shares memory with the server to transfer data. When operating in client mode, the number of receive or transmit queues may be set as an option:

rx-queues <n-rx-qs>

Number of receive queues. May be between 1 . . 255.

tx-queues <n-tx-qs>

Number of transmit queues. May be between 1 . . 255.

secret <sec-str>

A quoted secret string, up to 24 characters.

Memif Example

First, create a socket with an ID of 23, using a socket file of `/tmp/memif23.sock`:

```
tnsr(config)# interface memif socket 23 filename /tmp/memif23.sock
```

Next, run commands to create a memif interface with an interface ID of 100 taking on the role `server` on the socket created previously:

```
tnsr(config)# interface memif socket 23 interface 100
tnsr(config-memif)# role server
tnsr(config-memif)# exit
```

Now the interface will be available to TNSR. In this example with a socket ID of 23 and an interface ID of 100, the full interface name is `memif23/100`.

Memif status

For a list of all current memif entries, along with their names and configuration, use the `show interface memif` command:

```
tnsr# show interface memif

Socket Id  Filename
-----
0          /run/vpp/memif.sock
23         /tmp/memif23.sock

memif23/100:
  Socket id: 23
  Interface id: 100
  Interface: memif23/100
  Role: server
  Mode: ethernet
  MAC address: 02:fe:2d:e2:87:a8
  Ring size: 0
  Buffer size: 0
  Admin up: false
  Link up: false
```

9.3.3 Tap Interfaces

Virtual network tap interfaces give daemons and clients in the host operating system access to send and receive network traffic through TNSR to other networks. A tap interface can carry layer 2 and layer 3 frames between the host OS and TNSR, and be a bridge member.

Tap Configuration

The `interface tap <name>` command creates a tap object with the given name. This name is also used to create the tap interface in the host OS. For example, if a tap object was created with `interface tap mytap`, then the interface in the host OS is named `mytap`.

This command enters `config-tap` mode, which contains the following commands:

instance <instance>

Required instance identifier for the tap interface. A tap interface appears in TNSR using the `tap` prefix followed by the chosen identifier number. For example, with an identifier number of 1, the TNSR interface will be `tap1`.

mac-address <mac>

The MAC address for the TNSR side of the tap interface.

(rx-ring-size|tx-ring-size) <size>

Configures the receive (rx) or transmit (tx) ring buffer size.

Note: Default ring size is 256. The value must be a power of 2 and must be less than or equal to 32768.

host bridge <bridge-name>

Configure the tap as part of a host bridge.

Note: A tap object cannot have both an IP address and a bridge name set.

host (ipv4|ipv6) gateway <ip-addr>

Configure a gateway for the host tap interface.

host (ipv4|ipv6) prefix <ip-addr>

Configures the host IPv4 or IPv6 address for the tap interface.

host mac-address <mac>

The MAC address for the host side of the tap interface.

host namespace <ns>

Configure a namespace inside which the tap will be created on the host.

TAP Examples

Example tap Interface

The following commands create a tap object named mytap with an instance id of 1:

```
tnsr(config)# interface tap mytap
tnsr(config-tap)# instance 1
```

At this point, the TNSR and host OS interfaces exist but contain no configuration:

In TNSR:

```
tnsr# show interface tap1
Interface: tap1
  Admin status: down
  Link up, unknown, unknown duplex
  Link MTU: 9216 bytes
  MAC address: 02:fe:77:d9:be:1e
  IPv4 Route Table: ipv4-VRF:0
  IPv6 Route Table: ipv6-VRF:0
```

In the host OS:

```
$ ip address show mytap
300: mytap: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UNKNOWN
↪group
default qlen 1000
    link/ether 42:5a:f0:6f:d9:77 brd ff:ff:ff:ff:ff:ff
    inet6 fe80::405a:f0ff:fe6f:d977/64 scope link
        valid_lft forever preferred_lft forever
```

Example Tap Interface Addresses

Configuring addresses for tap interfaces depends on the location of the interface.

For the interface visible in TNSR, configure it in the same manner as other TNSR interfaces:

```
tnsr# configure
tnsr(config)# int tap1
tnsr(config-interface)# ip address 10.2.99.2/24
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
tnsr#
```

The MAC address of the tap interface may also be set on the tap object:

```
tnsr# configure
tnsr(config)# interface tap mytap
tnsr(config-tap)# mac-address 02:fe:77:d9:be:ae
tnsr(config-tap)# exit
tnsr(config)# exit
tnsr#
```

The address for the host OS interface is configured by the `host` command under the tap object instance:

```
tnsr# configure
tnsr(config)# interface tap mytap
tnsr(config-tap)# host ipv4 prefix 10.2.99.1/24
tnsr(config-tap)# exit
tnsr(config)# exit
tnsr#
```

At this point, the interfaces will show the configured addresses:

In TNSR:

```
tnsr# show interface tap1
Interface: tap1
  Admin status: up
  Link up, unknown, unknown duplex
  Link MTU: 9216 bytes
  MAC address: 02:fe:77:d9:be:ae
  IPv4 Route Table: ipv4-VRF:0
  IPv4 addresses:
    10.2.99.2/24
  IPv6 Route Table: ipv6-VRF:0
```

In the host OS:

```
$ ip address show mytap
308: mytap: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UNKNOWN
↪group
default qlen 1000
  link/ether 02:fe:77:d9:be:ae brd ff:ff:ff:ff:ff:ff
  inet 10.2.99.1/24 scope global mytap
    valid_lft forever preferred_lft forever
  inet6 fe80::02fe:77d9:beae/64 scope link
    valid_lft forever preferred_lft forever
```

The host `<family> prefix <address>` syntax works similarly for IPv6 with an appropriate address.

9.3.4 Loopback Interfaces

Loopback interfaces are internal interfaces available for use in TNSR for routing and other internal traffic handling purposes such as acting as a bridged virtual interface (*Bridge Interfaces*).

Loopback Configuration

Before a loopback interface can be configured, a loopback instance must be created by the `interface loopback <name>` command. This command enters `config-loopback` mode. The loopback must be given a unique name and a positive numeric instance identifier.

The following commands are available in `config-loopback` mode:

instance

A required instance identifier. This value is used to generate the loopback interface name in TNSR in the form of `loop<id>`. For example, with an id of 1, the loopback interface name is `loop1`.

description

A brief text description of this loopback instance.

mac-address

An optional MAC address to use for the loopback interface. If omitted, TNSR will generate a MAC in the form of `de:ad:00:00:00:<id>`.

Loopback Example

This example creates a new loopback object named `mgmtloop` with an instance identifier of 1:

```
tnsr(config)# interface loopback mgmtloop
tnsr(config-loopback)# instance 1
tnsr(config-loopback)# exit
```

Upon commit, the new interface will be available for use by TNSR. The interface will be designated `loop<instance id>`, in this case, `loop1`. It can then be configured in the same manner as other interfaces:

```
tnsr(config)# interface loop1
tnsr(config-interface)# ip address 10.25.254.1/24
tnsr(config-interface)# exit
```

9.3.5 GRE Interfaces

A Generic Routing Encapsulation (GRE) interface enables direct routing to a peer that does not need to be directly connected, similar to a VPN tunnel, but without encryption. GRE is frequently combined with an encrypted transport to enable routing or other features not possible with the encrypted transport on its own. GRE interfaces can be combined with dynamic routing protocols such as BGP, or use static routing.

GRE Configuration

To create a GRE object, TNSR requires an object name, positive integer instance ID, source IP address, and destination IP address. The first step is to run the `gre <object-name>` command, which enters `config-gre` mode. Inside `config-gre` mode, the following commands are available:

instance <id>

Required instance identifier. This value is used to generate the GRE interface name in TNSR in the form of `gre<id>`. For example, with an `id` of 1, the GRE interface name is `gre1`.

source <ip-address>

Required IP address on TNSR to use as a source for GRE traffic associated with this instance. Can be an IPv4 or IPv6 address.

destination <ip-address>

Required IP address of the remote GRE peer, which is the destination for GRE traffic associated with this instance. Can be an IPv4 or IPv6 address, but the address family must match that of the `source` IP address.

encapsulation route-table <route-table>

This option controls which route table is used by the GRE object, for traffic utilizing the GRE interface. The default behavior is to use the default routing table.

tunnel-type <type>

TNSR supports multiple GRE tunnel types, where `<type>` is one of the following:

I3

Layer 3 encapsulation, the default type of GRE tunnel, which can carry layer 3 IP traffic and above.

erspan session-id <id>

Encapsulated Remote Switched Port Analyzer (ERSPAN). This requires a session ID number, which is an integer in the range 0..1023. When combined with *Switch Port Analyzer (SPAN) Interfaces*, ERSPAN can deliver copies of local packets to a remote host for inspection. Explained in detail in *GRE ERSPAN Example Use Case*.

teb

Transparent Ethernet Bridging (TEB)

GRE Examples

This example creates a new GRE object named `test1`, with an instance id of 1, and the source and destination addresses shown:

```
tnsr(config)# gre test1
tnsr(config-gre)# instance 1
tnsr(config-gre)# source 203.0.113.2
tnsr(config-gre)# destination 203.0.113.25
tnsr(config-gre)# exit
```

Upon commit, the new GRE interface will be available for use by TNSR. The name of the GRE interface is `gre<instance id>`, which in this case results in `gre1`. The GRE interface can then be configured similar to other interfaces (*Configure Interfaces*):

```
tnsr(config)# interface gre1
tnsr(config-interface)# ip address 10.2.123.1/30
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
```

See also:

For an example ERSPAN configuration, see *GRE ERSPAN Example Use Case*

GRE Status

To view a list of current GRE objects, use `show gre`:

```
tnsr# show gre
```

| Name | Instance | Type | Source IP | Dest IP | Encap Rt | Session Id |
|-------|----------|------|-------------|--------------|------------|------------|
| test1 | 1 | L3 | 203.0.113.2 | 203.0.113.25 | ipv4-VRF:0 | 0 |

This command prints a list of all GRE objects and a summary of their configuration.

9.3.6 Switch Port Analyzer (SPAN) Interfaces

A SPAN interface ties two interfaces together such that packets from one interface (the source) are directly copied to another (the destination). This feature is also known as a “mirror port” on some platforms. SPAN ports are commonly used with IDS/IPS, monitoring systems, and traffic logging/statistical systems. The target interface is typically monitored by a traffic analyzer, such as snort, that receives and processes the packets.

A SPAN port mirrors traffic to another interface which is typically a local receiver. To send SPAN packets to a remote destination, see [GRE ERSPAN Example Use Case](#) which can carry mirrored packets across GRE.

SPAN Configuration

SPAN instances are configured from `config` mode using the `span <source-interface>` command. That command enters `config-span` mode. Inside `config-span` mode, the following commands are available:

onto <destination-interface> <layer> <state>

Specifies a destination for SPAN traffic. May be repeated for multiple destinations. This interface may not be the same as the `<source-interface>` given to create the span instance.

The available parameters include:

destination-interface

The interface which will receive copies of packets from the source interface. The destination interface can be any interface available to TNSR except for the `<source-interface>` given to create the span instance.

layer

Sets the layer above which packet information is forwarded to the destination. Can be one of the following choices:

hw

Mirror hardware layer packets.

l2

Mirror Layer 2 packets.

state

Can be one of the following choices:

rx

Enables receive packets

tx

Enables transmit packets

both

Enables both transmit and receive packets

disabled

Disables both transmit and receive

Note: When removing a span instance, the state does not need to be present on the command, and will be ignored.

SPAN Example

This example creates a new span that copies all packets sent and received on GigabitEthernet0/14/0 to memif1/1. The packet copies include hardware level information and above.

```
tnsr(config)# span GigabitEthernet0/14/0
tnsr(config-span)# onto memif1/1 hw both
tnsr(config-span)# exit
```

See also:

For an example ERSPAN configuration that combines GRE in ERSPAN mode with a span instance, see [GRE ERSPAN Example Use Case](#).

SPAN with VLAN Subinterfaces

SPAN traffic for VLAN subinterfaces must be configured in a slightly different way as the behavior of SPAN on subinterfaces is different from that of hardware interfaces.

TNSR cannot cause inbound packets to be mirrored for a VLAN by configuring SPAN directly on a VLAN subinterface. The SPAN must be on the hardware interface which hosts the VLAN subinterface. For example, with a VLAN 30 subinterface on the TenGigabitEthernet2/0/1 interface, use the following to span inbound packets including those for VLAN 30:

```
tnsr(config)# interface tap foobar
tnsr(config-tap)# instance 30
tnsr(config-tap)# exit
tnsr(config)# interface tap30
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# span TenGigabitEthernet2/0/1
tnsr(config-span)# onto tap30 hw rx
tnsr(config-span)# exit
tnsr(config)#
```

Note: This does not filter the traffic to only the specified VLAN subinterface, but will span all packets received on the interface. The receiving end could then filter based on the VLAN ID in the packet header.

A SPAN on the hardware interface does not capture outbound packets sent through the VLAN subinterface. To see outbound packets, the SPAN must only mirror tx packets on the VLAN subinterface, not the hardware interface:

```
tnsr(config)# span TenGigabitEthernet2/0/1.30
tnsr(config-span)# onto tap30 hw tx
tnsr(config-span)# exit
```


9.3.7 Bonding Interfaces

TNSR supports bonding multiple interfaces together for link aggregation and/or redundancy. Several bonding methods are supported, including Link Aggregation Control Protocol (LACP, 802.3ad). These types of interfaces may also be called LAG or LAGG on other platforms and switches.

Bond Configuration

A bond instance has two main components on TNSR: The bond itself, and the interfaces which are a member of the bond. Beyond that, the device to which the bonded interfaces connect, typically a switch, must also support the same bonding protocol and it must also have ports with an appropriately matching configuration.

Warning: Bonds may only be created between hardware interfaces. Virtual interfaces such as Tap interfaces, loopback interfaces, subinterfaces, and other bond interfaces cannot be added to a bond.

Creating a bond

The `interface bond <instance>` command in `config` mode enters `config-bond` mode. An instance number, such as 0, must be manually specified to create a new bond interface.

`config-bond` mode contains the following commands:

load-balance {l2|l23|l34}

Configures the load balancing hash for the bonded interface. This setting determines how traffic will be balanced between ports. Traffic matching a single source and destination pair for the configured hash value will flow over a single link. Using higher level hashing will balance loads more evenly in the majority of cases, depending on the environment, but requires additional resources to handle.

This load-balance configuration is only available in `lacp` and `xor` modes.

This should be set to match the switch configuration for the ports.

l2

Layer 2 (MAC address) hashing only. Any traffic to/from a specific pair of MAC addresses will flow over a single link. This method is the most common, and may be the only method supported by the other end of the bonded link.

Note: If the bonded interface only transmits traffic to a single peer, such as an upstream gateway, then all traffic will flow over a single link. The bond still has redundancy, but does not take advantage of load balancing.

l23

Layer 2 (MAC address) and Layer 3 (IP address) hashing. For non-IP traffic, acts the same as l2.

l34

Layer 3 (IP address) and Layer 4 (Port, when available) hashing. If no port information is present (or for fragments), acts the same as l23, and for non-IP traffic, acts the same as l2.

mode {round-robin|active-backup|xor|broadcast|lacp}

round-robin

Load balances packets across all bonded interfaces by sending a packet out each interface sequentially. This does not require any cooperation from the peer, but can potentially lead to packets arriving at the peer out of order. This can only influence outgoing traffic, the behavior of return traffic is up to the peer.

active-backup

Provides only redundancy. Uses a single interface of the bond, and will switch to another if the first interface fails. The switch can only see the MAC address of the active port.

xor

Provides hashed load balancing of packet transmission. The transmit behavior is controlled by the `load-balance` option discussed previously. This mode is a step up from `round-robin`, but the behavior of return traffic is still up to the peer.

broadcast

Provides only link redundancy by transmitting all packets on all links.

lacp

Provides dynamic load balancing and redundancy using Link Aggregation Control Protocol (LACP, 802.3ad). In this mode, TNSR will negotiate an LACP link with an appropriately-configured switch, and monitors the links. This method is the most flexible and reliable, but requires active cooperation from a switch or suitable peer. The load balancing behavior can be controlled with the `load-balance` command discussed previously.

mac-address <mac-address>

Optionally specifies a manually-configured MAC address to be used by all members of the bond, except in `active-backup` mode in which case it is only used by the active link.

Bond Interface Settings

Additionally, from within `config-interface` on an Ethernet interface, the following commands are available:

bond <instance> [long-timeout] [passive]**instance**

The instance ID of the bond to which this interface will belong.

long-timeout

Uses a 90-second timeout instead of the default timeout of 3 seconds when monitoring bonding peers, such as with LACP.

passive

This interface will be a member of the bond but will not initiate LACP negotiations.

Bond Example

This example sets up a basic LACP bond between two interfaces. The first step is to create the bond instance:

```
tnsr(config)# interface bond 0
tnsr(config-bond)# load-balance 12
tnsr(config-bond)# mode lacp
tnsr(config-bond)# mac-address 00:08:a2:09:95:99
tnsr(config-bond)# exit
```

Next, decide which TNSR interfaces will be members of the bond, and configure them to be a part of the bond instance. In this case, the example uses GigabitEthernet0/14/2 and GigabitEthernet0/14/3:

```
tnsr(config)# int GigabitEthernet0/14/2
tnsr(config-interface)# bond 0
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# int GigabitEthernet0/14/3
tnsr(config-interface)# bond 0
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
```

With that complete, TNSR will now have a new interface, BondEthernet0:

```
Interface: BondEthernet0
  Admin status: down
  Link up, unknown, unknown duplex
  Link MTU: 9216 bytes
  MAC address: 00:08:a2:09:95:99
  IPv4 Route Table: ipv4-VRF:0
  IPv6 Route Table: ipv6-VRF:0
  Slave interfaces:
    GigabitEthernet0/14/2
    GigabitEthernet0/14/3
  counters:
    received: 0 bytes, 0 packets, 0 errors
    transmitted: 0 bytes, 0 packets, 0 errors
    0 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

Looking at the interfaces that are members of the bond, the BondEthernet0 membership is also reflected there:

```
Interface: GigabitEthernet0/14/2
  Admin status: up
  Link up, unknown, full duplex
  Link MTU: 9206 bytes
  MAC address: 00:08:a2:09:95:99
  IPv4 Route Table: ipv4-VRF:0
  IPv6 Route Table: ipv6-VRF:0
  Bond interface: BondEthernet0
  counters:
    received: 52575 bytes, 163 packets, 0 errors
    transmitted: 992 bytes, 8 packets, 19 errors
    31 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

(continues on next page)

(continued from previous page)

```
Interface: GigabitEthernet0/14/3
  Admin status: up
  Link up, unknown, full duplex
  Link MTU: 9206 bytes
  MAC address: 00:08:a2:09:95:99
  IPv4 Route Table: ipv4-VRF:0
  IPv6 Route Table: ipv6-VRF:0
  Bond interface: BondEthernet0
  counters:
    received: 4006 bytes, 37 packets, 0 errors
    transmitted: 620 bytes, 5 packets, 13 errors
    20 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

A configuration can now be applied to BondEthernet0:

```
tnsr(config)# interface BondEthernet0
tnsr(config-interface)# ip address 10.2.3.1/24
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# exit
```

Finally, look at the completed interface configuration:

```
tnsr# show interface BondEthernet0

Interface: BondEthernet0
  Admin status: up
  Link up, unknown, unknown duplex
  Link MTU: 9216 bytes
  MAC address: 00:08:a2:09:95:99
  IPv4 Route Table: ipv4-VRF:0
  IPv4 addresses:
    10.2.3.1/24
  IPv6 Route Table: ipv6-VRF:0
  Slave interfaces:
    GigabitEthernet0/14/2
    GigabitEthernet0/14/3
  counters:
    received: 0 bytes, 0 packets, 0 errors
    transmitted: 806 bytes, 9 packets, 0 errors
    2366 drops, 0 punts, 0 rx miss, 9 rx no buffer
```

For information on the LACP state, use `show interface lacp`:

```
tnsr# show interface lacp
Interface name: GigabitEthernet0/14/2
  Bond name: BondEthernet0
  RX-state: CURRENT
  TX-state: TRANSMIT
  MUX-state: COLLECTING_DISTRIBUTING
  PTX-state: PERIODIC_TX
```

(continues on next page)

(continued from previous page)

```
Interface name: GigabitEthernet0/14/3
Bond name: BondEthernet0
RX-state: CURRENT
TX-state: TRANSMIT
MUX-state: COLLECTING_DISTRIBUTING
PTX-state: PERIODIC_TX
```

Bond Status

To view the bond configuration, use `show interface bond`. This will show the configured bond parameters and other information that does not appear on the interface output:

```
tnsr# show interface bond
Interface name: BondEthernet0
Mode: lacp
Load balance: 12
Active slaves: 2
Slaves: 2
Slave interfaces:
    GigabitEthernet0/14/2
    GigabitEthernet0/14/3
```

To view the bonding status of all interfaces, use `show interface bonding`:

```
tnsr# show interface bonding

Interface: BondEthernet0
  Admin status: up
  Slave interfaces:
    GigabitEthernet0/14/2
    GigabitEthernet0/14/3

Interface: GigabitEthernet0/14/0
  Description: Uplink
  Admin status: up

Interface: GigabitEthernet0/14/1
  Admin status: down

Interface: GigabitEthernet0/14/2
  Admin status: up
  Bond interface: BondEthernet0

Interface: GigabitEthernet0/14/3
  Admin status: up
  Bond interface: BondEthernet0

Interface: GigabitEthernet3/0/0
  Description: Local Network
  Admin status: up
```

To view the LACP status, use `show interface lacp [interface name]`:

```
tnsr# show interface lacp
Interface name: GigabitEthernet0/14/2
  Bond name: BondEthernet0
  RX-state: CURRENT
  TX-state: TRANSMIT
  MUX-state: COLLECTING_DISTRIBUTING
  PTX-state: PERIODIC_TX

Interface name: GigabitEthernet0/14/3
  Bond name: BondEthernet0
  RX-state: CURRENT
  TX-state: TRANSMIT
  MUX-state: COLLECTING_DISTRIBUTING
  PTX-state: PERIODIC_TX
```

9.3.8 Bridge Interfaces

Bridges connect multiple interfaces together bidirectionally, linking the networks on bridge members together into a single bridge domain. The net effect is similar to the members being connected to the same layer 2 or switch.

This is commonly used to connect interfaces across different types of links, such as Ethernet to VXLAN. Another common use is to enable filtering between two segments of the same network. It could also be used to allow individual ports on TNSR to act in a manner similar to a switch, but unless filtering is required between the ports, this use case is not generally desirable.

Warning: Bridges connect together multiple layer 2 networks into a single larger network, thus it is easy to unintentionally create a layer 2 loop if two bridge members are already connected to the same layer 2. For example, the same switch and VLAN.

There are two components to a bridge: The bridge itself, and the interfaces which are members of the bridge.

Bridge Configuration

Creating a Bridge

A bridge is created by the `interface bridge domain <bdi>` command, available in `config` mode. This command enters `config-bridge` mode where the following options are available:

arp entry ip <ip-addr> mac <mac-addr>

Configures a static ARP entry on the bridge. Entries present will be used directly, rather than having TNSR perform an ARP request flooded on all bridge ports to locate the target. Additionally, when a bridge is not set to learn MACs, these entries must be created manually to allow devices to communicate across the bridge.

arp term

Boolean value that when present enables ARP termination on this bridge. When enabled, TNSR will terminate and respond to ARP requests on the bridge. Disabled by default.

description <text>

A brief description of the bridge for reference purposes.

flood

Boolean value that when present enables Layer 2 flooding. When TNSR cannot locate the interface where a request should be directed on the bridge, it is flooded to all ports.

forward

Boolean value that when present enables Layer 2 unicast forwarding. Allows unicast traffic to be forwarded across the bridge.

learn

When present, enables Layer 2 learning on the bridge.

mac-age <minutes>

When set, enables MAC aging on the bridge using the specified aging time.

uu-flood

When present, enables Layer 2 unknown unicast flooding.

Warning: At least one of **flood**, **forward**, **learn**, or **uu-flood** **must** be enabled when creating a bridge for it to be valid.

Bridge Interface Settings

To add an interface to a bridge as a member, the following settings are available from within `config-interface` mode:

```
bridge domain <domain-id> [bvi] [shg <n>]
```

domain id

Bridge Domain ID, corresponding to the ID given when creating the bridge interface previously.

bvi

Boolean value that when present indicates that this is a Bridged Virtual Interface (BVI). A bridge connects multiple interfaces together but it does not connect them to TNSR. A BVI interface, typically a loopback, allows TNSR to participate in the bridge for routing and other purposes.

An L3 packet routed to the BVI will have L2 encapsulation added and then is handed off to the bridge domain. Once on the bridge domain, the packet may be flooded to all bridge member ports or sent directly if the destination is known or static. A packet arriving from the bridge domain to a BVI will be routed as usual.

Note: A bridge domain may only contain one BVI member.

shg <n>

A Split Horizon Group identifier, used with VXLAN interfaces. This number must be non-zero and the same number must be used on each VXLAN tunnel added to a bridge domain. This prevents packets from looping back across VXLAN interfaces which are meshed between peers.

Using ACLs with Bridges

There are two main scenarios to consider when crafting ACLs (*Access Lists*) for use with bridges and their member interfaces:

Packets forwarded within a bridge domain

The first scenario is filtering packets forwarded **within** a single bridge domain. For example, packets which arrive on one bridge domain member interface and are sent on another bridge domain member interface.

In this case, apply the access list to one or more **individual member interfaces** of the bridge domain. Applying an access list to the BVI loopback interface will not have any effect on these packets as the packet does not enter or exit the bridge or the BVI interface.

Packets routed between a bridge and an L3 hardware interface

The second scenario is filtering packets routed between a bridge domain and an L3 hardware interface which is **not** a member of the bridge.

In this case, packets are entering or exiting the bridge, thus access lists can be applied to the bridge domain BVI loopback interface and/or the L3 hardware interface.

Bridge Example

This example will setup a bridge between GigabitEthernet3/0/0 and GigabitEthernet0/14/1, joining them into one network. Further, a loopback interface is used to allow TNSR to act as a gateway for clients on these bridged interfaces.

First, create the bridge with the desired set of options:

```
tnsr(config)# interface bridge domain 10
tnsr(config-bridge)# flood
tnsr(config-bridge)# uu-flood
tnsr(config-bridge)# forward
tnsr(config-bridge)# learn
tnsr(config-bridge)# exit
```

Next, add both interfaces to the bridge:

```
tnsr(config)# int GigabitEthernet3/0/0
tnsr(config-interface)# bridge domain 10
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# int GigabitEthernet0/14/1
tnsr(config-interface)# bridge domain 10
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# interface loopback bridgeloop
tnsr(config-loopback)# instance 1
tnsr(config-loopback)# exit
tnsr(config)# interface loop1
tnsr(config-interface)# ip address 10.25.254.1/24
```

(continues on next page)

(continued from previous page)

```
tnsr(config-interface)# bridge domain 10 bvi
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

Bridge Status

To view the status of bridges, use the `show interface bridge domain [<id>]` command:

```
tnsr(config)# show interface bridge domain 10
Bridge Domain Id: 10
  flood: true
  uu-flood: true
  forward: true
  learn: true
  arp-term: false
  mac-age: 0
  BVI IF: loop1
  Domain Interface Members
    IF: GigabitEthernet0/14/1    SHG: 0
    IF: GigabitEthernet3/0/0    SHG: 0
    IF: local0                  SHG: 0
    IF: loop1                   SHG: 0
  ARP Table Entries
```

If the `id` value is omitted, TNSR will print the status of all bridges.

9.3.9 VXLAN Interfaces

Virtual Extensible LAN, or VXLAN, interfaces can be used to encapsulate Layer 2 frames inside UDP, carrying traffic for multiple L2 networks across Layer 3 connections such as between routed areas of a datacenter, leased lines, or VPNs.

VXLAN tunnels are commonly used to bypass limitations of traditional VLANs on multi-tenant networks and other areas that require large scale L2 connectivity without direct connections.

There are two main components to a VXLAN tunnel: The VXLAN tunnel itself, and the bridge domain used to terminate the tunneled traffic to another local interface.

VXLAN Configuration

A new VXLAN tunnel is created with the `vxlan <if-id>` command in `config` mode, which then enters `config-vxlan` mode.

Note: An `<if-id>` is a string which starts with a letter (a-z or A-Z) or underscore followed by letters, digits (0-9), or any of the following allowed characters: `_`, `/`, `.`, and `-`. For VXLAN interfaces, the string may be at most 63 characters long.

In `config-vxlan` mode, the following commands are available:

instance <id>

Required instance identifier configured on the VXLAN tunnel. Based on this, a new interface will be available in TNSR named `vxlan_tunnel<id>`. For example, with instance `0` the interface is named `vxlan_tunnel0`.

vni <u24>

Required VXLAN Network Identifier

source <ip-addr>

Required source IP address on TNSR used to send VXLAN tunnel traffic.

destination <ip-addr>

Required destination IP address for the far side of the tunnel. This can be a multicast address, but if it is, then the `multicast interface` must also be defined.

encapsulation route-table <rt-table-name>

Routing table used for VXLAN encapsulation.

multicast interface <if-name>

Interface used for multicast. Required if the destination address is a multicast address. If defined, the destination address must be multicast.

Note: The source IP address, destination IP address and encapsulation route table must all be of the same address family, either IPv4 or IPv6.

VXLAN Examples

The following examples demonstrate common ways that VXLAN interfaces can be used on TNSR.

VXLAN Bridging Example

VXLAN-Related Settings

When using VXLAN interfaces in combination with bridging, there are related settings in bridges and interfaces which supplement the settings placed directly on VXLAN interfaces.

In `config-bridge` mode, the `arp term` command to enable ARP termination is needed for bridges used with VXLAN tunnels.

In `config-interface` mode, when adding an interface to a bridge, the `shg` (Split Horizon Group) parameter is required for VXLAN tunnels. This number must be non-zero and the same number must be used on each VXLAN tunnel added to a bridge domain. This prevents packets from looping back across VXLAN interfaces which are meshed between peers.

VXLAN Bridge Configuration

First, create the bridge with the desired set of options:

```
tnsr(config)# interface bridge domain 10
tnsr(config-bridge)# arp term
tnsr(config-bridge)# flood
tnsr(config-bridge)# uu-flood
tnsr(config-bridge)# forward
tnsr(config-bridge)# learn
tnsr(config-bridge)# exit
```

Add host interface to bridge domain:

```
tnsr(config)# int GigabitEthernet3/0/0
tnsr(config-interface)# bridge domain 10 shg 1
tnsr(config-interface)# exit
```

Create the VXLAN tunnel:

```
tnsr(config)# vxlan xmpl
tnsr(config-vxlan)# instance 0
tnsr(config-vxlan)# vni 10
tnsr(config-vxlan)# source 203.0.110.2
tnsr(config-vxlan)# destination 203.0.110.25
tnsr(config-vxlan)# exit
```

Add the VXLAN tunnel to bridge domain:

```
tnsr(config)# int vxlan_tunnel0
tnsr(config-interface)# bridge domain 10 shg 1
tnsr(config-interface)# exit
```

VXLAN SPAN Example

VXLAN can be used to transport traffic in a manner similar to GRE, which can be useful in environments incompatible with GRE. For example, this type of setup can be used in place of the [ERSPAN/GRE recipe example](#) for use on Azure which does not allow GRE.

On TNSR, setup a VXLAN tunnel to the remote peer

```
tnsr(config)# vxlan vxlan1
tnsr(config-vxlan)# instance 1
tnsr(config-vxlan)# vni 13
tnsr(config-vxlan)# source 203.0.110.2
tnsr(config-vxlan)# destination 203.0.110.27
tnsr(config-vxlan)# exit
```

Now setup a SPAN on TNSR between a local interface and the newly created VXLAN

```
tnsr(config)# span GigabitEthernet3/0/0
tnsr(config-span)# onto vxlan_tunnel1 hw both
tnsr(config-span)# exit
```

On the remote peer, which in this example is a Linux host acting as a VXLAN tunnel endpoint, configure a matching VXLAN interface:

```
$ sudo ip link add vxlan1 type vxlan id 13 dev ens192 remote 203.0.110.2 dstport 4789
$ sudo ip link set dev vxlan1 up
```

VXLAN Status

To view the status of VXLAN tunnels, use the `show vxlan` command:

```
tnsr# show vxlan
Name Instance Source IP   Dest IP       Encap Rt   Decap Node IF Name      Mcast IF VNI
-----
xmpl 0        203.0.110.2 203.0.110.25 ipv4-VRF:0 1          vxlan_tunnel0      10
```

9.3.10 Host Interfaces

Host interfaces are interfaces which have not been allocated to the dataplane. As such, these exist separate from other types of TNSR interfaces. As the name implies, they are available for use by the host operating system. These interfaces are primarily used for host OS management.

Host interfaces may be managed from TNSR as described in this section, or using another mechanism in the host OS, such as Network Manager.

Warning: To be used as a host interface, an interface must not be used by the dataplane. To return an interface from dataplane to host control, see [Remove TNSR NIC for Host Use](#).

Host Interface Configuration

To configure a host interface, from `config` mode, use the `host interface <name>` command to enter `config-host-if` mode. The `<name>` parameter is the name of the interface in the host operating system. To see a list of available interfaces, use `show host interface`.

`config-host-if` mode contains the following commands:

description <text>

A brief text description of this interface, such as Management.

enable|disable

Enables or disables the interface.

ip address <ipv4-prefix>

Sets a static IPv4 address and CIDR mask to use on the interface.

ipv6 address <ipv6-prefix>

Sets a static IPv6 address and prefix to use on the interface.

mtu <mtu-value>

Sets the maximum transmission unit size for the interface.

Host Interface Example

This example configures the host OS interface `enp8s0f1` with an IP address of `10.2.178.2/24` and an MTU of `1500`:

```
tnsr# configure
tnsr(config)# host int enp8s0f1
tnsr(config-host-if)# ip address 10.2.178.2/24
tnsr(config-host-if)# mtu 1500
tnsr(config-host-if)# enable
tnsr(config-host-if)# exit
tnsr(config)# exit
```

To confirm that the settings were applied to the interface, use `show host interface`:

```
tnsr# show host interface enp8s0f1
Interface: enp8s0f1
  Link up
  Link MTU: 1500 bytes
  MAC address: 00:90:0b:7a:8a:6a
  IPv4 addresses:
    10.2.178.2/24
```

As additional confirmation, check how the interface looks in the host operating system using a shell command:

```
tnsr# host shell ip addr show enp8s0f1
7: enp8s0f1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UP group default_
qlen 1000
    link/ether 00:90:0b:7a:8a:6a brd ff:ff:ff:ff:ff:ff
    inet 10.2.178.2/24 scope global enp8s0f1
        valid_lft forever preferred_lft forever
```

Host Interface Status

The `show host interface (<name>|ipv4|ipv6|link)` command shows the current status of host interfaces. When run without parameters, `show host interface` will print the status of all host interfaces.

The command also supports the following parameters:

<name>

The name of an interface. Restricts the output to only the single given interface.

ipv4

Restricts the output to include only interface IPv4 addresses.

ipv6

Restricts the output to include only interface IPv6 addresses.

link

Restricts the output to include only interface link status information, including the MTU and MAC address.

Any subset of these parameters may be given in the same command to include the desired information.

STATIC ROUTING

A route is how TNSR decides where to deliver a packet. Each route is comprised of several components, including:

VRF/Route Table

A discrete collection of routes to be consulted by TNSR or its services.

Destination

The network/prefix to which clients or TNSR services will send packets.

Next Hop Address

The neighboring router which can accept traffic for the destination network.

Next Hop Interface

The interface through which TNSR can reach the neighboring router

10.1 Virtual Routing and Forwarding

Virtual Routing and Forwarding (VRF) is a feature which uses isolated L3 domains with alternate routing tables for specific interfaces and dynamic routing purposes.

When a VRF route table is created and assigned to interfaces, those interfaces effectively belong to a separate virtual “router” on its own layer 3 domain. A VRF entry may also be assigned to dynamic routing instances (e.g. BGP, OSPF) so that they may handle routing for that VRF.

A new VRF does not have any routes by default. Any traffic using an interface in a VRF not matching a route is dropped, so by default hosts attached to interfaces using a VRF cannot reach other interfaces.

Note: Adding an interface to a VRF automatically adds a route for the subnet on that interface and removes its automatic interface route from the default routing table.

When routing packets, TNSR consults the contents of the VRF route table for the interface the packet enters (ingress). The VRF route table may contain entries for destinations which direct traffic to egress through an interface in the same VRF or even a different VRF.

Note: To egress through a different VRF, add entries to the VRF route table which use a next-hop located in a different VRF. If the destination is a directly connected network on another interface add a route with the next hop as 0.0.0.0 along with the target interface. This must be added in both directions. See the example in [Communicate Between VRFs](#).

Adding a default route to a VRF will cause all traffic that doesn’t match any other route in the VRF to take that default route. This happens even if the destination is local to the firewall but on an interface not in the same VRF.

If an interface or routing daemon is not configured for a specific VRF, TNSR uses the default VRF. For IPv4, the default VRF routing table is `ipv4-VRF:0`. For IPv6, the default is `ipv6-VRF:0`. Though this default VRF has separate tables for IPv4 and IPv6, user-defined VRF route tables use the same name for IPv4 and IPv6.

Identical routes can have different destination paths in separate VRFs, and identical networks can even be directly connected to multiple interfaces in different VRFs, provided that the route table entries do not result in traffic crossing into a conflicting VRF.

10.1.1 Managing VRFs

A VRF must be created before it can be used by TNSR. To create a VRF, start in `config` mode and use the `route table <name>` command, which enters `config-route-table` mode. The VRF name must be between 2 and 15 characters in length. From within `config-route-table` mode, the new route table requires a non-zero ID.

```
tnsr(config)# route table myroutes
tnsr(config-route-table)# id 10
tnsr(config-route-table)#
```

For more information about options available in this mode, see [Managing Routes](#).

10.1.2 Utilizing VRFs

To utilize VRFs, specify them on interfaces and in dynamic routing daemons as needed.

Warning: For a service on TNSR to utilize VRFs the application must be aware of VRFs and be capable of using them directly. Currently the only services on TNSR which can utilize VRFs are dynamic routing daemons (BGP, OSPF, OSPF6, RIP).

Interfaces

To set a VRF on an interface, use the `vrf <vrf-name>` command from within `config-interface` mode.

```
tnsr(config)# interface LAN
tnsr(config-interface)# vrf myroutes
tnsr(config-interface)#
```

See also:

See [Interface Configuration Options](#) for more on configuring interface options.

Dynamic Routing

Use of VRF entries varies by dynamic routing types. Look in the type-specific sections of [Dynamic Routing](#) for details about using VRFs.

10.1.3 VRF Examples

Alternate Default Route

This brief example demonstrates the basics of creating and using a VRF with static routing.

First, create a new route table for the VRF:

```
tnsr(config)# route table myroutes
tnsr(config-route-table)# description My VRF
tnsr(config-route-table)# id 10
tnsr(config-route-table)# exit
```

Next, add a default route to the new table:

```
tnsr(config)# route table myroutes
tnsr(config-route-table)# route 0.0.0.0/0
tnsr(config-rttbl4-next-hop)# next-hop 0 via 203.0.113.1
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
```

Finally, assign the route table to an interface as a VRF:

```
tnsr(config)# interface LAN2
tnsr(config-interface)# vrf myroutes
tnsr(config-interface)# exit
tnsr(config)#
```

Traffic entering the LAN2 interface will now use the default route specified in this VRF route table instead of the default route in the default VRF route table.

Note: This will break communication between the LAN2 interface and other local interfaces. Continue on to the next example for information on how to work around that limitation.

Communicate Between VRFs

As mentioned previously, hosts on interfaces in different VRFs cannot communicate directly by default since the interface routes for other VRFs are not present. This communication can be allowed if needed by adding manual route table entries for the interfaces to the source and destination VRFs.

Building on the previous example, consider another local interface named LAN1 (10.27.0.0/24) which uses the default route table (ipv4-VRF:0) while LAN2 (10.27.1.0/24) uses the myroutes VRF.

Note: Though this example is between the default table and a VRF, the procedure is the same when communicating between two different VRFs.

First, add a route to the default route table which allows LAN1 to reach LAN2:

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 10.27.1.0/24
tnsr(config-rttbl4-next-hop)# next-hop 0 via 0.0.0.0 LAN2
```

(continues on next page)

(continued from previous page)

```
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
```

Next, add a route to the myroutes VRF which allows LAN2 to reach LAN1:

```
tnsr(config)# route table myroutes
tnsr(config-route-table)# route 10.27.0.0/24
tnsr(config-rttbl4-next-hop)# next-hop 0 via 0.0.0.0 LAN1
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
```

When viewing the route table, the additional interface routes are now present:

```
tnsr(config)# show route table myroutes
```

```
Route Table myroutes    AF: ipv4    ID: 10
```

```
-----
0.0.0.0/0                via 203.0.113.1        WAN weight 1 preference 0
10.27.0.0/24             via                    LAN1 weight 1 preference 0
10.27.1.1/24             via                    LAN2 weight 1 preference 0
```

Clients in LAN1 and LAN2 can now freely communicate despite the interfaces utilizing separate VRFs.

10.2 Neighbors

For directly connected networks which operate at layer 2, TNSR will attempt to locate neighboring hosts via Address Resolution Protocol (ARP) for IPv4 or Neighbor Discover Protocol (NDP) for IPv6. In this way, TNSR can discover the hardware MAC address to which a packet will be delivered in these networks.

10.2.1 Static Neighbors

Static neighbor entries can override this dynamic behavior so that a specified IPv4 or IPv6 address is always associated with the same MAC address.

The command to specify a static neighbor takes the following form:

```
tnsr(config)# neighbor <interface> <ip-address> <mac-address> [no-adj-route-table-entry]
```

The parameters for this command are:

<interface>

The interface on which this static entry will be placed.

Note: This interface must support layer 2 (L2) data. Neighbors cannot be configured on interfaces which only support layer 3 (L3), such as `ipip` or `gre` interfaces.

<ip-address>

The IPv4 or IPv6 address for the static neighbor entry.

<mac-address>

The MAC address to associate with the given IP address.

no-adj-route-table-entry

Do not create an adjacency route table entry.

For example, to add a static entry to map 1.2.3.4 to a MAC address of 00:11:22:33:44:55 on the interface GigabitEthernet3/0/0, run this command from config mode:

```
tnsr(config)# neighbor GigabitEthernet3/0/0 1.2.3.4 00:11:22:33:44:55
```

10.2.2 View Neighbors

To see the current table of known IPv4 and IPv6 neighbors, use the `show neighbor [interface <if-name>]` command.

Note: In other products, this information may be referred to as the ARP table or NDP table.

```
tnsr# show neighbor
```

| | Interface | S/D | IP Address | MAC Address |
|-----------------------|-----------|--------------|-------------------|-------------|
| GigabitEthernet0/14/0 | D | 203.0.113.1 | 00:90:0b:37:a3:24 | |
| GigabitEthernet0/14/0 | D | 203.0.113.14 | 00:0d:b9:33:0f:71 | |
| GigabitEthernet3/0/0 | S | 1.2.3.4 | 00:11:22:33:44:55 | |
| GigabitEthernet3/0/0 | D | 10.2.0.129 | 00:0c:29:4c:b3:9b | |

This output can optionally be filtered by interface name.

The S/D column shows if the entry is static (S) or dynamic (D).

10.3 Viewing Routes

To view the contents of all route tables:

```
tnsr# show route
```

To view the contents of a single route table:

```
tnsr# show route table <table name>
```

For example, to view the default IPv4 route table only, use:

```
tnsr# show route table ipv4-VRF:0
```

By default, the output omits entries which may clutter up the list, such as broadcast routes for each connected subnet, routes which drop traffic, and so on. To include these entries and view the complete route table, add the `all` keyword to the end of the command:

```
tnsr# show route all
```

```
tnsr# show route table ipv4-VRF:0 all
```

10.3.1 Route Lookup

To find a route which will be used for a given destination, use:

```
tnsr# show route table <table name> <prefix> [exact]
```

This command looks in a route table to find an entry which would be used by TNSR to deliver traffic to the given destination prefix. In other words: It answers the question “How will a packet get from here to there?”.

Note: This command does not filter the route table contents or search for routes with longer prefixes within a given range.

The command supports the following modifiers:

exact

Restricts results to those which exactly match the given prefix.

Route Lookup Example

For example, to find the route TNSR will use to deliver traffic for 10.4.0.1/32, use:

```
tnsr# show route table ipv4-VRF:0 10.4.0.1/32

Route Table ipv4-VRF:0  AF: ipv4
-----
10.4.0.0/24             via 10.2.222.2             ipip1 weight 1 preference 20
```

10.3.2 Route Flags

In the route display, the **flags:** row may contain the following:

no flags

If the flags line is empty, this is a normal route with no special actions.

local

This network is local to TNSR and packets to this destination will not leave the TNSR host.

drop

Packets matching this route will be dropped by TNSR. Commonly seen with null routes for subnets or for traffic which must not leave a subnet.

unreachable

Packets matching this route will be dropped by TNSR, and TNSR will send an ICMP “Destination unreachable” message back to the source address.

prohibit

Packets matching this route will be dropped by TNSR, and TNSR will send an ICMP “Destination administratively prohibited” message back to the source address.

10.3.3 Common Routes

Routing tables on TNSR may include unexpected entries by default or even after adding and configuring interfaces and other services. The following list covers several of these types of routes that may be present and what they mean:

0.0.0.0/32 (drop)

Null route to drop traffic with an empty address.

0.0.0.0/0 or ::/0

Default route for packets that do not match any other route, such as for Internet hosts or other remote destinations.

224.0.0.0/4 (drop)

Multicast that must not be routed.

224.0.0.0/24

Local subnet multicast.

240.0.0.0/4 (drop)

Reserved network that must not be routed.

255.255.255.255/32 (local)

Special broadcast address for networks local to TNSR.

fe80::/10

IPv6 link local.

x.x.x.<first>/32 (drop)

Null route for subnet configured on an interface. Last octet will vary depending on subnet size and network address. For example, this is .0 in a /24 subnet.

x.x.x.<last>/32 (drop)

Broadcast address for subnet configured on an interface. Last octet will vary depending on subnet size and network address. For example, this is .255 in a /24 subnet.

x.x.x.x/32 (via x.x.x.x, local)

Internal route for an IPv4 address present on a TNSR interface.

x:x:x::x/128 (via x:x:x::x, local)

Internal route for an IPv6 address present on a TNSR interface.

Routes can also be added to the table dynamically by other processes such as via BGP or if an interface is configured as a DHCP client. Check the status or other associated logs for configured features to find the origins of these routes.

10.4 Managing Routes

10.4.1 Route Configuration

Routes are entered into TNSR using the `route table <name>` command in configuration mode. When using the `route` command for this purpose, the table name must be specified in order to establish the routing context. This command enters `config-route-table` mode. From there, individual routes can be managed.

Inside `config-route-table` mode, the following commands are available:

description

Sets a description for the route table.

id <id>

A **required** numeric ID associated with this route table. It must be an unsigned 32-bit integer, greater than 0 (1-4294967295) and cannot overlap any other VRF ID.

Note: The ID 0 is reserved for use by the default route tables.

route <destination-prefix>

Configures a route to the specified destination network. This enters `config-rttbl-next-hop` mode where the remaining parameters for the route are set.

Tip: For a single address, use a /32 mask for IPv4 or /128 for IPv6.

Inside `config-rttbl-next-hop` mode, the following commands are available:

description

Sets a description for this route.

next-hop <hop-id> via <action|gateway>

Configures how TNSR will handle traffic to this destination. This may be repeated multiple times with unique *hop-id* values to specify multiple destinations.

Note: Take care when crafting `next-hop` entries for VRF route tables. Traffic matching this route will exit this VRF if the next hop is in a different VRF.

The following parameters are available to control the route behavior:

hop-id

The ID of the next hop. Must be unique between entries in the same route.

via <ip-address>

Sets the next hop for this route as an IP address. Additional modifiers are possible for any `via` form using an IP address destination, see [Route modifiers](#).

via <ip-address> <interface>

Configures both the IP address and interface for the next hop. May use modifiers, see [Route modifiers](#).

Tip: To add a route using an interface as a destination without a specific IP address, use 0.0.0.0 as the next hop along with the target interface. This is primarily used in VRFs to allow communication between interfaces in different VRFs ([Communicate Between VRFs](#)).

via <ip-address> next-hop-table <route-table-name>

Configures a recursive route lookup using a different route table. May use modifiers, see [Route modifiers](#).

Note: The IP address in this command may be 0.0.0.0 but that case requires the `resolve-via-host` modifier after the table name.

via classify <classify-name>

Reserved for future use.

via drop

Drops traffic to this destination (null route).

via local

The destination is local to TNSR, such as an interface address or loopback.

via null-send-prohibit

Packets matching this route will be dropped by TNSR, and TNSR will send an ICMP “Destination administratively prohibited” message back to the source address.

via null-send-unreach

Packets matching this route will be dropped by TNSR, and TNSR will send an ICMP “Destination unreachable” message back to the source address.

priority

Sets the administrative distance priority for this route. This value Helps routing protocols choose between multiple possible destinations. This is only a local value, and a lower value is taken as being more reliable (closer). The same priority is used for all next-hop entries.

Route modifiers

For routes set with a next hop using **via <ip-address>**, additional modifiers control how TNSR resolves the route destination.

weight

The weight of routes to the same destination. Acts as a ratio of packets to deliver to each next hop. Value must be from 1 to 255.

Tip: Equal weights will deliver the same amount of traffic to all next hops for this destination prefix, uneven weights will deliver more traffic via the higher weighted connection. If one path has a weight of 1, and the other has a weight of 3, then the first path will receive 25% ($1/(1+3)$) of the traffic and the other will receive 75% ($3/(1+3)$).

resolve-via-attached

Sets a constraint on recursive route resolution via attached network. The next hop is unknown, but destinations in this prefix may be located via ARP.

resolve-via-host

Sets a constraint on recursive route resolution via host. The next hop is known, but the interface is not.

Tip: Multiple modifiers may be used together, but when doing so, **weight** and **priority** must be set first.

10.4.2 Example

IPv4 example:

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 10.2.10.0/24
tnsr(config-rttbl4-next-hop)# next-hop 0 via 10.2.0.2
```

IPv6 Example:

```
tnsr(config)# route table ipv6-VRF:0
tnsr(config-route-table)# route fc07:b337:c4f3::/48
tnsr(config-rttbl6-next-hop)# next-hop 0 via 2001:db8:1::2
```

Breaking down the examples above, first the route table is specified. Within that context a destination network route is given. The destination network establishes a sub-context for a specific route. From there, the next hop configuration is entered.

To specify more than one route, exit out of the `next-hop` context so that TNSR is in the correct context for the route table itself, then enter an additional destination and next-hop.

10.5 Default Route

In TNSR, the default route, sometimes called a default gateway, is the gateway of last resort. Meaning, traffic that is not local and does not have any other route specified will be sent using that route. There is no `default` keyword in TNSR; Instead, the special network `0.0.0.0/0` is used for IPv4 and `::/0` is used for IPv6.

In this example, the gateway from *Example Configuration* is added using the WAN interface:

IPv4 Default Route Example:

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 0.0.0.0/0
tnsr(config-rttbl4-next-hop)# next-hop 0 via 203.0.113.1
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
```

IPv6 Default Route Example:

```
tnsr(config)# route table ipv6-VRF:0
tnsr(config-route-table)# route ::/0
tnsr(config-rttbl6-next-hop)# next-hop 0 via 2001:db8:0:2::1
tnsr(config-rttbl6-next-hop)# exit
tnsr(config-route-table)# exit
```

DYNAMIC ROUTING

Dynamic routing refers to routes that are capable of changing, generally due to routing protocols exchanging routing information with neighboring routers.

Unlike static routes, dynamic routing does not require remote network destinations and gateways to be hardcoded in the configuration. Routes and gateways are automatically determined by the protocol instead.

Currently TNSR supports multiple dynamic routing protocols:

Border Gateway Protocol (BGP)

BGP routes between autonomous systems, connecting to defined neighbors to exchange routing and path information. BGP supports IPv4 and IPv6.

Open Shortest Path First v2 (OSPF)

OSPF is a link-state routing protocol that automatically locates neighboring IPv4 routers within an autonomous system, typically with multicast, and exchanges routing information for networks reachable through each neighbor. OSPF v2 only supports IPv4.

Open Shortest Path First v3 (OSPF6)

Similar to OSPF v2, but for IPv6 networks.

Routing Information Protocol (RIP)

A routing protocol where each router broadcasts its routing table to peers on connected segments. Simple and widely supported, but not as fast or efficient as other protocols.

Each dynamic routing type supports *Virtual Routing and Forwarding (VRF)* and can have multiple server instances in different VRFs.

Dynamic routing on TNSR is handled by *FRR*.

11.1 Dynamic Routing Manager

The dynamic routing manager, currently the Zebra daemon from FRR, controls aspects of dynamic routing which are relevant to multiple types of dynamic routing. These include Access Lists, Prefix Lists, and Route Maps. These mechanisms allow for fine-tuning dynamic routing behavior.

11.1.1 Dynamic Routing Manager Configuration

Configuration of the dynamic routing manager itself is performed from within `config-route-dynamic-manager` mode, which is entered as follows:

```
tnsr(config)# route dynamic manager
tnsr(config-route-dynamic-manager)#
```

That mode offers logging and debugging commands, described next.

Logging

The dynamic routing manager daemon can send log messages to a file, via syslog, or both.

log file <filename> [<level>]

Instructs the dynamic routing manager daemon to send log messages to the specified file. The optional `level` parameter determines the verbosity of the logged data. See [Log levels](#) for details.

Warning: This command requires an absolute path to a log file, not a relative path. For example: `/var/log/frr/routing.log`. This file must be writable by the `frr` user.

log syslog [<level>]

Instructs the dynamic routing manager daemon to send log messages to syslog. The optional `level` parameter determines the verbosity of the logged data. See [Log levels](#) for details.

Log levels

Log levels set the verbosity of the logging recorded by the dynamic routing manager. Each level includes messages from higher priority levels. The default level is `debugging`, which will log as much detail as possible.

Note: Even if the log level is set to `debugging`, actual debugging messages may not appear unless specific debug entries are set. See [Debugging](#) for details.

In order of verbosity, from low to high, the available `level` values are:

- emergencies
- alerts
- critical
- errors
- warnings
- notifications
- informational
- debugging

For example, if the log level is set to `errors`, then the logs will contain messages with a level of `emergencies`, `alerts`, `critical`, and `errors`, and will exclude the rest.

Debugging

The debug command controls which debugging messages will be logged by the dynamic routing manager. These include:

debug events

General events.

debug fpm

Forwarding Plane Manager events.

debug kernel

Kernel messages.

debug kernel msgdump [send|receive]

Raw netlink messages, optionally limited to send or receive messages.

debug nht

Next-Hop tracking events

debug packet [send|receive] [detailed]

Information about each packet seen by the dynamic routing manager. Optionally limited to send or receive packets. The detailed keyword will log additional information for each packet.

debug rib [detailed]

Routing Information Base events, optionally with more detailed information.

Note: Debugging messages will only appear in logs if the logs are set to include debugging messages. See [Log levels](#) for details.

11.1.2 Dynamic Routing Access Lists

Access List entries determine if networks are allowed or denied in specific contexts used in various routing daemons. For example, an access list may be used to determine if a route is accepted or rejected, or for limiting routes distributed to neighbors.

The order of entries inside access lists is important, and this order is determined by a sequence number.

Access List Configuration

To create a new access list, use the `route dynamic access-list <name>` command, which enters `config-access-list` mode:

```
tnsr(config)# route dynamic access-list myacl
tnsr(config-access-list)#
```

`config-access-list` mode contains the following commands:

remark <text>

A text comment to describe this access list.

sequence <sequence-number> (permit|deny) <ip-prefix>

Creates a new rule with the specified sequence number to permit or deny a given prefix.

sequence <sequence-number>

The sequence number for this rule, which controls the order in which rules are matched

inside this access list. Each rule in an access list must have a unique sequence number. Best practice is to leave gaps in the sequence to allow for adding rules in the future. For example, use 10, 20, 30, rather than 1, 2, 3.

(permit|deny)

The action to take for this rule, either `permit` or `deny`.

<ip-prefix>

The IP prefix to match for this rule, given in network/prefix notation. For example, 192.168.0.0/16.

Access List Example

For example, the following ACL would deny 192.168.0.0/16 but permit all other networks:

```
tnsr(config)# route dynamic access-list myacl
tnsr(config-access-list)# sequence 10 deny 192.168.0.0/16
tnsr(config-access-list)# sequence 20 permit 0.0.0.0/0
tnsr(config-access-list)# exit
tnsr(config)#
```

This access list would then be used in another context, such as with a route map, to match routes for anything except 192.168.0.0/16 when taking other actions.

Access List Status

To view access lists, use the `show route dynamic access-list [name]` command. Add the name of an access list to restrict the output to a single access list.

```
tnsr# show route dynamic access-list

Access List: myacl
Remark:
  Seq Action Prefix
  ---
  10 deny 192.168.0.0/16
  20 permit 0.0.0.0/0
```

11.1.3 Dynamic Routing Prefix Lists

Prefix List entries determine parts of networks which can be allowed or denied in specific contexts used in routing daemons. For example, a prefix list may be used to match specific routes in a route map.

The order of entries inside prefix lists is important, and this order is determined by a sequence number.

Prefix List Configuration

To create a new prefix list, use the `route dynamic prefix-list <name>` command, which enters `config-prefix-list` mode:

```
tnsr(config)# route dynamic prefix-list mypl
tnsr(config-prefix-list)#
```

`config-prefix-list` mode contains the following commands:

description <text>

A text comment to describe this prefix list.

sequence <sequence-number> (permit|deny) <prefix> [ge <lower-bound>] [le <upper-bound>]

Creates a new rule with the specified sequence number to `permit` or `deny` a given prefix. This may optionally be bound by an upper or lower prefix size limit. When no upper or lower bound is set, the prefix will be matched only exactly as given. Setting bounds allows a prefix list to also match more specific routes which are a part of the specified network.

sequence <sequence-number>

The sequence number for this rule, which controls the order in which rules are matched inside this prefix list. Each rule in a prefix list must have a unique sequence number. Best practice is to leave gaps in the sequence to allow for adding rules in the future. For example, use 10, 20, 30, rather than 1, 2, 3.

(permit|deny)

The action to take for this rule, either `permit` or `deny`.

<ip-prefix>

The IP prefix to match for this rule, given in network/prefix notation. For example, 192.168.0.0/16.

ge <lower-bound>

Sets a lower bound for the prefix length. This must be greater than the prefix length given in `<prefix>`, and less than or equal to the value of `le <upper-bound>`, if present.

le <upper-bound>

Sets an upper bound for the prefix length. This must be greater than the prefix length given in `<prefix>`, and greater than or equal to the value of `ge <upper-bound>`, if present.

Prefix List Examples

For example, the following prefix list will match any of the RFC1918 networks:

```
tnsr(config)# route dynamic prefix-list RFC1918
tnsr(config-prefix-list)# description List of RFC1918 private address space
tnsr(config-prefix-list)# sequence 10 permit 10.0.0.0/8 le 32
tnsr(config-prefix-list)# sequence 20 permit 172.16.0.0/12 le 32
tnsr(config-prefix-list)# sequence 30 permit 192.168.0.0/16 le 32
```

For each of these entries, the prefix list will match based on the bits specified in the prefix. A match will occur for any network included in the specified range. For example, 10.0.0.0/8 le 32 means a route for any smaller network inside 10.0.0.0/8 will also match, so long as the prefix length is less than 32. So 10.2.0.0/16 will also match this entry, as will 10.34.157.82/32. Taken as a whole, this prefix list will match not only the list of RFC1918 networks exactly, but any smaller network wholly contained inside.

As another example, consider this rule instead:

```
tnsr(config-prefix-list)# sequence 10 deny 10.0.0.0/8 ge 24 le 32
```

This matches routes for networks inside of 10.0.0.0/8 with a prefix length greater than or equal to 24 but less than or equal to 32. Meaning it will **not** match larger networks such as 10.2.0.0/16 but it will match more specific networks such as 10.2.56.128/29 anywhere inside the 10.0.0.0/8 address space. This type of rule can be used to exclude small prefixes from being matched by a route map, for example.

Prefix lists are then used in another context, such as with a route map, to match routes any of the specified networks when taking other actions.

Prefix List Status

To view prefix lists, use the `show route dynamic prefix-list [name]` command. Add the name of a prefix list to restrict the output to a single prefix list.

```
tnsr(config)# show route dynamic prefix-list

Prefix Name: RFC1918
Description: List of RFC1918 private address space
  Seq Action Prefix      LE Len GE Len
  ---
  10 permit 10.0.0.0/8    32
  20 permit 172.16.0.0/12 32
  30 permit 192.168.0.0/16 32

Prefix Name: mypl
Description:
  Seq Action Prefix      LE Len GE Len
  ---
  10 deny 192.168.0.0/16
```

11.1.4 Dynamic Routing Route Maps

Route maps are a powerful mechanism which can match or set various values for use by routing daemons, especially BGP. A route map can match based on criteria such as those set by *Dynamic Routing Access Lists* and *Dynamic Routing Prefix Lists*, among others. Route maps can control, for example, whether or not specific routes are accepted from neighbors, or whether or not specific routes are distributed to neighbors. They can also adjust various properties of routes, which largely depends upon the context in which they are used, such as for BGP or OSPF.

Route Map Configuration

To create a new route map, use the `route dynamic route-map <route-map-name>` command, which enters `config-route-map` mode for the route map named `<route-map-name>`:

```
tnsr(config)# route dynamic route-map <route-map-name>
tnsr(config-route-map)#
```

Once in this mode, there are additional commands:

description <string>

A text description of this route map.

sequence <sequence>

The sequence number of this route map. Enters `config-route-map-rule` mode.

The sequence command may be repeated with different sequence numbers to setup additional rule entries in the same route map.

`config-route-map-rule` mode offers a variety of commands, which have been broken up into sections.

Route Map General Parameters

description <string>

A text description of this route map rule.

policy (permit|deny)

The action taken by this route map.

permit

When an entry is matched and permitted, the *Route Map Set Operations* portions of the route map are carried out, if present, and then *Route Map Control Operations* entries, if present, are performed. The route will be allowed unless the control flow ultimately prevents that from happening.

deny

When an entry is matched and denied, the route is not allowed.

Route Map Matching Criteria

match as-path <as-path-name>

Match based on *BGP AS Path Access Lists*.

match community <comm-list-name> [exact-match]

Match based on *BGP Community Lists*.

match extcommunity <extcomm-list-name>

Match based on Extended *BGP Community Lists*.

match interface <if-name>

Match based on a specific interface name.

match ip address access-list <access-list-name>

Match IPv4 route content based on *Dynamic Routing Access Lists*.

match ip address prefix-list <prefix-list-name>

Match IPv4 route content based on *Dynamic Routing Prefix Lists*.

match ip next-hop access-list <access-list-name>

Match the next-hop of IPv4 routes based on *Dynamic Routing Access Lists*.

match ip next-hop ipv4-address>

Match the next-hop of IPv4 routes based on IPv4 address.

match ip next-hop prefix-list <prefix-list-name>

Match the next-hop of IPv4 routes based on *Dynamic Routing Prefix Lists*.

match ipv6 address access-list <access-list-name>

Match IPv6 route content based on *Dynamic Routing Access Lists*.

match ipv6 address prefix-list <prefix-list-name>

Match IPv6 route content based on *Dynamic Routing Prefix Lists*.

match large-community <large-comm-list-name>

Match based on Large *BGP Community Lists*.

match local-preference <preference-uint32>

Match based on configured local preference of a route.

match metric <metric-uint32>

Match based on the metric of a route.

match origin (egpliglincomplete)

Match based on the origin (source) of a route. It can be one of *egp* (exterior gateway protocols), *igp* (interior gateway protocols), or *incomplete*.

match peer <peer-ip-address>

Match based on the IP address of the neighbor associated with a route.

match probability <percent>

Match a subset of routes based on the given percent value. For example, a value of 60 would match 60% of routes.

match source-protocol <src-protocol>

Matches based on the routing protocol for this route (For a list, see *Dynamic Routing Protocol Lists*.)

match tag <value>

Match a tag value set by another route map rule. This value is an integer from 1-4294967295.

Route Map Set Operations

set aggregator as <asn> ip address <ipv4-address>

Sets the AS of an aggregated route to the specified AS number and its origin to the specified IP address.

set as-path exclude <string-of-as-numbers>

Excludes the specified AS numbers from the path of the route.

set as-path prepend <string-of-as-numbers>

Prepends the specified AS numbers to the AS path

set as-path prepend last-as <asn>

Prepends the last AS a specified number of times to the leftmost end of the path.

set atomic-aggregate

Sets the BGP “atomic aggregate” attribute for the route. This informs BGP peers that some routing information may not be present due to route aggregation.

set community none

Removes information about *BGP Community Lists* from the route.

set community <community-value> [additive]

Sets the *BGP community* to the supplied list. The optional *additive* keyword causes the community value to be added to the route without replacing the existing values.

Note: To specify multiple communities, enclose a space-separated list of community values in double quotes. For example: `set community "100:200 100:300 100:400"`

set comm-list <community-list-name> delete

Removes specific values from *BGP Community Lists* lists.

set extcommunity rt <extcommunity-list-name>

Sets the route target to the given extended community list.

set extcommunity soo <extcommunity-list-name>

Sets the site of origin for the route to the given extended community list.

set forwarding-address <ipv6-address>

Sets the OSPF forwarding address for this route to the given IPv6 address.

set ip next-hop <ipv4-address>

Sets the next-hop for an IPv4 route to this specific address.

set ip next-hop peer-address

For inbound IPv4 routes received from a neighbor, sets the next-hop to the address of the neighbor.

For outgoing routes this is the local address used to establish an adjacency with the neighbor.

set ip next-hop unchanged

Do not change the next-hop on the route.

set ipv4 vpn next-hop (<ipv4-address>|<ipv6-address>)

Sets IPv4 VPN next-hop address to the given value.

set ipv6 next-hop global <ipv6-address>

Sets IPv6 next-hop address to the given globally routable IPv6 address.

set ipv6 next-hop local <ipv6-address>

Sets IPv6 next-hop address to the given link-local IPv6 address.

set ipv6 next-hop peer-address

For inbound IPv6 routes received from a neighbor, sets the next-hop to the address of the neighbor.

For outgoing routes this is the local address used to establish an adjacency with the neighbor.

set ipv6 next-hop prefer-global

For inbound routes with both a global and link-local next-hop available, prefer to use the global address.

set ipv6 vpn next-hop (<ipv4-address>|<ipv6-address>)

Sets IPv6 VPN next-hop address to the given value.

set large-community none

Removes information about Large *BGP Community Lists* from the route.

set large-community <large-community-value> [additive]

Sets the Large *BGP community* to the supplied list. The optional *additive* keyword causes the large community value to be added to the route without replacing the existing values.

set large-comm-list <large-comm-list-name> delete

Removes specific values from Large *BGP Community Lists* lists.

set local-preference <preference>

Sets the BGP local preference for the route to the supplied value.

set metric [+]<metric>

Sets the MED value for routes. When this router has multiple links to the same AS, the MED value influences which path the router will prefer. The router will prefer to use links with a lower MED value. Adding a + before the metric value will result in a relative adjustment instead of setting an absolute value.

set metric-type (type-1|type-2)

Sets the OSPF6 external metric type for this route. Type 1 metrics consider the internal path as a part of calculations, Type 2 do not.

set origin (egp|igp|unknown)

Sets the origin (source) of a route. It can be one of **egp** (exterior gateway protocols), **igp** (interior gateway protocols), or **incomplete**.

set originator <ipv4-addr>

Sets the originator ID to the supplied address.

set src <ip-address>

Sets the route source to the supplied address.

set tag <tag>

Set a tag value to be matched by another route map rule. This value is an integer from 1–4294967295.

set weight <weight>

Sets the weight of the route to the supplied value. When a remote AS is reachable via multiple paths through other intermediate AS neighbors, the router will prefer to use a higher weight path to reach it.

Route Map Control Operations

call <rt-map-name>

Will immediately process the named route map. If the called route map returns **deny**, then processing is stopped and the route is denied.

on-match next

Proceeds to the next rule in the route-map

on-match goto <sequence>

Skips to the rule with the given sequence number in this route map.

Route Map Examples

This example creates a route map to control which routes will be sent to peers via BGP. The first rule prevents any route from sending if it matches entries in the RFC1918 prefix list. The second rule allows routes that match networks listed in the MY-ROUTES prefix list. This ensures that even if other mechanisms would try to export routes to peers, that no routes to private networks are leaked.

```
tnsr(config)# route dynamic route-map EBGp-OUT
tnsr(config-route-map)# sequence 10
tnsr(config-route-map-rule)# policy deny
tnsr(config-route-map-rule)# match ip address prefix-list RFC1918
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# sequence 20
tnsr(config-route-map-rule)# policy permit
tnsr(config-route-map-rule)# match ip address prefix-list MY-ROUTES
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# exit
```

This route map is to be used with incoming routes from peers. The first rule prevents routes for local networks from being received and processed. The second rule applies attributes to all other received routes.

```
tnsr(config)# route dynamic route-map PEERS-IN
tnsr(config-route-map)# sequence 10
tnsr(config-route-map-rule)# policy deny
tnsr(config-route-map-rule)# match ip address prefix-list RFC1918
```

(continues on next page)

(continued from previous page)

```
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# sequence 20
tnsr(config-route-map-rule)# policy permit
tnsr(config-route-map-rule)# set metric 5000
tnsr(config-route-map-rule)# set local-preference 100
tnsr(config-route-map-rule)# set community no-export
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# exit
```

See also:

For more examples, see the following recipes:

- [Service Provider Route Reflectors and Client for iBGP IPv4](#)
- [TNSR IPsec Hub for pfSense software nodes](#)

Route Map Status

To view route maps, use the `show route dynamic route-map [name]` command. Add the name of a route map to restrict the output to a route map.

```
tnsr(config)# show route dynamic route-map
route-map EBGp-OUT deny 10
    match ip address prefix-list RFC1918
route-map EBGp-OUT permit 30
    match ip address prefix-list MY-ROUTES
route-map PEERS-IN deny 10
    match ip address prefix-list RFC1918
route-map PEERS-IN permit 20
    set community no-export
    set local-preference 100
    set metric 5000
```

11.1.5 Dynamic Routing Manager Status

TNSR supports several commands to display information about the dynamic routing manager daemon configuration and its status.

See also:

For more specific dynamic routing daemon status information, see [BGP Status](#), [OSPF Status](#), and [OSPF6 Status](#)

Configuration Information

To view the current configuration file for the dynamic routing manager daemon, use `show route dynamic manager`:

```
tnsr# show route dynamic manager
debug zebra events
log file /tmp/zebra-crit.log critical
log syslog warnings
```

To view other individual sections of the configuration:

```
tnsr# show route dynamic access-list [<access-list-name>]
tnsr# show route dynamic prefix-list [<prefix-list-name>]
tnsr# show route dynamic route-map [<route-map-name>]
```

Additional Information

Additional status information can be obtained by using the `vttysh` program outside of TNSR.

The `vttysh` program must be run as root:

```
sudo vttysh
```

The `vttysh` interface offers numerous commands. Of particular interest for BGP status are the following:

show ip route

The IP routing table managed by the FRR Zebra daemon, which marks the origin of routes to see which entries were obtained via BGP.

11.2 Border Gateway Protocol

Border Gateway Protocol (BGP) is a dynamic routing protocol used between network hosts. BGP routes between autonomous systems, connecting to defined neighbors to exchange routing information.

BGP can be used for exterior routing (ebgp) or interior routing (ibgp), routing across Internet circuits, private links, or segments of local networks.

11.2.1 BGP Required Information

Before starting, take the time to gather all of the information required to form a BGP adjacency to a neighbor. At a minimum, TNSR will need to know these items:

VRF Name

The name of the *Virtual Routing and Forwarding* instance for which this BGP instance will manage routes, or `default` for the default route table.

Local AS Number

The autonomous system (AS) number for TNSR. This is typically assigned by an upstream source, an RIR, or mutually agreed upon by internal neighbors.

Local Router ID

Typically the highest numbered local address on the firewall. This is also frequently set as the internal or LAN side IP address of a router. It does not matter what this ID is, so long as it is given in IPv4 address notation and does not conflict with any neighbors.

Local Network(s)

The list of networks that are advertised over BGP as belonging to the Local AS. For external BGP, this is typically the IP address block allocated by the RIR. For internal BGP, this may be a list of local networks or a summarized block.

Neighbor AS Number

The autonomous system number of the neighbor.

Neighbor IP Address

The IP address of the neighboring router.

The example in this section uses the following values:

Table 1: Example BGP Configuration

| Item | Value |
|---------------------|--------------|
| VRF Name | default |
| Local AS Number | 65002 |
| Local Router ID | 10.2.0.1 |
| Local Network(s) | 10.2.0.0/16 |
| Neighbor AS Number | 65005 |
| Neighbor IP Address | 203.0.113.14 |

Warning: If NAT is active on the same interface acting as a BGP peer, then NAT forwarding must also be enabled. See [NAT Forwarding](#).

11.2.2 BGP Example Configuration

The following example configures a BGP adjacency to a neighbor using the settings from [Example BGP Configuration](#):

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server vrf default
tnsr(config-bgp)# as-number 65002
tnsr(config-bgp)# router-id 10.2.0.1
tnsr(config-bgp)# no ebgp-requires-policy
tnsr(config-bgp)# no network import-check
tnsr(config-bgp)# neighbor 203.0.113.14
tnsr(config-bgp-neighbor)# remote-as 65005
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)# network 10.2.0.0/16
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)# exit
tnsr(config-frr-bgp)# enable
tnsr(config-frr-bgp)# exit
```

BGP Example with Loopback

BGP on TNSR can also be used with loopback interfaces for more advanced routing scenarios. Using a loopback for a BGP update source allows the path to the routing peer to be handled in some other way. It may be static, or it may involve multiple paths to the peer, for example.

This scenario is based on the previous example, but uses a loopback interface for the update source.

Configure Loopback

First, setup the loopback interface and address:

```
tnsr(config)# interface loopback bgploop
tnsr(config-loopback)# instance 1
tnsr(config-loopback)# exit
tnsr(config)# interface loop1
tnsr(config-interface)# ip address 10.5.222.1/32
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

Since the loopback is not on an interface, the 10.5.222.1 address must be routed to TNSR somehow. This could be an address in a routed block, or there could be another method of handling routes between the peers.

Route to Peer

Likewise, TNSR must know how to reach the remote peer, 10.5.222.2, which in this case the example also assumes is a loopback address configured in a similar manner. In this example, the peer is reachable at 203.0.113.14 which is in a network directly connected to TenGigabitEthernet6/0/0. For simplicity, this will only be a static route:

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 10.5.222.2/32
tnsr(config-rttbl4-next-hop)# next-hop 0 via 203.0.113.14
```

Setup BGP with Loopback Address

Now setup the BGP service, using the new neighbor address and with the loopback address as an update source:

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server vrf default
tnsr(config-bgp)# as-number 65002
tnsr(config-bgp)# router-id 10.2.0.1
tnsr(config-bgp)# no ebgp-requires-policy
tnsr(config-bgp)# no network import-check
tnsr(config-bgp)# neighbor 10.5.222.2
tnsr(config-bgp-neighbor)# remote-as 65005
tnsr(config-bgp-neighbor)# update-source 10.5.222.1
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)# network 10.2.0.0/16
tnsr(config-bgp-ip4uni)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config-bgp)# exit
tnsr(config-frr-bgp)# enable
tnsr(config-frr-bgp)# exit
```

11.2.3 BGP Configuration

The BGP service on TNSR contains numerous methods to configure and fine-tune BGP routing behavior. Due to this complexity, the topic has been split into several sections. Read through each section before attempting to create a new BGP configuration.

Enabling BGP

The BGP service has a master enable/disable toggle that must be set before BGP will operate. Enable BGP using the `enable` command in `config-frr-bgp` mode:

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# enable
```

To disable the service, use `no enable` or `disable`.

The BGP service is managed as described in [Service Control](#).

Warning: After starting or restarting TNSR, restart the BGP service from within the TNSR configuration mode CLI to ensure that the routes from BGP neighbors are fully populated throughout TNSR:

```
tnsr(config)# service bgp restart
```

BGP Router Configuration

This statement enters *BGP* server mode for the specified *VRF* and enters `config-bgp` mode.

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server vrf default
tnsr(config-bgp)#
```

Warning: Older versions of TNSR specified the *ASN* here, rather than a VRF name. That format has been deprecated. The ASN is still mandatory, but is now set by the `as-number <asn>` command within `config-bgp` mode.

BGP mode defines the main behaviors of the BGP daemon, as well as the neighbors and behavior of BGP for different address families, among other possibilities.

From within `config-bgp` mode, the following commands are available:

as-number <asn>

Mandatory. Sets the autonomous system number for this BGP instance.

address-family (ipv4|ipv6) (unicast|multicast)

Enter *BGP Address Family Configuration* mode.

always-compare-med

Instructs the BGP daemon to always consult MED values in routes, no matter which AS the routes were received through.

bestpath as-path (confed|ignore|multipath-relax|as-set|no-as-set)

Controls how the BGP daemon determines the best path to a destination. May be one of:

confed

Considers the length of confederation path sets and sequences.

ignore

Ignores AS path lengths when computing the route to a destination.

multipath-relax

Consider paths of equal length when choosing between multiple paths to a destination, rather than looking for an exact match. This allows load sharing across different AS paths, so long as they are of equal length.

as-set

For use with `multipath-relax`, it adds AS set information for aggregate routes.

no-as-set

For use with `multipath-relax`, it prevents AS set generation.

bestpath compare-routerid

Uses the router ID of peers (or originator ID, if present) to break ties when computing paths to a destination based on other information. A lower router ID will win in a tie.

bestpath med confed

Compare confederation path MEDs

bestpath med missing-as-worst

If a route is missing *MED* information, it will be considered least preferred.

client-to-client reflection

Enables reflection of routes from one client to another client.

cluster-id (<ipv4>|<value>)

Configures the BGP daemon to participate in route reflection with the given cluster ID. The ID may be given in IP address (dotted quad) notation or as an unsigned 32-bit integer (1-4294967295).

coalesce-time <value>

Configures the Subgroup coalesce timer, in milliseconds (1-4294967295).

confederation identifier <ASN>

Configures an AS number for the entire group of IBGP routers participating in confederation.

confederation peer <ASN>

Configures the sub-AS number for the subset of peers inside a group of IBGP routers participating in confederation.

dampening [penalty <val> [reuse <val> [suppress <val> [maximum <max>]]]]

This command enables BGP route flap dampening (RFC 2439) to prevent unstable routers from adversely affecting routing behavior.

penalty <penalty-val>

The time duration during which the stability value will be reduced by half if the route is unreachable.

reuse <reuse-val>

Stability threshold that must be crossed for a route to be reused.

suppress <suppress-val>

Stability threshold that, when crossed, a route will be suppressed.

maximum <suppress-max>

Maximum time to suppress a route considered stable.

deterministic-med

Determine route selection locally, even when MED values are present. Picks the best MED path from neighbor advertisements.

disable-ebgp-connected-route-check

Disable checking if nexthop is an eBGP session.

ebgp-requires-policy

Determines whether or not BGP will exchange routes with peers when a policy is not present allowing that to take place. For example, with this active, BGP will not exchange routes with a neighbor unless there is a route map configured on the *address family neighbor* entry which matches and permits the routes inbound and outbound.

Note: This behavior is enabled by default on new configurations in TNSR 21.07 and later, and is disabled when upgrading from older installations to preserve the pre-existing behavior in those environments. To disable, use `no ebgp-requires-policy`.

Warning: Consider creating appropriate route maps and using them rather than disabling the policy check, as using policies is a more secure behavior, and can prevent unintended routes from being exchanged.

ipv4-unicast-enabled

Controls whether or not BGP will advertise IPv4 unicast routes. By default, BGP will advertise both IPv4 and IPv6 unicast routes. Using `no` with this command will limit BGP such that it only advertises IPv6 unicast routes.

listen limit <value>

Maximum number of dynamic neighbors from 1-5000.

listen range (<ip4-prefix>|<ip6-prefix>) peer-group <peer-group-name>

Listen range for dynamic neighbors.

log-neighbor-changes

Instructs the BGP daemon to log changes in neighbor adjacencies. This is useful for tracking changes to neighbor relationships, especially during initial configuration.

See also:

See *Logging* for information on dynamic routing logging.

max-med administrative [<med>]

Sends the defined MED value, or 4294967294 when unset, at all times.

max-med on-startup period <seconds> [<med>]

Sends the defined MED value, or 4294967294 when unset, only at startup for the defined period in seconds, from 5-86400.

neighbor <peer>

Enter *BGP Neighbor Configuration* mode.

network import-check

Checks if a BGP network route exists in IGP before creating BGP table entries.

Note: This behavior is enabled by default on new configurations in TNSR 21.07 and later, and is disabled when upgrading from older installations to preserve the pre-existing behavior in those environments. To disable, use `no network import-check`.

route-reflector allow-outbound-policy

Allows attributes modified by route maps to be reflected.

router-id <A.B.C.D>

Sets the router ID for the BGP daemon. This is typically set to an IP address unique to this router, and commonly is set to a local private address.

timers keep-alive <interval> hold-time <hold-time>

Configures the intervals between keep alive messages and how long to wait for a response before considering the peer unreachable.

update-delay <delay>

Keeps BGP in a read-only mode for the specified time after the daemon restarts or peers are cleared.

write-quanta <packets>

Controls the size of peer update transmissions.

BGP Neighbor Configuration

From within `config-bgp` mode, the `neighbor` statement can take either an IP address to setup a single neighbor or it can take a name which configures a peer group. The command then changes to `config-bgp-neighbor` mode.

```
tnsr(config-bgp)# neighbor 203.0.113.14
tnsr(config-bgp-neighbor)#
```

Peer groups work nearly identical to neighbors, and they define options that are common to multiple neighbors.

Warning: A neighbor or peer group must first be defined here before it can be used inside an address family (*BGP Address Family Neighbor Configuration*).

`config-bgp-neighbor` mode contains the following commands:

advertisement-interval <interval-sec>

Minimal time between sending routing updates to this neighbor. Expressed in seconds between 0-600.

bfd enabled (true|false)

Enable Bidirectional Forwarding Detection for this BGP neighbor.

capability dynamic

Enables negotiation of the dynamic capability with this neighbor or peer group.

capability extended-nexthop

Enables negotiation of the extended-nexthop capability with this neighbor or peer group. This capability can set IPv6 next-hops for IPv4 routes when peering with IPv6 neighbors on interfaces without IPv4 connectivity. This is automatically enabled when peering with IPv6 link-local addresses.

disable-connected-check

Disables a check that normally prevents peering with eBGP neighbors which are not directly connected. This enables using loopback interfaces to establish adjacencies with peers.

description <string>

A brief text description of this neighbor.

dont-capability-negotiate

Disables dynamic capability negotiation with the peer. When set, the router does not advertise capabilities, nor does it accept them. This results in using only locally configured capabilities.

ebgp-multihop [hop-maximum <hops>]

The maximum allowed hops between this router and the neighbor, in the range 1-255. When enabled without a specific value, the default is 1. This value cannot be set if `ttl-security` is set.

(enable|disable)

The default state of a neighbor is disabled. To enable the neighbor, use the `enable` command. To disable the neighbor, run `disable` or `no enable`.

enforce-first-as

When set, enforces the first AS for eBGP routes.

local-as <asn> [no-prepend [replace-as]]

Sets the local AS number sent to this neighbor, which replaces the AS number configured on the BGP server itself. By default, this value is prepended to the AS path for routes received from this neighbor or peer group, and is added to the AS path for routes sent to this neighbor or peer group after the AS number from the BGP sever.

no-prepend

Suppresses prepending this AS number to the AS path for received routes.

replace-as

Suppresses prepending the BGP server AS to transmitted routes, so that only this value is present.

override-capability

Ignores capabilities sent by the peer during negotiation and uses locally configured capabilities instead.

passive

When set, this router will not issue requests to the neighbor on its own. The BGP daemon will only respond to remote requests from this neighbor.

password <line>

A password used by BGP for TCP-MD5 (RFC 2385) authentication of communications with the neighbor, up to 64 characters in length.

peer-group [<peer-group-name>]

Configure this neighbor as a member of the given peer group. Only valid for use in neighbors defined by address, not on peer groups.

port <port>

An alternate port number used by this daemon for BGP messages, if it uses a value other than TCP port 179.

remote-as <asn>

The remote AS number of this neighbor.

solo

Instructs the router to prevent reflection of routes received from this neighbor back to this neighbor. This command is not useful in peer groups with multiple members.

strict-capability-match

When set, enforces the comparison between the set of capabilities sent by the peer during negotiation

and the set of capabilities present in the local configuration. If there is a mismatch, an error is transmitted to the peer.

timers keepalive <interval> holdtime <hold>

Configures the intervals between keep alive messages and how long to wait for a response from this neighbor before considering the peer unreachable. This overrides the default values set on the BGP server itself. Both values must be in the range 0–65535, in seconds.

timers connect <seconds>

The amount of time, in seconds from 1–65535, in which a connection to this peer must be established or else it is considered unsuccessful.

ttl-security hops <hops>

Similar to `ebgp-multihop` but sets a specific hop count at which neighbors must be reached, rather than the maximum value set by `ebgp-multihop`. This command cannot be set if `ebgp-multihop` is set.

update-source (<ifname>|<ip-address>)

Configures a specific interface or IP address to use when sending messages to this peer.

Note: Within BGP neighbor mode, the most important directives are `remote-as` to set the AS number of the neighbor and `enable`. The majority of other neighbor configuration is handled by the neighbor definition for a specific address family (*BGP Address Family Neighbor Configuration*).

BGP Address Family Configuration

The TNSR BGP implementation is capable of handling routing information for IPv4 and IPv6 independently, among other network layer protocols. The `address-family <family> <type>` command defines BGP behavior for each specific supported case. The most common address families are `ipv4 unicast` and `ipv6 unicast`. The other possible choices supported in this version are `ipv4 multicast` and `ipv6 multicast`.

The `address-family` command changes to BGP address family mode, which contains settings specific to each address family. The prefix for this mode varies depending on the address family command which entered the mode. For example, when configuring settings for the IPv4 unicast address family, the prompt indicates `config-bgp-ip4uni`.

```
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)#
```

Each resulting mode, such as `config-bgp-ip4uni` or `config-bgp-ip6uni`, contains its own set of commands. As these may differ, they are split up in multiple sections here.

IPv4 or IPv6 Unicast

The following commands are available in `config-bgp-ip4uni` and `config-bgp-ip6uni` modes:

aggregate-address <ip-prefix> [as-set] [summary-only]

This command configures route aggregation using the specified prefix. More specific routes contained within the specified prefix will be aggregated into the larger prefix, minimizing the set of networks advertised to peers.

as-set

When present, routes for the specified prefix will include an AS set. An AS set is a collection of AS numbers for which routes have been aggregated. This allows peers to detect routing loops, duplicate routes, and so on.

summary-only

When present, aggregated routes for this prefix will not be announced, so peers only see the aggregate prefix and not the component networks.

distance external <extern> internal <intern> local <local>

Configures distance values which control how BGP will treat routes based on the length of their AS path.

external <extern>

The distance at which routes are considered external, from 1-255.

internal <intern>

The distance at which routes are considered internal, from 1-255.

local <local>

The distance at which routes are considered local, from 1-255.

distance administrative <dist> prefix <ip-prefix> [access-list <access-list-name>]

This command manually configures the administrative distance for a given prefix, with the following required parameters:

administrative <dist>

The administrative distance for this prefix, from 1-255.

prefix <ip-prefix>

The IP prefix to which this distance will be applied.

access-list <access-list-name>

An access list which can be used to apply the distance to only a subset of the configured prefix.

maximum-paths <non-ibgp-paths> [igbp <ibgp-paths> [equal-cluster-length]]

Configures the maximum number of paths for multi-path eBGP forwarding. This is enabled by default with a value of 64. This allows the router to utilize multiple equal identical paths via different routers.

Paths for prefixes advertised by multiple eBGP peers in the same AS are considered equal cost and result in a multi-path route.

Note: As this feature is enabled by default, to disable this behavior, set the value to 1 which limits routes to only a single path.

igbp <ibgp-paths>

Configures a value for multi-path forwarding in iBGP roles.

equal-cluster-length

Only consider paths as matching when cluster lengths are also equal.

neighbor <existing-neighbor>

Specifies an existing neighbor address or peer group to use with this address family, and enters *BGP Address Family Neighbor Configuration* mode.

Warning: This command cannot define a new neighbor. A neighbor or peer group must first be defined using the neighbor command from within config-bgp mode before it can be used here.

network <ip-prefix> [route-map <route-map>]

Configures a prefix to be advertised to peers in this address family.

route-map <route-map>

Specifies a route map used to limit advertisements of this prefix.

redistribute <route-source> [metric <val>|route-map <route-map-name>]

Enables redistribution of routes from another source. Available route sources are listed in *Dynamic Routing Protocol Lists*.

metric <val>

A MED value to apply to redistributed routes.

route-map <route-map-name>

Specifies a route map used to limit redistributed route advertisements.

redistribute ospf [metric <val>|route-map <route-map-name>]

Configure redistribution of routes from OSPF.

metric <val>

A MED value to apply to redistributed routes.

route-map <route-map-name>

Specifies a route map used to limit redistributed route advertisements.

redistribute table id <kernel-table-id> [metric <val>|route-map <route-map-name>]

Configure redistribution of routes only from a specific kernel routing table, rather than all tables.

metric <val>

A MED value to apply to redistributed routes.

route-map <route-map-name>

Specifies a route map used to limit redistributed route advertisements.

table-map <route-map-name>

Uses the specified route map to control how routes received from BGP peers are passed to the dynamic routing manager process, and thus, into routing tables.

IPv4 Multicast

The following commands are available in `config-bgp-ip4multi` mode. See *IPv4 or IPv6 Unicast* for descriptions of the commands and parameters:

- `aggregate-address`
- `distance external`
- `distance administrative`
- `neighbor`
- `network`
- `table-map`

IPv6 Multicast

The following commands are available in `config-bgp-ip6multi` mode. See *IPv4 or IPv6 Unicast* for descriptions of the commands and parameters:

- `distance external`
- `distance administrative`
- `neighbor`
- `network`

BGP Address Family Neighbor Configuration

From within a BGP address family configuration mode, the `neighbor <existing-neighbor>` command specifies an existing neighbor defined in *BGP Neighbor Configuration* mode. This command then enters an address-family-specific neighbor mode. Like address families, the prefix for this mode varies based on the family and type of address family it is run within. For example, with IPv4 unicast mode, the prompt is `config-bgp-ip4uni-nbr`.

```
tnsr(config-bgp-ip4uni)# neighbor 203.0.113.14
tnsr(config-bgp-ip4uni-nbr)#
```

The following commands are available in `config-bgp-<familytype>-nbr` modes:

activate

Activate this neighbor for use by BGP.

addpath-tx-all-paths

Advertise all known paths to this peer, instead of only advertising the base path.

addpath-tx-bestpath-per-as

Advertise only the best known base paths for each AS.

allowas-in [<occurrence>|origin]

Allows routes to be received from this peer which are from the same AS of this router, but through a different path.

<occurrence>

Allowed number of AS occurrences, from 1-10.

origin

Accept the AS of this router in an AS-path if the route originated in the AS of this router.

as-override

Override ASNs in outbound updates to this peer if the AS path is identical to the remote AS.

attribute-unchanged [as-path|next-hop|med]

Propagates route attributes to this peer unchanged. This behavior can be optionally restricted to only specific attributes, including the `as-path`, `next-hop`, and `med` attributes.

capability orf prefix-list (send|receive|both)

Advertise outbound route filtering capability to this peer. This behavior can be restricted by direction, `send`, `receive`, or `both`.

default-originate [route-map <route-map>]

Enables advertisement of a default route to this peer.

route-map <route-map>

Restricts this behavior based on the specified route map.

distribute-list <access-list-name> (in|out)

Defines an access list which is used by BGP to filter route updates for this peer, in either the **in** or **out** direction.

filter-list <aspath-name> (in|out)

Defines a list which is used by BGP to filter route updates by AS path, rather than prefix.

maximum-prefix [(limit|restart|threshold) <value>|warning-only]

Defines the maximum number of prefixes this router will accept from the peer before tearing down the BGP session.

Note: This action is considered harsh and the best practice is to filter received prefixes by other mechanisms such as a **prefix-list** rather than to abruptly break contact in this way.

limit <val>

The maximum number of prefixes to allow from the peer, from 1-4294967295.

restart <val>

Restarts the connection after limits are exceeded. The restart is performed at the defined interval, in minutes, from 1-65535.

threshold <val>

Warning message threshold, from 1-100.

warning-only

Warn the peer when the limit is exceeded, rather than disconnecting.

next-hop-self [force]

Uses the address of this router as the next-hop in routes announced to this peer if they are learned via eBGP.

force

When present, also sets the next-hop to the address of this router on reflected routes.

prefix-list <prefix-list-name> (in|out)

Defines a prefix list which is used by BGP to filter route updates for this peer, in either the **in** or **out** direction.

remove-private-AS [all] [replace-AS]

Prevents the BGP daemon from sending routes with private AS numbers to this peer.

all

When present, this action applies to all ASNs.

replace-AS

When present, replaces private AS numbers with the AS number of this router.

route-map <name> (in|out)

Defines a route map which is used by BGP to filter route updates for this peer, in either the **in** or **out** direction.

route-reflector-client

Configures this peer as a route reflector client. This allows routes received from peers in the same AS or using iBGP to be reflected to other peers, avoiding the need for a full mesh configuration between all routing peers.

route-server-client

Configures this peer as a route server client. This enables transparent mode, which retains attributes unmodified, and maintains a local RIB for this peer.

send-community (standard|large|extended)

Sends the community attribute to this peer, limited to the specified type (standard, large, extended).

soft-reconfiguration inbound

Allows the peer to send requests for soft reconfiguration, to apply changes to routes or new attributes without the need for a session reset.

unsuppress-map <route-map>

Configures a route map which BGP can use to unsuppress routes that would otherwise be suppressed by other configuration settings.

weight <weight>

Applies the given weight to routes received from this peer.

BGP AS Path Access Lists

AS Path access lists entries determine if networks are allowed or denied in specific BGP configuration contexts. They are primarily used in BGP route maps, but also can be used in other areas of BGP configuration which accept AS Path lists as parameters.

The order of entries inside an AS Path list is important, and this order is determined by a sequence number. As with other access lists, AS Path access lists implicitly deny anything not matched.

BGP AS Path Configuration

To create a new AS Path list, from `config-frr-bgp` mode, use the `as-path <name>` command, which enters `config-aspath` mode:

```
tnsr(config-frr-bgp)# as-path myasp
tnsr(config-aspath)#
```

`config-aspath` mode contains only the rule `<seq> (permit|deny) <pattern>` command which defines a new AS Path rule with the following parameters:

<seq>

The sequence number for this rule, which controls the order in which rules are matched inside this AS Path list. Each rule must have a unique sequence number. Best practice is to leave gaps in the sequence to allow for adding rules in the future. For example, use 10, 20, 30, rather than 1, 2, 3.

(permit|deny)

The action taken when this AS Path rule is matched, either `permit` or `deny`.

<pattern>

A [regular expression](#) pattern which will match on the AS number.

Regular expression patterns support common pattern special characters for matching, but also a special `_` character. The `_` character matches common AS delimiters such as start of line, end of line, space, comma, braces, and parenthesis. The `_` character can be used on either side of an AS number to match it exactly, such as `_65534_`.

BGP AS Path Example

This AS Path could match an empty AS value or the specific value of 65002, and no others:

```
tnsr(config-frr-bgp)# as-path myasp
tnsr(config-aspath)# rule 10 permit ^$
tnsr(config-aspath)# rule 20 permit _65002_
tnsr(config-aspath)# exit
tnsr(config-frr-bgp)#
```

This AS Path will match only when the path being compared starts with 6500. This is a common way to ensure that routes from a peer contain the expected AS in the AS Path.

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# as-path R2-AS
tnsr(config-aspath)# rule 10 permit ^65005
tnsr(config-aspath)# exit
tnsr(config-frr-bgp)# exit
tnsr(config)# route dynamic route-map CHECK-R2-AS
tnsr(config-route-map)# sequence 10
tnsr(config-route-map-rule)# policy permit
tnsr(config-route-map-rule)# match as-path R2-AS
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# exit
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server 65002
tnsr(config-bgp)# neighbor 10.2.222.2
tnsr(config-bgp-neighbor)# remote-as 65005
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)# neighbor 10.2.222.2
tnsr(config-bgp-ip4uni-nbr)# route-map CHECK-R2-AS in
tnsr(config-bgp-ip4uni-nbr)# exit
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)# exit
tnsr(config-frr-bgp)# exit
tnsr(config)#
```

BGP AS Path Status

To view AS Path lists, use the `show route dynamic bgp as-path [<name>]` command. Add the name of an AS Path list to restrict the output to a single entry.

```
tnsr(config)# show route dynamic bgp as-path

Name  Seq Policy Pattern
-----
R2-AS  10 permit ^65005

myasp  10 permit ^$
myasp  20 permit _65002_
```

BGP Community Lists

A BGP community, as defined in [RFC 1997](#), is a group of destinations which share common properties. Community Lists define sets of community attributes which the BGP daemon can use to match or set community values in routing updates. BGP communities determine AS membership and priority values in BGP-specific contexts such as route-maps.

The order of entries inside a Community List is important, and this order is determined by a sequence number.

BGP Well-Known Communities

There are several “well-known” communities available for use in Community Lists. Each of these communities have special meanings:

internet

A community value of 0, indicating the Internet as a destination.

no-export

Routes received carrying this attribute value must not be exported to routers outside of the current confederation.

no-advertise

Routes received carrying this attribute value must not be advertised to any other BGP peer.

local-as

Also known as “No Export Subconfed”. Routes received carrying this attribute value must not be advertised to any external BGP peer, even those in the same confederation.

blackhole

Routes received carrying this attribute should not be routed (e.g. null routed).

graceful-shutdown

Indicates support for [RFC 8326](#) Graceful Shutdown, which allows BGP routers to indicate to peers that specific paths can be gracefully shut down rather than abruptly terminated when performing an intentional shutdown.

no-peer

Indicates that routes with this community value should not be readvertised to peers ([RFC 3765](#)).

BGP Community List Configuration

To create a new Community List, from `config-frr-bgp` mode, use the `community-list <name> (standard|expanded) [normal|extended|large]` command, with the following parameters:

<name>

The name of this BGP Community List.

(standard|expanded)

The type of Community List, either `standard` or `expanded`:

standard

Matches based on specific values for community attributes.

expanded

Matches based on an ordered list using a regular expression. Due to the use of regular expression evaluation, these lists incur a performance penalty.

[normal|extended|large]

The type of communities contained inside this Community List, either `normal`, `extended`, or `large`.

normal

Normal community values as described in [RFC 1997](#).

extended

Extended BGP communities specified using 8-octet values as described in [RFC 5668](#). These communities also allow for IPv4-based policies.

large

Large BGP communities specified using 12-octet values as described in [RFC 8092](#) and [RFC 8195](#).

The full `community-list` command enters `config-community-list` mode:

```
tnsr(config-frr-bgp)# community-list mycom standard normal
tnsr(config-community-list)#
```

`config-community-list` mode contains the following commands:

description

Text describing the community list.

sequence <seq> (permit|deny) <community-value>**<seq>**

The sequence number for this rule, which controls the order in which rules are matched inside this Community List. Each rule must have a unique sequence number. Best practice is to leave gaps in the sequence to allow for adding rules in the future. For example, use 10, 20, 30, rather than 1, 2, 3.

(permit|deny)

The action taken when this Community List rule is matched, either `permit` or `deny`.

<community-value>

The value of the community to match.

Standard Community Lists

This is a space-separated list of communities in AS:VAL format, or from the [BGP Well-Known Communities](#) list.

Expanded Community Lists

A string containing a regular expression to match against.

Regular expression patterns support common pattern special characters for matching, but also a special `_` character. The `_` character matches common AS delimiters such as start of line, end of line, space, comma, braces, and parenthesis.

BGP Community List Example

This example sets up a Community List for the AS:VAL pair of AS 65002 and community value 10:

```
tnsr(config-frr-bgp)# community-list mycom standard normal
tnsr(config-community-list)# sequence 10 permit 65002:10
tnsr(config-community-list)# exit
tnsr(config-frr-bgp)#
```

This example sets up a Community List, used by a route map, to prevent distribution of routes marked with the well-known community `no-export`:

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# community-list POISON-ROUTES standard normal
tnsr(config-community-list)# sequence 10 permit no-export
tnsr(config-community-list)# exit
tnsr(config-frr-bgp)# exit
tnsr(config)# route dynamic route-map OUT
tnsr(config-route-map)# sequence 10
tnsr(config-route-map-rule)# policy deny
tnsr(config-route-map-rule)# match ip address prefix-list RFC1918
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# sequence 20
tnsr(config-route-map-rule)# policy deny
tnsr(config-route-map-rule)# match community POISON-ROUTES
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# sequence 30
tnsr(config-route-map-rule)# policy permit
tnsr(config-route-map-rule)# match ip address prefix-list MY-ROUTES
tnsr(config-route-map-rule)# exit
tnsr(config-route-map)# exit
tnsr(config)#
```

Note: In this example, note the use of `permit` in the Community List, which will succeed on a positive match. The route map then uses `deny` when a positive match is made on the community value.

BGP Community List Status

To view Community Lists, use the `show route dynamic bgp community-list [<name>]` command. Add the name of a Community List to restrict the output to a single entry.

```
tnsr(config)# show route dynamic bgp community-list
```

```
Name  Type      Size  Description
-----
POISON-ROUTES standard normal
      Seq Action Community
      ---
      10 permit no-export

mycom standard normal
      Seq Action Community
      ---
      10 permit 65002:10
```

BGP Debugging Information

The following debugging commands are available in `config-frr-bgp` mode. Messages will be logged in accordance with the settings in [Logging](#).

option debug allow-martians

Debug allowing martian next hops.

Martians are addresses that would otherwise be considered invalid such as reserved private networks and link-local addresses.

option debug as4 [segment]

Debug 4-byte AS numbers.

segment

Debug 4-byte AS numbers in AS-path segments.

option debug bestpath <ipv6-prefix>

Debug best path calculation for a given prefix.

option debug keepalive [<peer>]

Debug BGP neighbor keep alive behavior

peer

Restrict keep alive debugging to a single peer.

option debug neighbor-events [<peer>]

Debug BGP neighbor events

peer

Restrict neighbor event debugging to a single peer.

Tip: To log neighbor changes without enabling debugging, use `log-neighbor-changes` in [BGP Router Configuration](#).

option debug nht

Debug next hop tracking events.

option debug update-groups

Debug update groups.

option debug updates in <peer>

Debug inbound updates from a specific peer.

option debug updates out <peer>

Debug outbound updates from a specific peer.

option debug updates prefix (<ipv4-prefix>|<ipv6-prefix>)

Debug updates for a specific prefix.

option debug zebra [prefix (<ipv4-prefix>|<ipv6-prefix>)]

Debug BGP messages in the dynamic route manager (zebra)

prefix (<ipv4-prefix>|<ipv6-prefix>)

Restrict debugging of dynamic route manager BGP messages to a specific prefix.

11.2.4 BGP Status

TNSR supports several commands to display information about the BGP daemon configuration and its status.

See also:

For more general dynamic routing status information, see *Dynamic Routing Manager Status*

Configuration Information

To view the BGP configuration:

```
tnsr# show route dynamic bgp config [<as-number>]
```

To view other individual sections of the configuration:

```
tnsr# show route dynamic bgp as-path [<as-path-name>]
tnsr# show route dynamic bgp community-list [<community-list-name>]
```

Status Information

The general form of the command to view BGP non-configuration state information is `show route dynamic bgp <options>`. Output includes all VRFs by default, but may be restricted to a single VRF by using `show route dynamic bgp vrf <vrf-name> <options>` instead. The list of options is the same in both cases.

For a brief summary of BGP status information:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] [(ipv4|ipv6)] summary
```

For a list of configured BGP Neighbors and their status:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] neighbors [<peer>]
```

To limit the neighbor status output to a specific area, use the address family form of the command:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] (ipv4|ipv6) neighbors [<peer>
    [advertised-routes|dampened-routes|flap-statistics|prefix-counts|
    received|received-routes|routes]]
```

For information about a specific BGP peer group:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] peer-group <peer-group-name>
```

For a list of valid BGP next hops:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] nexthop [detail]
```

For details about an address or prefix in the BGP routing table:

```
tnsr# show route dynamic bgp [vrf <vrf-name>] (ipv4|ipv6) network <prefix>
```

BGP Active Session Control

The `session clear` command can be used to reset active BGP sessions. This command is available from within `config-frr-bgp` mode. The general form of the command is:

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# session clear [vrf <vrf-name>] (*|<peer>|<asn>) [soft]
```

The first parameter after the optional VRF name controls what will be cleared, and values may be completed automatically with tab:

- ***
Clears all open BGP sessions
- <peer>**
Clears all sessions to a specific peer IP address or peer group name
- <asn>**
Clears all sessions to a specific AS number

The second parameter, `soft` is optional and controls whether or not the command will trigger a soft reconfiguration.

Additional Information

Additional BGP status information can be obtained by using the `vttysh` program outside of TNSR.

The `vttysh` program must be run as root:

```
sudo vttysh
```

The `vttysh` interface offers numerous commands. Of particular interest for BGP status are the following:

- show bgp summary**
A brief summary of BGP status information.
- show bgp neighbors**
Lists configured BGP Neighbors and their status details.
- show ip bgp**
A list of routes and paths for networks involved in BGP.
- show ip route**
The IP routing table managed by the FRR Zebra daemon, which marks the origin of routes to see which entries were obtained via BGP.

11.2.5 Working with Large BGP Tables

Memory Concerns

On current versions of TNSR, IPv4 and IPv6 routes both use the *main heap* for memory instead of their own heap, and thus are unlikely to require tuning except for when dealing with hundreds of thousands or even millions of routes, depending on the configuration.

The memory allocated for the *statistics segment* may need tuned depending on the number of routes received, especially in cases where TNSR is configured with multiple worker threads.

For specific advice on tuning these values, see *Memory Usage and Tuning*.

CPU Usage Concerns

In addition to memory, processing large numbers of routes will also consume significant CPU power.

Maintenance of the FIB (processing incoming route changes) is handled by the main thread. If there are no workers, processing incoming packets will also be handled by the main thread. In order to prevent the two tasks from competing for CPU resources, one or more worker thread can be added.

With multiple worker threads available, the main thread will handle incoming routes while the workers process packets.

See *CPU Workers and Affinity* for information on configuring additional CPU workers.

Warning: When adding workers, tuning memory values may be required, especially for the statistics segment. See *Memory Usage and Tuning* for details.

11.3 Open Shortest Path First v2 (OSPF)

Open Shortest Path First v2 (OSPF) is a link-state routing protocol defined by [RFC 2328](#). OSPF automatically locates neighboring IPv4 routers within an autonomous system, typically with multicast, and exchanges IPv4 routing information for networks reachable through each neighbor.

OSPF is an interior routing protocol (IGP), and facilitates routing between private links or segments of local networks.

11.3.1 OSPF Required Information

Before starting, take the time to gather all of the information required to form an OSPF adjacency to a neighbor. At a minimum, TNSR will need to know these items:

VRF Name

The name of the *Virtual Routing and Forwarding* instance for which this OSPF instance will manage routes, or `default` for the default route table.

Local Router ID

Typically the highest numbered local address on the firewall. This is also frequently set as the internal or LAN side IP address of a router. It does not matter what this ID is, so long as it is given in IPv4 address notation and does not conflict with any neighbors.

OSPF Area

A designation for the set of networks to which this router belongs. Typically set to `0.0.0.0` for simple internal deployments, but can be any number capable of being expressed in dotted quad notation (IPv4 address) or as a 32-bit unsigned integer.

OSPF Active Interfaces

The interfaces on this router upon which the OSPF daemon will advertise itself and look for neighbors. These interfaces are connected to network segments with other routers. They may be connected to local networks or remote point-to-point links. These interfaces must be configured with IP addresses.

Warning: Outside NAT interfaces (`ip nat outside`) cannot be used as active interfaces in OSPF! The presence of NAT prevents OSPF from properly communicating with neighbors to form a full adjacency.

OSPF Active Interface Cost Values

OSPF calculates the most efficient way to route between networks based on the total cost of a path from source to destination. Less desirable links (e.g. wireless) can be given a higher cost so that paths over faster networks will be used by traffic unless the preferred path is unavailable. For single connections to other networks, this value is not necessary and may be omitted or set to a simple default such as 5 or 10.

OSPF Passive Interfaces

These interfaces contain networks which should be advertised as reachable through this router, but do not contain other routers.

The example in this section uses the following values:

Table 2: Example OSPF Configuration

| Item | Value |
|--------------------------|------------------------------|
| VRF Name | default |
| Local Router ID | 10.2.0.1 |
| OSPF Area | 0.0.0.0 |
| Active Interfaces (Cost) | TenGigabitEthernet6/0/0 (10) |
| Passive Interfaces | GigabitEthernet3/0/0 |

11.3.2 OSPF Example

This example configuration implements an OSPF setup using the required information from *Example OSPF Configuration*.

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# server vrf default
tnsr(config-ospf)# ospf router-id 10.2.0.1
tnsr(config-ospf)# passive-interface GigabitEthernet3/0/0
tnsr(config-ospf)# exit
tnsr(config-frr-ospf)# interface GigabitEthernet3/0/0
tnsr(config-ospf-if)# ip address * area 0.0.0.0
tnsr(config-ospf-if)# exit
tnsr(config-frr-ospf)# interface TenGigabitEthernet6/0/0
tnsr(config-ospf-if)# ip address * cost 5
tnsr(config-ospf-if)# ip address * area 0.0.0.0
tnsr(config-ospf-if)# exit
tnsr(config-frr-ospf)# enable
tnsr(config-frr-ospf)# exit
tnsr(config)#
```

A similar configuration may be applied to neighboring routers also connected to the same network as the TenGigabitEthernet6/0/0 interface. Adjust the router ID and interface names as needed.

For a simple configuration such as this, a single area for all routers is typical.

See also:

- For a more complex example involving multiple areas, see *OSPF Router with Multiple Areas and Summarization*.
- WireGuard requires specific adjustments to function properly with OSPF. See *WireGuard VPN with OSPF Dynamic Routing* for details.

11.3.3 OSPF Configuration

OSPF configuration on TNSR, as shown in the example, can be fairly straightforward. That said, there are a number of ways to fine-tune the behavior and create complex OSPF routing configurations.

Read through each section before attempting to create a new OSPF configuration.

Enable OSPF

The OSPF service has a master enable/disable toggle that must be set before OSPF will operate. Enable OSPF using the `enable` command in `config-frr-ospf` mode:

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# enable
```

To disable the service, use `no enable` or `disable`.

The OSPF service is managed as described in *Service Control*.

OSPF Server Configuration

To configure an OSPF server, start in `config-frr-ospf` mode and run the `server vrf <vrf-name>` command, where `<vrf-name>` is the name of a *Virtual Routing and Forwarding* instance or `default` for the default route table:

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# server vrf default
tnsr(config-ospf)#
```

This changes into `config-ospf` mode, which contains the following commands:

area <area-id>

Configures area-specific settings in *OSPF Area Configuration* mode.

auto-cost reference-bandwidth <bw>

A base value, in Mbit/s, which is used when OSPF automatically calculates cost values. The default value is **100** which means that an interface with 100Mbit/s of bandwidth or greater will have a cost of 1, with lower bandwidth values incurring higher cost values.

All routers in the same area should use the same value, otherwise automatic cost calculations would fail to accurately represent total path costs between routers.

capability opaque-lsa

Enables support for Opaque LSAs, as described in *RFC 2370*.

compatible rfc-1583-compatibility

Enables compatibility with the older OSPF standard from *RFC 1583*, which has been obsoleted by the newer *RFC 2328*. The specific change this option enables relates to external path preference calculation and routing loop prevention. See *RFC 2328* section **G.2** for specific details.

default-information originate (always|metric <val>|type <type>|route-map <map>)

Enables origination of a Type 5 AS-External LSA containing default route information into all areas capable of external routing.

always

Always advertise a default route, even when a default route is not present in the local routing table.

metric <val>

Advertise the default route as having the given metric.

type <type>

The type of metric, either 1 or 2. See *Metric Types* for details about each type operates.

route-map <map>

Apply the given route map to the outbound route advertisement.

default-metric <val>

Uses the given metric value as the default metric for OSPF routes when no other metric information is available.

distance [(external|inter-area|intra-area)] <dist>

Sets an administrative distance for routes obtained via OSPF. This can be configured globally as well as for specific types of OSPF routes.

external <dist>

Sets the administrative distance for external OSPF routes.

inter-area <dist>

Sets the administrative distance for OSPF routes between areas.

intra-area <dist>

Sets the administrative distance for OSPF routes inside an area.

distribution-list out <route-source> access-list <name>

Applies the given access list <name> to routes redistributed from the specified <route-source>.

Available route sources are listed in *Dynamic Routing Protocol Lists*, with the exception of `ospf` which cannot be used with this command.

log-adjacency-changes [detail]

Instructs the OSPF daemon to log changes in neighbor adjacencies. This is useful for tracking changes to neighbor relationships, especially during initial configuration.

The optional `detail` parameter increases the verbosity of the resulting log messages.

See also:

See *Logging* for information on dynamic routing logging.

max-metric router-lsa administrative

Sets the administrative distance of routes through this router to infinity, so that other routers will avoid using this router to reach other networks. Networks on this router are still reachable. See [RFC 3137](#) for more information.

max-metric router-lsa (on-shutdown|on-startup) <seconds>

Conditionally sets the administrative distance of routes through this router to infinity for a period of time after startup or shutdown. This allows other routers in the area to avoid using routes through this router until a full convergence is achieved.

neighbor <ip4-address> [(poll-interval <interval>|priority <prio>)]

Defines a non-multicast neighbor statically and configures per-neighbor settings for polling and priority.

poll-interval <interval>

Time, in seconds, between sending OSPF Hello messages to neighbors in a down state.

priority <prio>

A priority value applied to neighbors in a down state.

Note: WireGuard VPN interfaces are non-broadcast interfaces which require static neighbor definitions. See *WireGuard VPN with OSPF Dynamic Routing* for details.

ospf abr-type (cisco|ibm|shortcut|standard)

Controls the behavior of Area Border Router (ABR) functionality.

cisco|ibm

The default behavior of OSPF on TNSR, discussed in [RFC 3509](#). This behavior allows an ABR without a backbone connection to act as an internal router for all connected areas.

shortcut

Discussed in [draft-ietf-ospf-shortcut-abr-02](#), this behavior allows ABRs to consider summary LSAs from all attached areas, rather than being forced to route through a suboptimal path only because it is shorter.

standard

The ABR behavior described in the original OSPF standard. When set, a router attached to multiple areas requires a connection to a backbone. If no backbone is available, traffic attempting to cross areas will be dropped.

ospf router-id <router-id>

Sets the router ID for the OSPF daemon. This is typically set to an IP address unique to this router, and commonly is set to a local private address.

ospf write-multiplier <write>

Number of interfaces processed per write operation, from 1-100. Default value is 20.

passive-interface <if-name> [<ip4-address>]

Configures the specified interface as passive. This prevents the interface from actively participating in OSPF, while still allowing OSPF to operate on networks connected to that interface. This is commonly used for local interfaces without other routers attached. OSPF will announce networks attached to passive interfaces as stub links.

pce address (<ip4-address>|domain <asn>|flags <bits>|neighbor <asn>|scope <bits>)

Configures [RFC 5088](#) Path Computation Element (PCE) Discovery for OSPF. When active, this router will advertise support for PCE to neighbors via router information (RI) announcements. Requires `router-info` as to also be enabled.

<ip4-address>

The IP address used to reach the PCE

domain <asn>

AS numbers of domains controlled by the PCE, meaning it can compute paths for the autonomous systems and has visibility into them.

flags <bits>

Capability flags for the PCE, expressed as a bit pattern. The bits meanings are defined in [RFC 5088](#) section 4.5:

Table 3: PCE Capability Flags

| Bit | Capability |
|-----|---|
| 0 | Path computation with GMPLS link constraints |
| 1 | Bidirectional path computation |
| 2 | Diverse path computation |
| 3 | Load-balanced path computation |
| 4 | Synchronized path computation |
| 5 | Support for multiple objective functions |
| 6 | Support for additive path constraints (max hop count, etc.) |
| 7 | Support for request prioritization |
| 8 | Support for multiple requests per message |

neighbor <asn>

AS numbers of neighboring domains for which the PCE can compute paths.

scope <bits>

Scope for path computation, such as intra-area, inter-area, inter-AS, or inter-layer, expressed as a bit mask. The bits meanings are defined in [RFC 5088](#) section 4.2:

Table 4: PCE Scope

| Bit | Path Scope |
|-----|---|
| 0 | L bit: Can compute intra-area paths. |
| 1 | R bit: Can act as PCE for inter-area TE LSP computation. |
| 2 | Rd bit: Can act as a default PCE for inter-area TE LSP computation. |
| 3 | S bit: Can act as PCE for inter-AS TE LSP computation. |
| 4 | Sd bit: Can act as a default PCE for inter-AS TE LSP computation. |
| 5 | Y bit: Can act as PCE for inter-layer TE LSP computation. |

redistribute <route-source> [(metric <val>|route-map <map>|type <type>)]

Enables redistribution of routes from another source. Available route sources are listed in [Dynamic Routing Protocol Lists](#).

metric <val>

Advertise the default route as having the given metric.

type <type>

The type of metric, either 1 or 2. See [Metric Types](#) for details about each type operates.

route-map <map>

Apply the given route map to the redistributed route advertisements.

refresh timer <time>

Time, in seconds from 10–1800, between refreshing LSA information. Default value is 10.

router-info as

Enables advertisement of optional router capabilities to neighbors, as described in [RFC 4970](#). This adds information about enabled features, such as PCE, to Router Information (RI) LSA messages.

timers lsa min-arrival <min>

The minimum time allowed between advertisements by neighbors, from 0–600000, in milliseconds. Default is 1000.

timers throttle lsa all <delay>

Time between LSA transmissions from this router, in milliseconds, from 0–5000. Default is 5000.

timers throttle spf (delay|initial-hold|maximum-hold) <val>

Controls timers that determine when the router will make SPF routing decisions.

delay <val>

Minimum time after an event occurs before allowing SPF calculation. Lower values will react faster to changes, but can be less stable. Specified in milliseconds from 0-600000, with a default value of 0.

initial-hold <val>

Lowest time allowed between SPF calculations. Specified in milliseconds from 0-600000, with a default value of 50.

maximum-hold <val>

Highest time allowed between SPF calculations. Specified in milliseconds from 0-600000, with a default value of 5000.

SPF calculations are adaptive, and if a new event occurs which would otherwise trigger a calculation before the hold timer expires, then the hold is increased by the **initial-hold** value, up to the specified **maximum-hold**. This avoids excessive consecutive recalculations.

OSPF Interface Configuration

OSPF must use one or more interfaces to announce itself to neighbors and to receive announcements from neighbors. At least one interface must be configured and active in order to locate neighbors and form an adjacency.

Warning: Outside NAT interfaces (**ip nat outside**) cannot be used as active interfaces in OSPF! The presence of NAT prevents OSPF from properly communicating with neighbors to form a full adjacency.

To configure an interface for use with OSPF, start in **config-frr-ospf** mode and use the **interface <if-name>** command to enter **config-ospf-if** mode.

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# interface <if-name>
tnsr(config-ospf-if)#
```

config-ospf-if mode contains the following commands:

ip address (*|<ip4-address>)

These commands specify how OSPF will behave for all addresses on an interface (*) for a specific IPv4 address on an interface. In most cases, the * form will be used here, but when there are multiple addresses available on an interface, a specific choice may be necessary.

area <area-id>

This command defines the interface as a member of the given area. This is required to activate an interface for use by OSPF.

authentication [message-digest|null]

Configures authentication for OSPF neighbors on this interface. All routers connected to this interface must have identical authentication configurations. This can also be enabled in the area settings.

When run without parameters, simple password authentication is used.

message-digest

When set, enables MD5 HMAC authentication for this interface.

null

When set, no authentication is used by OSPF on this interface. This is the default behavior, but may be explicitly configured with this command to override the authentication configured for this area.

authentication-key <key>

Configures a simple password to use for authentication when that type of authentication is active. This password may only have a maximum length of 8 characters.

Warning: This method of authentication is weak, and MD5 HMAC authentication should be used instead if it is supported by all connected routers.

cost <link-cost>

A manual cost value to apply to this interface, rather than allowing automatic cost calculation to take place.

In situations where multiple paths are possible to the same destination, this allows OSPF to prefer one path over another when all else is equal.

dead-interval <time>

Time, in seconds from 1-65535, without communication from a neighbor on this interface before considering it dead. This is also known as the RouterDeadInterval timer in OSPF. Default value is 40. This timer should be set to the same value for all routers.

dead-interval minimal hello <multiplier>

When active, the dead-interval is forced to a value of 1 and OSPF will instead send <multiplier> number of Hello messages each second. This allows for faster convergence, but will consume more resources.

Note: When set, this overrides the values of both dead-interval and hello-interval. Custom values configured with those commands will be ignored by OSPF.

hello-interval <interval>

The interval, in seconds from 1-65535, at which this router will send hello messages. This is also known as the HelloInterval timer in OSPF. Default value is 10. This timer should be set to the same value for all routers.

A lower value will result in faster convergence times, but will consume more resources.

message-digest-key key-id <id> md5-key <key>

Configures MD5 HMAC authentication for use with message-digest type authentication.

key-id <id>

An integer value from 1-255 which identifies the secret key. This value must be identical on all routers.

md5-key <key>

The content of the secret key identified by key-id, which is used to generate the message digest. Given as an unencrypted string, similar to a password. The maximum length of the key is 16 characters.

mtu-ignore

When present, OSPF will ignore the MTU advertised by neighbors and can still achieve

a full adjacency when peers do not have matching MTU values.

retransmit-interval <interval>

The interval, in seconds from 1–65535, at which this router will retransmit Link State Request and Database Description messages. This is also known as the `RxmtInterval` timer in OSPF. Default value is 5.

priority <priority>

A priority value, from 0–255, assigned to this router. When determining which router will become the Designated Router (DR), the router with the highest priority is more likely to be elected as the DR.

The default value is 1. The value 0 is special and will prevent this router from being chosen as DR.

transmit-delay <delay>

The interval, in seconds from 1–65535, at which this router will transmit LSA messages. This is also known as the `InfTransDelay` timer in OSPF. Default value is 1.

ip bfd enabled (true|false)

Enable Bidirectional Forwarding Detection for OSPF on this interface.

ip network (broadcast|non-broadcast|point-to-multipoint|point-to-point)

Manually configures a specific type of network used on a given interface, rather than letting OSPF determine the type automatically. This controls how OSPF behaves and how it crafts messages when using an interface.

broadcast

Broadcast networks, such as typical Ethernet networks, allow multiple routers on a segment and OSPF can use broadcast and multicast to send messages to multiple targets at once. OSPF assumes that all routers on broadcast networks are directly connected and can communicate without passing through other routers.

non-broadcast

Non-broadcast networks support multiple routers but do not have broadcast or multicast capabilities. Due to this lack of support, neighbors must be manually configured using the `neighbor` command. When using this mode, OSPF simulates a broadcast network using Non-Broadcast Multi-Access (NBMA) mode, but transmits messages to known neighbors directly.

Note: WireGuard VPN interfaces are non-broadcast interfaces. See [WireGuard VPN with OSPF Dynamic Routing](#) for details.

point-to-multipoint

Similar to `non-broadcast` mode, but connections to manually configured neighbors are treated as a collection of point-to-point links rather than a shared network. Similar to a point-to-point network, OSPF disables DR election.

point-to-point

A point-to-point network links a single pair of routers. The interface is still capable of broadcast, and OSPF will dynamically discover neighbors. With this type of network, OSPF disables election of a DR.

OSPF Area Configuration

To configure area-specific settings in OSPF, start in `config-ospf` mode and use the `area <area-id>` command to enter `config-ospf-area` mode.

```
tnsr(config-ospf)# area <area-id>
tnsr(config-ospf-area)#
```

`config-ospf-area` mode contains the following commands:

authentication

Enables authentication for this area. Communication from peers must contain the expected authentication information to be accepted, and outgoing packets will have authentication information added.

When present on its own, the authentication mechanism used is simple passwords. Authentication passwords are configured in *OSPF Interface Configuration* mode using the `authentication-key` command.

message-digest

When present, enables MD5 HMAC authentication for this area. Much stronger authentication than simple passwords. The key is configured in *OSPF Interface Configuration* mode using the `message-digest-key` command.

default-cost <cost>

Sets the cost applied to default route summary LSA messages sent to stub areas.

export-list <acl-name>

Uses the given ACL to limit Type 3 summary LSA messages for intra-area paths that would otherwise be advertised. This behavior only applies if this router is the ABR for the area in question.

filter-list (in|out) prefix-list <prefix-list-name>

Similar to `export-list` and `import-list` but uses prefix lists instead of ACLs, and can work in either direction.

import-list <acl-name>

Similar to `export-list`, but for routes announced by other routers into this area.

nssa [(no-summary|translate (always|candidate|never))]

Configures this area as a Not-so-Stubby Area (NSSA), which does not contain external links but may contain static routes to non-OSPF destinations (See *Area Types* for more information on area types and behaviors).

no-summary

When present, the area will instead of considered an NSSA Totally Stub area (*Area Types*).

translate (always|candidate|never)

Configures NSSA-ABR translations, for converting between Type 5 and Type 7 LSAs.

always

Always translate messages.

candidate

Participate in NSSA-ABR candidate elections. Currently the default behavior.

never

Never translate messages.

range <prefix> [cost <val>|not-advertise|substitute <sub-prefix>]

Configure summarization of routes inside the given prefix. Instead of Type 1 (Router) and Type 2 (Network) LSAs, it creates Type 3 Summary LSAs instead.

cost <val>

Apply the specified cost to summarized routes for this prefix.

not-advertise

Disable advertisement for this prefix.

substitute <sub-prefix>

Instead of advertising the first prefix, advertise this prefix instead.

shortcut (default|disable|enable)

For use with `abr-type shortcut` (*OSPF Server Configuration*), this advertises the area as capable of supporting ABR shortcut behavior (*draft-ietf-ospf-shortcut-abr-02*).

stub [no-summary]

Configure this area as a Stub Area (*Area Types*).

no-summary

When present, the area will instead be considered a Totally Stub Area (*Area Types*).

virtual-link <router-id>

Configures a virtual link in this area between this router and the specified router. Both this router and the target router must be ABRs, and both must have a link to this (non-backbone) area. Additionally, the virtual link must be added on both ends. This command enters `config-ospf-vlink` mode which has a subset of commands available similar to *OSPF Interface Configuration*. The available commands are `authentication-key`, `dead-interval`, `hello-interval`, `message-digest-key`, `retransmit-interval`, and `transmit-delay`. The usage of these commands is explained in *OSPF Interface Configuration*.

The virtual link is used to exchange routing information directly between the routers involved, and can be used to deliver traffic via the peer if necessary. Such a relationship may be necessary to nudge traffic from an ABR with a single undesirable link to another ABR with a faster link to a common remote destination, when the path would otherwise be selected because it is shorter.

OSPF Debugging Information

The following debugging commands are available in `config-frr-ospf` mode. Messages will be logged in accordance with the settings in *Logging*.

debug event

Enable debugging information for OSPF events.

debug nssa

Enable debugging information for OSPF Not-So-Stubby Area information.

debug sr

Enable debugging information for OSPF Segment Routing information.

debug te

Enable debugging information for OSPF Traffic Engineering information.

debug (ism|nsm) (events|status|timers)

Enables State Machine debugging.

ism

Enable debugging information for the Interface State Machine.

nsm

Enable debugging information for the Neighbor State Machine.

For either of the above state machines, several types of debugging information are available:

events

Enable event debugging for the chosen state machine.

status

Enable status debugging for the chosen state machine.

timers

Enable timer debugging for the chosen state machine.

debug lsa (flooding|generate|install|refresh)

Enables Link State Advertisement debugging.

flooding

Enables debugging for LSA flooding.

generate

Enables debugging for LSA generation.

install

Enables debugging for LSA installation and deletion.

refresh

Enables debugging for LSA refresh.

debug packet (dd|hello|ls-acknowledgment|ls-request|ls-update) (send|recv) [detail]

Enables packet-level debugging.

dd

Debug database description packets.

hello

Debug OSPF hello packets.

ls-acknowledgment

Debug LSA acknowledgment packets.

ls-request

Debug LSA request packets.

ls-update

Debug LSA update packets.

Packet debugging entries are limited to a single direction:

send

Debug packets sent by this router.

recv

Debug packets received by this router.

Optionally, increased detail may be added to debugging messages by use of the `detail` parameter.

debug zebra (interface|redistribute)

Enables OSPF-specific debugging for the dynamic routing manager daemon.

interface

Debug dynamic routing manager interface information.

redistribute

Debug dynamic routing manager route redistribution information.

11.3.4 OSPF Status

TNSR supports several commands to display information about the OSPF daemon configuration and its status.

See also:

For more general dynamic routing status information, see *Dynamic Routing Manager Status*

The general form of the command to view OSPF state information is `show route dynamic ospf <options>`. Output includes all VRFs by default, but may be restricted to a single VRF by using `show route dynamic ospf vrf <vrf-name> <options>` instead. The list of options is the same in both cases.

Configuration Information

To view the OSPF configuration:

```
tnsr(config)# show route dynamic ospf config
interface GigabitEthernet3/0/0
    ip ospf area 0.0.0.0
exit
interface TenGigabitEthernet6/0/0
    ip ospf area 0.0.0.0
    ip ospf cost 10
exit
router ospf
    ospf router-id 10.2.0.1
    passive-interface GigabitEthernet3/0/0
```

Status Information

To view the OSPF database:

```
tnsr(config)# show route dynamic ospf database

      OSPF Router with ID (10.2.0.1)

      Router Link States (Area 0.0.0.0)

Link ID        ADV Router    Age  Seq#          CkSum  Link count
10.2.0.1       10.2.0.1      129  0x800000005  0x6808  2
10.25.0.1      10.25.0.1     157  0x800000005  0x45ce  2

      Net Link States (Area 0.0.0.0)

Link ID        ADV Router    Age  Seq#          CkSum
203.0.113.25   10.25.0.1     158  0x800000001  0x2e80
```

Additional more specific information is available by adding a keyword onto the end of the command `show route dynamic ospf database <name>` where <name> is one of the following choices:

asbr-summary

Autonomous System Boundary Router (ASBR) database summary.

external

External link state information.

max-age

Link State Advertisement (LSA) entries in MaxAge list.

network

Network link states.

nssa-external

Not-so-stubby-area external link states.

opaque-area

Link area Opaque-LSA.

opaque-as

Link AS Opaque-LSA.

opaque-link

Link local Opaque-LSA.

router

Router link states.

self-originate

Link states originated from this router.

summary

Network summary link states.

To view information about interfaces participating in OSPF:

```
tnsr(config)# show route dynamic ospf interface
GigabitEthernet3/0/0 is up
  ifindex 22, MTU 1500 bytes, BW 1000 Mbit <UP,RUNNING>
  Internet Address 10.2.0.1/24, Broadcast 10.2.0.255, Area 0.0.0.0
  MTU mismatch detection: enabled
  Router ID 10.2.0.1, Network Type BROADCAST, Cost: 10
  Transmit Delay is 1 sec, State DR, Priority 1
  No backup designated router on this network
  Multicast group memberships: <None>
  Timer intervals configured, Hello 10s, Dead 40s, Wait 40s, Retransmit 5
  No Hellos (Passive interface)
  Neighbor Count is 0, Adjacent neighbor count is 0
TenGigabitEthernet6/0/0 is up
  ifindex 23, MTU 1500 bytes, BW 1000 Mbit <UP,RUNNING>
  Internet Address 203.0.113.2/24, Broadcast 203.0.113.255, Area 0.0.0.0
  MTU mismatch detection: enabled
  Router ID 10.2.0.1, Network Type BROADCAST, Cost: 10
  Transmit Delay is 1 sec, State Backup, Priority 1
  Backup Designated Router (ID) 10.2.0.1, Interface Address 203.0.113.2
  Multicast group memberships: OSPFAllRouters OSPFDesignatedRouters
  Timer intervals configured, Hello 10s, Dead 40s, Wait 40s, Retransmit 5
  Hello due in 8.281s
  Neighbor Count is 1, Adjacent neighbor count is 1
```

To view information about current OSPF neighbors and adjacencies:

```
tnsr(config)# show route dynamic ospf neighbor
```

| Neighbor ID | Pri | State | Dead Time | Address | Interface |
|-------------|-----|-------|-----------|---------|-----------|
|-------------|-----|-------|-----------|---------|-----------|

(continues on next page)

(continued from previous page)

```

→          RXmtL RqstL DBsmL
10.25.0.1      1 Full/DR      39.774s 203.0.113.25  TenGigabitEthernet6/0/
→0:203.0.113.2      0      0      0

```

For more detailed neighbor information, use `show route dynamic ospf neighbor detail`.

To view information about current OSPF routes:

```

tnsr(config)# show route dynamic ospf route
===== OSPF network routing table =====
N    10.2.0.0/24      [10] area: 0.0.0.0
      directly attached to GigabitEthernet3/0/0
N    10.25.0.0/24    [20] area: 0.0.0.0
      via 203.0.113.25, TenGigabitEthernet6/0/0
N    203.0.113.0/24  [10] area: 0.0.0.0
      directly attached to TenGigabitEthernet6/0/0

===== OSPF router routing table =====

===== OSPF external routing table =====

```

To view information about this OSPF router:

```

tnsr(config)# show route dynamic ospf router-info
--- Router Information parameters ---
Router Capabilities: 0x100000000

```

To view information about all OSPF Area Border Routers (ABR) and Autonomous System Boundary Routers (ASBR):

```

tnsr(config)# show route dynamic ospf border-routers
===== OSPF router routing table =====
R    10.25.0.1      [10] area: 0.0.0.0, ABR
      via 203.0.113.25, TenGigabitEthernet6/0/0

```

See also:

- [OSPF Router with Multiple Areas and Summarization](#)
- [WireGuard VPN with OSPF Dynamic Routing](#)

11.3.5 OSPF Terminology

OSPF has some common terms used throughout this section which can be confusing for those unfamiliar with the protocol.

Area

A collection of routers inside an AS, each sharing the same area ID. An Area ID is typically formatted like an IP address in dotted quad notation, `nnn.nnn.nnn.nnn`, but can also be expressed as an unsigned 32-bit integer.

Area Border Router (ABR)

A router connected to multiple areas.

Autonomous System Boundary Router (ASBR)

A router connected to external networks (outside the area).

Backbone

The central area of an AS, typically area 0.0.0.0. All areas in the AS connect to the backbone through ABRs.

Cost

A numeric value assigned to a link between networks, used by OSPF to calculate optimal paths to a destination. Typically higher bandwidth or higher quality circuits will be assigned a low cost, while circuits that are undesirable will be given a high cost. OSPF will prefer to use a route when it has the lowest total cost from a source to a destination.

Designated Router (DR)

In a network with multiple routers, one of them will be elected as a Designated Router using Hello messages. The DR takes on the task of generating LSA messages for the network, among other special duties.

Flooding

The mechanism by which OSPF routers distribute link state database information to neighbors.

Hello

Special OSPF messages which introduce neighbors to each other. Using these messages, neighbors can discover each other and begin to form routing relationships.

Interior Gateway Protocol (IGP)

A routing protocol, such as OSPF, which exchanges information about how to reach networks inside an autonomous system.

Link State Advertisement (LSA)

Messages sent by OSPF routers which describe the state of network links, or the router itself, including information about its interfaces and other neighbors.

Link State Database (LSDB)

A database containing the collected LSA messages of all routers and networks in the domain.

Link State Advertisement Message Types

LSA messages each have a type, indicating the information carried within. These types may be referenced throughout this section when describing routing behaviors.

Type 1 - Router LSA

Sent by every router in an area. Contains a description of all links on the router, including their state and costs.

Type 2 - Network LSA

Sent by the DR for a network. Contains a description of every router attached to the network, including the DR.

Type 3 - Network Summary-LSA

Sent by ABRs. Contains a description of destinations outside the current area (inter-area) when the destination is an IP network.

Type 4 - ASBR Summary-LSA

Similar to Type 3, but when sent when the destination is an ASBR.

Type 5 - AS-external LSA

Sent by ASBRs. Contains a description of destinations outside of this AS. Typically each message only contains information about a single destination.

Type 6 - Multicast Group Membership LSA

Not used.

Type 7 - NSSA External Link-State Advertisements

Similar to Type 5, but are only exchanged inside an NSSA.

Type 8 - External attribute LSA

Carry information from external routing protocols, such as BGP, when such destinations are announced with Type 5 LSAs.

Type 9 - Link Scope Opaque LSA

Carries information intended for uses other than OSPF, such as available bandwidth. It is carried through to other routers without being processed by OSPF itself. Type 9 messages are for other routers on the same link.

Type 10 - Area Scope Opaque LSA

Similar to Type 9, but flooded to all routers in an area.

Type 11 - AS Scope Opaque LSA

Similar to Type 9, but flooded to all routers throughout the AS, except for special areas such as stubs.

Area Types

OSPF Areas can be one of several types which alter their behavior in important ways.

Normal

A typical area in which all routers know all possible routes.

Stub Area

An area with no external connections. Since traffic passing out of a stub area must pass through an ABR, it only needs to know about routes to the ABR, not beyond the ABR. Routers in a stub area do not receive Type 5 LSAs.

Totally Stub Area

Similar to a stub area, but routers also do not receive summary LSA messages except for default route information. As such, they do not receive LSA messages of type 3, 4, or 5.

Not-so-Stubby-Area (NSSA)

Similar to a Stub area but it may contain static routes to non-OSPF networks. Routers in an NSSA exchange external routing information in Type 7 LSAs instead of Type 5.

NSSA Totally Stub Area

Similar to both NSSA and a Totally Stub area. As such, they do not receive LSA messages of type 3, 4, or 5.

Metric Types

Type 1 or E1

A Type 1 external metric, also known as E1, uses a similar cost calculation to typical link states, where internal and external costs are added together to find the total cost.

Type 2 or E2

A Type 2 external metric, also known as E2, only considers external costs and ignores internal costs.

11.4 Open Shortest Path First v3 (OSPF6)

Open Shortest Path First v3 (OSPF6) is defined by [RFC 5340](#) and is similar to OSPF v2, but operates with IPv6 networks. Thus, it is a link-state routing protocol that automatically locates neighboring IPv6 routers within an autonomous system, typically with multicast, and exchanges IPv6 routing information for networks each neighbor.

OSPF6 is an interior routing protocol (IGP), and facilitates routing between private links or segments of local networks.

Terms used in this section are shared with OSPF, and are covered in [OSPF Terminology](#).

11.4.1 OSPF6 Required Information

Before starting, take the time to gather all of the information required to form an OSPF6 adjacency to a neighbor. This list is similar to that of OSPF. At a minimum, TNSR will need to know these items:

Local Router ID

Typically the highest numbered local address on the firewall. This is also frequently set as the internal or LAN side IP address of a router. It does not matter what this ID is, so long as it is given in IPv4 address notation and does not conflict with any neighbors.

OSPF6 Area

A designation for the set of networks to which this router belongs. Typically set to 0.0.0.0 for simple internal deployments, but can be any number capable of being expressed in dotted quad notation (IPv4 address) or as a 32-bit unsigned integer.

OSPF6 Active Interfaces

The interfaces on this router upon which the OSPF6 daemon will advertise itself and monitor for neighbors. These interfaces are connected to network segments with other routers. They may be connected to local networks or remote point-to-point links. These interfaces only require an IPv6 link local address.

OSPF6 Active Interface Cost Values

OSPF6 calculates the most efficient way to route between networks based on the total cost of a path from source to destination. Less desirable links (e.g. wireless) can be given a higher cost so that paths over faster networks will be used by traffic unless the preferred path is unavailable. For single connections to other networks, this value is not necessary and may be omitted or set to a simple default such as 5 or 10.

OSPF6 Passive Interfaces

These interfaces contain networks which TNSR will advertise as reachable through this router, but do not contain other routers.

The example in this section uses the following values:

Table 5: Example OSPF Configuration

| Item | Value |
|--------------------------|------------------------------|
| Local Router ID | 10.2.0.1 |
| OSPF Area | 0.0.0.0 |
| Active Interfaces (Cost) | TenGigabitEthernet6/0/0 (10) |
| Passive Interfaces | GigabitEthernet3/0/0 |

11.4.2 OSPF6 Example

This example configuration implements an OSPF setup using the required information from *Example OSPF Configuration*.

```
tnsr(config)# route dynamic ospf6
tnsr(config-frr-ospf6)# server vrf default
tnsr(config-ospf6)# ospf6 router-id 10.2.0.1
tnsr(config-ospf6)# interface GigabitEthernet3/0/0 area 0.0.0.0
tnsr(config-ospf6)# interface TenGigabitEthernet6/0/0 area 0.0.0.0
tnsr(config-ospf6)# exit
tnsr(config-frr-ospf6)# interface GigabitEthernet3/0/0
tnsr(config-ospf6-if)# passive
tnsr(config-ospf6-if)# exit
tnsr(config-frr-ospf6)# interface TenGigabitEthernet6/0/0
tnsr(config-ospf6-if)# cost outgoing 10
tnsr(config-ospf6-if)# exit
tnsr(config-frr-ospf6)# enable
tnsr(config-frr-ospf6)# exit
tnsr(config)#
```

A similar configuration may be applied to neighboring routers also connected to the same network as the TenGigabitEthernet6/0/0 interface. Adjust the router ID and interface names as needed.

11.4.3 OSPF6 Configuration

There are a number of ways to fine-tune the behavior and create complex OSPF6 routing configurations. The available configuration parameters are covered throughout this section.

Enable OSPF6

The OSPF6 service has a master enable/disable toggle that must be set before OSPF6 will operate. Enable OSPF6 using the `enable` command in `config-frr-ospf6` mode:

```
tnsr(config)# route dynamic ospf6
tnsr(config-frr-ospf6)# enable
```

To disable the service, use `no enable` or `disable`.

The OSPF6 service is managed as described in *Service Control*.

OSPF6 Server Configuration

To configure the OSPF6 server, start in `config-frr-ospf6` mode and run the `server vrf default` command:

```
tnsr(config)# route dynamic ospf6
tnsr(config-frr-ospf6)# server vrf default
tnsr(config-ospf6)#
```

Note: OSPF6 only supports a single instance on the default VRF.

This changes into `config-ospf6` mode, which contains the following commands:

area <area-id>

Configures area-specific settings in *OSPF6 Area Configuration* mode.

auto-cost reference-bandwidth <bw>

A base value, in Mbit/s, which is used when OSPF6 automatically calculates cost values. The default value is 100 which means that an interface with 100Mbit/s of bandwidth or greater will have a cost of 1, with lower bandwidth values incurring higher cost values.

All routers in the same area should use the same value, otherwise automatic cost calculations would fail to accurately represent total path costs between routers.

distance [(external|inter-area|intra-area)] <dist>

Sets an administrative distance for routes obtained via OSPF6. This can be configured globally as well as for specific types of OSPF6 routes.

external <dist>

Sets the administrative distance for external OSPF6 routes.

inter-area <dist>

Sets the administrative distance for OSPF6 routes between areas.

intra-area <dist>

Sets the administrative distance for OSPF6 routes inside an area.

interface <if-name> area <area-id>

This command defines an interface as a member of the given OSPF6 area. This is required to activate an interface for use by OSPF6.

log-adjacency-changes [detail]

Instructs the OSPF6 daemon to log changes in neighbor adjacencies. This is useful for tracking changes to neighbor relationships, especially during initial configuration.

The optional `detail` parameter increases the verbosity of the resulting log messages.

See also:

See *Logging* for information on dynamic routing logging.

ospf6 router-id <router-id>

Sets the router ID for the OSPF6 daemon. This is typically set to an IPv4 address unique to this router, and commonly is set to a local private address.

Note: Even though OSPF6 handles IPv6 routing, router IDs are still specified using IPv4 addresses in dotted quad notation.

redistribute <route-source> [route-map <map>]

Enables redistribution of routes from another source. Available route sources are listed in *Dynamic Routing Protocol Lists*.

route-map <map>

Apply the given route map to the redistributed route advertisements.

stub-router administrative

Administratively declares this router as a stub router, having no external connections.

timers lsa min-arrival <min>

The minimum time allowed between advertisements by neighbors, from 0-600000, in milliseconds. Default is 1000.

timers throttle spf (delay|initial-hold|maximum-hold) <val>

Controls timers that determine when the router will make SPF routing decisions.

delay <val>

Minimum time after an event occurs before allowing SPF calculation. Lower values will react faster to changes, but can be less stable. Specified in milliseconds from 0-600000, with a default value of 0.

initial-hold <val>

Lowest time allowed between SPF calculations. Specified in milliseconds from 0-600000, with a default value of 50.

maximum-hold <val>

Highest time allowed between SPF calculations. Specified in milliseconds from 0-600000, with a default value of 5000.

SPF calculations are adaptive, and if a new event occurs which would otherwise trigger a calculation before the hold timer expires, then the hold is increased by the **initial-hold** value, up to the specified **maximum-hold**. This avoids excessive consecutive recalculations.

OSPF6 Interface Configuration

OSPF6 must use one or more interfaces to announce itself to neighbors and to receive announcements from neighbors. At least one interface must be configured and active in order to locate neighbors and form an adjacency.

Warning: Outside NAT interfaces (**ip nat outside**) cannot be used as active interfaces in OSPF6! The presence of NAT prevents OSPF6 from properly communicating with neighbors to form a full adjacency.

To configure an interface for use with OSPF6, start in **config-frr-ospf6** mode and use the **interface <if-name>** command to enter **config-ospf6-if** mode.

```
tnsr(config)# route dynamic ospf6
tnsr(config-frr-ospf6)# interface <if-name>
tnsr(config-ospf6-if)#
```

config-ospf6-if mode contains the following commands:

advertise prefix-list <name>

Filters route advertisements using the specified prefix list (*Dynamic Routing Prefix Lists*).

bfd enabled (true|false)

Enable Bidirectional Forwarding Detection for OSPF6 on this interface.

cost outgoing <link-cost>

A manual cost value to apply to this interface, rather than allowing automatic cost calculation to take place.

In situations where multiple paths are possible to the same destination, this allows OSPF6 to prefer one path over another when all else is equal.

dead-interval <time>

Time, in seconds from 1-65535, without communication from a neighbor on this interface before considering it dead. This is also known as the `RouterDeadInterval` timer in OSPF6. Default value is 40. This timer should be set to the same value for all routers.

hello-interval <interval>

The interval, in seconds from 1-65535, at which this router will send hello messages. This is also known as the `HelloInterval` timer in OSPF6. Default value is 10. This timer should be set to the same value for all routers.

A lower value will result in faster convergence times, but will consume more resources.

instance-id <value>

An alternate OSPF6 instance identifier for this interface. Typically omitted or set to 0.

mtu <value>

Explicitly configures an MTU value for this interface. This value will override the interface MTU determined automatically by the operating system. Useful in cases where the router is unable to determine the actual interface MTU, for example on virtual interfaces such as those used by IPsec.

mtu-ignore

When present, OSPF6 will ignore the MTU advertised by neighbors and can still achieve a full adjacency when peers do not have matching MTU values.

network (broadcast|point-to-point)

Manually configures a specific type of network used on a given interface, rather than letting OSPF6 determine the type automatically. This controls how OSPF6 behaves and how it crafts messages when using an interface.

broadcast

Broadcast networks, such as typical Ethernet networks, allow multiple routers on a segment and OSPF6 can use multicast to send messages to multiple targets at once. OSPF6 assumes that all routers on broadcast networks are directly connected and can communicate without passing through other routers.

point-to-point

A point-to-point network links a single pair of routers. The interface is still capable of broadcast, and OSPF6 will dynamically discover neighbors. With this type of network, OSPF6 disables election of a DR.

passive

Configures this interface as passive. This prevents the interface from actively participating in OSPF6, while still allowing OSPF6 to operate on networks connected to that interface. This is commonly used for local interfaces without other routers attached. OSPF6 will announce networks attached to passive interfaces as stub links.

priority <priority>

A priority value, from 0-255, assigned to this router. When determining which router will become the Designated Router (DR), the router with the highest priority is more likely to be elected as the DR.

The default value is 1. The value 0 is special and will prevent this router from being chosen as DR.

retransmit-interval <interval>

The interval, in seconds from 1-65535, at which this router will retransmit Link State Request and Database Description messages. This is also known as the `RxmtInterval` timer in OSPF6. Default value is 5.

transmit-delay <delay>

The interval, in seconds from 1-65535, at which this router will transmit LSA messages. This is also known as the `InfTransDelay` timer in OSPF6. Default value is 1.

OSPF6 Area Configuration

To configure area-specific settings in OSPF6, start in `config-ospf6` mode and use the `area <area-id>` command to enter `config-ospf6-area` mode.

```
tnsr(config-ospf6)# area <area-id>
tnsr(config-ospf6-area)#
```

`config-ospf6-area` mode contains the following commands:

range <prefix> [cost <val>|not-advertise]

Configure summarization of routes inside the given prefix. Instead of Type 1 (Router) and Type 2 (Network) LSAs, it creates Type 3 Summary LSAs instead.

cost <val>

Apply the specified cost to summarized routes for this prefix.

not-advertise

Disable advertisement for this prefix.

OSPF6 Debugging Information

The following debugging commands are available in `config-frr-ospf6` mode. Messages will be logged in accordance with the settings in [Logging](#).

debug abr

Enables debugging for Area Border Routers.

debug asbr

Enables debugging for Autonomous System Boundary Routers.

debug flooding

Enables debugging for Link State Advertisement flooding.

debug interface

Enables debugging for OSPF6 interfaces.

debug border-routers (area <area-id>|router <router-id>)

Enables debugging for specific border routers, either by area or router ID.

debug lsa <lsa-type> <event-type>

Enables LSA message debugging.

LSA Type

Specifies a type of LSA message to debug, which must be one of the following: `as-external`, `inter-prefix`, `inter-router`, `intra-prefix`, `link`, `network`, `router`, `unknown`. These message types are described further in [Link State Advertisement Message Types](#).

Event Type

Specifies when to log debug information for the specified type of LSA message.

examine

Enables debugging when examining LSA messages.

flooding

Enables debugging when flooding LSA messages.

originate

Enables debugging when originating LSA messages.

debug message (dd|hello|ls-acknowledgment|ls-request|ls-update|unknown) (recv|send)

Enables packet-level debugging of OSPF6 messages.

dd

Debug database description packets.

hello

Debug OSPF6 hello packets.

ls-acknowledgment

Debug LSA acknowledgment packets.

ls-request

Debug LSA request packets.

ls-update

Debug LSA update packets.

unknown

Debug OSPF6 messages of unknown types.

Message debugging entries are limited to a single direction:

send

Debug messages sent by this router.

recv

Debug messages received by this router.

debug neighbor event

Enable debugging information for OSPF6 neighbor events.

debug neighbor state

Enable debugging information for OSPF6 neighbor state changes.

debug route [(inter-area|intra-area|table)]

Enables debugging for OSPF6 route calculations.

debug route memory

Enables debugging for OSPF6 route table memory usage.

debug spf (database|process|time)

Debug SPF calculations

database

Enable debugging for LSA message counts during SPF calculation

process

Enable detailed debugging of the SPF calculation process.

time

Enable debugging for SPF calculation timing.

debug zebra [(recv|send)]

Enables OSPF6-specific debugging for dynamic routing manager daemon messages, in the send or receive direction, or both when the direction is omitted.

11.4.4 OSPF6 Status

TNSR supports several commands to display information about the OSPF6 daemon configuration and its status.

See also:

For more general dynamic routing status information, see *Dynamic Routing Manager Status*

The general form of the command to view OSPF6 state information is `show route dynamic ospf6 <options>`.

Configuration Information

To view the OSPF6 configuration:

```
tnsr# show route dynamic ospf6 config
interface GigabitEthernet3/0/0
    ipv6 ospf6 passive

interface TenGigabitEthernet6/0/0
    ipv6 ospf6 cost 10

router ospf6
    ospf6 router-id 10.2.0.1
    interface GigabitEthernet3/0/0 area 0.0.0.0
    interface TenGigabitEthernet6/0/0 area 0.0.0.0
```

Status Information

To view the OSPF6 database:

```
tnsr# show route dynamic ospf6 database

      Area Scoped Link State Database (Area 0.0.0.0)

Type LSId          AdvRouter      Age   SeqNum          Payload
Rtr  0.0.0.0        10.2.0.1        146  800000002      10.27.0.1/0.0.0.13
Rtr  0.0.0.0        10.27.0.1       147  800000002      10.27.0.1/0.0.0.13
Net  0.0.0.13        10.27.0.1       147  800000001      10.27.0.1
Net  0.0.0.13        10.27.0.1       147  800000001      10.2.0.1
INP  0.0.0.0         10.2.0.1        146  800000003      2001:db8:f0::/64
INP  0.0.0.0         10.27.0.1       147  800000003      2001:db8:f2::/64
INP  0.0.0.13        10.27.0.1       147  800000001      2001:db8:0:2::/64

      I/F Scoped Link State Database (I/F GigabitEthernet3/0/0 in Area 0.0.0.0)

Type LSId          AdvRouter      Age   SeqNum          Payload
Lnk  0.0.0.14        10.2.0.1       187  800000001      fe80::290:bff:fe7a:8a65

      I/F Scoped Link State Database (I/F TenGigabitEthernet6/0/0 in Area 0.0.0.0)

Type LSId          AdvRouter      Age   SeqNum          Payload
Lnk  0.0.0.15        10.2.0.1       187  800000001      fe80::290:bff:fe7a:8a67
Lnk  0.0.0.13        10.27.0.1     192  800000001      fe80::290:bff:fe7a:87c1
```

(continues on next page)

(continued from previous page)

AS Scoped Link State Database

| Type | LSId | AdvRouter | Age | SeqNum | Payload |
|------|------|-----------|-----|--------|---------|
|------|------|-----------|-----|--------|---------|

To view information about interfaces participating in OSPF6:

```
tnsr# show route dynamic ospf6 interface
GigabitEthernet3/0/0 is up, type BROADCAST
  Interface ID: 14
  Internet Address:
    inet : 10.2.0.1/24
    inet6: 2001:db8:f0::1/64
    inet6: fe80::290:bff:fe7a:8a65/128
  Instance ID 0, Interface MTU 1500 (autodetect: 1500)
  MTU mismatch detection: enabled
  Area ID 0.0.0.0, Cost 100
  State DR, Transmit Delay 1 sec, Priority 1
  Timer intervals configured:
    Hello 10, Dead 40, Retransmit 5
  DR: 10.2.0.1 BDR: 0.0.0.0
  Number of I/F scoped LSAs is 1
    0 Pending LSAs for LSUUpdate in Time 00:00:00 [thread off]
    0 Pending LSAs for LSAck in Time 00:00:00 [thread off]
TenGigabitEthernet6/0/0 is up, type BROADCAST
  Interface ID: 15
  Internet Address:
    inet : 203.0.113.2/24
    inet6: 2001:db8:0:2::2/64
    inet6: fe80::290:bff:fe7a:8a67/128
  Instance ID 0, Interface MTU 1500 (autodetect: 1500)
  MTU mismatch detection: enabled
  Area ID 0.0.0.0, Cost 100
  State BDR, Transmit Delay 1 sec, Priority 1
  Timer intervals configured:
    Hello 10, Dead 40, Retransmit 5
  DR: 10.27.0.1 BDR: 10.2.0.1
  Number of I/F scoped LSAs is 2
    0 Pending LSAs for LSUUpdate in Time 00:00:00 [thread off]
    0 Pending LSAs for LSAck in Time 00:00:00 [thread off]
TenGigabitEthernet6/0/1 is down, type BROADCAST
  Interface ID: 16
  OSPF not enabled on this interface
TenGigabitEthernet8/0/0 is down, type BROADCAST
  Interface ID: 17
  OSPF not enabled on this interface
```

To view information about current OSPF neighbors and adjacencies:

```
tnsr# show route dynamic ospf6 neighbor
Neighbor ID    Pri    DeadTime    State/IfState    Duration I/F[State]
10.27.0.1      1      00:00:33    Full/DR          00:04:41 TenGigabitEthernet6/0/
↪ 0[BDR]
```

For more detailed neighbor information, use `show route dynamic ospf6 neighbor detail`.

```
tnsr# show route dynamic ospf6 neighbor detail
Neighbor 10.27.0.1%TenGigabitEthernet6/0/0
  Area 0.0.0.0 via interface TenGigabitEthernet6/0/0 (ifindex 15)
  His IfIndex: 13 Link-local address: fe80::290:bff:fe7a:87c1
  State Full for a duration of 00:04:58
  His choice of DR/BDR 10.27.0.1/10.2.0.1, Priority 1
  DbDesc status: Slave SeqNum: 0xb7380c00
  Summary-List: 0 LSAs
  Request-List: 0 LSAs
  Retrans-List: 0 LSAs
  0 Pending LSAs for DbDesc in Time 00:00:00 [thread off]
  0 Pending LSAs for LSReq in Time 00:00:00 [thread off]
  0 Pending LSAs for LSUpdate in Time 00:00:00 [thread off]
  0 Pending LSAs for LSack in Time 00:00:00 [thread off]
```

To view information about current OSPF6 routes:

```
tnsr# show route dynamic ospf6 route-table
*N IA 2001:db8:0:2::/64          ::          TenGigabitEthern 00:05:37
*N IA 2001:db8:f0::/64          ::          GigabitEthernet3 00:06:17
*N IA 2001:db8:f2::/64          fe80::290:bff:fe7a:87c1 TenGigabitEthern 00:05:32
```

To view information about current OSPF6 border routers:

```
tnsr# show route dynamic ospf6 border-routers
Router-ID      Rtr-Bits Options      Path-Type Area
```

To view information about the OSPF6 area:

```
tnsr# show route dynamic ospf6 area
+-10.2.0.1 [0]
  +-10.27.0.1 Net-ID: 0.0.0.13 [100]
    +-10.27.0.1 [100]
```

To view OSPF6 link state information:

```
tnsr# show route dynamic ospf6 linkstate

SPF Result in Area 0.0.0.0

Destination: 10.2.0.1
Destination type: Linkstate
Installed Time: 00:07:10 ago
  Changed Time: 00:07:10 ago
Lock: 2 Flags: BA--
Memory: prev: (nil) this: 0x23fc980 next: 0x23fd140
Associated Area: 0.0.0.0
Path Type: Intra-Area
LS Origin: Router Id: 0.0.0.0 Adv: 10.2.0.1
Options: --|R|--|E|V6
Router Bits: -----
Prefix Options: xxx
```

(continues on next page)

(continued from previous page)

```

Metric Type: 1
Metric: 0 (0)
Paths count: 0
Nexthop count: 0
Nexthop:

Destination: 10.27.0.1
Destination type: Linkstate
Installed Time: 00:07:10 ago
  Changed Time: 00:07:10 ago
Lock: 2 Flags: BA--
Memory: prev: 0x23fc980 this: 0x23fd140 next: 0x23de700
Associated Area: 0.0.0.0
Path Type: Intra-Area
LS Origin: Router Id: 0.0.0.0 Adv: 10.27.0.1
Options: --|R|-|--|E|V6
Router Bits: -----
Prefix Options: xxx
Metric Type: 1
Metric: 100 (1)
Paths count: 0
Nexthop count: 1
Nexthop:
  fe80::290:bff:fe7a:87c1 TenGigabitEthern

Destination: 10.27.0.1 Net-ID: 0.0.0.13
Destination type: Linkstate
Installed Time: 00:07:10 ago
  Changed Time: 00:07:10 ago
Lock: 2 Flags: BA--
Memory: prev: 0x23fd140 this: 0x23de700 next: (nil)
Associated Area: 0.0.0.0
Path Type: Intra-Area
LS Origin: Network Id: 0.0.0.13 Adv: 10.27.0.1
Options: --|R|-|--|E|V6
Router Bits: -----
Prefix Options: xxx
Metric Type: 1
Metric: 100 (0)
Paths count: 0
Nexthop count: 1
Nexthop:
  :: TenGigabitEthern

```

To view SPF calculation information:

```

tnsr# show route dynamic ospf6 spf
+-10.2.0.1 [0]
  +-10.27.0.1 Net-ID: 0.0.0.13 [100]
    +-10.27.0.1 [100]

```

11.5 Routing Information Protocol (RIP)

RIP is a simple interior routing protocol (IGP), and facilitates routing between private links or segments of local networks. It is a distance vector routing protocol, informing neighbors of known routes, gateways, and hop counts to destinations.

TNSR supports both RIPv1 ([RFC 1058](#)) and RIPv2 ([RFC 1723](#)).

RIP is widely supported and simple, but lacks the speed, efficiency, or capabilities of more powerful routing protocols such as BGP or OSPF.

11.5.1 RIP Required Information

Though RIP is a simple routing protocol, there are a few values that must be determined before a working configuration is possible. More information about these values can be found in [RIP Server Configuration](#).

VRF Name

The name of the *Virtual Routing and Forwarding* instance for which this RIP instance will manage routes, or `default` for the default route table.

RIP Version

The version of RIP utilized by TNSR must be set to either 1 or 2. This value must match the version used by other connected routers.

Network(s)

The subnet(s) for which routes will be advertised by RIP. Note that this value is not used directly, but is used to locate active subnets on interfaces which match.

Active Interface(s)

Interfaces participating in RIP, connected to a segment with other routers also running RIP. This is optional if the subnet of the interface is also covered by the **Network(s)** value.

Neighbor(s)

Neighboring router(s) running RIP with which TNSR will exchange routes. RIP will find neighbors automatically, but it is helpful to know which neighbors to look for when troubleshooting.

The example in this section uses the following values:

Table 6: Example RIP Configuration

| Item | Value |
|---------------------|-------------------------|
| VRF Name | default |
| RIP Version | 2 |
| Network(s) | 10.2.0.0/16 |
| Active Interface(s) | TenGigabitEthernet6/0/0 |
| Neighbor(s) | 203.0.113.27 |

11.5.2 RIP Example

This example configuration implements a RIP setup using the required information from *Example RIP Configuration*.

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# server vrf default
tnsr(config-rip)# version 2
tnsr(config-rip)# network prefix 10.2.0.0/16
tnsr(config-rip)# network interface TenGigabitEthernet6/0/0
tnsr(config-rip)# exit
tnsr(config-frr-rip)# enable
tnsr(config-frr-rip)# exit
tnsr(config)#
```

A similar configuration may be applied to neighboring routers also connected to the same network as the TenGigabitEthernet6/0/0 interface. Adjust the networks, neighbors, and interface names as needed.

11.5.3 RIP Configuration

RIP behavior can be customized in several ways, including features such as authentication. The available configuration parameters are covered throughout this section.

Enable RIP

The RIP service has a master enable/disable toggle that must be set before RIP will operate. Enable RIP using the `enable` command in `config-frr-rip` mode:

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# enable
```

To disable the service, use `no enable` or `disable`.

The RIP service is managed as described in *Service Control*.

RIP Server Configuration

To configure the RIP service, start in `config-frr-rip` mode and run the `server vrf <vrf-name>` command, where `<vrf-name>` is the name of a *Virtual Routing and Forwarding* instance or `default` for the default route table:

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# server vrf default
tnsr(config-rip)#
```

This changes into `config-rip` mode, which contains the following commands:

allow-ecmp

Allow equal cost multi-path routing, where the same destination is reachable through multiple routers.

default-information originate

Transmit default route information to RIP neighbors.

distance default <value>

Administratively sets the default distance to the given value (1-255).

distance <prefix> distance <value> [access-list <acl-name>]

Sets custom distance values for specific network prefixes.

prefix

The prefix for which this distance is set.

distance <value>

The distance value to advertise for this prefix.

access-list <acl-name>

An optional access list used to filter this distance based on specific subnets or addresses inside the given prefix.

distribution-list interface <interface> (access-list|prefix-list) (in|out) <name>

Applies either the given access list or prefix list to routes distributed from networks on the specified interface. This allows control over which routes will be distributed by RIP to neighbors.

interface <interface>

The interface which is the source of routes filtered by this directive. May be * or a specific interface name.

access-list (in|out) <name>

An access list to filter against in the specified direction.

prefix-list (in|out) <name>

A prefix list to filter against in the specified direction.

neighbor <ip4-address>

Defines the address of a neighboring router with which TNSR will exchange routes using RIP. When a neighbor is defined in this manner, RIP will always transmit to the neighbor even on passive interfaces.

network (interface <if-name>|prefix <prefix>)

Defines which networks will have routes distributed by RIP to neighbors. These can be specified by interface or prefix.

Note: These values are not used directly, but are used by RIP to locate active subnets which match the given interface or prefix.

interface <if-name>

Advertise routes for networks directly connected to the given interface.

prefix <prefix>

Advertise routes for active networks matching the given prefix.

For example, if 10.2.0.0/16 is given and 10.2.0.0/24 and 10.2.1.0/24 are both present on active interfaces, then those two prefixes will be advertised to neighbors, not 10.2.0.0/16.

offset-list <interface> (in|out) <acl-name>

Modifies RIP metrics using access-lists.

interface

The interface on which metrics will be adjusted. May be * or a specific interface name.

(in|out)

The direction in which modifications are made.

in

Modify route metrics received from RIP neighbors.

out

Modify route metrics advertised to RIP neighbors.

acl-name

The name of the access list used to apply metric changes.

passive-interface <interface> [<ip4-address>]

Controls whether or not RIP will transmit multicast or unicast packets on interfaces. RIP messages are always accepted in passive mode, and RIP messages are always transmitted to defined neighbors.

Warning: When the `default` value is set to passive, the meaning of this list is inverted. Instead of specifying passive interfaces, the list defines non-passive interfaces instead.

interface

Interface to configure as passive. May be `default` or a specific interface name.

ip4-address

A specific IP address to configure as passive on the given interface.

redistribute <route-source> [(metric <value>|route-map <name>)]

Enables redistribution of routes from another source. Available route sources are listed in [Dynamic Routing Protocol Lists](#).

metric <val>

Advertise the route as having the given metric.

route-map <map>

Apply the given route map to the redistributed route advertisements.

route prefix <ip4-prefix>

Creates a static route in RIP for the given prefix, which is advertised to neighbors as reachable through this router.

route-map-filter interface <interface> (in|out) route-map <name>

Apply a route-map to RIP routes. See [Dynamic Routing Route Maps](#) for more information on route maps.

interface

The interface on which this route-map will be applied. May be `default` or a specific interface name.

(in|out)

The direction in which the route-map will be applied to routes.

route-map <name>

The route-map to apply.

timers (garbage-collection|table-update|timeout) <value>

Adjust timer values for RIP. Each timer is specified in seconds and can be set to a value from 5-2147483647.

table-update

How often RIP will transmit a copy of its route table to neighbors. Default is 30 seconds.

timeout

How long RIP will wait before a route is no longer considered valid after receiving an advertisement. Default is 180 seconds.

garbage-collection

The time to wait before removing an invalid route from the routing table. Default is 120 seconds.

For example, if a neighbor stops advertising a route or loses connectivity, then advertisements for that route will no longer be received. The route will eventually reach the timeout value since it is no longer seen in advertisements. Once it reaches the timeout value without an advertisement, it is flagged as invalid. Then once it has been invalid for long enough to reach the garbage collection age, it is removed from the routing table.

The lowest amount of time a route can be in the table while invalid is `timeout + garbage-collection`, which by default is 180+120 or 300 seconds (5 minutes). The longest time would be that value plus the update time, in this case, 330 seconds total.

version {1|2}

The RIP version to use when communicating with RIP neighbors.

1

RIP as described in [RFC 1058](#). An older version of the protocol which utilizes class-based routing (e.g. Class A, Class B, etc) and does not support subnetting or authentication. RIP v1 sends updates using broadcast messages which must be processed by every node on connected segments.

2

RIP as described in [RFC 1723](#). An updated version of the protocol which uses classless routing (CIDR), authentication. RIP v2 sends messages using multicast, allowing only interested routers to receive the messages by joining the appropriate multicast group (224.0.0.9).

RIP Interface Configuration

In basic configurations, RIP will automatically determine which interfaces to use. However, the interface behavior can be tuned when necessary.

To configure settings for RIP interfaces, start in `config-frr-rip` mode and use the `interface <if-name>` command to enter `config-rip-if` mode.

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# interface <if-name>
tnsr(config-rip-if)#
```

`config-rip-if` mode contains the following commands:

authentication mode <mode> [auth-length <type>]

Configures RIPv2 authentication for this interface. When authentication is enabled, TNSR will ignore updates from unauthenticated peers, including RIPv1 peers.

Note: Updates from unauthenticated peers are ignored, but requests for routes from unauthenticated peers are still honored.

mode <mode>

Selects the authentication mode.

md5

MD5-based HMAC authentication, which is more secure than plain text. Keys

for MD5 authentication are configured with the `key-chain` command in `config-rip` mode (*RIP Keychain Configuration*).

text

Insecure plain text password authentication. The password is set with the `authentication string` command in this mode.

auth-length <type>

Configures the expected length of the authentication data.

rfc

RFC-compatible data length (16 bytes).

old-ripd

Obsolete ripd length (20 bytes), compatible only with older ripd implementations.

authentication key-chain <name>

The name of a key-chain to use with MD5 authentication (*RIP Keychain Configuration*).

authentication string <auth-string>

The string used for plain text authentication. Must be less than 16 characters.

receive version (1|2|both)

Configures the RIP versions allowed to be received by TNSR on this interface.

send version (1|2|both)

Configures the RIP versions TNSR will transmit on this interface.

split-horizon [poisoned-reverse]

Prevents a route from being advertised back to the interface through which it was received. This technique helps to prevent routing loops.

poisoned-reverse

Instead of preventing such routes from being advertised, this option causes RIP to actively advertise the networks as unreachable by setting the metric to 16. This is more proactive for preventing routing loops, but the primary drawback is that this does not scale well, due to the size increase of advertisements.

v2-broadcast

When set, TNSR will transmit RIPv2 updates using broadcast on this interface instead of using multicast.

RIP Keychain Configuration

Key chains are used for MD5-based HMAC authentication, configured in `config-rip-if` mode (*RIP Interface Configuration*).

To configure Keychain settings in RIP, start in `config-frr-rip` mode and use the `key-chain <name>` command to enter `config-rip-key-chain` mode.

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# key-chain <name>
tnsr(config-rip-key-chain)#
```

`config-rip-key-chain` mode contains the following commands:

key <key-id> string <key-string>

key-id

A numeric identifier for the key within this chain, can be any integer value from 0-2147483647.

key-string

A string containing the contents of the key. This string must match between all nodes using this key-chain.

RIP Debugging Information

The following debugging commands are available in `config-frr-rip` mode. Messages will be logged in accordance with the settings in [Logging](#).

debug events

Enable debugging information for RIP events.

debug zebra

Enables RIP-specific debugging for the dynamic routing manager daemon.

debug packet (send|recv)

Enables packet-level RIP debugging.

Packet debugging entries can be limited to a single direction:

send

Debug packets sent by this router.

recv

Debug packets received by this router.

11.5.4 RIP Status

TNSR supports several commands to display information about the RIP daemon configuration and its status.

See also:

For more general dynamic routing status information, see [Dynamic Routing Manager Status](#)

Configuration Information

To view the RIP configuration:

```
tnsr(config)# show route dynamic rip config
router rip
  version 2
  network TenGigabitEthernet6/0/0
  network 10.2.0.0/16
exit
```

Note: The configuration may be further restricted to only a single *VRF* with `show route dynamic rip vrf <vrf-name> config`.

Status Information

To view the RIP routing database:

```
tnsr(config)# show route dynamic rip
Codes: R - RIP, C - connected, S - Static, O - OSPF, B - BGP
Sub-codes:
    (n) - normal, (s) - static, (d) - default, (r) - redistribute,
    (i) - interface
```

| | Network | Next Hop | Metric From | Tag Time |
|------|----------------|--------------|----------------|----------|
| C(i) | 10.2.0.0/24 | 0.0.0.0 | 1 self | 0 |
| C(i) | 10.2.8.0/24 | 0.0.0.0 | 1 self | 0 |
| C(i) | 10.2.222.0/24 | 0.0.0.0 | 1 self | 0 |
| R(n) | 10.27.0.0/24 | 203.0.113.27 | 2 203.0.113.27 | 0 02:46 |
| R(n) | 10.27.8.0/24 | 203.0.113.27 | 2 203.0.113.27 | 0 02:46 |
| C(i) | 203.0.113.0/24 | 0.0.0.0 | 1 self | 0 |

Note: The routing database may be further restricted to only a single *VRF* with `show route dynamic rip vrf <vrf-name>`.

To view the RIP status:

```
tnsr(config)# show route dynamic rip status
Routing Protocol is "rip"
  Sending updates every 30 seconds with +/-50%, next due in 12 seconds
  Timeout after 180 seconds, garbage collect after 120 seconds
  Outgoing update filter list for all interface is not set
  Incoming update filter list for all interface is not set
  Default redistribution metric is 1
  Redistributing:
  Default version control: send version 2, receive version 2
    Interface      Send Recv  Key-chain
  GigabitEthernet3/0/02      2
  TenGigabitEthernet6/0/02    2
  ipip1          2      2
  Routing for Networks:
    10.2.0.0/16
    TenGigabitEthernet6/0/0
  Routing Information Sources:
    Gateway      BadPackets BadRoutes  Distance Last Update
    203.0.113.27      0          0         120    00:00:12
  Distance: (default is 120)
```

Note: The configuration may be further restricted to only a single *VRF* with `show route dynamic rip vrf <vrf-name> status`.

11.6 Dynamic Routing Protocol Lists

Throughout dynamic routing, certain commands accept parameters which specify a supported routing protocol or source of routes. Currently, the following values are valid in these parameters:

connected

Routes for directly connected networks

kernel

Routes from the kernel

system

Routes from system configuration

bgp

Routes obtained dynamically from BGP neighbors

ospf

IPv4 routes obtained dynamically from OSPF neighbors

ospf6

IPv6 routes obtained dynamically from OSPF6 neighbors

VIRTUAL ROUTER REDUNDANCY PROTOCOL

Virtual Router Redundancy Protocol (VRRP) is a protocol which allows routers to coordinate control of IP addresses between multiple nodes acting as a single “virtual” router cluster. Multiple nodes coordinating control in this way allows for redundancy, where a single node failing does not adversely affect traffic passing through the virtual router.

The specific version of VRRP used by TNSR is VRRPv3 as defined in [RFC 5798](#), but will be referred to as “VRRP” throughout this document.

With VRRP, one router acts as the primary master node and additional routers act as backup nodes. Commonly there are only two routers in a cluster: A primary node and a secondary node. VRRP supports additional nodes if a use case calls for increased redundancy.

Addresses configured on the primary node are defined as virtual router (VR) addresses on all participating nodes, including the primary node which is considered the owner of the VR addresses. The VR addresses are then used as next hop gateways by peers, rather than traditional addresses. This includes delivery of routed subnets from upstream sources as well as acting as a gateway for local clients. Since peers communicate with the shared virtual addresses, when a failure occurs communications will continue through whichever node is elected master of the VR addresses. This allows traffic to flow with little to no interruption when a node fails.

The current master of VR addresses is determined by an election process. The election process considers the priority value for the VR address on each node first, among other factors. The owner of the VR addresses has the highest possible priority, 255, and additional nodes will have a lower priority from 1-254 (e.g. 100).

Participating nodes advertise their state to peers and listen for these advertisements from peers. Typically only the current master will transmit advertisements. If other nodes fail to see advertisements from a higher priority node in a timely manner defined by the settings, control of the virtual address is assumed by the backup node with the next highest priority. This state information is transmitted via multicast on a local segment, to a multicast destination of 224.0.0.18 for IPv4 and ff02::12 for IPv6.

| |
|---|
| <p>Warning: Switches (physical or virtual) must allow the multicast advertisements to flow freely. Ensure switch features such as storm control or rate limiting are relaxed or disabled on ports participating in VRRP.</p> |
|---|

At layer 2, VRRP works by enabling the nodes to essentially share a single MAC address. This MAC address is derived from the ID of the associated VR address, with the form of 00:00:5E:00:01:<id> where <id> is the VR ID (1-255) in hexadecimal. The multicast advertisements from the current master allow compatible switches to direct traffic to the correct port, so that the current master receives traffic destined for the MAC address associated with the VR address being advertised.

| |
|--|
| <p>Warning: In virtual environments, special switch and VM configuration settings may be required to allow VRRP to function. This settings may include, but are not limited to: vSwitch or VM port promiscuous mode, allowing forged transmits, and allowing MAC address changes. These are necessary for TNSR to properly send and receive not only the VRRP advertisements, but also for traffic using the shared VRRP MAC address.</p> |
|--|

12.1 VRRP Compatibility

Currently *VRRP* is only compatible with routed deployments.

12.1.1 VRRP Hardware Compatibility

VRRP requires network interface hardware on which DPDK PMDs support programming an additional MAC address. Without this capability, the interface cannot receive traffic addressed to the VRRP MAC address.

The following DPDK PMDs are supported:

- em
- fm10k
- i40e
- iavf
- ice
- igb
- ixgbe
- mlx4
- mlx5
- virtio

12.1.2 Disable Source Pruning

Some poll mode drivers (PMDs) require configuration changes for VRRP to function. Specifically, devices from the Intel X710/XL710 Family use the I40E PMD which has issues with VRRP due to “source pruning”. When a VRRP virtual MAC address is added to the NIC, source pruning causes any received packets which have that virtual MAC address as the source MAC address to be dropped. This can cause a VRRP VR to fail to receive advertisements from a higher priority peer after it enters the master state. The end result is more than one VRRP VR thinks it is in the master state.

There is a device argument to disable this behavior which allows VRRP to function normally.

Determine if the driver is affected

The first step is to check the hardware used by TNSR to see if it is affected. The easiest way is to check `sudo vppctl show hardware-interfaces` from a shell prompt. Affected interfaces have Intel X710/XL710 Family in their output. For example:

```
[...]
TenGigabitEthernet6/0/0          3      up    TenGigabitEthernet6/0/0
  Link speed: 10 Gbps
  RX Queues:
    queue thread      mode
    0      main (0)    polling
  Ethernet address 00:e0:ed:87:24:54
  Intel X710/XL710 Family
[...]
```

Any interfaces participating in VRRP from this device family must have source pruning disabled.

Set Device Argument

To disable source pruning, set the device argument `disable_source_pruning=1` on each affected interface.

See also:

For more information on setting device arguments, see [DPDK Configuration](#).

Using the example above, to disable it on that device, use:

```
tnsr(config)# dataplane dpdk dev 0000:06:00.0 network devargs disable_source_pruning=1
```

Alternately, disable it on all interfaces by setting it as a default network device configuration parameter:

```
tnsr(config)# dataplane dpdk dev default network devargs disable_source_pruning=1
```

Restart the dataplane to activate the changes:

```
tnsr(config)# service dataplane restart
```

12.1.3 VRRP and NAT

VRRP may not be used on interfaces involved in outbound NAT when the *VR* priority is 255. Currently there is an interaction between NAT and VRRP in this case which leads to both nodes failing to receive and process VRRP advertisements from peers. When NAT is present on outbound NAT interfaces, use a lower priority value. Conflicting configurations will be rejected by input validation.

See also:

See the recipe [VRRP with Outside NAT](#) for a compatible example configuration.

12.1.4 VRRP and Reflect ACLs

As there is not yet a method for VRRP cluster nodes to share state data, using `reflect` type ACLs may result in active connections being dropped when control is transferred between cluster nodes. New connections may be made immediately.

12.1.5 VRRP and AWS/Azure

Currently VRRP does not support unicast peers for routed environments such as AWS and Azure. This functionality will be added in a future release.

12.2 VRRP Example

This example is a basic two-node *VRRP* cluster with one node as the owner of an internal and external *VR* address, and the other as a backup. This is a routed configuration with a statically routed subnet used for the internal LAN.

In this example, the upstream ISP will deliver a routed subnet (198.51.100.0/24) to the WAN-side VR address (203.0.113.2), and internal clients will use the LAN-side VR address (198.51.100.1) as their gateway.

Interface tracking is included in the example to protect against a single failure of either WAN or LAN.

See also:

- See *VRRP Configuration* for more information on how the commands in the example function.
- See *Disable Source Pruning* for important hardware compatibility information that may necessitate configuration changes before VRRP can function.

12.2.1 Diagram

12.2.2 Required Information

These tables contain all required information to configure the cluster.

The information in this first table is related to the setup in general, not a specific cluster node.

Table 1: Example Basic VRRP Configuration Related Information

| Item | Value |
|--------------------|-----------------|
| Upstream Gateway | 203.0.113.1 |
| Routed Subnet | 198.51.100.0/24 |
| LAN Client Gateway | 198.51.100.1 |

This information is for the primary node, which in this example is called R1.

Table 2: Example Basic VRRP Configuration for R1

| Item | Value |
|----------------------|-----------------|
| R1 WAN Interface | 0000:06:00:0 |
| R1 WAN IP Address | 203.0.113.2/24 |
| R1 WAN VR ID | 220 |
| R1 WAN VR Address | 203.0.113.2 |
| R1 WAN VR Priority | 255 (Owner) |
| R1 LAN Interface | 0000:06:00:1 |
| R1 LAN IP Address | 198.51.100.1/24 |
| R1 LAN VR ID | 210 |
| R1 LAN VR Address | 198.51.100.1 |
| R1 LAN VR Priority | 255 (Owner) |
| R1 Priority Decrease | 240 (15) |

This information is for the secondary node, which in this example is called R2. Note that the interface addresses are different than R1, but the same VR address is used.

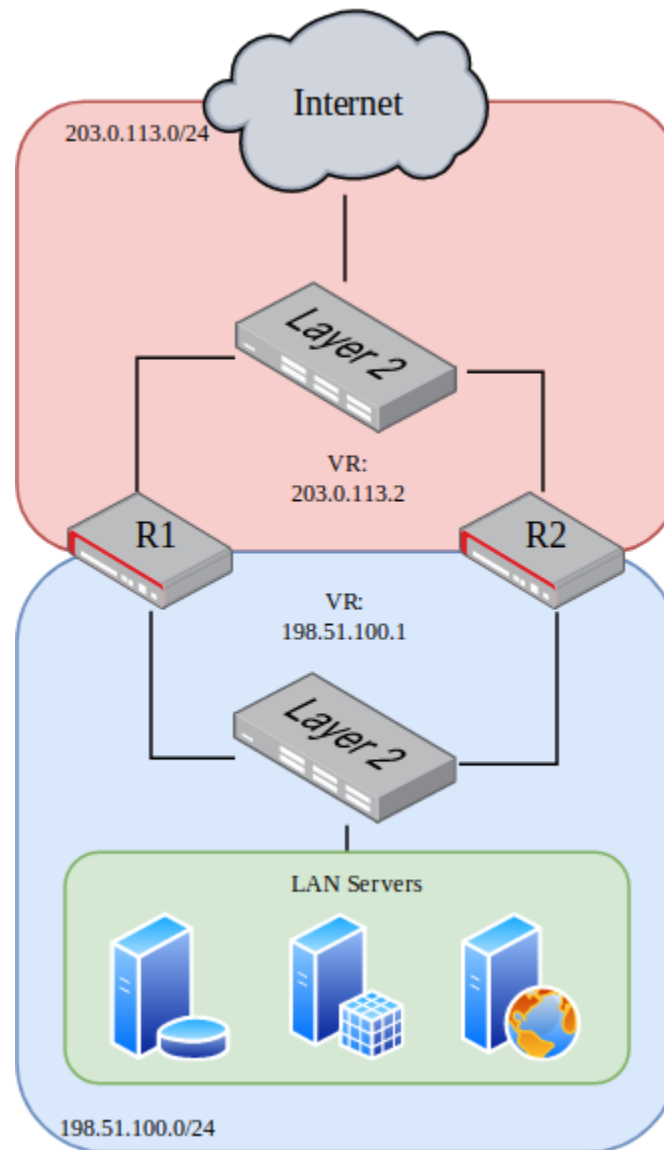


Fig. 1: VRRP Example Diagram

Table 3: Example Basic VRRP Configuration for R2

| Item | Value |
|----------------------|-----------------|
| R2 WAN Interface | 0000:06:00:0 |
| R2 WAN IP Address | 203.0.113.3/24 |
| R2 WAN VR ID | 220 |
| R2 WAN VR Address | 203.0.113.2 |
| R2 WAN VR Priority | 100 |
| R2 LAN Interface | 0000:06:00:1 |
| R2 LAN IP Address | 198.51.100.2/24 |
| R2 LAN VR ID | 210 |
| R2 LAN VR Address | 198.51.100.1 |
| R2 LAN VR Priority | 100 |
| R2 Priority Decrease | 90 (10) |

12.2.3 Example Configuration

The configuration commands in this section show how the settings from the table above are applied to each node. Some additional VRRP settings are shown in the commands but not the tables, but they are using the default values, shown for emphasis.

First, set the R1 interface names:

```
r1 tnsr(config)# dataplane dpdk dev 0000:06:00.0 network name WAN
r1 tnsr(config)# dataplane dpdk dev 0000:06:00.1 network name LAN
r1 tnsr(config)# service dataplane restart
```

Next, configure the R1 WAN interface:

```
r1 tnsr(config)# int WAN
r1 tnsr(config-interface)# ip address 203.0.113.2/24
r1 tnsr(config-interface)# ip vrrp-virtual-router 220
r1 tnsr(config-vrrp4)# preempt true
r1 tnsr(config-vrrp4)# v3-advertisement-interval 100
r1 tnsr(config-vrrp4)# priority 255
r1 tnsr(config-vrrp4)# track-interface LAN priority-decrement 240
r1 tnsr(config-vrrp4)# virtual-address 203.0.113.2
r1 tnsr(config-vrrp4)# exit
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
```

Next, configure the R1 LAN interface:

```
r1 tnsr(config)# int LAN
r1 tnsr(config-interface)# ip address 198.51.100.1/24
r1 tnsr(config-interface)# ip vrrp-virtual-router 210
r1 tnsr(config-vrrp4)# preempt true
r1 tnsr(config-vrrp4)# v3-advertisement-interval 100
r1 tnsr(config-vrrp4)# priority 255
r1 tnsr(config-vrrp4)# track-interface WAN priority-decrement 240
r1 tnsr(config-vrrp4)# virtual-address 198.51.100.1
r1 tnsr(config-vrrp4)# exit
```

(continues on next page)

(continued from previous page)

```
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
```

R1 is now complete.

Set the R2 interface names:

```
r2 tnsr(config)# dataplane dpdk dev 0000:06:00.0 network name WAN
r2 tnsr(config)# dataplane dpdk dev 0000:06:00.1 network name LAN
r2 tnsr(config)# service dataplane restart
```

Configure the R2 WAN interface:

```
r2 tnsr(config)# int WAN
r2 tnsr(config-interface)# ip address 203.0.113.3/24
r2 tnsr(config-interface)# ip vrrp-virtual-router 220
r2 tnsr(config-vrrp4)# preempt true
r2 tnsr(config-vrrp4)# accept-mode true
r2 tnsr(config-vrrp4)# v3-advertisement-interval 100
r2 tnsr(config-vrrp4)# priority 100
r2 tnsr(config-vrrp4)# track-interface LAN priority-decrement 90
r2 tnsr(config-vrrp4)# virtual-address 203.0.113.2
r2 tnsr(config-vrrp4)# exit
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
```

Finally, configure the R2 LAN interface:

```
r2 tnsr(config)# int LAN
r2 tnsr(config-interface)# ip address 198.51.100.2/24
r2 tnsr(config-interface)# ip vrrp-virtual-router 210
r2 tnsr(config-vrrp4)# preempt true
r2 tnsr(config-vrrp4)# accept-mode true
r2 tnsr(config-vrrp4)# v3-advertisement-interval 100
r2 tnsr(config-vrrp4)# priority 100
r2 tnsr(config-vrrp4)# track-interface WAN priority-decrement 90
r2 tnsr(config-vrrp4)# virtual-address 198.51.100.1
r2 tnsr(config-vrrp4)# exit
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
```

At this point, the interface and VRRP configuration is complete for both nodes.

LAN clients in 198.51.100.0/24 can use the LAN VR address of 198.51.100.1 as their default gateway.

12.2.4 VRRP Example with NAT

As mentioned in *VRRP Compatibility*, the example above cannot be used in combination with NAT because r1 has a priority of 255 on its VR addresses. To use VRRP with NAT, an additional address not used by either node is required by TNSR for use as the VRRP virtual address.

The configuration is largely the same as above, with a few key differences. An example for this configuration is covered in *VRRP with Outside NAT*.

12.3 VRRP Configuration

VRRP is configured on a per-interface basis from within `config-interface` mode. To define a new *VR* address, use `ip vrrp-virtual-router <vrid>` for IPv4 or `ipv6 vrrp-virtual-router <vrid>` for IPv6 when configuring an interface.

The `<vrid>` must be an integer from 1-255. This identifier must be identical for all nodes in the same cluster using a specific VR address. The VR ID must also be different from VR IDs used for other VR addresses on any other VRRP router on the network segment connected to this interface.

Note: The VR ID must only be unique on a single layer 2 network segment. The same VR ID may be used on different segments.

Note: In situations where it is unclear whether or not there is other VRRP traffic on a segment, run packet captures looking for VRRP to see if any turns up. There would typically be at least one VRRP advertisement per second from other nodes on the network. A packet capture would also show which VR IDs are active on the segment and thus should be avoided.

Tip: Though it is common to use the last octet of the VR address as the VR ID, this is not required.

Example which creates a new virtual router address:

```
tnsr(config)# int TenGigabitEthernet6/0/0
tnsr(config-interface)# ip vrrp-virtual-router 220
tnsr(config-vrrp4)#
```

This command enters `config-vrrp4` (IPv4) or `config-vrrp6` (IPv6) mode to configure the properties of the VR address. This mode includes the following commands:

virtual-address <ip-address>

The IPv4 or IPv6 address which will be shared by the virtual router. Also referred to as the “Virtual Router Address” or “VR Address”.

For the primary node, or owner, for this address (priority 255), the same IP address must be configured on an interface.

accept-mode (true|false)

Controls whether TNSR will accept packets delivered to this virtual address while in master state if it is not the IP address owner (Priority of 255). The default is `false`.

Deployments that rely on pinging the virtual address or using it for services such as DNS or IPsec should enable this feature.

Note: Accept mode has no effect when the VR address priority is set to 255. In that case, the router with priority 255 is considered the owner of the address and will already receive traffic without accept mode.

Note: IPv6 Neighbor Solicitations and Neighbor Advertisements MUST NOT be dropped when accept-mode is 'false'.

preempt (true|false)

Instructs TNSR whether or not to preempt a lower priority peer to become master. The default value is **true**, and the owner of a VR address will always preempt other nodes, no matter how this value is set. When set to **false**, a failed node will not take back over from the current master when it recovers, but would wait until a new election occurs.

priority <priority>

The priority for the VR address on this host. Higher values are preferred during the master election process, with the highest priority router currently operating winning the election.

The primary node, which is the owner of the VR address, must use a priority of 255 and no other node should have that priority. Lower priority nodes should use unique priority values, evenly distributed throughout the 1-254 range, depending on the number of nodes. The default value is **100**.

Warning: VRRP priority 255 is not compatible with NAT. To use VRRP on an interface configured for outbound NAT, use a lower priority (1-254) instead. Since no router will be the owner of the VR address in this case, enable **accept-mode** to receive traffic for the VR address if communication with the TNSR host is necessary.

v3-advertisement-interval <interval>

The interval, specified in centiseconds (hundredths of a second), at which VRRP advertisements will be sent by this node. The default value is **100**, or one second. The value may be in the range of 1-4095.

track-interface <interface> priority-decrement <value>

This command configures interface tracking, which allows the status of a *different* interface to affect the priority value advertised for this VR address. This allows TNSR to demote itself when other interfaces fail in some way, otherwise known as “preemption”.

The following conditions constitute a failure which results in a priority decrease when tracking an interface:

- The tracked interface is administratively disabled
- The tracked interface suffers a link loss
- The tracked interface no longer has an IP address matching the address family of this VR address

When the priority is decreased by the configured amount, other routers with the same VR address may preempt this router and assume a master role if they now have a higher priority for the VR address. In other words, this allows a VR address to demote itself upon detecting a problem without harshly changing the VR address status directly.

Without interface tracking, VRRP only protects against situations which cause a failure of the entire node at once (e.g. reboot, power off, stopping TNSR).

Note: Consider a scenario with all routers sharing the same VR address configured with interface

tracking, and all suffer the same failure. For example, a dead switch. In that case, the current master would still be master even with adjusted priority values since all affected routers would have adjusted their priorities by the same amount. If instead the VR address state were adjusted directly to assume a backup role, then there would be no active master remaining, and connectivity would be lost to this VR address.

interface

The interface monitored by TNSR for making VR address priority adjustments. This must be a *different* interface, not the interface holding the VR address.

value

The amount by which the priority value will be decreased when the status of <interface> changes to a failed state. May be from 0-255. The chosen value is up to the administrator and varies depending on the importance of the interface being tracked and the desirability of triggering a preemption.

For example, if this router is typically the owner of the VR address with a priority of 255, and the next highest router has a priority of 200, then a value of 60 would ensure that a failure will decrease the priority sufficiently to allow the other router to assume the master role.

Note: The advertised priority value can only decrease to a minimum of 1.

12.4 VRRP Status

The status of *VRRP VR* addresses is included in the output of `show interface [<if-name>]`. To view only the VRRP status and no other information, use `show interface [<if-name>] ip vrrp-virtual-router` for IPv4 or `show interface [<if-name>] ipv6 vrrp-virtual-router` for IPv6.

```
r1 tnsr# show interface ip vrrp-virtual-router
Interface: TenGigabitEthernet6/0/0
  IPv4 VRRP:
    VR: 220
      State: master, Priority: 255, Flags:          Addresses: 203.0.113.2
      Timers: Adv 100cs, Master down 300cs, Skew 0cs

Interface: TenGigabitEthernet6/0/1
  IPv4 VRRP:
    VR: 210
      State: master, Priority: 255, Flags:          Addresses: 198.51.100.1
      Timers: Adv 100cs, Master down 300cs, Skew 0cs
```

```
r2 tnsr# show interface ip vrrp-virtual-router
Interface: TenGigabitEthernet6/0/0
  IPv4 VRRP:
    VR: 220
      State: backup, Priority: 100, Flags:          Addresses: 203.0.113.2
      Timers: Adv 100cs, Master down 341cs, Skew 41cs

Interface: TenGigabitEthernet6/0/1
```

(continues on next page)

(continued from previous page)

```
IPv4 VRRP:  
  VR: 210  
    State: backup, Priority: 100, Flags:          Addresses: 198.51.100.1  
    Timers: Adv 100cs, Master down 341cs, Skew 41cs
```

In a properly configured cluster in a normal state, the output should be similar to the above sample. The primary node will show **master** for the state of all configured VR addresses, and the secondary node will show **backup**.

ACCESS LISTS

Access Lists can be used to control ingress or egress traffic or to match hosts, networks and other contexts. An ACL contains a set of rules that defines source and destination hosts or networks to match, along with other aspects of traffic such as protocol and port number. Access Lists have an implicit final deny action. Any traffic not matched with an explicit permit rule will be dropped. Access Lists assume “any” for a value unless otherwise specified.

Access Lists can be stateful (**reflect**), or work without state tracking (**permit**).

Access Lists must be defined first and then applied to an interface along with a specific direction.

Host ACLs operate differently, as they govern traffic for interfaces in the host operating system rather than inside TNSR.

13.1 Standard ACLs

A standard ACL works with IPv4 or IPv6 traffic at layer 3. The name of an ACL is arbitrary so it may be named in a way that makes its purpose obvious.

ACLs consist of one or more rules, defined by a sequence number that determines the order in which the rules are applied. A common practice is to start numbering at a value higher than 0 or 1, and to leave gaps in the sequence so that rules may be added later. For example, the first rule could be 10, followed by 20.

Each rule must have an **action** and a defined **ip-version**. Rules can also define a **source**, **destination**, **protocol**, and other attributes for matching packets.

description <text>

Text describing the purpose of this ACL.

action (deny|permit|reflect)

Determines what happens to packets matched by the rule. This is required.

deny

Drop a packet matching this rule.

permit

Pass a single packet matching the rule. Since this action is per-packet and stateless, a separate ACL may also be required to pass traffic in the opposite direction.

reflect

Permit a packet matching this rule and use a stateful packet processing path. Track the session and automatically permit return traffic in the opposite direction.

Note: Reflection consumes additional resources to track session state. By default the dataplane allocates 1GB memory for ACL entries and 64MB for hash entries which hold reflection session data. ACL entries consume approximately 200 bytes each and

ACL hash entries consume approximately 20 bytes each. This results in a limit of roughly 4 million ACL entries and 3 million ACL hash entries.

ip-version (ipv4|ipv6)

Controls whether IPv4 or IPv6 packets will be matched by the rule. This is required, and also governs validation of the source and destination when applicable.

(source|destination)

Define matching criteria for a rule based on where a packet came from or where it is going.

source address <ip-address>

Match the source address of a packet. The given address must match the type set for `ip-version`.

source port any

Match any TCP or UDP source port number (0 through 65535). Only valid when `protocol` is set to TCP or UDP. This is the default behavior when the rule does not contain a source port value.

source port <port-first> [- <port-last>]

Match the specified TCP or UDP source port or range of source ports. When supplying a range, the first port must be lower than the last port. Only valid when `protocol` is set to `tcp` or `udp`.

destination address <ip-address>

Match the destination address of a packet. The given address must match the type set for `ip-version`.

destination port any

Match any TCP or UDP destination port number (0 through 65535). Only valid when `protocol` is set to TCP or UDP. This is the default behavior when the rule does not contain a destination port value.

destination port <port-first> [- <port-last>]

Match the specified TCP or UDP destination port or range of destination ports. When supplying a range, the first port must be lower than the last port. Only valid when `protocol` is set to `tcp` or `udp`.

Note: Matching a source or destination port is only possible when the `protocol` is explicitly set to `tcp` or `udp`.

protocol (any|icmp|icmpv6|tcp|udp|<proto-number>)

Sets the protocols which will be matched by this rule. This may be one of: `any`, `icmp`, `icmpv6`, `tcp`, `udp`, or a numeric `protocol number` from 0–255. If no protocol is specified, then the rule will match any protocol.

tcp flags value <v> mask <m>

For rules matching TCP packets, `tcp flags` further restrict the match. This statement requires both a `value` and `mask`, which may be given in either order. The `value` and `mask` together define the flags matched out of a possible set of flags. These flags are specified numerically using the standard values for the flags: `URG=32`, `ACK=16`, `PSH=8`, `RST=4`, `SYN=2`, `FIN=1`. Add the values together to reach the desired value.

For example, with stateful filtering a common way to detect the start of a TCP session is to look for the TCP SYN flag with a mask of SYN+ACK. That way it will match only when SYN is set and ACK is not set. Using the values from the previous paragraph yields: `tcp flags value 2 mask 18`

icmp (code|type) <first> [- <last>]

For rules matching ICMP protocol packets, `icmp type` and `icmp code` restrict matches to a specific value or range. The type and code are entered numerically in the range of 0–255. For a list of possible type and code combinations, see the [IANA ICMP Parameters list](#).

icmp (code|type) any

Match any ICMP code or type. This is the default behavior.

See also:

- [ACL Troubleshooting](#)
- [Using ACLs with Bridges](#)

13.1.1 Standard ACL Example

The following example ACL will block only SSH (tcp port 22) to 203.0.113.2 and permit all IPv4 other traffic:

```
tnsr(config)# acl blockssh
tnsr(config-acl)# rule 10
tnsr(config-acl-rule)# action deny
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination address 203.0.113.2/32
tnsr(config-acl-rule)# destination port 22
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 20
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# exit
tnsr(config-acl)# exit
tnsr(config)# int GigabitEthernet0/14/1
tnsr(config-interface)# access-list input acl blockssh sequence 10
tnsr(config-interface)# exit
tnsr(config)#
```

Deconstructing the above example, the ACL behaves as follows:

- The name of the ACL is **blockssh**
- The first rule is **10**. This leaves some room before it in case other rules should be matched before this rule in the future.
- Rule 10 will **deny** traffic matching:
 - A destination of a single IPv4 address, **203.0.113.2**
 - A destination of a single TCP port, **22 (ssh)**
 - A source of **any** is implied since it is not specified
- The second rule is **20**. The gap between 10 and 20 leaves room for future expansion of rules between the two existing rules.
- Rule 20 will **permit** all other IPv4 traffic, since there is no source or destination given.

The ACL is then applied to GigabitEthernet0/14/1 in the inbound direction.

13.2 MACIP ACLs

MACIP ACLs and layer 3 ACLs (*Standard ACLs*) work similarly, but MACIP ACLs match traffic at layer 2 using MAC addresses.

Since MACIP ACLs work with layer 2 information, they can only effectively function on interfaces which support operating at layer 2, such as Ethernet. Additionally, MACIP ACLs can only match layer 2 interface packets from neighboring hosts on directly connected networks.

Warning: The MAC address of a remote host that reaches TNSR via routing through another gateway cannot be determined, thus cannot be matched by a MACIP ACL.

For example, traffic arriving at TNSR from the Internet via Ethernet will typically have a source MAC address of the default gateway or routing peer, and *not* the actual source of the traffic.

MACIP ACLs may only be applied in the input direction, and only match source addresses.

description <text>

Text describing the purpose of this ACL.

action <name>

Determines how the rule governs packets that match.

deny

Drops a packet which matches this rule.

permit

Passes a single packet matching the rule.

ip-version (ipv4|ipv6)

Controls whether IPv4 or IPv6 packets will be matched by the rule. This is required when an address is present for the rule, and governs validation of the address value when applicable.

address <ip-prefix>

Match the source IPv4 or IPv6 address of a packet.

mac address <mac-address>

Optionally specifies a MAC address to block, in six groups of two colon-separated hexadecimal values, such as 00:11:22:33:44:55. When unset, the default value is 00:00:00:00:00:00 and uses the same value for a mask, which will match any MAC address.

mac mask <mac-mask>

Optionally specifies a mask which defines portions of a MAC address to match, similar to an IP Prefix value. Given in six groups of two colon-separated hexadecimal values, such as ff:ff:ff:00:00:00, which matches the first half of a given MAC address. A mask of ff:ff:ff:ff:ff:ff matches an entire MAC address exactly. A mask of 00:00:00:00:00:00 matches any MAC address, and is the default behavior when no mask is set.

See also:

- [ACL Troubleshooting](#)
- [Using ACLs with Bridges](#)

13.2.1 MACIP ACL Example

```
tnsr(config)# macip blockamac
tnsr(config-macip)# rule 10
tnsr(config-macip-rule)# action deny
tnsr(config-macip-rule)# mac address 00:11:22:33:44:55
tnsr(config-macip-rule)# mac mask ff:ff:ff:ff:ff:ff
tnsr(config-macip-rule)# exit
tnsr(config-macip)# exit
tnsr(config)# int GigabitEthernet0/14/2
tnsr(config-interface)# access-list macip blockamac
tnsr(config-interface)# exit
tnsr(config)#
```

13.3 Viewing ACL and MACIP Information

The `show acl [<name>]` command prints a list of defined ACLs and their actions. If `<name>` is given, then output is limited to the specified ACL.

```
tnsr# show acl

Access Control List: blockssh
  IPv Seq Action      Source          Dest Proto      SP/T  DP/C Flag Mask
-----
ipv4  10   deny  0.0.0.0/0 203.0.113.2/32  tcp  0-65535 22-22 0x00 0x00
ipv4  20  permit  0.0.0.0/0   0.0.0.0/0      0
```

The `show macip [<name>]` command works the same way for MACIP entries:

```
tnsr(config)# show macip

MACIP ACL: blockamac
  AF Seq Action  IP Prefix      MAC Address
-----
ipv4  10   deny  0.0.0.0/0 00:11:22:33:44:55 ff:ff:ff:ff:ff:ff
```

13.3.1 Viewing ACLs on Interfaces

The `show interface` command can display which ACLs are present on interfaces (*Interface Configuration Options*).

When viewing all interface information, the ACLs are printed inline:

```
tnsr# show interface GigabitEthernet6/0/0
Interface: GigabitEthernet6/0/0
  Description: Uplink
  Admin status: up
  Link up, link-speed 1000 Mbps, full duplex
  Link MTU: 1500 bytes
  MAC address: 00:90:0b:7a:8a:67
  IPv4 MTU: 0 bytes
```

(continues on next page)

(continued from previous page)

```

IPv4 Route Table: ipv4-VRF:0
IPv4 addresses:
    203.0.113.2/24
IPv6 MTU: 0 bytes
IPv6 Route Table: ipv6-VRF:0
IPv6 addresses:
    2001:db8:0:2::2/64
Input ACLs
    10: blockbadhosts
VLAN tag rewrite: disable
Rx-queues
    queue-id 0 : cpu-id 1
detailed counters:
    received: 9460961 bytes, 52985 packets, 0 errors
    received unicast: 108752 bytes, 776 packets
    received multicast: 9147108 bytes, 49377 packets
    received broadcast: 205101 bytes, 2832 packets
    transmitted: 129422 bytes, 995 packets, 19 errors
    transmitted unicast: 121938 bytes, 917 packets
    transmitted multicast: 7232 bytes, 72 packets
    transmitted broadcast: 252 bytes, 6 packets
    protocols: 2421 IPv4, 3458 IPv6
    52295 drops, 0 punts, 0 rx miss, 0 rx no buffer

```

To view a summary of all ACLs used by interfaces, use the `access-list` filtering option:

```

tnsr# show interface access-list
Interface: GigabitEthernet6/0/0
    Input ACLs
        10: blockbadhosts
Interface: GigabitEthernet6/0/1
    Input ACLs
        10: blockbadhosts

```

To view only ACLs for a single interface, both the interface name and the `access-list` filtering option can be used together:

```

tnsr# show interface GigabitEthernet6/0/0 acl
Interface: GigabitEthernet6/0/0
    Input ACLs
        10: blockbadhosts

```

13.4 ACL and NAT Interaction

When NAT is active, ACL rules are always processed before NAT on interfaces where NAT is applied, in any direction.

The remainder of the section refers to the following example static NAT rule:

```

nat static mapping tcp local 10.2.0.129 22 external 203.0.113.2 222

```

In this example, the rule is applied on the external-facing interface containing 203.0.113.2.

13.4.1 Inbound ACL Rules

ACL Rules set to be processed in the **inbound** direction on an interface (`access-list input acl <name> sequence <seq>`) will match on the **external** address and/or port in a static NAT rule. In the above example, this means an inbound ACL would match on a destination IP address of `203.0.113.2` and/or a destination port of `222`.

13.4.2 Outbound ACL Rules

ACL Rules set to be processed in the **outbound** direction on an interface (`access-list output acl <name> sequence <seq>`) will match on the **local** address and/or port in a static NAT rule. In the above example, this means an outbound ACL would match on a source IP address of `10.2.0.129` and/or a source port of `22`.

13.4.3 ACL and NAT Flow Chart

This diagram shows the logic behind how TNSR processes packets with ACLs and outside NAT active on an interface. The flow depends on a number of factors such as whether or not ACLs use the `reflect` action and whether or not NAT forwarding is active.

13.5 Host ACLs

TNSR can also create host ACLs to control traffic on host interfaces, such as the management interface. These ACLs are implemented using Netfilter.

As mentioned in *Default Allowed Traffic*, TNSR includes a default set of host ACLs which protect host OS interfaces. Host ACLs created by administrators can override or augment the default blocking behavior.

ACLs are ordered by sequence number, and evaluated from the start to the end, stopping when a match is found. Each ACL contains one or more rules which define matching criteria and actions taken.

To create a new ACL, from `config` mode, use the command `host acl <acl-name>`, with the name to use for the new ACL. This command enters `config-host-acl` mode, where the following commands are available:

description <text>

A text description of the host ACL.

sequence <acl-seq>

The sequence number of this ACL. This sequence number controls the order of the ACLs when TNSR generates the host OS ruleset.

rule <rule-seq>

Creates a new rule in this ACL with the given sequence number and enters `config-host-acl-rule` mode. The sequence number of the rule controls the order of the individual rules inside this ACL.

Inside `config-host-acl-rule` mode, the following commands are available:

action (deny|permit)


Controls whether packets matching this rule will be passed (`permit`) or dropped (`deny`).

description <text>

A text description of this rule.

match input-interface <host-interface>

When set, this rule will only match traffic on the given host interface name. This is an interface name as seen by the host operating system, and not a TNSR interface.

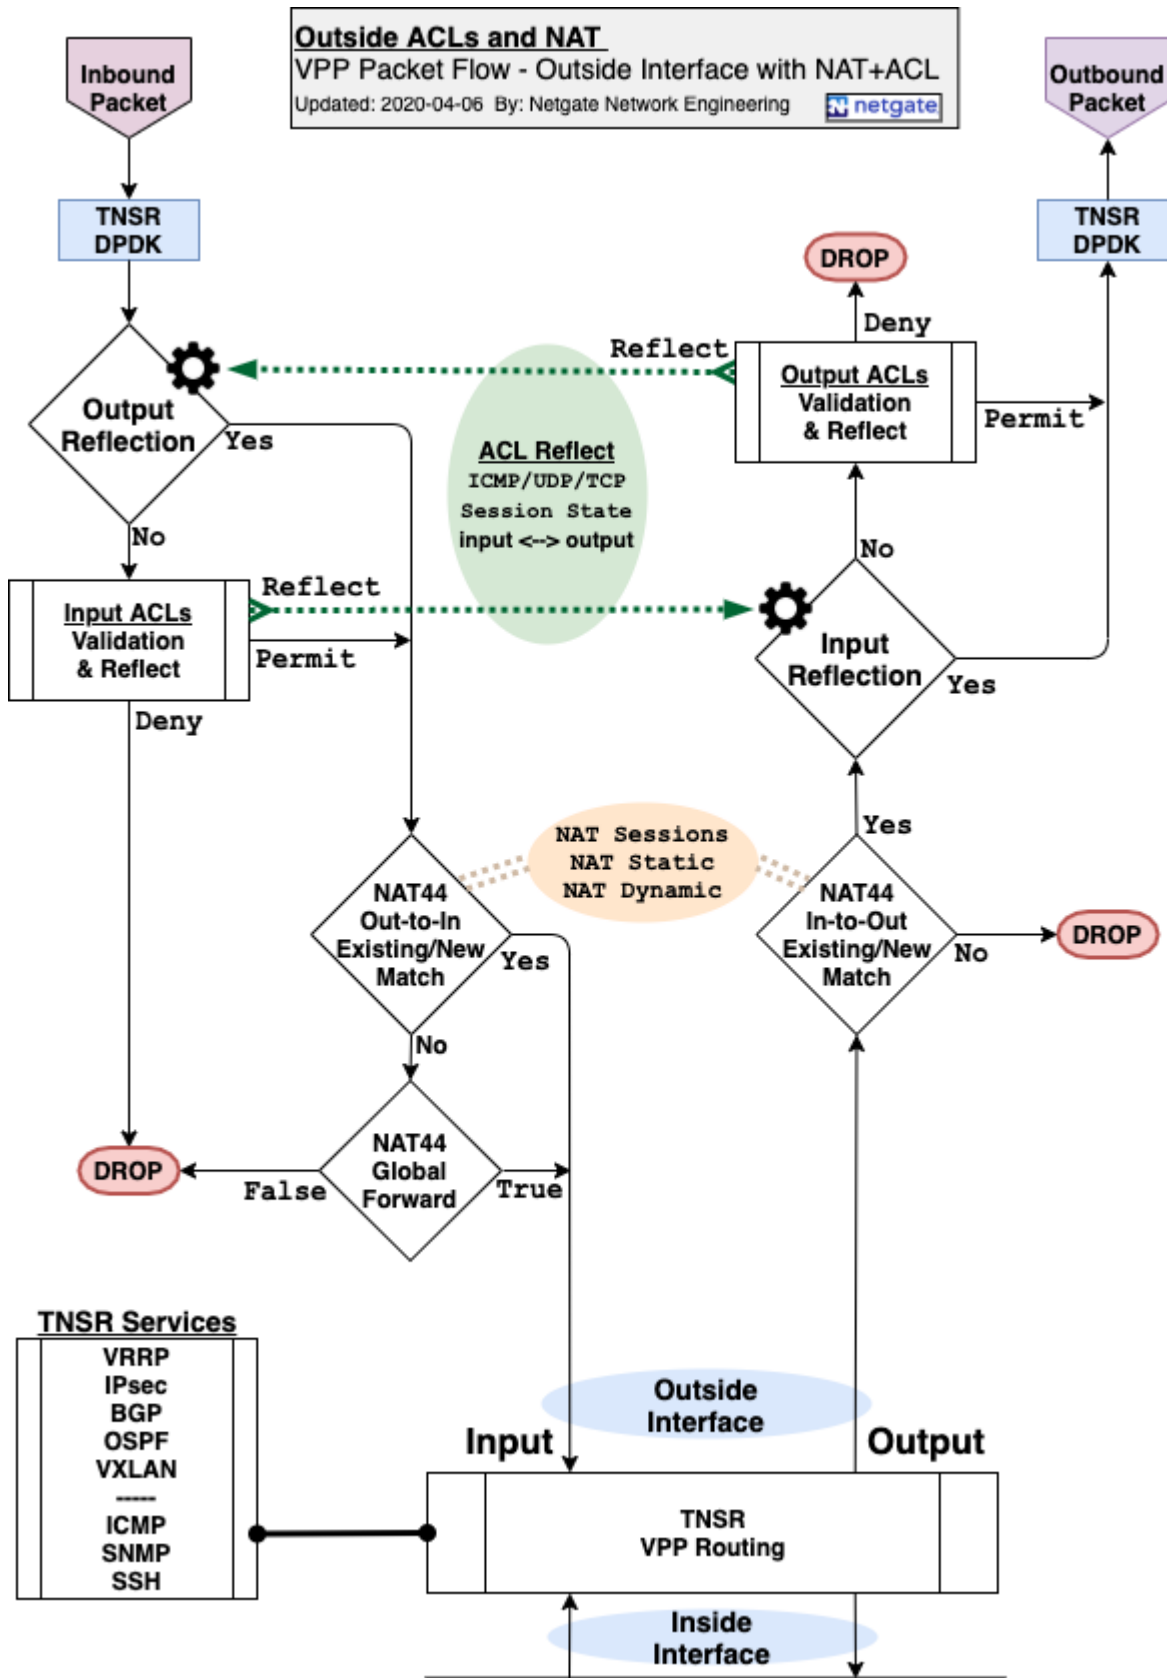

match ip address (source|destination) <ip-prefix>

Matches based on a given source or destination network.

match ip icmp type <type> [code <code>]

Matches a specific IPv4 ICMP type and optionally matches the ICMP code as well. To match ICMP, the IP protocol must be set to icmp.

Allowed types include: address-mask-reply, address-mask-request, destination-unreachable, echo-reply, echo-request, info-reply, info-request, parameter-problem, redirect, router-advertisement, router-solicitation, source-quench, time-exceeded, timestamp-reply, timestamp-request.

match ip icmpv6 type <type> [code <code>]

Matches a specific IPv6 ICMP type and optionally matches the ICMP code as well. To match ICMP, the IP protocol must be set to icmp.

Allowed types include: destination-unreachable, echo-reply, echo-request, mld-listener-query, mld-listener-reduction, mld-listener-report, nd-neighbor-advert, nd-neighbor-solicit, nd-redirect, nd-router-advert, nd-router-solicit, packet-too-big, parameter-problem, router-renumbering, time-exceeded.

match ip port (source|destination) <port-num>

Matches the given source or destination port number. To match a port, the protocol must be tcp or udp.

match ip port (source|destination) range start <low-port-num> [end <high-port-num>]

Matches the given source or destination port range, given as a lower start port number and a higher ending port number. To match a port, the protocol must be tcp or udp.

match ip protocol (icmp|tcp|udp|<proto-number>)

Matches the specified IP protocol. When unset, any protocol will match the rule. However, this option must be set to enable protocol-specific matching such as ports (TCP or UDP) or ICMP types/codes. To match protocols other than TCP, UDP, and ICMP, specify the [protocol number](#) from 0-255.

match ip tcp flag (ack|cwr|ece|fin|psh|rst|syn|urg)

Matches a specific TCP flag. May only be used when protocol is set to tcp.

match ip version (4|6)

Matches based on whether a packet is IPv4 (4), or IPv6 (6). This is required when matching by source or destination address.

match mac address (source|destination) <mac>

Matches based on the source or destination MAC address. This is only valid for neighboring hosts on interfaces which provide layer 2 information, such as Ethernet.

13.5.1 Host ACL Example

This example configures a rule to allow traffic from the remote system 203.0.113.54 to reach a local host OS daemon on port 12345, used by the [TNSR IDS](#) daemon:

```
tnsr(config)# host acl tnsrids
tnsr(config-host-acl)# sequence 10
tnsr(config-host-acl)# description TNSR IDS
tnsr(config-host-acl)# rule 100
tnsr(config-host-acl-rule)# description Pass to tnsrids
tnsr(config-host-acl-rule)# action permit
```

(continues on next page)

(continued from previous page)

```
tnsr(config-host-acl-rule)# match ip address source 203.0.113.54/32
tnsr(config-host-acl-rule)# match ip version 4
tnsr(config-host-acl-rule)# match ip protocol tcp
tnsr(config-host-acl-rule)# match ip port destination 12345
```

13.5.2 Host ACL Status

To see the list of current host ACLs, use the following command:

```
tnsr# show host acl
Access Control List: tnsrids
  IPv Seq Action          Src IP      Dst IP          Src MAC          Dst MAC Proto
  ↪SP/T    DP/C Flag bytes  pkts
-----
  ↪-----
ipv4 100 accept    203.0.113.54/32
  ↪      12345      0      0
                                     tcp
```

Alternately, to see the host ACL ruleset directly:

```
tnsr# show host ruleset
table inet tnsr_filter {
    chain tnsr_input_mgmt_local {
        jump tnsrids
    }

    chain tnsr_input_mgmt_default {
        tcp dport 22 accept
        tcp dport 80 accept
        tcp dport 443 accept
        ip protocol 1 accept
        ip6 nexthdr 58 accept
        tcp dport 123 accept
        udp dport 123 accept
        udp dport 161 accept
        ip ttl 1 udp dport 33434-33524 counter packets 0 bytes 0 accept
        ip6 hoplimit 1 udp dport 33434-33524 counter packets 0 bytes 0 accept
        tcp dport 9482 accept
    }

    chain tnsr_input {
        type filter hook input priority 0; policy accept;
        iifname "lo" accept
        ct state 0x2,0x4 accept
        jump tnsr_input_mgmt_local
        jump tnsr_input_mgmt_default
        drop
    }

    chain tnsr_forward {
        type filter hook forward priority 0; policy drop;
    }
}
```

(continues on next page)

(continued from previous page)

```
chain tnsrids {  
    meta nfproto 2 meta nfproto 2 ip saddr 203.0.113.54 tcp dport 12345  
    ↪counter packets 0 bytes 0 accept  
}  
}
```

IPSEC

IPsec provides a standards-based VPN implementation compatible with other IPsec implementations. The IPsec sub-system in TNSR is handled by [strongSwan](#).

Currently, TNSR supports routed IPsec, allowing BGP or static routes to send traffic through IPsec.

14.1 Required Information

Before attempting to configure an IPsec tunnel, several pieces of information are required in order for both sides to build a tunnel. Typically the administrators of both tunnel endpoints will negotiate and agree upon the values to use for an IPsec tunnel.

At a minimum, these pieces of information should be known to both endpoints before attempting to configure a tunnel:

Local Address

The IP address on TNSR which will be used to send and accept IPsec traffic from the peer.

Local IKE Identity

The IKE identifier for TNSR, typically an IP address and the same as **Local Address**.

Local Network(s)

A list of local networks which will communicate through the IPsec tunnel to hosts on **Remote Network(s)**. This is not entered into the configuration on TNSR for routed IPsec, but will be needed by the peer.

Remote Address

The IP address of the IPsec peer.

Remote IKE Identity

The identifier for the IPsec peer, typically the same as **Remote Address**.

Remote Network(s)

A list of networks at the peer location with which hosts in the **Local Network(s)** will communicate. If using static routing, routes must be manually added for these networks using the **Remote IPsec Address** and `pipX` interface. If BGP is used with IPsec, this will be handled automatically.

IKE Version

Either 1 for IKEv1 or 2 for IKEv2. IKEv2 is stronger and more capable, but not all IPsec equipment can properly handle IKEv2.

IKE Lifetime

The maximum amount of time that an IKE session can stay alive until it is renegotiated.

IKE Encryption

The encryption algorithm used to encrypt IKE messages.

IKE Integrity

The integrity algorithm used to authenticate IKE messages

IKE DH/MODP Group

Diffie-Hellman group for key establishment, given in bits.

IKE Authentication

The type of authentication used to verify the identity of the peer.

Pre-Shared Key

When using Pre-Shared Key for IKE Authentication, this key is used on both sides to authenticate the peer.

SA Lifetime

The amount of time that a child security association can be active before it is rekeyed.

SA Encryption

The encryption algorithm used to encrypt tunneled traffic.

SA Integrity

The integrity algorithm used to authenticate tunneled traffic.

SA DH/MODP Group

Diffie-Hellman group for security associations, in bits.

Local IPsec Address

The local IP address for the `ipipX` interface, used for routing traffic to/from IPsec peers.

Remote IPsec Address

The remote IP address for the peer on `ipipX`, used as a gateway for routing, or a BGP neighbor.

Warning: If NAT is active on the same interface acting as an IPsec endpoint, then NAT forwarding must also be enabled. See [NAT Forwarding](#).

14.2 IPsec Example

14.2.1 Required Information

This table contains the *Required Information* used to form the IPsec tunnel used in this example.

Table 1: Example IPsec Configuration

| Item | Value |
|----------------------|------------------|
| Local Address | 203.0.113.2 |
| Local IKE Identity | 203.0.113.2 |
| Local Network(s) | 10.2.0.0/16 |
| Remote Address | 203.0.113.25 |
| Remote IKE Identity | 203.0.113.25 |
| Remote Network(s) | 10.25.0.0/16 |
| IKE Version | 2 |
| IKE Lifetime | 28800 |
| IKE Encryption | AES-128 |
| IKE Integrity | SHA1 |
| IKE DH/MODP Group | 2048 (14) |
| IKE Authentication | Pre-Shared Key |
| Pre-Shared Key | mysupersecretkey |
| SA Lifetime | 3600 |
| SA Encryption | AES-128 |
| SA Integrity | SHA1 |
| SA DH/MODP Group | 2048 (14) |
| Local IPsec Address | 172.32.0.1/30 |
| Remote IPsec Address | 172.32.0.2 |

14.2.2 Example Configuration

This configuration session implements the tunnel described by the settings in *Example IPsec Configuration*:

```
tnsr(config)# ipsec tunnel 0
tnsr(config-ipsec-tunnel)# enable
tnsr(config-ipsec-tunnel)# local-address 203.0.113.2
tnsr(config-ipsec-tunnel)# remote-address 203.0.113.25
tnsr(config-ipsec-tunnel)# crypto config-type ike
tnsr(config-ipsec-tunnel)# crypto ike
tnsr(config-ipsec-crypto-ike)# version 2
tnsr(config-ipsec-crypto-ike)# lifetime 28800
tnsr(config-ipsec-crypto-ike)# proposal 1
tnsr(config-ike-proposal)# encryption aes128
tnsr(config-ike-proposal)# integrity sha1
tnsr(config-ike-proposal)# group modp2048
tnsr(config-ike-proposal)# exit
tnsr(config-ipsec-crypto-ike)# identity local
tnsr(config-ike-identity)# type address
tnsr(config-ike-identity)# value 203.0.113.2
tnsr(config-ike-identity)# exit
tnsr(config-ipsec-crypto-ike)# identity remote
tnsr(config-ike-identity)# type address
tnsr(config-ike-identity)# value 203.0.113.25
tnsr(config-ike-identity)# exit
tnsr(config-ipsec-crypto-ike)# authentication local
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# type psk
```

(continues on next page)

(continued from previous page)

```
tnsr(config-ike-auth-round)# psk mysupersecretkey
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# type psk
tnsr(config-ike-auth-round)# psk mysupersecretkey
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
tnsr(config-ipsec-crypto-ike)# child 1
tnsr(config-ike-child)# lifetime 3600
tnsr(config-ike-child)# proposal 1
tnsr(config-ike-child-proposal)# encryption aes128
tnsr(config-ike-child-proposal)# integrity sha1
tnsr(config-ike-child-proposal)# group modp2048
tnsr(config-ike-child-proposal)# exit
tnsr(config-ike-child)# exit
tnsr(config-ipsec-crypto-ike)# exit
tnsr(config-ipsec-tunnel)# exit
tnsr(config)# interface ipip0
tnsr(config-interface)# ip address 172.32.0.1/30
tnsr(config-interface)# mtu 1400
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 10.25.0.0/16
tnsr(config-rttbl4-next-hop)# next-hop 0 via 172.32.0.2
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
tnsr(config)# exit
```

This example is used as a reference through the remainder of the chapter.

Tip: If the TNSR device hardware supports cryptographic acceleration, enable it for optimal performance. See [IPsec Cryptographic Acceleration](#) for details.

14.3 IPsec Configuration

The `ipsec tunnel <n>` command, issued from `config` mode, changes to IPsec tunnel mode. This is denoted by `config-ipsec-tunnel` in the prompt.

The identifier number for tunnel entries starts at 0 and increments by one. To determine the next tunnel number for a new entry, run `ipsec tunnel ?` and TNSR will print the existing tunnel ID numbers.

This command creates an IPsec tunnel with an identifier of 0:

```
tnsr(config)# ipsec tunnel 0
tnsr(config-ipsec-tunnel)#
```

The remainder of the configuration is covered in the following sections.

14.3.1 IPsec Endpoints

Next, the IPsec tunnel needs endpoints, defined using the following commands from within `config-ipsec-tunnel` mode:

local-address

Defines the IP address used by TNSR for this IPsec tunnel. This address must exist on a TNSR interface.

remote-address

Defines the IP address or fully qualified hostname of the remote peer.

Note: When using a hostname, TNSR must be able to resolve it using DNS in the `dataplane` namespace when the tunnel is configured. See *System DNS Resolution Behavior* for information on configuring DNS resolution in namespaces.

Additionally, the `strongSwan` daemon will resolve the hostname each time an IPsec connection lookup is performed.

IPsec Endpoint Example

```
tnsr(config-ipsec-tunnel)# local-address 203.0.113.2
tnsr(config-ipsec-tunnel)# remote-address 203.0.113.25
```

14.3.2 IPsec Keys

Inside `config-ipsec-tunnel` mode, the following commands are available for IPsec key management.

crypto config-type (ike|manual)

Configures the type of key management TNSR will use for this tunnel.

ike

Internet Key Exchange (IKE). The most common method of key management. IPsec tunnels utilize IKE to dynamically handle key exchange when both parties are negotiating a security association.

manual

Static key management.

crypto ike

Enters `config-ipsec-crypto-ike` mode to configure IPsec IKE behavior, which is the bulk of the remaining work for most IPsec tunnels.

IKE Configuration

Inside `config-ipsec-crypto-ike` mode, the following commands are available to configure basic IKE behavior:

version <x>

Instructs TNSR to use either IKEv1 or IKEv2. Use 2 for IKEv2, which is more secure, or 1 for IKEv1 which is more common and more widely supported.

lifetime <x>

Sets the maximum time for this IKE session to be valid, in seconds within the range 120..214783647. Default value is 14400 seconds (4 hours). Commonly set to 28800 seconds (8 hours). This value should be longer than the IKE child lifetime, discussed later.

dpd-interval <x>

Optional time to wait between sending Dead Peer Detection (DPD) polls, given in seconds within the range 0-65535.

key-renewal (reauth|rekey)

Controls the method used to update keys on an established IKE security association (SA) before the lifetime expires.

reauth

TNSR performs a full teardown and re-establishment of IKE and child SAs.

rekey

Inline rekeying while SAs stay active. Only available in IKEv2.

proposal <name>

Configures a new *IKE proposal* and enters config-ike-proposal mode.

identity (local|remote)

Configures *IKE identity* validation and enters config-ike-identity mode.

authentication (local|remote)

Configures *IKE authentication* and enters config-ike-auth mode.

udp-encapsulation

Forces UDP encapsulation for IKE, also known as NAT Traversal or NAT-T.

Under normal conditions, UDP encapsulation will be automatically activated when NAT is detected and automatically disabled otherwise. With udp-encapsulation set, UDP encapsulation is forcefully enabled.

Note: UDP encapsulation cannot be disabled, it can only be automatically controlled or forcefully enabled.

Additional config-ipsec-crypto-ike mode commands are available to configure other aspects of the IPsec tunnel, such as proposals, identity, and authentication. These are covered next.

IKE Example

This example tells TNSR to use IKE for key management, and then sets the tunnel to IKEv2 and a lifetime of 8 hours.

```
tnsr(config-ipsec-tunnel)# crypto config-type ike
tnsr(config-ipsec-tunnel)# crypto ike
tnsr(config-ipsec-crypto-ike)# version 2
tnsr(config-ipsec-crypto-ike)# lifetime 28800
```


Additional IKE Configuration

The remainder of the IKE configuration is covered in the following sections.

IKE Proposal

IKE Proposals instruct TNSR how the key exchange will be encrypted and authenticated. TNSR supports a variety of encryption algorithms, integrity/authentication hash algorithms, pseudo-random functions (PRF), and Diffie-Hellman (DH) group specifications. These choices must be coordinated between both endpoints.

Tip: Some vendor IPsec implementations refer to IKE/ISAKMP as “Phase 1”, which may help when attempting to map values supplied by a peer to their corresponding values in TNSR.

From within `config-ipsec-crypto-ike` mode, use the `proposal <name>` command to start a new proposal and enter `config-ike-proposal` mode. In `config-ike-proposal` mode, the following commands are available:

encryption <ea-name>

Configures the *encryption algorithm* to use for the proposal.

integrity <ia-name>

Configures the *integrity algorithm* to use for the proposal.

prf <prf-name>

Configures the *pseudo-random function* (PRF) to use for the proposal.

group <group-name>

Configures the *Diffie-Hellman group* (DH Group) to use for the proposal.

Tip: To see a list of supported choices for each option, follow the initial command with a `?`, such as `encryption ?`.

Each of these is described in more detail in the following sections.

Encryption Algorithms

TNSR supports many common, secure encryption algorithms. Some older and insecure algorithms are not supported.

Algorithms based on AES are common and secure, and are widely supported by other VPN implementations.

AES-GCM, or *AES Galois/Counter Mode* is an efficient and fast authenticated encryption algorithm, which means it provides data privacy as well as integrity validation, without the need for a separate integrity algorithm.

Additionally, AES-based algorithms can often be accelerated by AES-NI.

Warning: TNSR includes the Triple-DES (3DES) algorithm for compatibility with legacy systems, but it is not considered secure. Specifically, 3DES is considered broken by attacks such as [Sweet32](#). Use stronger encryption algorithms where possible.

A full list of encryption algorithms supported by TNSR:

```
tnsr(config-ike-proposal)# encryption ?
<cr>
3des                Triple-DES
aes128              128 bit AES-CBC
aes128ccm12         128 bit AES-CCM with 12 byte ICV
aes128ccm16         128 bit AES-CCM with 16 byte ICV
aes128ccm8          128 bit AES-CCM with 8 byte ICV
aes128ctr           128 bit AES-Counter
aes128gcm12         128 bit AES-GCM with 12 byte ICV
aes128gcm16         128 bit AES-GCM with 16 byte ICV
aes128gcm8          128 bit AES-GCM with 8 byte ICV
aes192              192 bit AES-CBC
aes192ccm12         192 bit AES-CCM with 12 byte ICV
aes192ccm16         192 bit AES-CCM with 16 byte ICV
aes192ccm8          192 bit AES-CCM with 8 byte ICV
aes192ctr           192 bit AES-Counter
aes192gcm12         192 bit AES-GCM with 12 byte ICV
aes192gcm16         192 bit AES-GCM with 16 byte ICV
aes192gcm8          192 bit AES-GCM with 8 byte ICV
aes256              256 bit AES-CBC
aes256ccm12         256 bit AES-CCM with 12 byte ICV
aes256ccm16         256 bit AES-CCM with 16 byte ICV
aes256ccm8          256 bit AES-CCM with 8 byte ICV
aes256ctr           256 bit AES-Counter
aes256gcm12         256 bit AES-GCM with 12 byte ICV
aes256gcm16         256 bit AES-GCM with 16 byte ICV
aes256gcm8          256 bit AES-GCM with 8 byte ICV
camellia128         128 bit Camellia
camellia128ccm12    128 bit Camellia-CCM with 12 byte ICV
camellia128ccm16    128 bit Camellia-CCM with 16 byte ICV
camellia128ccm8     128 bit Camellia-CCM with 8 byte ICV
camellia128ctr      128 bit Camellia-Counter
camellia192         192 bit Camellia
camellia192ccm12    192 bit Camellia-CCM with 12 byte ICV
camellia192ccm16    192 bit Camellia-CCM with 16 byte ICV
camellia192ccm8     192 bit Camellia-CCM with 8 byte ICV
camellia192ctr      192 bit Camellia-Counter
camellia256         256 bit Camellia
camellia256ccm12    256 bit Camellia-CCM with 12 byte ICV
camellia256ccm16    256 bit Camellia-CCM with 16 byte ICV
camellia256ccm8     256 bit Camellia-CCM with 8 byte ICV
camellia256ctr      256 bit Camellia-Counter
chacha20poly1305    256 bit ChaCha20/Poly1305 with 16 byte ICV
```

Integrity Algorithms

Integrity algorithms provide authentication of messages and randomness, ensuring that packets are authentic and were not altered by a third party before arriving, and also for constructing keying material for encryption.

Note: When using an authenticated encryption algorithm like AES-GCM with a child Security Association (SA) as opposed to IKE/ISAKMP, an integrity option **should not** be configured, as it is redundant and reduces performance.

When an authenticated encryption algorithm is used with IKE, configure a Pseudo-Random Function (PRF) instead of an Integrity Algorithm. If an integrity algorithm is defined in this case, TNSR will attempt to map the chosen algorithm to an equivalent PRF.

A full list of integrity algorithms supported by TNSR:

```
tnsr(config-ike-proposal)# integrity ?
<CR>
aesccmac          AES-CMAC 96
aesxcbc           AES-XCBC 96
md5               MD5 96
sha1              SHA1 96
sha256            SHA2 256 bit blocks, 128 bits output
sha384            SHA2 384 bit blocks, 192 bits output
sha512            SHA2 512 bit blocks, 256 bits output
```

Pseudo-Random Functions

A Pseudo-Random Function (PRF) is similar to an integrity algorithm, but instead of being used to authenticate messages, it is only used to provide randomness for purposes such as keying material. PRFs are primarily used with an authenticated encryption algorithm type such as AES-GCM, but they can be explicitly defined for use with other integrity algorithms.

If a PRF is not explicitly defined, TNSR will attempt to derive the PRF to use based on the integrity algorithm for a given proposal.

A full list of pseudo-random functions supported by TNSR:

```
tnsr(config-ike-proposal)# prf ?
<CR>
prfaesccmac       AES128-CMAC PRF
prfaesxcbc        AES128-XCBC PRF
prfmd5            MD5 PRF
prfsha1           SHA1 PRF
prfsha256         SHA2-256 PRF
prfsha384         SHA2-384 PRF
prfsha512         SHA2-512 PRF
```

Diffie-Hellman Groups

Diffie-Hellman (DH) exchanges allow two parties to establish a shared secret across an untrusted connection. DH choices can be referenced in several different ways depending on vendor implementations. Some reference a DH group by number, others by size. When referencing by group number, generally speaking higher group numbers are more secure.

Tip: In most cases, modp2048 (Group 14) is the lowest choice considered to provide sufficient security in a modern computing environment.

A full list of DH Groups supported by TNSR:

```
tnsr(config-ike-proposal)# group ?
<CR>
curve25519      Group 31 (Elliptic Curve 25519, 256 bit)
ecp256          Group 19 (256 bit ECP)
ecp384          Group 20 (384 bit ECP)
ecp521          Group 21 (521 bit ECP)
modp1024        Group 2 (1024 bit modulus)
modp1024s160    Group 22 (1024 bit modulus, 160 bit POS)
modp1536        Group 5 (1536 bit modulus)
modp2048        Group 14 (2048 bit modulus)
modp2048s224    Group 23 (2048 bit modulus, 224 bit POS)
modp2048s256    Group 24 (2048 bit modulus, 256 bit POS)
modp3072        Group 15 (3072 bit modulus)
modp4096        Group 16 (4096 bit modulus)
modp6144        Group 17 (6144 bit modulus)
modp768         Group 1 (768 bit modulus)
modp8192        Group 18 (8192 bit modulus)
```

Warning: TNSR supports modp768 (Group 1) and modp1024 (Group 2) for compatibility purposes but they are considered broken by the [Logjam Attack](#) and should be avoided.

TNSR also supports modp1024s160 (Group 22), modp2048s224 (Group 23), and modp2048s256 (Group 24) for compatibility but they should also be avoided as they have a [questionable source of primes](#).

IKE Proposal Example

This example configures one proposal. This proposal uses AES-128 encryption, SHA-1 for integrity hashing, and DH group 14 (2048 bit modulus).

```
tnsr(config-ipsec-crypto-ike)# proposal 1
tnsr(config-ike-proposal)# encryption aes128
tnsr(config-ike-proposal)# integrity sha1
tnsr(config-ike-proposal)# group modp2048
tnsr(config-ike-proposal)# exit
```

IKE Identity

In IKE, each party must ensure it is communicating with the correct peer. One aspect of this validation is the identity information included in IKE. Each router tells the other its own local identity and they each validate it against the stored remote identity. If they do not match, the peer is rejected.

From within `config-ipsec-crypto-ike` mode, use the `identity local` and `identity remote` commands to configure local and remote identity information. In either case, the `identity` command enters `config-ike-identity` mode.

IKE requires both local and remote identities. The local identity is sent to the remote peer during the exchange. The remote identity is used to validate the identity received from the peer during the exchange.

In `config-ike-identity`, the following commands are available:

type <name>

Sets the type of identity value. The following types are available:

address

IPv4 or IPv6 address in the standard notation for either (e.g. `192.0.2.3` or `2001:db8:1:2::3`)

This is the most common type, with the value set to the address on TNSR used as the `local-address` for the IPsec tunnel.

dn

An X.509 distinguished name (e.g. certificate subject)

email

Email address (e.g. `user@example.com`).

fqdn

A fully qualified domain name (e.g. `host.example.com`)

key-id

An arbitrary string used as an identity

none

Automatically interpret the type based on the value

value <text>

The identity value, in a format corresponding to the chosen `type`.

Note: The local identity type and value must both be supplied to the administrator of the remote peer so that it can properly identify this endpoint.

Identity Example

First configure the local identity of this firewall. The identity is an IP address, using the same value as the local address of the IPsec tunnel.

```
tnsr(config-ipsec-crypto-ike)# identity local
tnsr(config-ike-identity)# type address
tnsr(config-ike-identity)# value 203.0.113.2
tnsr(config-ike-identity)# exit
```

Next, configure the remote identity. The remote peer has also chosen to use an IP address, the value of which is the remote address used for the IPsec tunnel.

```
tnsr(config-ipsec-crypto-ike)# identity remote
tnsr(config-ike-identity)# type address
tnsr(config-ike-identity)# value 203.0.113.25
tnsr(config-ike-identity)# exit
```

IKE Authentication

After verifying the identity, TNSR will attempt to authenticate the peer using the secret from its configuration in one or two round passes. In most common configurations there is only a single authentication round, however in IKEv2 a tunnel may have two rounds of unique authentication.

From within `config-ipsec-crypto-ike` mode, use the `authentication local` and `authentication remote` commands to configure local and remote authentication information. In either case, the `authentication` command enters `config-ike-auth` mode.

TNSR will use the parameters under `authentication local` to authenticate outbound traffic and the `authentication remote` parameters are used to authenticate inbound traffic.

Note: With pre-shared key mode, most real-world configurations use identical values for both local and remote authentication.

From `config-ike-auth` mode, the `round <n>` command configures parameters for round 1 or 2. As mentioned previously, most configurations will only use round 1. The `round` command then enters `config-ike-auth-round` mode.

In `config-ike-auth-round` mode, the following commands are available:

type <name>

The type of authentication to perform.

Currently the only authentication type supported by TNSR is `psk` (pre-shared key).

psk <text>

For `psk` type authentication, this command defines the pre-shared key value.

IKE Authentication Example

This example only has one single round of authentication, a pre-shared key of `mysupersecretkey`. Thus, the `type` is set to `psk` and then the `psk` is set to the secret value.

Warning: Do not transmit the pre-shared key over an insecure channel such as plain text e-mail!

First, add the local authentication parameters:

```
tnsr(config-ipsec-crypto-ike)# authentication local
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# type psk
tnsr(config-ike-auth-round)# psk mysupersecretkey
```

(continues on next page)

(continued from previous page)

```
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
```

Next, configure the remote authentication parameters. As in most practical uses, this is set identically to the local authentication value.

```
tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# type psk
tnsr(config-ike-auth-round)# psk mysupersecretkey
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
```

14.3.3 Security Associations

After establishing a secure channel, the two endpoints can negotiate an IPsec security association (IPsec SA) as a “child” entry. TNSR supports adding multiple children as needed, though with routed IPsec only one is necessary.

Tip: Some vendor IPsec implementations refer to IPsec security association child entries as “Phase 2”, which may help when attempting to map values supplied by a peer to their corresponding values in TNSR.

From within `config-ipsec-crypto-ike` mode, the `child <n>` command configures the child noted by the given number. The `child` command enters `ike-child` mode.

Within `ike-child` mode, the following commands are available:

lifetime <x>

Sets the maximum time for this child IPsec SA to be valid before it must be rekeyed. The value is given in seconds within the range 120 . . 214783647. Default value is 3600 seconds (one hour). This value must be shorter than the IKE lifetime, discussed earlier.

replay-window (0|64)

Number of packets in replay window. The replay window is used to protect the tunnel against attacks where the sequence number is re-used or has been processed recently. Some allowance is helpful in dealing with network link issues that cause packets to arrive late or out-of-order. A value of 0 disables the replay window. A value of 64 enables a 64 packet replay window.

proposal <name>

Each child may have one or more `proposal` entries which define acceptable encryption, integrity, and DH Group (Perfect Forward Security, PFS) parameters to encrypt and validate the IPsec SA traffic.

Child SA proposals work similarly to IKE/ISAKMP proposals as described in *IKE Proposal*.

This command enters `config-ike-child-proposal` mode to configure these proposals. In `config-ike-child-proposal` mode, the following commands are available:

encryption <ea-name>

Configures the *encryption algorithm* to use for the proposal.

integrity <ia-name>

Configures the *integrity algorithm* to use for the proposal.

group <group-name>

Configures the *Diffie-Hellman group* (DH Group) to use for the proposal.

sequence-number (esn|noesn)

Controls whether or not TNSR will attempt to negotiate extended sequence number (ESN) support with the peer. ESN uses 64-bit sequence numbers instead of the 32-bit sequence numbers. The default is `noesn` which disables ESN negotiation.

Child SA Example

This example only has a single child, thus `child 1`. The child has a lifetime of `3600`.

```
tnsr(config-ipsec-crypto-ike)# child 1
tnsr(config-ike-child)# lifetime 3600
```

Next, create a child SA proposal. This example uses AES-128 for encryption, SHA-1 for an authentication hash, and PFS group 14 (2048 bit modulus).

```
tnsr(config-ike-child)# proposal 1
tnsr(config-ike-child-proposal)# encryption aes128
tnsr(config-ike-child-proposal)# integrity sha1
tnsr(config-ike-child-proposal)# group modp2048
```

This completes the configuration for the IPsec tunnel, at this point after exiting back to basic mode the tunnel will attempt to establish a connection to the peer.

```
tnsr(config-ike-child-proposal)# exit
tnsr(config-ike-child)# exit
tnsr(config-ipsec-crypto-ike)# exit
tnsr(config-ipsec-tunnel)# exit
```

14.3.4 Configuring the IPsec Interface

TNSR supports routed IPsec via the `ipipX` interface. The number of the ipsec interface corresponds to the index number of the tunnel set previously. For example `ipsec tunnel 0` is `ipip0`, and `ipsec tunnel 2` is `ipip2`.

These IPsec interfaces are used to configure routed IPsec connectivity and they behave like most other interfaces. For example, they can have access lists defined to filter traffic.

The `ipipX` interface should be configured with an IP address and the peer will have its own IP address in the same subnet. This allows the two endpoints to communicate directly over the IPsec interface and also gives the peer an address through which traffic for other subnets may be routed. When configured in this way, it acts like a directly connected point-to-point link to the peer.

IPsec Interface MTU

IPsec adds per-packet overhead which reduces the maximum packet size which can traverse IPsec without fragmentation. Avoiding fragmentation is important to ensure maximum performance and reliability for IPsec traffic. Some platforms have been observed to have issues processing fragmented IPsec traffic, resulting in packet loss or instability.

Given a hardware interface MTU of `1500` bytes an IPsec MTU of `1400` bytes is safe for most environments.

The amount of overhead added by IPsec varies depending on tunnel configuration parameters such as the encryption algorithm, integrity algorithm, and UDP encapsulation. As such, the maximum MTU may be higher than `1400` bytes in some environments, but will require additional testing unique to each tunnel to determine its optimal MTU.

Alternately, *full IP reassembly* can be enabled on the hardware interface that has the tunnel endpoint address configured to help alleviate fragmentation issues.

IPsec Interface Example

In this example, the `ipip0` interface is given an address of `172.32.0.1/30`. The remote peer will be `172.32.0.2/30`

```
tnsr(config)# interface ipip0
tnsr(config-interface)# ip address 172.32.0.1/30
tnsr(config-interface)# mtu 1400
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

14.3.5 IPsec Routes

The IPsec interface allows the peers to talk directly, but in most cases with IPsec there is more interesting traffic to handle. For example, a larger subnet on the LAN side of each peer that must communicate securely.

To allow these networks to reach one another, routes are required. These may be managed manually using static routes, or a dynamic routing protocol such as BGP can manage the routes automatically.

IPsec Static Route Example

This example adds a static route to the main IPv4 routing table for a subnet located behind the peer. Any traffic trying to reach a host inside the `10.25.0.0/16` subnet will be routed through the `ipip0` interface using the peer address in that subnet (`172.32.0.2`) as the next hop.

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 10.25.0.0/16
tnsr(config-rttbl4-next-hop)# next-hop 0 via 172.32.0.2
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
tnsr(config)# exit
```

See also:

For a larger example involving BGP for dynamic route management, see *TNSR IPsec Hub for pfSense software nodes*.

14.3.6 Enable/Disable IPsec Tunnels

New IPsec tunnels are in a disabled state by default and must be explicitly enabled:

```
tnsr(config)# ipsec tunnel <n>
tnsr(config-ipsec-tunnel)# enable
```

Should the need arise to disable the tunnel in the future, the process is similar:

```
tnsr(config)# ipsec tunnel <n>
tnsr(config-ipsec-tunnel)# disable
```

When disabling a tunnel the configuration can remain in place, but the tunnel will not be loaded into the IPsec daemon.

14.4 IPsec Status Information

To view status information about active IPsec tunnels, use the `show ipsec tunnel` command. This command prints status output for all IPsec tunnels, and it also supports printing tunnel information individually by providing the tunnel ID. This command supports several additional parameters to increase or decrease the amount of information it displays.

The following forms of `show ipsec tunnel` are available:

show ipsec tunnel

Display a short summary of all IPsec tunnels.

show ipsec tunnel n

Display a short summary of a specific IPsec tunnel n.

show ipsec tunnel [n] verbose

Display a verbose list of all IPsec tunnels, optionally limited to a single tunnel n. The output shows detailed information such as active encryption, hashing, DH groups, identifiers, and more.

show ipsec tunnel [n] ike [verbose]

Display only IKE parameters of all tunnels. Optionally limited to a single tunnel n and/or expanded details with `verbose`.

show ipsec tunnel [n] child [verbose]

Display only IPsec child Security Association parameters of all tunnels. Optionally limited to a single tunnel n and/or expanded details with `verbose`.

14.4.1 IPsec Status Examples

Show the status of tunnel 0:

```
tnsr# show ipsec tunnel 0
IPsec Tunnel: 0
  IKE SA: ipip0    ID: 13    Version: IKEv2
    Local: 203.0.113.2[500]    Remote: 203.0.113.25[500]
    Status: ESTABLISHED    Up: 372s    Reauth: 25275s
  Child SA: child0    ID: 9
    Status: INSTALLED    Up: 372s    Rekey: 2583s    Expire: 3228s
    Received: 0 bytes, 0 packets
    Transmitted: 0 bytes, 0 packets
```

Adding the `verbose` keyword also shows detailed information about the encryption parameters:

```
tnsr# show ipsec tunnel 0 verbose
IPsec Tunnel: 0
  IKE SA: ipip0    ID: 13    Version: IKEv2
    Local: 203.0.113.2[500]    Remote: 203.0.113.25[500]
    Status: ESTABLISHED    Up: 479s    Rekey: 24757s    Reauth: 25168s
    Local ID: 203.0.113.2    Remote ID: 203.0.113.25
    Cipher: AES_CBC 128    MAC: HMAC_SHA1_96
    PRF: PRF_HMAC_SHA1    DH: MODP_2048
    SPI Init: 1880997989256787091    Resp: 1437908875259838715
    Initiator: true
  Child SA: child0    ID: 9
    Status: INSTALLED    Up: 479s    Rekey: 2476s    Expire: 3121s
    Received: 0 bytes, 0 packets
```

(continues on next page)

(continued from previous page)

```
Transmitted: 0 bytes, 0 packets
Cipher: AES_CBC 128   MAC: HMAC_SHA1_96   PFS: MODP_2048
SPI in: 2318058408    out: 1979056986
```

Specifying the `ike` or `child` parameter filters the output, and these also support `verbose` output.

Note: The first Child SA entry uses DH information from the parent IKE SA, and not its own PFS setting. As such, Child SA entries in this situation will display %IKE at the end of their PFS value to indicate the source. The PFS value configured on the Child SA is used when a Child SA is rekeyed.

```
tnsr# show ipsec tunnel 0 ike
IPsec Tunnel: 0
  IKE SA: ipip0    ID: 13    Version: IKEv2
    Local: 203.0.113.2[500]    Remote: 203.0.113.25[500]
    Status: ESTABLISHED    Up: 372s    Reauth: 25275s
```

```
tnsr# show ipsec tunnel 0 ike verbose
IPsec Tunnel: 0
  IKE SA: ipip0    ID: 13    Version: IKEv2
    Local: 203.0.113.2[500]    Remote: 203.0.113.25[500]
    Status: ESTABLISHED    Up: 479s    Reauth: 25168s
    Local ID: 203.0.113.2    Remote ID: 203.0.113.25
    Cipher: AES_CBC 128    MAC: HMAC_SHA1_96
    PRF: PRF_HMAC_SHA1    DH: MODP_2048
    SPI Init: 1880997989256787091    Resp: 1437908875259838715
    Initiator: true
```

14.5 IPsec Cryptographic Acceleration

There are three types of cryptographic acceleration available for use on TNSR:

- Software cryptographic acceleration
- CPU-based AES-NI cryptographic acceleration
- Hardware-based Intel® QuickAssist Technology (QAT) cryptographic acceleration

The list above is in order of likely performance boost, from least to most. In other words, software acceleration is slowest, QAT is fastest. The availability of AES-NI CPU instructions and QAT vary by platform and installed hardware.

14.5.1 Software Cryptographic Acceleration

TNSR will automatically configure software cryptographic acceleration for VPP if an IPsec tunnel is defined in the configuration. To enable this configuration, the VPP service must be restarted manually so it can enable the feature and allocate additional memory.

Note: The cryptographic accelerator setting applies to all tunnels, so the restart is only required after the first IPsec tunnel configured by TNSR. The restart is not required for additional tunnels or when changing IPsec settings.

Restart the VPP dataplane from the TNSR basic mode CLI using the following command:

```
tnsr# config
tnsr(config)# service dataplane restart
```

If the TNSR configuration contains no IPsec tunnels, TNSR will not require the memory resources associated with cryptographic acceleration and TNSR will not require a restart of the VPP dataplane service.

14.5.2 AES-NI cryptographic acceleration

AES-NI cryptographic acceleration takes advantage of AES acceleration instructions available in most modern CPUs. Since this feature relies on CPU support, it is not available on all hardware and, depending on the hypervisor and its configuration, may not be passed through from a host to a VM.

AES-NI offers a significant performance boost with AES-based ciphers, especially with AEAD ciphers such as AES-GCM.

AES-NI is automatically used if available.

14.5.3 QAT cryptographic acceleration

TNSR Supports hardware compatible with Intel® QuickAssist Technology (QAT) for accelerating cryptographic operations, such as IPsec. This requires the presence of a compatible QAT device, which may be a component of the hardware platform or an add-in card such as the CPIC devices sold by Netgate.

Note: This hardware can be found in CPIC cards as well as many C3000 and Skylake Xeon systems. Netgate [XG-1541](#) and [XG-1537](#) hardware has an add-on option for a CPIC card.

To configure a QAT device, follow the procedures described in [Setup QAT Compatible Hardware](#) to enable the device in the dataplane configuration.

Warning: There is a known incompatibility between QAT and VT-d on some platforms which can prevent IPsec traffic from passing when QAT acceleration is enabled. See [VT-d/IOMMU](#) for details.

WIREGUARD

15.1 Design Considerations

One of the main considerations when choosing a WireGuard implementation layout is whether to use one tunnel with many peers, or one tunnel per peer.

15.1.1 Routing to WireGuard Peers

WireGuard uses what it calls “Cryptokey Routing” to map traffic inside WireGuard to a specific peer which is then encrypted using the public key for that peer. In practice, this means that when multiple peers are defined on a WireGuard instance each peer instance must define the set of networks reachable through that peer. This can make managing networks and routes cumbersome when using a single instance with many peers for site-to-site connectivity.

When there is only one peer on a wireguard interface, it can instead assume that the one peer is the correct destination for all traffic which crosses the interface (e.g. **Allowed Prefixes** set to `0.0.0.0/0` or `::/0`). And in that case, a routing protocol such as BGP can manage the operating system routing to the neighbor instead of static routes.

Due to the way WireGuard uses peer-to-peer non-broadcast interfaces in VPP, WireGuard requires tunnel next hop configurations for each peer pointing the peer address(es) to the appropriate WireGuard interfaces and peer external addresses to find their adjacency. See *WireGuard Tunnel Next Hop* for details.

15.1.2 Design Style

Every WireGuard tunnel is a peer to peer connection, but there are different ways WireGuard can behave depending on whether or not a peer endpoint is known or defined on both sides:

Site-to-Site

- Peer endpoint filled in on both sides
- Both peers can initiate traffic first

Remote Access “Server”

- Remote peer knows the endpoint configuration
- Local side does not contain endpoint configuration for the peer
- Only remote peer can initiate traffic
- **Not supported** on TNSR at this time

Remote Access “Client”

- Endpoint address and port filled in locally

- Remote side does not contain endpoint configuration
- Can initiate traffic to the peer

Warning: TNSR is limited by the capabilities of WireGuard in the dataplane. Currently the dataplane requires static endpoint addresses and ports defined locally and for each peer. Due to this limitation, TNSR can only act in either a site-to-site or remote access client role.

15.2 Required Information

Before attempting to configure a WireGuard instance, several pieces of information are required in order for both sides to build a tunnel.

At a minimum, these pieces of information should be known before attempting to configure a WireGuard.

- Public keys for each peer
- Endpoint IP addresses and ports for each peer
- A subnet to use for communication between peers
- Lists of remote networks on each peer

15.2.1 WireGuard Keys

Every WireGuard peer, including this router, needs a private and public key pair.

Each peer should generate its own keys and the private key should not leave that peer if possible.

Warning: While keeping a backup of the keys is a good idea, do not copy the private key contents unnecessarily. Other peers do not need to know the private key, they only need the public key.

To generate a key pair, use the `wg` command from any system which has the WireGuard tools installed.

```
$ wg genkey | tee tnsr1.prv.key | wg pubkey > tnsr1.pub.key
$ cat tnsr1.prv.key
6CdptoVJkKPG3Bc5gKLlps3LC0D+2ga8Nfxh31Bhp0o=
$ cat tnsr1.pub.key
gJHc9lDjcM3Kf004BdRP3tZWttZ1d23nvZoDy8FYQ1E=
```

Note: These tools are installed by default on TNSR. They can be installed on other systems using the OS package manager (e.g. `sudo apt install wireguard-tools`.)

Most graphical WireGuard clients (e.g. Windows, Android, iOS) also include their own mechanism to generate keys. Distribute the public keys to the other peers as needed via some means (e.g. e-mail).

15.2.2 Endpoint IP Addresses

Both peers must have a static endpoint address, as outlined in *Design Style*.

15.2.3 WireGuard Interface Subnet

Choose a subnet for the WireGuard interface itself. WireGuard will use this to communicate between peers. For tunnels with one peer on each end, this can be a /30 prefix for IPv4. For a setup with many peers, use a large enough subnet to contain them all.

Within this subnet, decide which addresses will be used by each peer.

Note: Addresses must be allocated to peers manually in the configuration, WireGuard does not have any mechanism to assign them on demand.

15.2.4 WireGuard Tunnel Next Hop

The dataplane requires an additional per-peer next hop configuration for WireGuard tunnels to locate a peer adjacency. This is due to the fact that WireGuard interfaces are non-broadcast interfaces and get handled differently internally by the dataplane.

See also:

Tunnel Next Hops

Each peer must have a tunnel next hop configured pointing to the WireGuard interface and peer addresses so that the dataplane can properly find adjacencies.

For a peer interface address of 10.2.111.2 on WireGuard instance 1 where the WireGuard peer external address is 203.0.113.25 the entry would look like:

```
tnsr(config)# tunnel next-hops wg1
tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.2 ipv4-next-hop-address 203.
→0.113.25
tnsr(config-tunnel-nh-if)# exit
```

15.2.5 Remote Networks

TNSR must know which networks exist at each peer for two reasons:

- WireGuard must have the peer network(s), including their designated interface address, defined as allowed prefixes. This configures an association between keys and addresses for cryptokey routing internal to WireGuard.
- TNSR must have routes in the route table for the networks so it knows to send traffic to these networks across a specific WireGuard interface.

This can be simplified in cases where there is only one peer per instance, as all networks can be allowed from a single peer and the routes can then be managed dynamically by a routing protocol.

15.3 WireGuard Configuration Settings

The interface `wireguard <instance>` command, issued from `config` mode, changes to WireGuard mode. This is denoted by `config-wireguard` in the prompt.

```
tnsr(config)# interface wireguard 1
tnsr(config-wireguard)#
```

The `<instance>` value corresponds with the number of the resulting WireGuard `wg` interface which will be present after configuring the WireGuard instance. For example, `interface wireguard 1` results in `wg1`, `interface wireguard 5` results in `wg5`.

Note: After configuring the WireGuard instance and peers, configure the corresponding `wg` interface with an address, enable it, and also setup routing.

See also:

See [WireGuard Site-to-Site Example](#) for an example configuration.

15.3.1 WireGuard Instance Configuration

The WireGuard instance configuration in `config-wireguard` mode defines parameters using the following commands:

description <desc>

A text description of this WireGuard instance for reference.

peer <peer-id>

Enter `config-wireguard-peer` mode to create or edit a peer.

port <port-value>

The local UDP port used by WireGuard to send and receive WireGuard packets for this instance. Each WireGuard instance must use a different port and it must not conflict with other existing UDP services.

Most WireGuard implementations assume a default port of 51820, which makes that a good starting value.

private-key

These commands manage the private key used by WireGuard for encryption. Use only one of the following:

private-key base64 <key>

Defines a private key as a Base 64 string, e.g. `IPbehUo58KvYl/qmA+50bAaWeXgB+eP+8QqmDkLV9XA=`.

source-address <ip-addr>

The IP address used by WireGuard to send and receive traffic.

WireGuard Instance Example

```
r1 tnsr(config)# interface wireguard 1
r1 tnsr(config-wireguard)# description WireGuard P2P - R1-R2
r1 tnsr(config-wireguard)# source-address 203.0.113.2
r1 tnsr(config-wireguard)# port 51820
r1 tnsr(config-wireguard)# private-key base64 IPbehUo58KvYl/
↪ qmA+50bAaWeXgB+eP+8QqmDkLV9XA=
```

15.3.2 WireGuard Peer Configuration

allowed-prefix <prefix>

A network *on the peer side* which is *reachable through this peer*. The specified network is allowed to communicate with WireGuard bidirectionally. This command sets up an association between this network and the public key on this peer for internal WireGuard cryptokey routing.

This command may be repeated to define multiple allowed prefixes.

The same network cannot be allowed from multiple peers on the same instance.

Tip: This can be set to `0.0.0.0/0` (IPv4) or `::/0` (IPv6) to allow any network to or from this peer. This can only be used on instances with a single peer. This is useful when routing all traffic across a VPN or when using a dynamic routing protocol such as BGP or OSPF.

Warning: This **does not** add routes to any route table in TNSR, it is internal to WireGuard. Routes for TNSR to direct traffic to WireGuard must be configured separately.

description <desc>

A text description of this peer for reference.

endpoint-address <endpoint-addr>

The remote address the peer uses to send and receive WireGuard traffic.

This may be left undefined if a peer has a dynamic address, so long as that peer has an endpoint defined pointing to this instance. One side of the peer relationship may have an undefined address, but not both.

keep-alive <interval>

Interval, in seconds, at which WireGuard will send keep alive packets to the peer. May be omitted or set to `0` to disable.

port

The UDP port the peer uses to send and receive WireGuard traffic.

This may be left undefined if a peer has a dynamic address or is behind NAT, so long as that peer has a port defined pointing to this instance. One side of the peer relationship may have an undefined port, but not both.

public-key base64 <key>

The public key for this peer. WireGuard will encrypt traffic destined for this peer using this public key. This key, along with the allowed prefixes list, allow WireGuard to internally route traffic to specific peers.

route-table <table-name>

An alternate routing table to use for this peer.

WireGuard Peer Example

```
r1 tnsr(config-wireguard)# peer 1
r1 tnsr(config-wireguard-peer)# description R2
r1 tnsr(config-wireguard-peer)# endpoint-address 203.0.113.25
r1 tnsr(config-wireguard-peer)# port 51820
r1 tnsr(config-wireguard-peer)# allowed-prefix 10.2.111.2/32
r1 tnsr(config-wireguard-peer)# allowed-prefix 10.25.0.0/24
r1 tnsr(config-wireguard-peer)# public-key base64 kIGM3jon1y43ZiCh9YryxNNfda/
→Qh5d1aBHSfKZbYTA=
r1 tnsr(config-wireguard-peer)# exit
r1 tnsr(config-wireguard)# exit
```

15.4 WireGuard Site-to-Site Example

This example demonstrates how to configure a site-to-site WireGuard tunnel between two TNSR peers (R1 and R2) with a static route for LAN-to-LAN connectivity.

See also:

This example uses static routing, but WireGuard can also work with dynamic routing protocols such as BGP and OSPF. OSPF requires special configuration to work with WireGuard, see [WireGuard VPN with OSPF Dynamic Routing](#) for details. BGP works as usual with WireGuard.

15.4.1 Required Information

Generate Keys

Before starting, generate the necessary keys for both peers:

```
r1 $ wg genkey | tee r1.prv.key | wg pubkey > r1.pub.key
r1 $ cat r1.prv.key
IPbehUo58KvYl/qmA+50bAaWeXgB+eP+8QqmDkLV9XA=
r1 $ cat r1.pub.key
K/l2cD3PCCioSnerIe7tOSAqyRQ8dB1LAoeiJqn0uiY=
```

```
r2 $ wg genkey | tee r2.prv.key | wg pubkey > r2.pub.key
r2 $ cat r2.prv.key
EIe79EjECubUeIw+6EKkX0Le0IoFgxM33ydRyr2IJWE=
r2 $ cat r2.pub.key
kIGM3jon1y43ZiCh9YryxNNfda/Qh5d1aBHSfKZbYTA=
```

Settings Summary

The table *Example WireGuard Configuration* contains the *Required Information* and other *configuration settings* which form the WireGuard tunnel for this example.

Table 1: Example WireGuard Configuration

| Item | Value |
|-------------------|--|
| R1 Address | 203.0.113.2 |
| R1 WG Private Key | IPbehUo58KvYl/qmA+50bAaWeXgB+eP+8QqmDkLV9XA= |
| R1 WG Public Key | K/l2cD3PCCioSnerIe7t0SAqyRQ8dB1LAoeiJqn0uiY= |
| R1 Local WG Port | 51820 |
| R1 Local Network | 10.2.0.0/24 |
| R1 WG Interface | 10.2.111.1/30 |
| R2 Address | 203.0.113.25 |
| R2 WG Private Key | EIE79EjECubUeIw+6EKkX0Le0IoFgxM33ydRyr2IJWE= |
| R2 WG Public Key | kIGM3jon1y43ZiCh9YryxNNfda/Qh5d1aBHSfKZbYTA= |
| R2 Local WG Port | 51820 |
| R2 Local Network | 10.25.0.0/24 |
| R2 WG Interface | 10.2.111.2/30 |

15.4.2 Example Configuration

The commands below are performed from the CLI on each TNSR instance (R1 and R2) from within config mode.

R1

First create the WireGuard instance on R1:

```
r1 tnsr(config)# interface wireguard 1
r1 tnsr(config-wireguard)# description WireGuard P2P - R1-R2
r1 tnsr(config-wireguard)# source-address 203.0.113.2
r1 tnsr(config-wireguard)# port 51820
r1 tnsr(config-wireguard)# private-key base64 IPbehUo58KvYl/
↪ qmA+50bAaWeXgB+eP+8QqmDkLV9XA=
```

When adding the peer entry, use values from R2:

```
r1 tnsr(config-wireguard)# peer 1
r1 tnsr(config-wireguard-peer)# description R2
r1 tnsr(config-wireguard-peer)# endpoint-address 203.0.113.25
r1 tnsr(config-wireguard-peer)# port 51820
```

The allowed-prefix list for this peer includes the WireGuard interface address of R2 and the local network at R2:

```
r1 tnsr(config-wireguard-peer)# allowed-prefix 10.2.111.2/32
r1 tnsr(config-wireguard-peer)# allowed-prefix 10.25.0.0/24
```

The public key in the peer is the public key of R2:

```
r1 tnsr(config-wireguard-peer)# public-key base64 kIGM3jonly43ZiCh9YryxNNfda/
↪Qh5d1aBHSfKZbYTA=
r1 tnsr(config-wireguard-peer)# exit
r1 tnsr(config-wireguard)# exit
```

Next configure the corresponding wg1 interface on R1:

```
r1 tnsr(config)# interface wg1
r1 tnsr(config-interface)# enable
r1 tnsr(config-interface)# description WireGuard P2P - R1-R2
r1 tnsr(config-interface)# ip address 10.2.111.1/30
r1 tnsr(config-interface)# exit
```

Then add a tunnel next hop entry for the WireGuard Peer at R2 using the wg1 interface:

```
r1 tnsr(config)# tunnel next-hops wg1
r1 tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.2 ipv4-next-hop-address↪
↪203.0.113.25
r1 tnsr(config-tunnel-nh-if)# exit
```

Note: VPP requires this entry to setup and locate the adjacency on a non-broadcast interface like those used by WireGuard. See [WireGuard Tunnel Next Hop](#).

Now add the static route to the LAN at R2:

```
r1 tnsr(config-route-table)# route 10.25.0.0/24
r1 tnsr(config-rttbl4-next-hop)# next-hop 0 via 10.2.111.2
r1 tnsr(config-rttbl4-next-hop)# exit
r1 tnsr(config-route-table)# exit
```

R2

Moving over to R2, create the WireGuard instance there:

```
r2 tnsr(config)# interface wireguard 1
r2 tnsr(config-wireguard)# description WireGuard P2P - R2-R1
r2 tnsr(config-wireguard)# source-address 203.0.113.25
r2 tnsr(config-wireguard)# port 51820
r2 tnsr(config-wireguard)# private-key base64↪
↪EIE79EjECubUeIw+6EKkX0Le0IoFgxM33ydRyr2IJWE=
```

When creating the peer entry, use values for R1 inside the entry:

```
r2 tnsr(config-wireguard)# peer 1
r2 tnsr(config-wireguard-peer)# description R1
r2 tnsr(config-wireguard-peer)# endpoint-address 203.0.113.2
r2 tnsr(config-wireguard-peer)# port 51820
r2 tnsr(config-wireguard-peer)# allowed-prefix 10.2.111.1/32
r2 tnsr(config-wireguard-peer)# allowed-prefix 10.2.0.0/24
r2 tnsr(config-wireguard-peer)# public-key base64 K/
↪l2cD3PCCioSnerIe7tOSAqyRQ8dB1LAoeiJqn0uiY=
```

(continues on next page)

(continued from previous page)

```
r2 tnsr(config-wireguard-peer)# exit
r2 tnsr(config-wireguard)# exit
```

Now configure the R2 wg1 interface:

```
r2 tnsr(config)# interface wg1
r2 tnsr(config-interface)# enable
r2 tnsr(config-interface)# description WireGuard P2P - R2-R1
r2 tnsr(config-interface)# ip address 10.2.111.2/30
r2 tnsr(config-interface)# exit
```

Then add a tunnel next hop entry for the WireGuard Peer at R1 using the wg1 interface:

```
r2 tnsr(config)# tunnel next-hops wg1
r2 tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.1 ipv4-next-hop-address_
↪ 203.0.113.2
r2 tnsr(config-tunnel-nh-if)# exit
```

Finally, configure the static route to the R1 LAN:

```
r2 tnsr(config-route-table)# route 10.2.0.0/24
r2 tnsr(config-rttbl4-next-hop)# next-hop 0 via 10.2.111.1
r2 tnsr(config-rttbl4-next-hop)# exit
r2 tnsr(config-route-table)# exit
```

15.5 WireGuard Status

To view the status of one or more WireGuard tunnels, use the `show wireguard [<instance>]` command. This command prints the status of all WireGuard tunnels and can optionally limit the output to a specific instance.

15.5.1 WireGuard Status Examples

View all WireGuard tunnels:

```
tnsr# show wireguard

Interface: wg1
  Instance: 1
  Description: WireGuard P2P - R1-R2
  Source address: 203.0.113.2
  Port: 51820
  Public key: K/l2cD3PCCioSnerIe7t0SAqyRQ8dB1LAoeiJqn0uiY=
  Private key: IPbehUo58KvYl/qmA+50bAaWeXgB+eP+8QqmDkLV9XA=
  Peer ID: 1
    Description: R2
    Endpoint IP: 203.0.113.25
    Port: 51820
    Flags: 0x2 ESTABLISHED
    Public key: kIGM3jon1y43ZiCh9YryxNNfda/Qh5d1aBHSfKZbYTA=
```

(continues on next page)

(continued from previous page)

```

Interface: wg2
  Instance: 2
  Description: WireGuard P2P - R1-R3
  Source address: 203.0.113.2
  Port: 51821
  Public key: o5dG8Wy4gsc4bmzF+h4DIO/rNHQHjSjsbw1sM2JghQc=
  Private key: W0y604Y5RemUbsWz7kayXZhZfPhlzobZMu9MxeNBL1k=
  Peer ID: 2
    Description: R3
    Endpoint IP: 203.0.113.17
    Port: 51821
    Flags: 0x2 ESTABLISHED
    Public key: qSXl+mo80nOiIi+La5dkJhV5B1bVJlZqK3rvPlUBb1Q=

```

View a specific WireGuard tunnel:

```

tnsr# show wireguard 2

Interface: wg2
  Instance: 2
  Description: WireGuard P2P - R1-R3
  Source address: 203.0.113.2
  Port: 51821
  Public key: o5dG8Wy4gsc4bmzF+h4DIO/rNHQHjSjsbw1sM2JghQc=
  Private key: W0y604Y5RemUbsWz7kayXZhZfPhlzobZMu9MxeNBL1k=
  Peer ID: 2
    Description: R3
    Endpoint IP: 203.0.113.17
    Port: 51821
    Flags: 0x2 ESTABLISHED
    Public key: qSXl+mo80nOiIi+La5dkJhV5B1bVJlZqK3rvPlUBb1Q=

```

15.6 WireGuard Overview

Warning: Work in progress. Proceed with caution. Content is volatile and subject to change as VPP/TNSR WireGuard behavior is tested and refined.

WireGuard is a modern VPN Layer 3 protocol designed for speed and simplicity. It is designed for high performance and has only a small number of options in its configuration.

WireGuard utilizes a private and public key pair for itself and each peer. Communication with a peer is encrypted using its public key, and a peer decrypts the messages using its private key. Peers never need to know the private key of other peers, they only need their own private key. This makes exchanging keys safe as the public keys are public knowledge and it wouldn't matter if a third party knows these. An administrator can grant someone access to a VPN using the public key, but it's useless without the corresponding private key.

WireGuard behaves unlike other traditional VPN types in several ways:

- It has no concept of connections or sessions
- It has no facilities for user authentication

- It has no facilities for pushing settings or other control messages to peers

A WireGuard tunnel consists of an instance with one or more peer definitions and an interface associated with the WireGuard instance. The instance and its peers contain all of the keys and other configuration data necessary to communicate between each other. The interface defines the address TNSR uses to communicate inside the WireGuard tunnel to the peers.

WireGuard interfaces carry Layer 3 information and above.

TUNNEL NEXT HOPS

Tunnels which utilize non-broadcast interfaces cannot locate peers using functions such as ARP and thus may require additional configuration for the dataplane to locate an adjacency.

Tunnel next hop entries create an association in the dataplane tunnel endpoint information database which defines a relationship between the overlay address (tunnel interface address) and underlay address (outer peer address used to establish the tunnel) of a particular peer.

Note: In current versions of TNSR software the only tunnel type this applies to is *WireGuard*. See *WireGuard Tunnel Next Hop* for information specific to WireGuard.

To define a new tunnel next hop entry use `tunnel next-hop <interface>` from `config` mode. This command enters `config-tunnel-nh-if` mode where the next hop entries for that interface are defined.

16.1 Tunnel Next Hop Configuration

Within `config-tunnel-nh-if` mode the following command is available:

(ipv4-tunnel-destination|ipv6-tunnel-destination) <inner-address>

This command starts a new next hop definition for the address of a peer reachable using the tunnel interface. This is the internal address of the tunnel peer which is typically in a shared subnet with the local address on the tunnel interface.

The command takes one additional parameter:

(ipv4-next-hop-address|ipv6-next-hop-address) <outer-address>

This parameter specifies the external address of the tunnel peer.

16.2 Example

The following example is for a peer interface address of `10.2.111.2` on WireGuard instance 1 where the WireGuard peer external address is `203.0.113.25`:

```
tnsr(config)# tunnel next-hops wg1
tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.2 ipv4-next-hop-address 203.
↪0.113.25
tnsr(config-tunnel-nh-if)# exit
```


16.3 Tunnel Next Hop Status

To view a list of current tunnel next hop definitions, use the `show tunnel next-hops` command:

```
tnsr# show tunnel next-hops
Interface Destination Address Next Hop Address
-----
wg1          10.2.111.2      203.0.113.25
wg2          10.2.112.2      203.0.113.17
```

NETWORK ADDRESS TRANSLATION

Network Address Translation, or NAT, involves changing properties of a packet as it passes through a router. Typically this is done to mask or alter the source or destination to manipulate how such packets are processed by other hosts.

The most common examples are:

- Source NAT, also known as Outbound NAT, which translates the source address and port of a packet to mask its origin.
- Destination NAT, commonly referred to as Static NAT or Port Forwards which translate the destination address and port of a packet to redirect the packet to a different target host behind the router.

TNSR applies NAT based on the configured mode and the presence of directives that set **inside** (internal/local) and **outside** (external/remote) interfaces.

An **inside** interface is a local interface where traffic enters and it will have its source hidden by NAT. An **outside** interface is an interface where that translation will occur as a packet exits TNSR. An example of this is shown in *Outbound NAT*.

Note: NAT is processed *after* ACL rules. For more information, see *ACL and NAT Interaction*.

Note: NAT-specific virtual reassembly parameters have been deprecated in favor of shallow virtual reassembly. See *IP Reassembly*.

17.1 NAT Modes

There are two NAT modes supported by TNSR, configured by the following command:

```
tnsr(config)# nat global-options nat44 endpoint-dependent (true|false)
```

false

Endpoint-independent NAT mode. The default NAT mode. Formerly known as “simple” NAT mode. Holds less information for each session, but only works with outbound NAT and static mappings.

true

Endpoint-dependent NAT mode. Uses more information to track each session, which also enables additional features such as **out-to-in-only** and **twice-nat**.

Note: There must be at least one `inside` and `outside` interface for NAT to function, see [Network Address Translation](#) and [Outbound NAT](#) for more details.

Warning: The mode cannot be changed while NAT is enabled. Disable NAT before running this command ([Enable NAT](#)).

17.1.1 Endpoint-independent NAT

Endpoint-independent NAT is the most basic NAT mode. It tracks sessions in a hash table using four items:

- Source IP address
- Source port
- Protocol
- FIB table index

17.1.2 Endpoint-dependent NAT

Endpoint-dependent NAT mode tracks more information about each connection. As suggested by the name, the key difference is in tracking the destination of the connection:

- Source IP address
- Source port
- Target IP address
- Target port
- Protocol
- FIB table index

Some NAT features require this extra information, notably `out-to-in-only` and `twice-nat`.

17.2 NAT Global Options

The NAT options described here control TNSR NAT behavior independent of interfaces and address pools.

Warning: These options cannot be changed while NAT is enabled. Disable NAT before running these commands ([Enable NAT](#)).

17.2.1 NAT Forwarding

When NAT is active, it will affect traffic to and from services on TNSR, such as IPsec and BGP. When NAT is enabled in this mode, by default TNSR will drop traffic that doesn't match an existing NAT session or static NAT rule. To change this behavior, enable NAT forwarding mode:

```
tnsr(config)# nat global-options nat44 forwarding true
```

If NAT is active and there are **no** services present on TNSR which need to communicate using an interface involved with NAT, then it is more secure and efficient to disable forwarding:

```
tnsr(config)# nat global-options nat44 forwarding false
```

17.2.2 NAT Behavior

nat global-options nat44 out2in-dpo (true|false)

Enables out-to-in DPO. Only compatible with Endpoint-independent NAT mode. When enabled, special routes are added to the FIB for NAT pool addresses and inbound packets on an outside interface do not have NAT applied by default. When TNSR processes inbound packets it performs a route lookup, and if the destination is a NAT pool address the route lookup will find the special NAT route and only then will TNSR apply NAT to the packet.

This allows for increased performance in mixed environments where NAT is not applied to all traffic. It also enables forwarding for routed (non-NAT) packets so that TNSR may have a mix of NAT and routed interfaces attached locally.

nat global-options nat44 static-mapping-only (true|false)

Static mapping only, disables dynamic translation of connections. Not compatible with NAT pools.

17.2.3 NAT Sizing Options

The following commands control the size of various NAT limits:

nat global-options nat44 max-translations-per-thread <n>

Defines the number of NAT translation entries to allow per worker thread. The default value is 128000.

This option is available in Endpoint-dependent and Endpoint-independent NAT mode.

Note: Increasing this value will also increase memory required by the main heap, see [NAT](#).

nat global-options nat44 max-translations-per-user <n>

Defines the number of NAT translation entries to allow for each IP address. The default value is 10240, but it can be set to any integer value between 1-262144. The ideal value depends entirely on the environment and number of sessions per IP address involved in NAT. This includes traffic sourced from TNSR itself address as well, not only internal source IP addresses. This option is only available in Endpoint-independent NAT mode.

nat global-options nat44 max-users-per-thread <n>

Defines the number of unique IP addresses in NAT sessions to allow in each worker thread. Default value is 1024. This option is only available in Endpoint-independent NAT mode.

The dataplane automatically tunes the size of the hashes which control memory available for NAT functions based on the size of `max-translations-per-thread` and `max-users-per-thread`.

17.2.4 NAT Session Timeout Duration

The `nat global-options timeouts (icmp|tcp_established|tcp_transitory|udp) <seconds>` command controls how long NAT sessions in various states will be retained while idle (no packets passing which match the session entry).

Longer session idle timeouts are friendlier to user connections, at the expense of resource consumption required to retain the NAT sessions for long periods.

Tip: Lower timeouts will allow a greater number of sessions over time without an equivalent increase in maximum sessions (and memory, see [NAT](#)). This is because there will be fewer *concurrent* sessions, as shorter sessions are less likely to overlap than longer sessions.

The following timeout values can be changed:

icmp

Idle timeout for ICMP sessions (e.g. Echo/ping). The default value is **60** seconds.

tcp_established

Idle timeout for established TCP connections. Established connections should rarely be forced down in most use cases, so a long timeout is best for this value. The default value is **7440** seconds (2 hours, 4 minutes). It is common to see this set as high as **86400** (24 hours) in deployments with long-lived idle connections.

tcp_transitory

Idle timeout for TCP connections which are not fully established (being setup or torn down). The default value is **240** seconds (4 minutes) which is typically sufficient.

udp

Idle timeout for UDP sessions. Since UDP is technically stateless and has no formal setup/tear-down for sessions, there is no way for TNSR to determine if a UDP “connection” is established or finished. The default value is **300** seconds (5 minutes) which, combined with client and server keep-alives, is typically sufficient.

A longer idle timeout may be required in certain cases, such as for VoIP connections passing through which expect to reuse specific source ports.

In deployments with many short-lived UDP connections, such as DNS queries, lowering the timeout will help manage session usage/turnover more efficiently.

The `show nat config` command output includes the current timeout values.

17.2.5 Enable NAT

After setting the mode and other global options, NAT must be enabled before the CLI will accept non-global NAT configuration commands.

To enable NAT, run the following command:

```
tnsr(config)# nat global-options nat44 enabled true
```

When NAT is disabled, any NAT configuration options present will not be active in the dataplane. This includes NAT interface assignments, pool contents, and static mappings, among others. These settings will be retained in the configuration database on TNSR, and will be restored if NAT is enabled in the future.

17.3 NAT Pool Addresses

Before TNSR can perform any type of NAT, an **inside** and **outside** interface must be set and at least one out-side/external address (e.g. WAN-side) must be listed in a NAT pool. These pools are added from configure mode (*Configuration Mode*) in the TNSR CLI (*Entering the TNSR CLI*).

Note: TNSR will respond to ARP and ICMP echo requests (ping) for addresses in NAT pools, even when they are not configured on interfaces. Ensure that NAT pool addresses are not used by other hosts on the network.

Warning: These options cannot be changed while NAT is disabled. Enable NAT before running these commands (*Enable NAT*).

17.3.1 Single NAT Pool Address

For a single external address, define a NAT pool like so:

```
tnsr(config)# nat pool addresses 203.0.113.2
```

Note: This can be an IP address configured directly on an interface, but that is not a requirement.

A single pool address can also be configured with range style syntax:

```
tnsr(config)# nat pool addresses 203.0.113.2 - 203.0.113.2
```

17.3.2 Multiple NAT Pool Addresses

For multiple addresses, there are two methods: Using a range or repeating the command with single addresses.

First, using a range:

```
tnsr(config)# nat pool addresses 203.0.113.2 - 203.0.113.6
```

Note: NAT pools are defined as single addresses or contiguous ranges. It is not possible to remove or exclude addresses from within a pool configured as a range; The entire range must be removed by using the starting address. To exclude addresses in the middle of a range from use in NAT pools, use multiple discrete pools with ranges that do not include the undesirable addresses.

The range command can be repeated to define multiple ranges:

```
tnsr(config)# nat pool addresses 203.0.113.2 - 203.0.113.3  
tnsr(config)# nat pool addresses 203.0.113.5 - 203.0.113.6
```

Repetition of the single entry form for each pool address also results in multiple pool entries:

```
tnsr(config)# nat pool addresses 203.0.113.2
tnsr(config)# nat pool addresses 203.0.113.3
tnsr(config)# nat pool addresses 203.0.113.5
tnsr(config)# nat pool addresses 203.0.113.6
```

17.3.3 NAT Pool Interfaces

TNSR also supports using an interface to automatically determine pool addresses:

```
tnsr(config)# nat pool interface GigabitEthernet0/14/1
```

For *Outbound NAT* this is typically the interface set as `ip nat outside`.

17.3.4 NAT Pool Route Table (VRF)

NAT pools can optionally take an argument which defines a specific route table (VRF, *Virtual Routing and Forwarding*) in which the NAT pool will operate. For example, this allows TNSR to apply NAT pools selectively to traffic depending on the VRF configured on specific local interfaces.

Note: This is only possible when specifying a static address range for a pool, not for an interface name or single address style. A single address can be passed as both the lower and upper range boundary to apply a VRF to a single NAT pool address.

```
tnsr(config)# nat pool addresses 203.0.113.2 - 203.0.113.3 route-table myroutes
tnsr(config)# nat pool addresses 203.0.113.5 - 203.0.113.5 route-table myroutes
```

17.4 Outbound NAT

Outbound NAT, sometimes referred to as Source NAT, Overload NAT or Port Address Translation (PAT), changes the source address and port of packets exiting a given interface. This is most commonly performed in order to hide the origin of a packet, allowing multiple IPv4 hosts inside a network to share one, or a limited number of, external or outside addresses on a router.

Warning: NAT must be enabled before these options can be configured. See *Enable NAT* for details.

In TNSR, this type of NAT is configured by marking the LAN or internal interface as `inside` and the WAN or external interface as `outside`, for example:

```
tnsr(config)# nat pool addresses 203.0.113.2
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# ip nat outside
tnsr(config-interface)# exit
tnsr(config)# interface GigabitEthernet0/14/2
tnsr(config-interface)# ip nat inside
tnsr(config-interface)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config)# nat global-options nat44 forwarding true
tnsr(config)#
```

Traffic originating on the inside interface and exiting the outside interface will have its source address changed to match that of the outside interface.

Warning: A usable address on the outside NAT interface **must** exist as a part of a NAT pool (*NAT Pool Addresses*) or connectivity from the inside interface will not function with NAT configured. Use either an address pool as shown above, or `nat pool interface <name>` where <name> is the same interface that contains `ip nat outside`.

The `nat pool` command may be repeated multiple times to specify additional pool addresses, ranges, and interfaces. NAT will make use of all available addresses configured in pools:

```
tnsr(config)# nat pool addresses 203.0.113.3
tnsr(config)# nat pool addresses 203.0.113.4
```

See also:

For more information on the behavior of NAT pools, see *NAT Pool Addresses*.

Warning: When activating `ip nat outside`, services on TNSR may fail to accept or initiate traffic on that interface depending on the NAT mode. For services on TNSR to function in combination with `ip nat outside`, endpoint-dependent NAT mode must be enabled.

The following commands set TNSR to endpoint-dependent NAT mode:

```
tnsr(config)# nat global-options nat44 enabled false
tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr(config)# nat global-options nat44 enabled true
```

Additionally, NAT forwarding must be enabled for this traffic to be accepted by TNSR. See *NAT Forwarding* for details.

17.5 Static NAT

Static NAT entries alter traffic, redirecting it to a static host on an internal network, or mapping it to a static address on the way out:

```
tnsr(config)# nat pool addresses <external address>
tnsr(config)# nat static mapping [(icmp|tcp|udp|any)]
                        local <local address> [(any|<local port>)]
                        external (<external address>|<external interface>) [(any|<external
↵port>)]
                        [twice-nat] [out-to-in-only] [route-table <rt-tbl-name>]
```

There are two common use cases for static NAT in practice: Port Forwarding and 1:1 NAT.

Warning: Remember to add the address of the outside interface as a part of a NAT pool (*NAT Pool Addresses*) or the static NAT entry will fail to commit.

Warning: The out-to-in-only and twice-nat features require endpoint-dependent NAT mode. In TNSR 18.11 and later, this is the default mode.

The following commands set TNSR to endpoint-dependent NAT mode:

```
tnsr(config)# nat global-options nat44 enabled false
tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr(config)# nat global-options nat44 enabled true
```

The protocol, and port numbers for protocols which use ports, may be omitted. When omitted, the value defaults to any.

17.5.1 Port Forwards

Port forwards redirect a port on an external NAT pool address to a port on a local host. A port forward is accomplished by specifying ports in the static NAT command:

```
tnsr(config)# nat pool addresses 203.0.113.2
tnsr(config)# nat static mapping tcp local 10.2.0.5 22 external 203.0.113.2 222
```

In the above example, a TCP connection to port 222 on 203.0.113.2 will be forwarded to port 22 on 10.2.0.5. The source address remains the same.

Note: To forward all TCP or UDP ports, use the keyword **any** instead of a specific port number.

17.5.2 1:1 NAT

1:1 NAT, also called One-to-One NAT or in some cases “Network Address Translation”, maps all protocols and ports of an external address to an internal address. This mapping works for inbound and outbound packets. To create a 1:1 mapping, make a static NAT entry which does not specify any protocol or ports:

```
tnsr(config)# nat pool addresses 203.0.113.3
tnsr(config)# nat static mapping local 10.2.0.5 external 203.0.113.3
```

Note: The protocol may also be specified as **any** in this case.

17.5.3 Twice NAT

Twice NAT changes both the source and destination address of inbound connection packets. This works similar to a static NAT port forward, but requires an additional NAT address specification.

First, add the internal address for source translation:

```
tnsr(config)# nat pool addresses 10.2.0.2 twice-nat
```

Next, add the external address to which the client originally connects:

```
tnsr(config)# nat pool addresses 203.0.113.2
```

Finally, add the static mapping which sets up the destination translation:

```
tnsr(config)# nat static mapping tcp local 10.2.0.5 22 external 203.0.113.2 222 twice-nat
```

In the above example, a TCP connection to port 222 on 203.0.113.2 will be forwarded to port 22 on 10.2.0.5. When the packet leaves TNSR, the source is translated so the connection appears to originate from 10.2.0.2 using a random source port.

Warning: This feature requires endpoint-dependent NAT mode. In TNSR 18.11 and later, this is the default mode.

The following commands set TNSR to endpoint-dependent NAT mode:

```
tnsr(config)# nat global-options nat44 enabled false
tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr(config)# nat global-options nat44 enabled true
```

17.6 NAT Status

TNSR offers several ways to view the active NAT configuration, rules, and sessions. These start with `nat show`, and are all available in `config` and `master` mode.

17.6.1 View NAT Configuration

To view the current NAT configuration parameters (not rules), use `show nat config`:

```
tnsr# show nat config

NAT Configuration Parameters
-----
endpoint-dependent true
translation hash buckets 16384
translation hash memory 12189696
user hash buckets 1024
user hash memory 761856
max translations per user 10240
max translations per thread 10240
max users per thread 1024
outside Route Table ipv4-VRF:0
inside Route Table ipv4-VRF:0
dynamic mapping enabled
forwarding is enabled
out2in-dpo is disabled
UDP timeout 300s
TCP established connections timeout 7440s
TCP transitory connections timeout 240s
ICMP timeout 60s
```

17.6.2 View Static Mappings

To view currently configured static NAT mappings, use `show nat static-mappings`:

```
tnsr# show nat static-mappings
```

Static Mappings

| Proto | Local IP | Port | External IP | Port | Interface | Twice NAT | Out to In | Route Table |
|-------|----------|------|-------------|------|-----------|-----------|-----------|-------------|
| tcp | 10.2.0.5 | 22 | 203.0.113.2 | 222 | | | | ipv4-VRF:0 |

17.6.3 View Dynamic Configuration

To view the IP addresses or interfaces currently assigned for use by NAT, use `show nat dynamic addresses` or `show nat dynamic interfaces`, depending on the TNSR NAT configuration:

```
tnsr# show nat dynamic addresses
```

| Pool | Addresses | Route Table | Twice NAT |
|------|-------------|-------------|-----------|
| | 203.0.113.2 | | |

17.6.4 View Interfaces

To view the interfaces which are currently marked as inside and outside for NAT purposes, use `show nat interface-sides`:

```
tnsr# show nat interface-sides
```

| Interfaces | Side |
|-----------------------|---------|
| GigabitEthernet0/14/0 | outside |
| GigabitEthernet3/0/0 | inside |

17.6.5 View NAT Sessions

To view a summary of outgoing NAT sessions by source address, use `show nat sessions`:

```
tnsr# show nat sessions
```

NAT sessions

| IP address | Static | Dynamic | Route Table |
|-------------|--------|---------|-------------|
| 10.2.0.1 | 0 | 4 | ipv4-VRF:0 |
| 203.0.113.2 | 0 | 1 | ipv4-VRF:0 |

Note: In endpoint-dependent NAT mode this command only outputs data for active NAT sessions. In endpoint-independent mode this command outputs data for both active and expired sessions.

To see more detail for each specific session, add `verbose` to the previous command, which becomes `show nat sessions verbose`:

```
tnsr# show nat sessions verbose
```

```
NAT sessions detail
```

```
-----
```

| Proto | Inside/Outside/Ext | Type | Route Table | Last used | Bytes/pkts |
|-------|--------------------|---------|-------------|-----------|------------|
| udp | 10.2.0.1:123 | dynamic | ipv4-VRF:0 | 143 | 498 |
| | 203.0.113.2:16253 | | | | 6 |
| | 52.6.160.3:123 | | | | |
| udp | 10.2.0.1:123 | dynamic | ipv4-VRF:0 | 143 | 498 |
| | 203.0.113.2:18995 | | | | 6 |
| | 184.105.182.7:123 | | | | |
| udp | 10.2.0.1:123 | dynamic | ipv4-VRF:0 | 145 | 498 |
| | 203.0.113.2:53893 | | | | 6 |
| | 69.36.182.57:123 | | | | |
| udp | 10.2.0.1:123 | dynamic | ipv4-VRF:0 | 207 | 498 |
| | 203.0.113.2:44109 | | | | 6 |
| | 198.50.238.163:123 | | | | |

17.7 NAT Examples

The examples in this section describe and demonstrate use cases and packet flows for typical scenarios involving NAT.

17.7.1 AWS NAT Examples

When using TNSR with AWS, it is relatively easy to unintentionally create an asymmetric routing situation. AWS knows about the local networks and will happily egress traffic with NAT for them, when other networking setups would otherwise drop or fail to hand off the traffic.

The examples in this section covers what would happen with a TNSR setup in AWS with two instances: An internal LAN instance with a local “client” system making an outbound request, and an external WAN instance that is intended to handle public-facing traffic. TNSR sits between the WAN and LAN instance to route traffic. In AWS, the VPC routing table is configured such that the LAN instance uses TNSR for its default gateway. The expected flow is that traffic flows from clients, through TNSR, to the Internet and back the same path.

This table lists the networks and addresses used by these examples.

| Item | Value |
|---------------|--|
| AWS Networks | 192.0.2.0/24 (LAN), 198.18.5.0/24 (WAN), 203.0.113.0/24 (External) |
| AWS Gateways | 192.0.2.1 (LAN), 198.18.5.1 (WAN), 203.0.113.1 (External) |
| TNSR LAN | 192.0.2.2/24 |
| TNSR WAN | 198.18.5.2 |
| TNSR GW | 198.18.5.1 (AWS Gateway) |
| LAN Client | 192.0.2.5/24 |
| LAN Client GW | 192.0.2.2 (TNSR LAN) |
| Server | 198.51.100.19/24 |
| Server GW | 198.51.100.1 |

17.7.2 AWS Example without NAT

In this example, TNSR is not configured to perform NAT. This example steps through each portion of a packet and its reply, and then discusses the problems at the end.

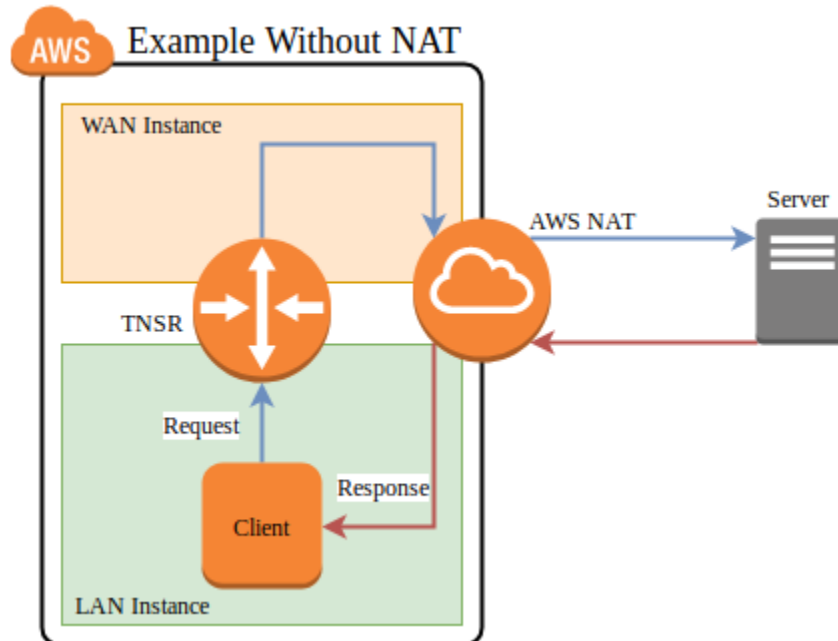


Fig. 1: AWS example packet flow without NAT

First, the client initiates a connection using a packet which arrives on the TNSR LAN interface

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|-----------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | 192.0.2.2 |

TNSR performs a FIB lookup. The destination IP address is not within the subnets configured on the TNSR instance interfaces, so it matches the default route

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|---------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | Default |

TNSR forwards the packet out its WAN interface to its default gateway on the WAN. TNSR is not configured for NAT, thus it does not perform any translation.

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|------------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | 198.18.5.1 |

The packet reaches the AWS internet gateway connected to the VPC. Its source IP address is still the private IP address of the LAN instance.

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|------------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | 198.18.5.1 |

The AWS internet gateway performs NAT. It recognizes the source IP address as belonging to the LAN instance and rewrites it to the public IP address of the LAN instance.

| Proto | Source | Destination | Via |
|-------|--------------------|-------------------|---------|
| TCP | 203.0.113.50:40250 | 198.51.100.19:443 | Default |

The AWS internet gateway forwards the packet to the internet.

| Proto | Source | Destination | Via |
|-------|--------------------|-------------------|-------------|
| TCP | 203.0.113.50:40250 | 198.51.100.19:443 | 203.0.113.1 |

The destination host sends a reply to the public IP address of the LAN instance. It arrives at the AWS internet gateway.

| Proto | Source | Destination | Via |
|-------|-------------------|--------------------|--------------|
| TCP | 198.51.100.19:443 | 203.0.113.50:40250 | 198.51.100.1 |

The AWS internet gateway performs NAT. It recognizes the destination IP address as belonging to LAN instance and rewrites it to the private IP address of the LAN instance.

| Proto | Source | Destination | Via |
|-------|-------------------|----------------|---------------|
| TCP | 198.51.100.19:443 | 192.0.2.5:1025 | Direct L2 LAN |

The AWS internet gateway knows how to reach the private IP address of the LAN instance directly, so it forwards the reply packet directly to the LAN instance, skipping the TNSR instance.

| Proto | Source | Destination | Via |
|-------|-------------------|----------------|---------------|
| TCP | 198.51.100.19:443 | 192.0.2.5:1025 | Direct L2 LAN |

The packet arrives at the client.

The return path skipped TNSR, so TNSR is only seeing half the packets for the connection. At best this means the asymmetric routing will bypass any filtering or inspection of the replies (IDS/IPS), and at worst it could mean subsequent packets would be dropped instead of passing through TNSR.

17.7.3 AWS Example with NAT

In this example, TNSR has NAT configured such that its LAN is defined as an *inside* interface and its WAN is an *outside* interface. See [Outbound NAT](#) for details. Packets leaving the WAN will be translated such that they leave with a source address set to the TNSR WAN interface IP address.

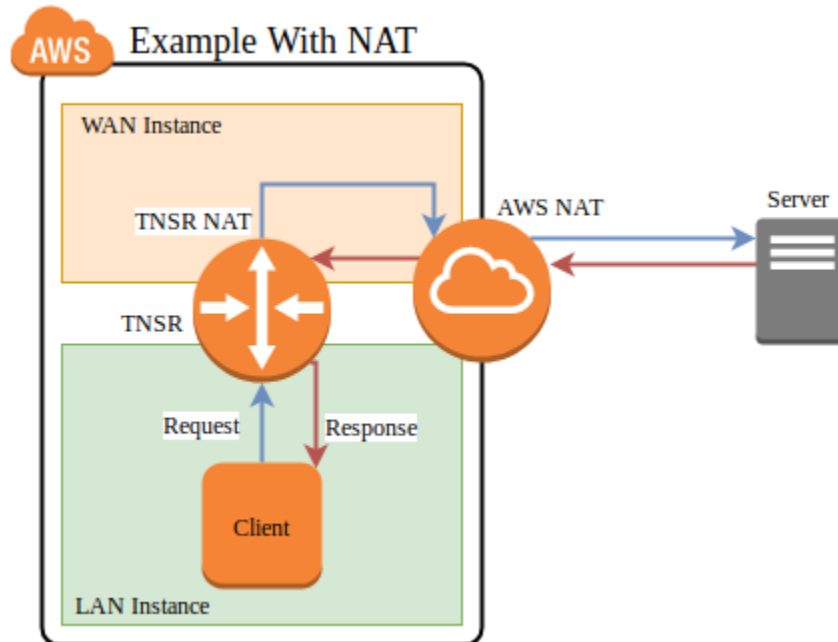


Fig. 2: AWS example packet flow with NAT

First, the client initiates a connection using a packet which arrives on the TNSR LAN interface

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|-----------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | 192.0.2.2 |

TNSR performs a FIB lookup. The destination IP address is not within the subnets configured on the TNSR instance interfaces, so it matches the default route

| Proto | Source | Destination | Via |
|-------|----------------|-------------------|---------|
| TCP | 192.0.2.5:1025 | 198.51.100.19:443 | Default |

TNSR applies NAT and forwards the packet out its WAN interface to its default gateway on the WAN subnet.

| Proto | Source | Destination | Via |
|-------|------------------|-------------------|------------|
| TCP | 198.18.5.2:34567 | 198.51.100.19:443 | 198.18.5.1 |

The packet reaches the AWS internet gateway connected to the VPC. Its source IP address is the private IP address of the TNSR WAN instance.

| Proto | Source | Destination | Via |
|-------|------------------|-------------------|------------|
| TCP | 198.18.5.2:34567 | 198.51.100.19:443 | 198.18.5.1 |

The AWS internet gateway performs NAT. It recognizes the source IP address as belonging to the WAN instance and rewrites it to the public IP address of the WAN instance.

| Proto | Source | Destination | Via |
|-------|--------------------|-------------------|---------|
| TCP | 203.0.113.50:40250 | 198.51.100.19:443 | Default |

The AWS internet gateway forwards the packet to the internet.

| Proto | Source | Destination | Via |
|-------|--------------------|-------------------|-------------|
| TCP | 203.0.113.50:40250 | 198.51.100.19:443 | 203.0.113.1 |

The destination host sends a reply to the public IP address of the WAN instance. It arrives at the AWS internet gateway.

| Proto | Source | Destination | Via |
|-------|-------------------|--------------------|--------------|
| TCP | 198.51.100.19:443 | 203.0.113.50:40250 | 198.51.100.1 |

The AWS internet gateway performs NAT. It recognizes the destination IP address as belonging to WAN instance and rewrites it to the private IP address of the WAN instance. The AWS internet gateway knows how to reach the private IP address of the WAN instance directly, so it forwards the reply packet directly to the WAN instance.

| Proto | Source | Destination | Via |
|-------|-------------------|------------------|---------------|
| TCP | 198.51.100.19:443 | 198.18.5.2:34567 | Direct L2 WAN |

The packet arrives at the TNSR WAN, which performs NAT. It recognizes the source and destination as matching an existing NAT state belonging to the LAN client and rewrites the destination address to the LAN client. TNSR knows how to reach the client LAN IP address directly, so it forwards the reply packet.

| Proto | Source | Destination | Via |
|-------|-------------------|----------------|---------------|
| TCP | 198.51.100.19:443 | 192.0.2.5:1025 | Direct L2 LAN |

The packet arrives back at the client.

In this case, the NAT performed on TNSR ensured that the AWS gateway delivered the reply back to TNSR instead of handing it off directly. This allowed the packet and its reply to use the same path outbound and inbound.

MAP (MAPPING OF ADDRESS AND PORT)

MAP is short for Mapping of Address and Port. It is a carrier-grade IPv6 transition mechanism capable of efficiently transporting high volumes of IPv4 traffic across IPv6 networks.

There are two MAP implementations in TNSR Enterprise: MAP-T which uses translation and MAP-E which uses encapsulation.

With MAP, IPv4 requests are forwarded from an end user Customer Edge (CE) device through an IPv6 Border Relay (BR) router which processes and forwards the requests to IPv4 destinations. Customer IPv6 requests can proceed directly to IPv6 destinations without going through the BR, which lowers the burden on the BR.

MAP is stateless, thus capable of handling large scale traffic volume without additional overhead for tracking individual connections. Each CE device receives a public IPv4 address but may only use a specific port range on that address. In this way, multiple users may share a public address without an additional layer of NAT. Since this relationship is predetermined, the ports are also available bidirectionally, which is not possible with other solutions such as Carrier-Grade NAT/NAT444.

MAP-T and MAP-E require port information to operate, thus fragments must be reassembled at the BR before forwarding. This is due to the fact that protocol and port information are only present in the first packet. Intelligent caching & forwarding may be employed for handling fragments.

TNSR can currently act as a BR, providing service to CE clients.

18.1 MAP Configuration

MAP configurations consist of MAP domains, MAP rules, and interface configuration.

18.1.1 MAP Domains

A MAP domain encompasses a set of addresses, translation parameters, and MAP rules. Groups of CE devices belong to specific MAP domains.

A MAP domain is created in config mode using the `nat nat64 map <domain name>` command from within config mode. That command enters `config-map` mode.

This mode, `config-map`, contains a number of MAP options specific to a MAP domain:

description

A short text description noting the name or purpose of this MAP domain.

port-set <length|offset>

A port set is, as the name implies, a set of ports. This is typically divided up into multiple sets of ports, the exact size and ranges of which are calculated using the port set length and offset, discussed next. With MAP, users are overloaded onto a single IP address, with different port sets on a single

IP address being allocated to multiple users. In this way, users can share individual IP addresses but only have access to specific ranges of ports.

port-set length <psid-length>

Determines the number of port sets to allocate inside the available 16-bit port range (1-65536). A larger port set length allows for more users to share an address, but allocates them each a smaller number of ports. For example, a port set length of 8 uses 8 bits to define the port set, leaving the remaining 8 bits for use by each customer, or 256 ports each.

port-set offset <psid-offset>

Determines the position of the port set identifier inside the available bits which represent the port. An offset of 0 means the identifier is first, and the ports per user will be contiguous. Placing the offset in the middle of the available space will allow users to utilize multiple ranges that are not contiguous, but each user will have slightly less ports available. For example, with a port set length of 8, but an offset of 2, each user can utilize only 192 ports instead of 256, since it is split into three ranges of 64 ports each. The offset cannot be larger than the port set length subtracted from the total available bits (16).

There are minor security benefits when using multiple non-contiguous port ranges since it is more difficult for an attacker to guess which ports belong to a given customer, but the loss of port capacity may outweigh this benefit in most environments.

embedded-address bit-length <ea-width>

The Embedded Address Bits value is the sum of the bits needed for the IPv4 prefix and the port set length. For example, if the IPv4 prefix is a /24, that requires 8 bits to embed and allows 256 addresses for users. A port set length of 8 allows for 256 port sets. With a port set offset of 0, this yields a maximum of 65,536 users sharing 256 IPv4 addresses, each of which can use 256 ports.

Note: To utilize MAP rules, this value must be 0.

ipv4 prefix <ip4-prefix>

The IPv4 Prefix is available pool of IPv4 addresses which can be utilized by MAP clients. The size of this prefix must be represented in the Embedded Address Bits. For example, a /24 prefix network requires 8 bits to uniquely identify an address.

ipv6 prefix <ip6-prefix>

The IPv6 prefix contains the range of possible addresses assigned to clients. The end-user network must be at least a 64 prefix, leaving 64 bits to represent both this prefix and the embedded address bits. The smallest possible IPv6 prefix will be 128 bits less the sum of the end user network and embedded address bits. For example, with an embedded address length of 16, 48 bits remain for the IPv6 prefix. Shorter prefixes (e.g. 44) allow for additional IPv6 subnets to be assigned to clients.

ipv6 source <ip6-src>

The IPv6 source address on the router used as the MAP domain BR address and Tunnel source. This address should exist on the interface used for mapping. For MAP-T, this must have a prefix length of either /64 or /96. For MAP-E, this is a single address (/128) and not a prefix.

mtu <mtu-val>

The Maximum Transmission Unit (MTU) is the largest packet which can traverse the link without fragmentation. This must be set appropriately due to the importance of MAP fragment handling, as required information to calculate targets is only in the first packet and not additional fragments.

18.1.2 MAP Rules

MAP rules exist inside a MAP domain and are configured from within `config-map` mode. MAP rules map specific port sets to specific MAP CE end user addresses. These are 1:1 manual mappings and take the place of automatic calculation, and as such to use MAP rules, the `embedded-address bit-length` must be 0.

A map rule takes the following form:

```
rule port-set <psid> ipv6-destination <ip6-destination>
```

The components of a rule are:

port-set <psid>

The port set ID (PSID) to match for this rule.

ipv6-destination <ip6-destination>

The MAP CE IPv6 address to associate with this specific port set ID.

18.1.3 MAP Interface Configuration

TNSR must be told which interface is used with MAP, and how that interface will operate.

Within `config-interface` mode (*Configure Interfaces*), there are two possible settings for MAP:

map <enable|disable>

Enables or disables MAP for this interface.

map translate

When present and MAP is enabled, the interface operates in translate mode (MAP-T). When not set, encapsulation is used instead (MAP-E).

18.1.4 View MAP Configuration

The MAP configuration can be viewed with the `show map [<map-domain-name>]` command. Without a given domain name, information is printed for all MAP domains, plus the MAP parameters.

```
tnsr# show map cpoc
```

| Name | IP4 Prefix | IP6 Prefix | IP6 Src Pref | EA Bits | PSID Off | PSID Len | MTU |
|------|----------------|---------------|--------------------------|---------|----------|----------|------|
| cpoc | 192.168.1.0/24 | 2001:db8::/32 | 1234:5678:90ab:cdef::/64 | 16 | 6 | 4 | 1280 |

```
tnsr# show map
```

```
MAP Parameters
```

```
-----
```

```
Fragment: outer
```

```
Fragment ignore-df: false
```

```
ICMP source address: 0.0.0.0
```

```
ICMP6 unreachable msgs: disabled
```

```
Pre-resolve IPv4 next hop: 0.0.0.0
```

```
Pre-resolve IPv6 next hop: ::
```

```
Security check enabled: true
```

```
Security check fragments enabled: false
```

```
Traffic-class copy: enabled
```

(continues on next page)

(continued from previous page)

Traffic-class value: 0

| Name | IP4 Prefix | IP6 Prefix | IP6 Src Pref | EA Bits | PSID Off | PSID Len | MTU |
|------|----------------|---------------|--------------------------|---------|----------|----------|------|
| cpoc | 192.168.1.0/24 | 2001:db8::/32 | 1234:5678:90ab:cdef::/64 | 16 | 6 | 4 | 1280 |

18.2 MAP Parameters

MAP Parameters control the behavior of MAP-T and MAP-E. These parameters are configured by the `nat nat64 map parameters` command from within `config` mode, which enters `config-map-param` mode where the individual values are set.

From within `config-map-param` mode, the following commands are available:

fragment ignore-df

Allows TNSR to perform IPv4 fragmentation even when packets contain the do-not-fragment (DF) bit. This improves performance by moving the burden of fragmentation to the endpoint rather than the MAP relay.

fragment (inner|outer)

Controls whether TNSR will fragment the inner (encapsulated or translated) packets or the outer (tunnel) packets.

icmp source-address <ipv4-address>

Sets the IPv4 address used by TNSR to send relayed ICMP error messages.

icmp6 unreachable-msgs (enable|disable)

When enabled, TNSR will generate ICMPv6 unreachable messages when a packet fails to match a MAP domain or fails a security check.

pre-resolve (ipv4|ipv6) next-hop <ip46-address>

Manually configures the next hop for IPv4 or IPv6 routing of MAP traffic, which bypasses a routing table lookup. This increases performance, but means that the next hop cannot be determined dynamically or by routing protocol.

security-check (enable|disable)

Enables or disables validation of decapsulated IPv4 addresses against the external IPv6 address on single packets or the first fragment of a packet. Disabling the check increases performance but potentially allows IPv4 address spoofing.

security-check fragments (enable|disable)

Extends the previous security check to all fragments instead of only inspecting the first packet.

tcp mss <mss-value>

Sets the MSS value for MAP traffic, typically the MTU less 40 bytes.

traffic-class tc <tc-val>

Sets the Class/TOS field of outer IPv6 packets to the specified value.

traffic-class copy (enable|disable)

When enabled, copies the class/TOS field from the inner IPv4 packet header to the outer IPv6 header. This is enabled by default, but disabling can slightly improve performance.

Note: MAP-specific virtual reassembly parameters have been deprecated in favor of shallow virtual reassembly. See [IP Reassembly](#).

18.2.1 View MAP Parameters

The current value of MAP parameters can be displayed by the `show map` command:

```
tnsr# show map
MAP Parameters
-----
Fragment: outer
Fragment ignore-df: false
ICMP source address: 0.0.0.0
ICMP6 unreachable msgs: disabled
Pre-resolve IPv4 next hop: 0.0.0.0
Pre-resolve IPv6 next hop: ::
Security check enabled: true
Security check fragments enabled: false
Traffic-class copy: enabled
Traffic-class value: 0

Name IP4 Prefix      IP6 Prefix      IP6 Src Pref      EA Bits PSID Off PSID Len MTU
-----
cpoc 192.168.1.0/24  2001:db8::/32  1234:5678:90ab:cdef::/64      16      6      4 1280
```

18.3 MAP Example

18.3.1 Environment

| MAP Border Relay | |
|-----------------------|--------------------------|
| Item | Value |
| MAP Domain Name | cpoc |
| IPv6 Prefix | 2001:db8::/32 |
| IPv6 Source Prefix | 1234:5678:90ab:cdef::/64 |
| IPv4 Prefix | 192.168.1.0/24 |
| Port Set Length | 8 |
| Port Set Offset | 0 |
| Embedded Address Bits | 16 |
| MTU | 1300 |
| Interface | GigabitEthernet0/14/0 |
| IPv6 Address | fd01:2::1/64 |
| IPv4 Address | 203.0.113.2/24 |

18.3.2 TNSR Border Relay Configuration

This shows an example Border Relay (BR) configuration in TNSR to provide service to MAP-T Customer Edge (CE) clients. This example assumes some configuration details are already in place, such as the IPv4 prefix already being routed to the BR from upstream, and default routes configured in TNSR for upstream gateways.

First, configure the interface connected to the upstream network. There could be separate interfaces for reaching the Internet and for reaching the CE network, but this example uses a single interface.

```
tnsr(config)# interface GigabitEthernet0/14/0
tnsr(config-interface)# ip address 203.0.113.2/24
tnsr(config-interface)# ipv6 address fd01:2::1/64
tnsr(config-interface)# exit
```

Next, configure the MAP domain:

```
tnsr(config)# nat nat64 map cpoc
tnsr(config-map)# ipv4 prefix 192.168.1.0/24
tnsr(config-map)# ipv6 prefix 2001:db8::/32
tnsr(config-map)# ipv6 source 1234:5678:90ab:cdef::/64
tnsr(config-map)# embedded-address bit-length 16
tnsr(config-map)# port-set length 4
tnsr(config-map)# port-set offset 6
tnsr(config-map)# mtu 1280
tnsr(config-map)# exit
```

Then add a static route:

```
tnsr(config)# route table ipv6-VRF:0
tnsr(config-route-table)# route 2001:db8::/32
tnsr(config-rttbl6-next-hop)# next-hop 0 via fd01:2::2
tnsr(config-rttbl6-next-hop)# exit
tnsr(config-route-table)# exit
```

Lastly, enable MAP and MAP-T translation for the interface:

```
tnsr(config)# interface GigabitEthernet0/14/0
tnsr(config-interface)# map translate
tnsr(config-interface)# map enable
tnsr(config-interface)# exit
```

See also:

For information on configuring other operating systems to act as a CE, consult their documentation or check the links in [Additional MAP Reading and Tools](#) for additional information.

18.4 MAP Types

18.4.1 MAP-T (Translation)

With MAP-T, translations are made using mapping rules that can calculate addresses and ports based on information embedded in an IPv6 address, along with several known parameters.

MAP-T clients determine where to send translated IPv4 traffic using the Default Mapping Rule (DMR) IPv6 /64 prefix.

18.4.2 MAP-E (Encapsulation)

MAP-E is similar to MAP-T, but instead of translating IPv4 traffic and encoding information in the address, the IPv4 requests are encapsulated in IPv6 between the CE and BR as described in [RFC 2473](#).

MAP-E clients send all IPv4 encapsulated traffic to the BR IPv6 address.

18.4.3 Additional MAP Reading and Tools

MAP is a complex topic and much of it is outside the scope of TNSR documentation. There are a number of additional resources that have information on MAP along with examples for other operating systems and example environments.

The following links are good starting points for MAP information.

- CableLabs MAP Technical Report [CL-TR-MAP-V01-160630](#)
- Charter MAP-T deployment presentation [MAP-T NANOG Video](#) / [MAP-T NANOG Slides](#)
- Cisco [MAP Simulation Tool](#)
- MAP-E [RFC 7597](#)
- MAP-T [RFC 7599](#)

DYNAMIC HOST CONFIGURATION PROTOCOL

The Dynamic Host Configuration Protocol (DHCP) service on TNSR provides automatic addressing to clients on an interface. Typically, this service uses a local, internal interface such as one connected to a LAN or DMZ.

19.1 DHCP Configuration

The main IPv4 DHCP configuration mode, entered with `dhcp4 server`, defines global options for IPv4 DHCP that affect the general behavior of DHCP as well as options that cover all subnets and pools.

To enter IPv4 DHCP configuration mode, enter:

```
tnsr# configure
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)#
```

From this mode, there are a variety of possibilities, including:

subnet

Subnet configuration, see *Subnet Configuration*.

description

Description of the DHCP server

option

A DHCP Option declaration, see *DHCP Options*.

decline-probation-period <n>

Decline lease probation period, in seconds.

echo-client-id <boolean>

Controls whether or not the DHCP server sends the client-id back to the client in its responses.

interface listen <if-name>

The interface upon which the DHCP daemon will listen. **This is required.**

interface socket (raw|udp)

Controls whether the DHCP daemon uses raw or UDP sockets.

lease filename <path>

Lease database file

lease lfc-interval <n>

Lease file cleanup frequency, in seconds.

This value defaults to 3600 which cleans up old lease data at one hour (3600 second) intervals.

Warning: Avoid setting this to a value of 0 which causes lease data to be retained indefinitely. This allows the lease database to continually grow in size over time without limitations.

lease persist <boolean>

Whether or not the lease database will persist.

logging <logger-name>

Controls which events are logged by the DHCP daemon. Enters `config-kea-dhcp4-log` mode. See [DHCP Logging](#) for more information.

match-client-id <boolean>

When true, DHCP will attempt to match clients first based on client ID and then by MAC address if the client ID doesn't produce a match. When false, it prefers the MAC address.

next-server <IP Address>

Specifies a TFTP server to be used by a client.

rebind-timer <n>

Sets the period, in seconds, at which a client must rebind its address.

renew-timer <n>

Sets the period, in seconds, at which a client must renew its lease.

valid-lifetime <n>

The period of time, in seconds, for which a lease will be valid.

Some of these values may be set here globally, and again inside subnets or pools. In each case, the more specific value will be used. For example, if an option is defined in a pool, that would be used in place of a global or subnet definition; A subnet option will be favored over a global option. In this way, the global space may define defaults and then these defaults can be changed if needed for certain areas.

19.1.1 DHCP Options

DHCP Options provide information to clients beyond the basic address assignment. These options give clients other aspects of the network configuration, tell clients how they should behave on the network, and give them information about services available on the network. Common examples are a default gateway, DNS Servers, Network Time Protocol servers, network booting behavior, and dozens of other possibilities.

See also:

For a list of Standard IPv4 DHCP options, see [Standard IPv4 DHCP Options](#). This list also includes the type of data expected and whether or not they take multiple values.

The general form of an option is:

```
tnsr(config-kea-dhcp4)# option <name>
tnsr(config-kea-dhcp4-opt)# data <comma-separated values>
tnsr(config-kea-dhcp4-opt)# exit
```

This example defines a global domain name for all clients in all subnets:

```
tnsr(config-kea-dhcp4)# option domain-name
tnsr(config-kea-dhcp4-opt)# data example.com
tnsr(config-kea-dhcp4-opt)# exit
```

This example defines a default gateway for a specific subnet:

```
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 10.2.0.1
tnsr(config-kea-subnet4-opt)# exit
```

To see a list of option names, enter:

```
tnsr(config-kea-dhcp4)# option ?
```

When defining options the data can take different forms. The DHCP daemon uses comma-separated value (CSV) format by default and it will automatically convert the text representation of a value to the expected data in the daemon.

Inside the option configuration mode, the following choices are available:

always-send <boolean>

Controls whether the DHCP server will always send this option in a response, or only when requested by a client. The default behavior varies by option and is documented in [Standard IPv4 DHCP Options](#)

csv-format <boolean>

Toggles between either CSV formatted data or raw binary data. This defaults to `true` unless an option does not have a default definition. In nearly all cases this option should be left at the default.

data <data>

Arbitrary option data. Do not enclose in quotes. To see option data types and expected formats, see [Standard IPv4 DHCP Options](#)

space <name>

Option space in which this entry exists, defaults to `dhcp4`.

Standard IPv4 DHCP Options

This list contains information about the standard IPv4 DHCP options, sourced from the [Kea Administrator Manual](#) section on [DHCP Options](#).

For a list of the Types and their possible values, see [DHCP Option Types](#).

| Name | Code | Type | Array | Always Return |
|---------------------------|------|--------------|-------|---------------|
| time-offset | 2 | int32 | false | false |
| routers | 3 | ipv4-address | true | true |
| time-servers | 4 | ipv4-address | true | false |
| name-servers | 5 | ipv4-address | true | false |
| domain-name-servers | 6 | ipv4-address | true | true |
| log-servers | 7 | ipv4-address | true | false |
| cookie-servers | 8 | ipv4-address | true | false |
| lpr-servers | 9 | ipv4-address | true | false |
| impress-servers | 10 | ipv4-address | true | false |
| resource-location-servers | 11 | ipv4-address | true | false |
| boot-size | 13 | uint16 | false | false |
| merit-dump | 14 | string | false | false |
| domain-name | 15 | fqdn | false | true |
| swap-server | 16 | ipv4-address | false | false |
| root-path | 17 | string | false | false |
| extensions-path | 18 | string | false | false |
| ip-forwarding | 19 | boolean | false | false |
| non-local-source-routing | 20 | boolean | false | false |

continues on next page

Table 1 – continued from previous page

| Name | Code | Type | Array | Always Return |
|-----------------------------|------|------------------------------|-------|---------------|
| policy-filter | 21 | ipv4-address | true | false |
| max-dgram-reassembly | 22 | uint16 | false | false |
| default-ip-ttl | 23 | uint8 | false | false |
| path-mtu-aging-timeout | 24 | uint32 | false | false |
| path-mtu-plateau-table | 25 | uint16 | true | false |
| interface-mtu | 26 | uint16 | false | false |
| all-subnets-local | 27 | boolean | false | false |
| broadcast-address | 28 | ipv4-address | false | false |
| perform-mask-discovery | 29 | boolean | false | false |
| mask-supplier | 30 | boolean | false | false |
| router-discovery | 31 | boolean | false | false |
| router-solicitation-address | 32 | ipv4-address | false | false |
| static-routes | 33 | ipv4-address | true | false |
| trailer-encapsulation | 34 | boolean | false | false |
| arp-cache-timeout | 35 | uint32 | false | false |
| ieee802-3-encapsulation | 36 | boolean | false | false |
| default-tcp-ttl | 37 | uint8 | false | false |
| tcp-keepalive-interval | 38 | uint32 | false | false |
| tcp-keepalive-garbage | 39 | boolean | false | false |
| nis-domain | 40 | string | false | false |
| nis-servers | 41 | ipv4-address | true | false |
| ntp-servers | 42 | ipv4-address | true | false |
| vendor-encapsulated-options | 43 | empty | false | false |
| netbios-name-servers | 44 | ipv4-address | true | false |
| netbios-dd-server | 45 | ipv4-address | true | false |
| netbios-node-type | 46 | uint8 | false | false |
| netbios-scope | 47 | string | false | false |
| font-servers | 48 | ipv4-address | true | false |
| x-display-manager | 49 | ipv4-address | true | false |
| dhcp-option-overload | 52 | uint8 | false | false |
| dhcp-message | 56 | string | false | false |
| dhcp-max-message-size | 57 | uint16 | false | false |
| vendor-class-identifier | 60 | binary | false | false |
| nwip-domain-name | 62 | string | false | false |
| nwip-suboptions | 63 | binary | false | false |
| tftp-server-name | 66 | string | false | false |
| boot-file-name | 67 | string | false | false |
| user-class | 77 | binary | false | false |
| client-system | 93 | uint16 | true | false |
| client-ndi | 94 | record (uint8, uint8, uint8) | false | false |
| uuid-guid | 97 | record (uint8, binary) | false | false |
| subnet-selection | 118 | ipv4-address | false | false |
| domain-search | 119 | binary | false | false |
| vivco-suboptions | 124 | binary | false | false |
| vivso-suboptions | 125 | binary | false | false |

DHCP Option Types

binary

An arbitrary string of bytes, specified as a set of hexadecimal digits.

boolean

Boolean value with allowed values `true` or `false`.

empty

No value, data is carried in suboptions.

fqdn

Fully qualified domain name (e.g. `www.example.com`).

ipv4-address

IPv4 address in dotted-decimal notation (e.g. `192.0.2.1`).

ipv6-address

IPv6 address in compressed colon notation (e.g. `2001:db8::1`).

ipv6-prefix

An IPv6 address and prefix length

record

Structured data of other types (except `record` and `empty`).

string

Any arbitrary text.

int8

8-bit signed integer with values between -128 to 127.

int16

16-bit signed integer with values between -32768 to 32767.

int32

32 bit signed integer with values between -2147483648 and 2147483647.

psid

Port Set ID and length with values in the format `<id>/<length>`. Defines a port set for use by the client. The value of `<id>` is 0-65535, value of `<length>` is 0-16.

tuple

A length encoded as an 8-bit unsigned integer followed by a string of this length.

uint8

8 bit unsigned integer with values between 0 and 255.

uint16

16 bit unsigned integer with values between 0 and 65535.

uint32

32 bit unsigned integer with values between 0 and 4294967295.

IPv4 DHCP Option Definitions

TNSR also supports custom DHCP option definitions. These allow new options not listed in *Standard IPv4 DHCP Options* to be defined and they may also be used to change the standard definitions. Once created, these entries may be used as any other option, in the manner covered earlier in this document.

To create a new option definition, start in `config-kea-dhcp4` mode and use the `option-def <name>` command:

```
tnsr(config-kea-dhcp4)# option-def <name>
tnsr(config-kea-dhcp4-optdef)#
```

Note: To create a custom option, use a unique custom name; to redefine a standard option, enter its name from *Standard IPv4 DHCP Options*.

This command enters `config-kea-dhcp4-optdef` mode where the following additional commands are available:

array <true/false>

When set to `true`, the data for this option is an array of values.

code <code-val>

The code number for the DHCP option.

encapsulate <encap>

Encapsulated option space name.

record-types <types>

Record field type list.

space <space-name>

Option space name.

type <type>

Type of the option data, see *DHCP Option Types* for a list of types and allowed values.

19.1.2 Subnet Configuration

A subnet defines a network in which the DHCP server will provide addresses to clients, for example:

```
tnsr(config-kea-dhcp4)# subnet 10.2.0.0/24
tnsr(config-kea-subnet4)# interface GigabitEthernet0/14/2
```

From within the `subnet4` configuration mode, the following commands can be used:

id <id>

Sets an optional unique identifier for this subnet.

interface <name>

Required. The interface on which the subnet is located.

option

Defines an option specific to this subnet (*DHCP Options*).

pool

Defines a pool of addresses to serve inside this subnet. (*Address Pool Configuration*).

reservation <ipv4-address>

Defines a host reservation to tie a client MAC address to a static IP address assignment.

At a minimum, the subnet itself must contain an `interface` definition and a `pool`.

19.1.3 Address Pool Configuration

A pool controls which addresses inside the subnet can be used by clients, for example:

```
tnsr(config-kea-subnet4)# pool 10.2.0.128-10.2.0.191
tnsr(config-kea-subnet4-pool)#
```

A pool may be defined as an address range (inclusive) as shown above in `<ipv4-addr>-<ipv4-addr>` format, or as a prefix, such as `10.2.0.128/26`.

Options can be defined inside a pool that only apply to clients receiving addresses from that pool.

19.1.4 Host Reservations

A reservation sets up a static IP address reservation for a client inside a subnet. For example:

```
tnsr(config-kea-subnet4)# reservation 10.2.0.20
tnsr(config-kea-subnet4-reservation)#
```

This reservation ensures that a client always obtains the same IP address, and can also provide the client with DHCP options that differ from the main subnet configuration.

Reservations are defined from within `config-kea-subnet4` mode, and take the form of `reservation <ipv4-address>`. That command then enters `config-kea-subnet4-reservation` mode, which contains the following options:

hostname <hostname>

The hostname for this client.

mac-address <mac-address>

Mandatory. The MAC address of the client, used to uniquely identify the client and assign this reserved IP address. The same MAC address cannot be used in more than one reservation on a single subnet.

option <dhcp4-option>

DHCP options specific to this client. See *DHCP Options* for details on configuring DHCP options.

At a minimum, a reservation entry requires the `ipv4-address` which defines the reservation itself, and a `mac-address` to identify the client.

Warning: While it is possible to define a reservation inside a pool, this can lead to address conflicts in certain cases, such as when a different client already holds a lease for the new reservation.

The best practice is to keep reservations outside of the dynamic assignment pool.

Host reservation example:

```
tnsr(config-kea-subnet4)# reservation 10.2.0.20
tnsr(config-kea-subnet4-reservation)# mac-address 00:0c:29:4c:b3:9b
tnsr(config-kea-subnet4-reservation)# hostname mint-desktop
tnsr(config-kea-subnet4-reservation)# exit
tnsr(config-kea-subnet4)#
```

19.2 DHCP Logging

DHCP logging is configured in `config-kea-dhcp4-log` mode. To enter this mode, start in `config-kea-dhcp4` mode and issue the `logging <logger-name>` command.

The `<logger-name>` parameter must be one of these names:

kea-dhcp4

Default DHCPv4 logging behavior, used when no settings exist for a specific logger.

kea-dhcp4.alloc-engine

DHCPv4 lease allocation events.

kea-dhcp4.bad-packets

DHCPv4 packets that are dropped or rejected.

kea-dhcp4.callouts

DHCPv4 hook point callout registration/execution.

kea-dhcp4.commands

DHCPv4 commands received over the command channel.

kea-dhcp4.ddns

DHCPv4 client FQDN and Hostname option processing.

kea-dhcp4.dhcp4

DHCPv4 server basic operations.

kea-dhcp4.dhcpshr

DHCPv4 libkea-dhcpshr library default logging.

kea-dhcp4.eval

DHCPv4 client classification expression evaluation.

kea-dhcp4.hooks

DHCPv4 hook registration/deregistration.

kea-dhcp4.hosts

DHCPv4 host reservation management.

kea-dhcp4.leases

DHCPv4 lease allocation.

kea-dhcp4.options

DHCPv4 option processing/parsing/encoding.

kea-dhcp4.packets

DHCPv4 packet reception/transmission.

kea-dhcp4.stat_cmds_hooks

DHCPv4 libdhcp_stat_cmds library default logging.

For example:

```
tnsr(config-kea-dhcp4)# logging kea-dhcp4
tnsr(config-kea-dhcp4-log)#
```

See also:

See the [Kea documentation for Logging](#), for a list of values and their meanings.

19.2.1 DHCP Logging Options

`config-kea-dhcp4-log` mode contains the following commands:

debug-level <level>

The amount of debug information to log, when a log message is classified using the debug severity level. From 0 (lowest detail) to 99 (most detail).

output <location>

Sets the log output location and enters `config-kea-dhcp4-log-out` mode to further configure behavior for the given location. The <location> must be one of:

stdout

Log messages to standard output.

stderr

Log messages to standard error.

syslog

Log messages to syslog using the daemon name.

syslog:<name>

Log messages to syslog using the given <name>.

<filename>

The full path and filename in which to log messages.

severity (debug|error|fatal|info|warn)

The severity level of messages to write in the log:

fatal

Errors severe enough to cause the daemon to exit.

error

Errors which are notable but otherwise do not prevent the daemon from functioning.

warn

Unusual conditions which are not normal but also not causing problems.

info

General noteworthy events and other similar messages.

debug

Debugging messages, which are highly informative but also verbose. The amount of debugging information can be further controlled by the `debug-level` command.

19.2.2 DHCP Log Output

The output <location> command from `config-kea-dhcp4-log` mode enters `config-kea-dhcp4-log-out` mode, which contains the following commands:

flush (false|true)

Flush the log buffer after writing each line. Lowers performance but ensures that every log message is written completely. This can help in cases where the daemon dies before the log buffer is emptied.

maxsize <size>

When logging to a file, this option controls the maximum size of the log file before it is rotated. Default value is 10240000 (10MB).

maxver <rotate>

When logging to a file and rotation is enabled, this command controls how many previous log files

are retained when performing log rotation. The default value is 1, which is also the minimum allowed value.

If the value of `maxsize` is greater than 204800, the daemon will perform log rotation when the size of the log file exceeds `maxsize`. When rotating logs, the current log will be renamed to `<filename>.1`. If `<filename>.1` already exists, it will be renamed to `<filename>.2`, and so on until the number of log files reaches the value of `maxver`. Older log files beyond the limit set by `maxver` are removed.

19.3 DHCP Service Control and Status

19.3.1 Enable the DHCP Service

Enable the DHCP4 server:

```
tnsr(config)# dhcp4 enable
tnsr(config)#
```

19.3.2 Disable the DHCP Service

Similar to the DHCP `enable` command, disable the DHCP4 service from configuration mode:

```
tnsr(config)# dhcp4 disable
tnsr(config)#
```

19.3.3 Check the DHCP Service Status

Check the status of the DHCP services from configuration mode:

```
tnsr(config)# service dhcp4 status
DHCPv4 server: active
DHCPv6 server: inactive
DHCP DDNS: inactive
Control Agent: inactive
Kea DHCPv4 configuration file: /etc/kea/kea-dhcp4.conf
Kea DHCPv6 configuration file: /etc/kea/kea-dhcp6.conf
Kea DHCP DDNS configuration file: /etc/kea/kea-dhcp-ddns.conf
Kea Control Agent configuration file: /etc/kea/kea-ctrl-agent.conf
keactrl configuration file: /etc/kea/keactrl.conf
```

19.3.4 View the DHCP Configuration

View the current Kea DHCP Daemon and Control TNSR Configuration:

```
tnsr# show kea
```

View the current Kea DHCP Daemon TNSR Configuration:

```
tnsr# show kea dhcp4
```

View the current Kea DHCP daemon configuration file:

```
tnsr# show kea dhcp4 config-file
```

View the current Kea Control TNSR Configuration:

```
tnsr# show kea keactrl
```

View the current Kea Control Configuration file:

```
tnsr# show kea keactrl config-file
```

19.3.5 View the DHCP Lease Database

View the database of active DHCP leases:

```
tnsr# show kea dhcp4 leases
IP address HW address      Hostname  Subnet ID  Start           End
↪State
-----
↪-----
10.2.0.129 00:0c:29:4c:b3:9b mintclient      1 06/19/20 14:55:11 06/19/20 16:55:11↪
↪default
10.2.0.130 00:0c:29:41:dc:ac graybeard      1 05/28/20 11:21:19 05/28/20 15:47:59↪
↪expired
10.2.0.131 00:0c:29:13:54:93 doctor          1 06/19/20 15:22:18 06/19/20 17:22:18↪
↪default
```

19.4 DHCP Service Example

Configure the DHCP IPv4 Service from configuration mode (*Configuration Mode*). This example uses the interface and subnet from *Example Configuration*:

```
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)# description LAN DHCP Server
tnsr(config-kea-dhcp4)# interface listen GigabitEthernet0/14/2
tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr(config-kea-dhcp4)# option domain-name
tnsr(config-kea-dhcp4-opt)# data example.com
tnsr(config-kea-dhcp4-opt)# exit
tnsr(config-kea-dhcp4)# subnet 10.2.0.0/24
tnsr(config-kea-subnet4)# pool 10.2.0.128-10.2.0.191
tnsr(config-kea-subnet4-pool)# exit
tnsr(config-kea-subnet4)# interface GigabitEthernet0/14/2
tnsr(config-kea-subnet4)# option domain-name-servers
tnsr(config-kea-subnet4-opt)# data 8.8.8.8, 8.8.4.4
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 10.2.0.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config-kea-dhcp4)# exit
tnsr(config)# dhcp4 enable
tnsr(config)#
```

The above example configures `example.com` as the domain name supplied to all clients. For the specific subnet in the example, the TNSR IP address inside the subnet is supplied by DHCP as the default gateway for clients, and DHCP will instruct clients to use `8.8.8.8` and `8.8.4.4` for DNS servers.

Note: The `subnet` definition requires an interface.

DNS RESOLVER

TNSR uses the [Unbound](#) Domain Name System Resolver to handle DNS resolution and client queries.

Unbound is a recursive caching DNS resolver. Unbound can validate DNS data integrity with DNSSEC, and supports query privacy using DNS over TLS.

By default Unbound will act as a DNS resolver, directly contacting root DNS servers and other authoritative DNS servers in search of answers to queries. Unbound can also act as a DNS Forwarder, sending all DNS queries to specific upstream servers.

20.1 DNS Resolver Configuration

Unbound can be configured with a wide array of optional parameters to fine-tune its behavior. Due to the large number of options, this documentation is split into several parts, with related options listed together.

These options are all found in `config-unbound` mode, which is entered by the command `unbound server` from configuration mode ([Configuration Mode](#)).

do-ip4

Tells Unbound to use, or not use, IPv4 for answering or performing queries. Default is enabled. Unless TNSR has no IPv4 connectivity, this should be left enabled.

do-ip6

Tells Unbound to use, or not use, IPv6 for answering or performing queries. Default is enabled. Unless there is a situation where TNSR is configured with IPv6 addresses but lacks working connectivity to upstream networks via IPv6, this should remain enabled.

do-udp

Tells Unbound to use, or not use, UDP for answering or performing queries. Default is enabled. In nearly all cases, DNS requires UDP to function, except special cases such as a pure DNS over TLS environment. Thus, this should nearly always be left enabled.

do-tcp

Tells Unbound to use, or not use, TCP for answering or performing queries. Default is enabled. TCP is generally required for functional DNS, especially for queries with large answers. DNS over TLS also requires TCP. Unless a use case specifically calls for UDP DNS only, this should remain enabled.

interface <x.x.x.x> [port <n>]

Configures an interface IP address that Unbound will use for binding as a server, and an optional port specification. In most cases there should be an interface definition for a TNSR IP address in each local network, plus a definition for localhost (127.0.0.1 as shown in [Resolver Mode Example](#)). The port number defaults to 53 and should not be changed in most use cases.

outgoing-interface <ip-address>

Configures an interface IP address that Unbound will use when making outbound DNS queries to upstream servers (roots or forwarders).

Note: If this is not configured, Unbound will make queries using the host OS default route, and not TNSR interfaces or routes.

port <n>

Sets the default port which Unbound will use to listen for client queries. Defaults to 53.

verbosity <n>

Sets the verbosity of the logs, from 0 (no logs) through 5 (high). Default value is 1. Each level provides the information from the lower levels plus additional data.

- Level 1: Operational Information
- Level 2: Additional details
- Level 3: Per-query logs with query level information
- Level 4: Algorithm level information
- Level 5: Client identification for cache misses

access-control

Configures access control list entries for Unbound. See *Access Control Lists*.

forward-zone

Enters config-unbound-fwd-zone mode. See *Forward Zones*.

20.1.1 Access Control Lists

Access Control Lists in Unbound determine which clients can and cannot perform queries against the DNS Resolver as well as aspects of client behavior.

The default behavior is to allow access from TNSR itself (localhost), but refuse queries from other clients.

Example:

```
tnsr(config)# unbound server
tnsr(config-unbound)# access-control 10.2.0.0/24 allow
```

The general form of the command is:

```
tnsr(config-unbound)# access-control <IPv4 or IPv6 Network Prefix> <action>
```

The **IPv4 or IPv6 Network Prefix** is a network specification, such as 10.2.0.0/24 or 2001:db8::/64. For a single address, use /32 for IPv4 or /128 for IPv6.

The **Action** types are:

allow

Allow access to recursive and local data queries for clients in the specified network.

allow_snoop

Allow access to recursive and local data queries for clients in the specified network, additionally this allows access to cache snooping. Cache snooping is a technique to use nonrecursive queries to examine the contents of the cache for debugging or identifying malicious data.

refuse

Stops queries from clients in the specified network, but sends a DNS response code REFUSED error. This is the default behavior for networks other than localhost, since it is friendly and protocol-safe response behavior.

refuse_non_local

Similar to **refuse** but allows queries for authoritative local data. Recursive queries are refused.

deny

Drops and does not respond to queries from clients in the specified network. In most cases a **refuse** action is preferable since DNS is not designed to handle a non-response. A lack of response may cause clients to send additional unwanted queries.

deny_non_local

Allows queries for authoritative local-data only, all other queries are dropped without a response.

20.1.2 Forward Zones

In Unbound, a Forward Zone controls how queries are handled on a per-zone basis. This can be used to send queries for a specific domain or zone to a specific DNS server, or it can be used to setup forwarding mode sending all queries to one or more upstream recursive DNS servers.

Forward Zone Examples

Example to override the default resolver behavior and forward all queries to an upstream DNS server:

```
tnsr(config)# unbound server
tnsr(config-unbound)# forward-zone .
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.8.8
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.4.4
```

This forwards the root zone (.) and all zones underneath to the specified servers, in this case, 8.8.8.8 and 8.8.4.4.

Example to send queries for one specific domain to an alternate server:

```
tnsr(config)# unbound server
tnsr(config-unbound)# forward-zone example.com
tnsr(config-unbound-fwd-zone)# nameserver address 192.0.2.5
```

This example sends all queries for **example.com** and subdomains underneath **example.com** to the server at 192.0.2.5. This is useful for sending queries for internal domains to a local authoritative DNS server, or an internal DNS server reachable through a VPN.

Forward Zone Configuration

To enter **config-unbound-fwd-zone** mode, start from **config-unbound** mode and use the **forward-zone <zone-name>** command. The **<zone-name>** takes the form of the domain part of a fully qualified domain name (FQDN), but may also be **.** to denote the root zone.

nameserver address <ip-address> [port <port>] [auth-name <name>]

Specifies a DNS server for this zone by IP address. Optionally, a port number may be given (default 53). **auth-name** sets the FQDN of the DNS server for use in validating certificates with DNS over TLS.

nameserver host <host-name>

Specifies a DNS server for this zone by FQDN. This hostname will be resolved before use.

forward-first

When enabled, if a query fails to the forwarding DNS servers it will be retried using resolver mode through the root DNS servers. By default this behavior is disabled.

forward-tls-upstream

When enabled, queries to the DNS servers in this zone are sent using DNS over TLS, typically on port 853. This mode provides query privacy by encrypting communication between Unbound and upstream DNS servers in the zone. Default is disabled as this feature is not yet widely supported by other platforms.

Multiple DNS server address or host entries may be given for a forward zone. These servers are not queried sequentially and are not necessarily queried simultaneously. Unbound tracks the availability and performance of each DNS server in the zone and will attempt to use the most optimal server for a query.

20.1.3 Local Zones

Unbound can host local zone data to complement, control, or replace upstream DNS data. This feature is commonly used to supply local clients with host record responses that do not exist in upstream DNS servers, or to supply local clients with a different response, akin to a DNS view.

Local Zone Example

This basic example configures a local zone for `example.com` and two hostnames inside. If a client queries TNSR for these host records, it will respond with the answers configured in the local zone. If a client requests records for a host under `example.com` not listed in this local zone, then the query is resolved as usual through the usual resolver or forwarding server mechanisms.

```
tnsr(config)# unbound server
tnsr(config-unbound)# local-zone example.com
tnsr(config-unbound-local-zone)# type transparent
tnsr(config-unbound-local-zone)# hostname server.example.com
tnsr(config-unbound-local-host)# address 192.0.2.5
tnsr(config-unbound-local-host)# exit
tnsr(config-unbound-local-zone)# hostname db.example.com
tnsr(config-unbound-local-host)# address 192.0.2.6
tnsr(config-unbound-local-host)# exit
```

Local Zone Configuration

Local zones are configured in `config-unbound` mode (*DNS Resolver Configuration*) using the `local-zone <zone-name>` command. This defines a new local zone and enters `config-unbound-local-zone` mode.

Within `config-unbound-local-zone` mode, the following commands are available:

description <descr>

A short text description of the zone

type <type>

The type for this local zone, which can be one of:

transparent

Gives local data, and resolves normally for other names. If the query matches a defined

host but not the record type, the client is sent a NOERROR, NODATA response. This is the most common type and most likely the best choice for most scenarios.

typetransparent

Similar to transparent, but will forward requests for records that match by name but not by type.

deny

Serve local data, drop queries otherwise.

inform

Like transparent, but logs the client IP address.

inform_deny

Drops queries and logs the client IP address.

no_default

Normally resolve AS112 zones.

redirect

Serves zone data for any subdomain in the zone.

refuse

Serve local data, else reply with REFUSED error.

static

Serve local data, else NXDOMAIN or NODATA answer.

hostname <fqdn>

Defines a new hostname within the zone, and enters config-unbound-local-host mode. A local zone may contain multiple hostname entries.

Note: Include the domain name when creating a hostname entry.

Inside config-unbound-local-host mode, the following commands are available:

description <descr>

A short text description of this host

address <ip-address>

The IPv4 or IPv6 address to associate with this hostname for forward and reverse (PTR) lookups.

20.1.4 Security Tuning

Unbound can be tuned to provide stronger (or weaker) security and privacy, depending on the needs of the network and features supported by clients and upstream servers.

caps-for-id

Experimental support for draft [dns-0x20](#). This feature combats potentially spoofed replies by randomly flipping the 0x20 bit of ASCII letters, which switches characters between upper and lower case. The answer is checked to ensure the case in the response matches the request exactly. This is disabled by default since it is experimental, but is safe to enable unless the upstream server does not copy the query question to the response identically. Most if not all servers follow this convention, but it is unknown if this behavior is truly universal.

harden dnssec-stripped

Require DNSSEC for trust-anchored zones. If the DNSSEC data is absent, the zone is marked as bogus. If disabled and no DNSSEC data is received in the response, the zone is marked insecure.

Default behavior is enabled. If disabled, there is a risk of a forced downgrade attack on the response that disables security on the zone.

harden glue

Trust glue only if the server is authorized. Default is enabled.

hide identity

When enabled, queries are refused for `id.server` and `hostname.bind`, which prevents clients from obtaining the server identity. Default behavior is enabled.

hide version

When enabled, queries are refused for `version.server` and `version.bind`, preventing clients from determining the version of Unbound. Default behavior is disabled.

thread unwanted-reply-threshold <threshold>

When set, Unbound tracks the total number of unwanted replies in each thread. If the threshold is reached, Unbound will take defensive action and logs a warning. This helps prevent cache poisoning by clearing the RRSet and message caches when triggered. By default this behavior is disabled. If this behavior is desired, a starting value of 10000000 (10 million) is best. Change the value in steps of 5-10 million as needed.

jostle timeout <t>

Timeout in milliseconds, used when the server is very busy. This timeout should be approximately the same as the time it takes for a query to reach an upstream server and receive a response (round trip time). If a large number of queries are received by Unbound, than half the active queries are allowed to complete and the other half are replaced by new queries. This helps reduce the effectiveness of a denial of service attack by allowing the server to ignore slow queries when under load. The default value is 200 msec.

20.1.5 Cache & Performance Tuning

port outgoing range <n>

Sets the number of source ports Unbound may use per thread to connect when making outbound queries to upstream servers. A larger number of ports provides protection against spoofing. Default value varies by platform. A large number of ports yields better performance but it also consumes more host resources.

edns reassembly size <s>

Number to advertise as the EDNS reassembly buffer size, in bytes. This value is sent in queries and must not be set larger than the default message buffer size, 65552. The default value is 4096, which is recommended by RFC. May be set lower to alleviate problems with fragmentation resulting in timeouts. If the default value is too large, try 1472, or 512 in extreme cases. Avoid setting that low as it will cause many queries to fall back to TCP which can negatively impact performance.

host cache num-hosts <num>

Number of hosts to hold in the cache, defaults to 10000. Larger caches can result in increased performance but consume more host resources.

host cache slabs <s>

Number of slabs in the host cache. Larger numbers help prevent lock contention by threads when performing cache operations. The value is a power of 2, between 0 . . 10

host cache ttl <t>

The amount of time, in seconds, that entries in the host cache are kept. Default value is 900 seconds.

key prefetch

When enabled, Unbound will start fetching DNSKEYS when it sees a DS record instead of waiting

until later in the process. Prefetching keys will consume more CPU, but reduces latency. The default is disabled.

key cache slabs <s>

Number of slabs in the key cache. Larger numbers help prevent lock contention by threads when performing key cache operations. The value is a power of 2, between 0 . . 10. Setting to a number close to the number of CPUs/cores in the host is best.

message prefetch

Prefetch message cache items before they expire to keep entries in the cache updated. When enabled, Unbound will consume approximately 10% more throughput and CPU time but it will keep popular items primed in the cache for better client performance. Disabled by default.

message cache size <s>

Size of the message cache, in bytes. The message cache stores *DNS* meta-information such as message formats. Default value is 4 MB.

message cache slabs <s>

Number of slabs in the message cache. Larger numbers help prevent lock contention by threads when performing message cache operations. The value is a power of 2, between 0 . . 10. Setting to a number close to the number of CPUs/cores in the host is best.

rrset cache size <s>

Size of the RRset cache, in bytes. The RRset cache stores resource records. Default value is 4 MB.

rrset cache slabs <s>

Number of slabs in the RRset cache. Larger numbers help prevent lock contention by threads when performing RRset cache operations. The value is a power of 2, between 0 . . 10. Setting to a number close to the number of CPUs/cores in the host is best.

rrset-message cache ttl maximum <max>

Maximum time that values in the RRset and message caches are kept in the cache, specified in seconds. The default value is 86400 (1 day). When set lower, Unbound will be forced to query for data more often, but it will also ignore very large TTLs in *DNS* responses.

rrset-message cache ttl minimum <max>

Minimum time that values in the RRset and message caches are kept in the cache, specified in seconds. The default value is 0, which honors the TTL specified in the *DNS* response. Higher values may ignore the TTL set by the response, which means a record may be out of sync with the source, but it also prevents queries from being repeated frequently when a very low TTL is set by the domain.

socket receive-buffer size <s>

SO_RCVBUF socket receive buffer size for incoming queries on the listening port(s). Larger values result in less drops during spikes in activity. The default is 0 which uses the system default value. Cannot be set higher than the maximum value for the operating system, such as the one shown in the `net.core.rmem_max` sysctl OID.

tcp buffers incoming <n>

Number of incoming TCP buffers that Unbound will allocate per thread. Larger values can handle higher loads, but will consume more resources. The default value is 10. A value of 0 will disable acceptance of TCP queries.

tcp buffers outgoing <n>

Number of outgoing TCP buffers that Unbound will allocate per thread. Larger values can handle higher loads, but will consume more resources. The default value is 10. A value of 0 will disable TCP queries to authoritative *DNS* servers.

thread num-queries <n>

Number of queries serviced by each thread simultaneously. If more queries arrive and there is no

room to answer them, the new queries will be dropped, unless older/slower queries can be dropped by using the `jostle timeout`. Default varies by platform but is typically 512 or 1024.

thread num-threads <n>

Number of threads created by Unbound for serving clients. Defaults to one thread per CPU/core. To disable threading, set to 1.

serve-expired

When enabled, Unbound will immediately serve answers to clients using expired cache entries if they exist. Unbound still performs the query and will update the cache with the result. This can result in faster, but potentially incorrect, answers for client queries. Default is disabled.

20.2 DNS Resolver Service Control and Status

20.2.1 Enable the DNS Resolver

Enable the DNS Resolver:

```
tnsr(config)# unbound enable
tnsr(config)#
```

20.2.2 Disable the DNS Resolver

Similar to the `enable` command, disable the DNS Resolver from configuration mode:

```
tnsr(config)# unbound disable
tnsr(config)#
```

20.2.3 Check the DNS Resolver Status

Check the status of the DNS Resolver from configuration mode:

```
tnsr(config)# service unbound status
* unbound.service - Unbound recursive Domain Name Server
  Loaded: loaded (/usr/lib/systemd/system/unbound.service; disabled; vendor preset:
  ↳ disabled)
  Active: active (running) since Wed 2018-08-22 15:26:05 EDT; 55min ago
  Process: 26675 ExecStartPre=/usr/sbin/unbound-anchor -a /var/lib/unbound/root.key -c /
  ↳ etc/unbound/icannbundle.pem (code=exited, status=0/SUCCESS)
  Process: 26673 ExecStartPre=/usr/sbin/unbound-checkconf (code=exited, status=0/SUCCESS)
  Main PID: 26679 (unbound)
  CGroup: /system.slice/unbound.service
          └─26679 /usr/sbin/unbound -d

Aug 22 15:26:05 tnsr.example.com systemd[1]: Starting Unbound recursive Domain Name
  ↳ Server...
Aug 22 15:26:05 tnsr.example.com unbound-checkconf[26673]: unbound-checkconf: no errors
  ↳ in /etc/unbound/unbound.conf
Aug 22 15:26:05 tnsr.example.com systemd[1]: Started Unbound recursive Domain Name
  ↳ Server.
```

(continues on next page)

(continued from previous page)

```
Aug 22 15:26:05 tnsr.example.com unbound[26679]: [26679:0] notice: init module 0: subnet
Aug 22 15:26:05 tnsr.example.com unbound[26679]: [26679:0] notice: init module 1:↵
↵validator
Aug 22 15:26:05 tnsr.example.com unbound[26679]: [26679:0] notice: init module 2:↵
↵iterator
Aug 22 15:26:05 tnsr.example.com unbound[26679]: [26679:0] info: start of service↵
↵(unbound 1.6.6).
```

20.2.4 View the DNS Resolver Configuration

View the current Unbound DNS Resolver daemon configuration file:

```
tnsr# show unbound config-file
```

20.3 DNS Resolver Examples

Configure the DNS Resolver Service from configuration mode (*Configuration Mode*). These examples use the interface and subnet from *Example Configuration*.

20.3.1 Resolver Mode Example

For Resolver mode, the configuration requires only a few basic options:

```
tnsr# configure
tnsr(config)# unbound server
tnsr(config-unbound)# interface 127.0.0.1
tnsr(config-unbound)# interface 10.2.0.1
tnsr(config-unbound)# outgoing-interface 203.0.113.2
tnsr(config-unbound)# access-control 10.2.0.0/24 allow
tnsr(config-unbound)# exit
tnsr(config)# unbound enable
```

This example enables the Unbound DNS Resolver and configures it to listen on localhost as well as 10.2.0.1 (GigabitEthernet0/14/2, labeled LAN in the example). It uses 203.0.113.2, which is the example WAN interface address, for outgoing queries. The example also allows clients inside the local subnet, 10.2.0.0/24, to perform DNS queries and receive responses.

20.3.2 Forwarding Mode Example

For Forwarding mode, use the configuration above plus these additional commands:

```
tnsr# configure
tnsr(config)# unbound server
tnsr(config-unbound)# forward-zone .
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.8.8
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.4.4
tnsr(config-unbound-fwd-zone)# exit
tnsr(config-unbound)# exit
```

This example builds on the previous example but instead of working in resolver mode, it will send all DNS queries to the upstream DNS servers 8.8.8.8 and 8.8.4.4.

NETWORK TIME PROTOCOL

The Network Time Protocol (NTP) service on TNSR synchronizes the host clock with reference sources, typically remote servers. It also acts as an NTP server for clients.

21.1 NTP Configuration

Outside of the NTP server mode, the namespace of the NTP daemon can be set by the following command:

ntp namespace (host|dataplane)

Configures the namespace (*Networking Namespaces*) in which the NTP daemon will run. Running in the **host** namespace, NTP has access to host OS interfaces and routing, which is suitable for reaching internal time servers. Running in the **dataplane** namespace enables NTP to act as a server for clients connected to TNSR interfaces as well as reach servers to which TNSR can route.

NTP is capable of operating in either namespace, but only in one namespace at a time.

Inside NTP server mode, the NTP daemon has a variety of options to fine-tune its timekeeping behavior.

interface sequence <seq> <action> <address>

Interface binding options. The default behavior when no **interface** configuration entries are present is to bind to all available addresses on the host.

seq

The sequence number controls the order of the interface definitions in the NTP daemon configuration.

action

The action taken for NTP traffic on this interface, it can be one of:

drop

Bind the daemon to this interface, but drop NTP traffic.

ignore

Do not bind the daemon to this interface.

listen

Bind the daemon to this interface and use it for NTP traffic.

address

The address or interface to bind. This may be:

prefix <prefix>

An IPv4/IPv6 prefix, which will bind to only that specific address.

interface <if-name>

An interface name, which will bind to every address on that interface.

all

Bind to all interfaces and addresses on TNSR.

server <address|host> <server>

Defines an NTP peer with which the daemon will attempt to synchronize the clock. This command enters `config-ntp-server` mode. The server may be specified as:

address <IPv4/IPv6 Address>

An IPv4 or IPv6 address specifying a single NTP server.

host <fqdn>

A fully qualified domain name, which will be resolved using DNS.

Within `config-ntp-server` mode, additional commands are available that control how NTP interacts with the specified server:

iburst

Use 8 packets on unreachable servers, which results in faster synchronization at startup and when a peer is recovering.

maxpoll <poll>

Maximum polling interval for NTP messages. This is specified as a power of 2, in seconds. May be between 7 and 17, defaults to 10 (1024 seconds).

noselect

Instructs NTP to not use the server for synchronization, but it will still connect and display statistics from the server.

prefer

When set, NTP will prefer this server if it and multiple other servers are all viable candidates of equal quality.

operational-mode server

This entry is a single server. When the server is specified as an FQDN, if the DNS response contains multiple entries then only one is selected. Can also be used with IPv4/IPv6 addresses directly, rather than FQDN entries.

operational-mode pool

This entry is a pool of servers. Only compatible with FQDN hosts. NTP will expect multiple records in the DNS response and will use all of these entries as distinct servers. This is a reliable way to configure multiple NTP peers with minimal configuration.

| |
|--|
| Warning: An operational-mode is required. |
|--|

tinker panic <n>

Sets the NTP panic threshold, in seconds. This is a sanity check which will cause NTP to fail if the difference between the local and remote clocks is too great. Commonly set to 0 to disable this check so that NTP will still synchronize when its clock is off by a large factor. The default value is 1000.

tos orphan <n>

Configures the stratum of orphan mode servers from 1 to 16. When all UTC reference peers below this stratum are unreachable, clients in the same subnet may use each other as references as a last resort.

driftfile <file>

Full path to the filename used by the NTP daemon to store clock drift information to improve accuracy over time. This file and its directory must be writable by the `ntp` user or group.

statsdir <file>

Full path to statistics directory used by the NTP daemon. This directory must be writable by the `ntp` user or group.

<enable|disable> monitor

Explicitly enables or disables the monitoring facility used to poll the NTP daemon for information about peers and other statistics.

This is enabled by default, and is also enabled if `limited` is present in any `restrict` entries. This is required for `show ntp <x>` commands which display peer information to function.

Note: To return to the default behavior after configuring an explicit enabled or disabled state, negate the option with `no`. For example, if the monitor was explicitly enabled with `enable monitor`, then use `no enable monitor` to return to the default behavior.

21.1.1 NTP Restrictions

NTP restrictions control how NTP treats traffic from peers. The *NTP Configuration Examples* at the start of this section contains a good set of restrictions to use as a starting point.

These restrictions are configured using the `restrict` command from within `config-ntp` mode.

restrict (default|<fqdn>|<ip-prefix>|source)

This command enters `config-ntp-restrict` mode.

The restriction is placed upon an address specified as:

default

The default restriction for any host.

source

Default restrictions for associated hosts.

<fqdn>

An address specified as an FQDN to be resolved using DNS.

<prefix>

An IPv4 or IPv6 network specification.

In `config-ntp-restrict` mode, the following settings control what hosts matching this restriction can do:

kod

Sends a Kiss of Death packet to misbehaving clients. Only works when paired with the `limited` option.

limited

Enforce rate limits on clients. This does not apply to queries from `ntpq/ntpd` or the `show ntp <x>` commands.

nomodify

Allows clients to query read only server state information, but does not allow them to make changes.

nopeer

Deny unauthorized associations. When using a server entry in `pool` mode, this should be present in the `default` restriction but not in the `source` restriction.

noquery

Deny `ntpq/ntpdc/show ntp <x>` queries for NTP daemon information. Does not affect NTP acting as a time server.

noserve

Disables time service. Still allows `ntpq/ntpdc/show ntp <x>` queries

notrap

Decline mode 6 trap service to clients.

21.1.2 NTP Logging

The NTP Logging configuration controls which type of events are logged by the NTP daemon using `syslog`, and the verbosity of the logs. By default, the NTP daemon will log all synchronization messages.

The logging configuration is set using the `logconfig` command from within `config-ntp` mode.

logconfig sequence <seq> <action> <class> <type>

seq

Specifies the sequence for log entries so that the order of parameters may be controlled by the configuration.

action

Specifies the action for this log entry, as one of:

set

Set the mask for the log entry. Typically this would be used for the first entry to control which message class+type is logged as the base set of log entries.

add

Add log entries matching this specification to the specified total set of logs.

delete

Do not log entries matching this specification in the total set of logs.

class

Specifies the message class, which can be one of:

all

All message classes

clock

Messages about local clock events and information.

peer

Messages about peers.

sync

Messages about the synchronization state.

sys

Messages about system events and status.

type

Specifies the type of messages to log for each class:

all

All types of messages.

events

Event messages.

info

Informational messages.

statistics

Statistical information.

status

Status changes.

21.2 NTP Service Control and Status

21.2.1 Enable the NTP Service

Enable the NTP server:

```
tnsr(config)# ntp enable
tnsr(config)#
```

21.2.2 Disable the NTP Service

Similar to the NTP enable command, disable the NTP service from configuration mode:

```
tnsr(config)# ntp disable
tnsr(config)#
```

21.2.3 Check the NTP Service Status

Check the status of the NTP services from configuration mode using `service ntp <namespace> status`, where <namespace> is the namespace where NTP is running (host or dataplane):

```
tnsr(config)# service ntp host status
* ntpd.service - Network Time Service
  Loaded: loaded (/usr/lib/systemd/system/ntpd.service; disabled; vendor preset:
  ↳ disabled)
  Active: active (running) since Wed 2020-08-12 08:32:30 EDT; 1 day 1h ago
  Process: 7498 ExecStart=/usr/sbin/ntpd -u ntp:ntp $OPTIONS (code=exited, status=0/
  ↳ SUCCESS)
  Main PID: 7500 (ntpd)
  Tasks: 2 (limit: 23720)
  Memory: 1.6M
  CGroup: /system.slice/ntpd.service
          └─7500 /usr/sbin/ntpd -u ntp:ntp -g

Aug 13 09:24:51 tnsr ntpd[7500]: Soliciting pool server 69.164.213.136
Aug 13 09:25:56 tnsr ntpd[7500]: Soliciting pool server 208.79.89.249
Aug 13 09:27:03 tnsr ntpd[7500]: Soliciting pool server 206.55.191.142
Aug 13 09:28:10 tnsr ntpd[7500]: Soliciting pool server 47.144.196.17
Aug 13 09:29:15 tnsr ntpd[7500]: Soliciting pool server 68.233.45.146
Aug 13 09:30:21 tnsr ntpd[7500]: Soliciting pool server 198.255.68.106
Aug 13 09:31:26 tnsr ntpd[7500]: Soliciting pool server 38.229.71.1
```

(continues on next page)

(continued from previous page)

```
Aug 13 09:32:32 tnsr ntpd[7500]: Soliciting pool server 72.5.72.15
Aug 13 09:33:38 tnsr ntpd[7500]: Soliciting pool server 172.98.193.44
Aug 13 09:34:42 tnsr ntpd[7500]: Soliciting pool server 173.255.21
```

21.2.4 View NTP Peers

The NTP peer list shows the peers known to the NTP daemon, along with information about their network availability and quality. For more information on peer associations, see [View NTP Associations](#).

```
tnsr(config)# show ntp peers
```

| Id | Host | Ref ID | Stratum | Reach | Poll | Delay | Offset | Jitter |
|-------|-----------------|----------------|---------|-------|------|---------|--------|--------|
| 17417 | 5.9.80.113 | 192.53.103.103 | 2 | 0xff | 512 | 134.456 | -1.936 | 3.904 |
| 17418 | 95.216.39.155 | 131.188.3.223 | 2 | 0xff | 512 | 151.370 | -1.582 | 4.883 |
| 17419 | 145.239.118.233 | 85.199.214.98 | 2 | 0xec | 512 | 126.181 | 4.112 | 21.541 |
| 17420 | 178.128.4.44 | 204.123.2.5 | 2 | 0xff | 512 | 80.998 | 2.906 | 4.140 |

21.2.5 View NTP Associations

The NTP peer associations list shows how the NTP daemon is using each peer, along with its status. These peers are listed by ID. For more information on each peer, see [View NTP Peers](#).

```
tnsr(config)# show ntp associations
```

| Id | Status | Persistent | Auth En | Authentic | Reachable | Broadcast | Selection | Event | Count |
|-------|--------|------------|---------|-----------|-----------|-----------|-----------|----------|-------|
| 17417 | 0x931a | true | false | false | true | false | outlier | sys_peer | 1 |
| 17418 | 0x941a | true | false | false | true | false | candidate | sys_peer | 1 |
| 17419 | 0x941a | true | false | false | true | false | candidate | sys_peer | 1 |
| 17420 | 0x961a | true | false | false | true | false | sys.peer | sys_peer | 1 |

21.2.6 View NTP Daemon Configuration File

View the current NTP Daemon configuration file, generated by the settings in TNSR:

```
tnsr# show ntp config-file
#
# NTP config autogenerated
#

tinker panic 0

tos orphan 12

logconfig =syncall +clockall

restrict ::/0 kod limited nomodify nopeer notrap
restrict default kod limited nomodify nopeer notrap
restrict source kod limited nomodify notrap
```

(continues on next page)

(continued from previous page)

```
pool pool.ntp.org maxpoll 9
```

21.3 NTP Configuration Examples

21.3.1 NTP Client Example

Configure the NTP Service as a client from configuration mode (*Configuration Mode*). This example uses `pool.ntp.org` in pool mode so that multiple DNS results are used as reference servers.

```
tnsr(config)# ntp server
tnsr(config-ntp)# tos orphan 12
tnsr(config-ntp)# tinkr panic 0
tnsr(config-ntp)# logconfig sequence 1 set sync all
tnsr(config-ntp)# logconfig sequence 2 add clock all
tnsr(config-ntp)# restrict default
tnsr(config-ntp-restrict)# kod
tnsr(config-ntp-restrict)# limited
tnsr(config-ntp-restrict)# nomodify
tnsr(config-ntp-restrict)# nopeer
tnsr(config-ntp-restrict)# notrap
tnsr(config-ntp-restrict)# noquery
tnsr(config-ntp-restrict)# exit
tnsr(config-ntp)# restrict source
tnsr(config-ntp-restrict)# kod
tnsr(config-ntp-restrict)# limited
tnsr(config-ntp-restrict)# nomodify
tnsr(config-ntp-restrict)# notrap
tnsr(config-ntp-restrict)# exit
tnsr(config-ntp)# restrict 127.0.0.1
tnsr(config-ntp-restrict)# exit
tnsr(config-ntp)# server host pool.ntp.org
tnsr(config-ntp-server)# operational-mode pool
tnsr(config-ntp-server)# maxpoll 9
tnsr(config-ntp-server)# exit
tnsr(config-ntp)# exit
tnsr(config)# ntp enable
tnsr(config)#
```

Note: When acting as a client, the NTP daemon may run in either the `host` or `dataplane` namespace. The choice is decided by the location of the NTP servers and how the NTP daemon must route to reach those servers.

21.3.2 NTP Server Example

To act as an NTP server, start with the client example above (*NTP Client Example*) and then configure the additional parts from this section.

First, to serve clients connected to TNSR interfaces, the NTP instance **must** run in the `dataplane` namespace:

```
tnsr(config)# ntp namespace dataplane
tnsr(config)# ntp server
tnsr(config-ntp)#
```

Now add restrictions which allow peers from local subnets:

```
tnsr(config-ntp)# restrict 10.2.0.0/24
tnsr(config-ntp-restrict)# kod
tnsr(config-ntp-restrict)# limited
tnsr(config-ntp-restrict)# nomodify
tnsr(config-ntp-restrict)# notrap
tnsr(config-ntp-restrict)# noquery
tnsr(config-ntp-restrict)# exit
```

Note: These restrictions are a rough guideline, and may vary depending on the needs and behaviors of the clients.

Repeat the `restrict` directive for each local subnet for which the NTP daemon will act as a time server. When finished, `exit` out of `config-ntp` mode.

21.4 NTP Best Practices

Use a minimum of three servers, either as three separate server entries or a pool containing three or more servers. This is to ensure that if the clock on any one server becomes skewed, the remaining two sources can be used to determine that the skewed server is no longer viable. Otherwise NTP would have to guess which one is accurate and which is skewed.

There are a large number of public NTP servers available under `pool.ntp.org`. The `pool.ntp.org` DNS entry will return a number of randomized servers in each DNS query response. These can be used individually or as pools. The easiest way is to use the `pool` operational mode, which uses all returned servers as if they were specified individually.

When using entries as individual `server` entries, these responses can be subdivided into mutually exclusive pools of peers to avoid overlap. For example, if a configuration specifies `pool.ntp.org` multiple times for `server` entries, the same IP address could accidentally be selected twice. In this case, use `0.pool.ntp.org`, `1.pool.ntp.org`, `2.pool.ntp.org`, and so on. When queried in this way, the responses will be unique for each number.

Furthermore, there are also pools available for regional and other divisions. For example, to only receive responses for servers in the United States, use `us.pool.ntp.org` as a pool or `<n>.us.pool.ntp.org` as servers. For more information, see <https://www.ntppool.org/en/>

LINK LAYER DISCOVERY PROTOCOL

The Link Layer Discovery Protocol (LLDP) service provides a method for discovering which routers are connected to a LAN segment, and offers a way to discover the topology of a network.

22.1 Configuring the LLDP Service

LLDP is configured in two places: Global router parameters and per-interface parameters.

To enable LLDP, TNSR requires global settings for LLDP and at least one interface must participate in LLDP.

22.1.1 LLDP Router Configuration

Three LLDP commands are available in configuration mode (*Configuration Mode*) to configure global LLDP parameters for this router. All of these commands are required to activate LLDP.

lldp system-name <name>

The router hostname advertised by LLDP.

lldp tx-interval <seconds>

Transmit interval, which controls the time between LLDP messages in seconds.

lldp tx-hold <value>

Transmit hold multiplier, which is multiplied by the transmit interval to calculate the total time used for the Time-To-Live (TTL) of the LLDP message.

Tip: If the transmit interval is 30 and the transmit hold multiplier is 4, then the advertised TTL of the LLDP message is 120 ($4 \times 30 = 120$).

Warning: The LLDP timer options do not have default values and must be manually set.

Example:

```
tnsr(config)# lldp system-name MyRouter
tnsr(config)# lldp tx-interval 30
tnsr(config)# lldp tx-hold 4
```

These parameters can be changed at any time.

22.1.2 LLDP Interface Configuration

Additional LLDP commands are available in `config-interface` mode (*Interface Command*) to configure per-interface LLDP identification:

lldp port-name <name>

The name of the interface as advertised by LLDP. This must be present on an interface for it to participate in LLDP.

lldp management (ipv4|ipv6) <ip-address>

The IPv4 and/or IPv6 address advertised by LLDP as a means to manage this router on this interface.

lldp management oid <oid>

An object identifier associated with the management IP address on this interface.

Warning: LLDP requires `lldp port-name` to be present on at least one interface to function.

Example:

```
tnsr(config)# interface TenGigabitEthernet3/0/0
tnsr(config-interface)# lldp port-name MyPort
tnsr(config-interface)# lldp management ipv4 192.0.2.123
tnsr(config-interface)# lldp management ipv6 2001:db8::1:2:3:4
tnsr(config-interface)# exit
tnsr(config)#
```

Warning: Due to a limitation of the underlying API, all LLDP interface parameters must be configured at the same time. When LLDP parameters change, TNSR requires a *dataplane restart* for the new settings to take effect. See *Known Issues*.

22.2 LLDP Status

LLDP status cannot be viewed natively in TNSR at this time, but the status may be obtained directly from the dataplane at the CLI using the command `dataplane shell sudo vppctl show lldp`:

```
tnsr# dataplane shell sudo vppctl show lldp
Local interface      Peer chassis ID    Remote port ID    Last heard    Last sent    Status
TenGigabitEthernet3/0/0  54:78:1a:c0:ab:80 Fa0/1             17.1s ago     25.3s ago    active
```

Alternately, run the command directly from a host shell prompt and not through the TNSR CLI using `sudo dp-exec vppctl show lldp`.

Warning: In either of these examples, the user account must have access to `sudo` to run the command.

PUBLIC KEY INFRASTRUCTURE

TNSR supports Public Key Infrastructure (PKI) X.509 certificates for various uses by the router and supporting software. PKI uses a pair of keys to encrypt and authenticate data, one public and one private. The private key is known only to its owner, and the public key can be known by anyone.

PKI works in an asymmetric fashion. A message is encrypted using the public key, and can only be decrypted by the private key. The private key can also be used to digitally sign a message to prove it originated from the key holder, and this signature can be validated using the public key. Combined with certificates, this provides a means to identify an entity and encrypt communications.

A Certificate Authority (CA) independently verifies the identity of the entity making a request for a certificate, and then signs a request, yielding a certificate. This certificate can then be validated against the certificate of the CA itself by anyone who has access to that CA certificate. In some cases, this CA may be an intermediate, meaning it is also signed by another CA above it. All together, this creates a chain of trust starting with the root CA all the way down to individual certificates. So as long as the CA is trustworthy, any certificate it has signed can be considered trustworthy.

Due to their size and private nature, certificates and keys are stored on the filesystem and not in the XML configuration. PKI files are stored under the following locations:

- Certificate Authorities: `/etc/pki/tls/tnsr/CA/`
- Certificates and Signing Requests: `/etc/pki/tls/tnsr/certs/`
- Private Keys: `/etc/pki/tls/tnsr/private/`

A key pair, CSR, and certificate associated with each other must all have the same name.

The process for creating a certificate is as follows:

- Create keys for `name`.
- Create a certificate signing request for `name` with the attributes to use for the certificate.
- Submit the CSR to a CA, which will sign the CSR and return a certificate.
- Enter or import the certificate contents for `name` into TNSR.

23.1 Key Management

Warning: Private keys are secret. These keys should never need to leave the firewall, with the exception of backups. The CA does not need the private key to sign a request.

TNSR can generate RSA key pairs with sizes of 2048, 3072, or 4096 bits. Larger keys are more secure than shorter keys. RSA Keys smaller than 2048 bits are no longer considered secure in practice, and are thus not allowed.

23.1.1 Generate a Key Pair

To generate a new key pair named `mycert` with a length of 4096 bits:

```
tnsr# pki private-key mycert generate key-length 4096
-----BEGIN PRIVATE KEY-----
[...]
-----END PRIVATE KEY-----
```

The key pair is stored in a file at `/etc/pki/tls/tnsr/private/<name>.key`.

Note: Remember that the private key, CSR, and certificate must all use identical names!

23.1.2 Importing a Key Pair

In addition to generating a key pair on TNSR, a private key may also be imported from an outside source. The key data can be imported in one of two ways:

- Use `pki private-key <name> enter` then copy and paste the PEM data
- Copy the PEM format key file to the TNSR host, then use `pki private-key <name> import <file>` to import from a file from the current working directory.

Copy and Paste

First, use the `enter` command:

```
tnsr# pki private-key mycert enter
Type or paste a PEM-encoded private key.
Include the lines containing 'BEGIN PRIVATE KEY' and 'END PRIVATE KEY'
```

Next, paste the key data:

```
-----BEGIN PRIVATE KEY-----
<key data>
-----END PRIVATE KEY-----
```

Import from File

First, make sure that the copy of the key file is in PEM format.

Next, copy the key file to TNSR and start the CLI from the directory containing this file. The filename extension is not significant, and may be `key`, `pem`, `txt`, or anything else depending on how the file was originally created.

Next, use the `import` command:

```
tnsr# pki private-key mycert import mycert.key
```

23.1.3 Other Key Operations

To view a list of all current keys known to TNSR:

```
tnsr# pki private-key list
mycert
```

To view the contents of the private key named `mycert` in PEM format:

```
tnsr# pki private-key mycert get
-----BEGIN PRIVATE KEY-----
<key data>
-----END PRIVATE KEY-----
```

Warning: When making a backup copy of this key, store the backup in a protected, secure location. Include the armor lines (BEGIN, END) when making a backup copy of the key.

To delete a key pair which is no longer necessary:

```
tnsr# pki private-key <name> delete
```

Warning: Do not delete a private key associated with a CSR or Certificate which is still in use!

23.2 Certificate Signing Request Management

A certificate signing request, or CSR, combines the public key along with a list of attributes that uniquely identify an entity such as a TNSR router. Once created, the CSR is exported and sent to the Certificate Authority (CA). The CA will sign the request and return a certificate.

23.2.1 Set Certificate Signing Request Attributes

The first step in creating a CSR is to set the attributes which identify this firewall. These attributes will be combined to form the certificate Subject:

```
tnsr# pki signing-request settings clear
tnsr# pki signing-request set common-name tnsr.example.com
tnsr# pki signing-request set subject-alt-names add hostname tnsr.example.com
tnsr# pki signing-request set subject-alt-names add ipv4-address 203.0.113.2
tnsr# pki signing-request set country US
tnsr# pki signing-request set state Texas
tnsr# pki signing-request set city Austin
tnsr# pki signing-request set org Example Co
tnsr# pki signing-request set org-unit IT
```

The attributes include:

common-name

The common name of the entity the certificate will identify, typically the fully qualified domain name of this host, or a username.

subject-alt-names

Subject Alternative Name (SAN) entries which are alternate ways to identify the owner of the certificate. Some modern clients ignore the `common-name` and use the contents of the SAN list to validate the identity.

Note: SAN entries are technically optional but the best practice is to at least define one with a hostname, similar to the `common-name` attribute.

TNSR supports the following SAN types:

email

An e-mail address.

hostname

A hostname or fully qualified domain name.

ipv4-address

An IPv4 address, typically a static address assigned to the host which will use the certificate.

ipv6-address

An IPv6 address.

uri

A Uniform Resource Identifier (URI) string.

country

The country in which the entity is located.

state

The state or province in which the entity is located.

city

The city in which the entity is located.

org

The company name associated with the entity.

org-unit

The department or division name inside the company.

Note: At a minimum, a `common-name` must be set to generate a CSR.

Next, set the required digest algorithm which will be used to create a hash of the certificate data:

```
tnsr# pki signing-request set digest sha256
```

This algorithm can be any of the following choices, from weakest to strongest: `sha224`, `sha256`, `sha384`, or `sha512`.

Note: SHA-256 is the recommended minimum strength digest algorithm.

Before generating the CSR, review the configured attributes for the CSR:

```
tnsr# pki signing-request settings show
Certificate signing request fields:
    common-name: tnsr.example.com
```

(continues on next page)

(continued from previous page)

```
country: US
state: Texas
city: Austin
org: Example Co
org-unit: IT
digest: sha256
subject-alt-names:
  hostname: tnsr.example.com
  ipv4-address: 203.0.113.2
```

If any attributes are incorrect, change them using the commands shown previously.

23.2.2 Generate a Certificate Signing Request

If the attributes are all correct, generate the CSR using the same name as the private key created previously. TNSR will output CSR data to the terminal in PEM format:

```
tnsr# pki signing-request mycert generate

-----BEGIN CERTIFICATE REQUEST-----
<csr data>
-----END CERTIFICATE REQUEST-----
```

The CSR data is stored in a file at `/etc/pki/tls/tnsr/certs/<name>.csr`

Note: Remember that the private key, CSR, and certificate must all use identical names!

The CSR data for existing entries can be displayed in PEM format:

```
tnsr# pki signing-request mycert get

-----BEGIN CERTIFICATE REQUEST-----
<csr data>
-----END CERTIFICATE REQUEST-----
```

Copy and paste the CSR data, including the armor lines (BEGIN, END), from the terminal into a local file, and submit that copy of the CSR to the CA for signing.

Warning: Remember, the private key for the CSR is not required for signing. Do not send the private key to the CA.

23.2.3 Other CSR Operations

A CSR entry may be deleted once the certificate has been imported to TNSR:

```
tnsr# pki signing-request <name> delete
```

To view a list of all CSR entries known to TNSR:

```
tnsr# pki signing-request list
```

To delete a specific SAN entry:

```
tnsr# pki signing-request set subject-alt-names delete <name>
```

To clear all SAN entries:

```
tnsr# pki signing-request set subject-alt-names clear
```

To reset all CSR attribute contents:

```
tnsr# pki signing-request settings clear
```

23.3 Certificate Management

After submitting the certificate signing request to the CA, the CA will sign the request and return a signed copy of the certificate. Typically this will be sent in PEM format, the same format used for the CSR and private key.

The certificate data can be imported in one of two ways:

- Use `pki certificate <name> enter` then copy and paste the PEM data
- Copy the PEM format certificate file to the TNSR host, then use `pki certificate <name> import <file>` to import from a file from the current working directory.

The certificate data is stored in a file at `/etc/pki/tls/tnsr/certs/<name>.cert` after entering or importing the contents.

Warning: When importing a certificate created outside of TNSR, The private key must be imported and present before TNSR can import the certificate.

23.3.1 Copy and Paste

First, use the `enter` command:

```
tnsr# pki certificate mycert enter
Type or paste a PEM-encoded certificate.
Include the lines containing 'BEGIN CERTIFICATE' and 'END CERTIFICATE'
```

Note: Remember that the private key, CSR, and certificate must all use identical names!

Next, paste the certificate data:

```
-----BEGIN CERTIFICATE-----  
<cert data>  
-----END CERTIFICATE-----
```

23.3.2 Import from File

First, make sure that the copy of the certificate file is in PEM format. The CA may have delivered the certificate in PEM format, or another format. Convert the certificate to PEM format if it did not come that way.

Next, copy the certificate file to TNSR and start the CLI from the directory containing the certificate file. The filename extension is not significant, and may be `pem`, `crt`, `txt`, or anything else depending on how the file was delivered from the CA.

Next, use the `import` command:

```
tnsr# pki certificate mycert import mycert.pem
```

23.3.3 Other Certificate Operations

To view a list of all certificates known to TNSR:

```
tnsr# pki certificate list
```

To view the PEM data for a specific certificate known to TNSR:

```
tnsr# pki certificate <name> get
```

To delete a certificate:

```
tnsr# pki certificate <name> delete
```

23.4 Certificate Authority Management

As mentioned in *Public Key Infrastructure*, a Certificate Authority (CA) provides a starting point for a chain of trust between entities using certificates. A CA will sign a certificate showing that it is valid, and as long as an entity trusts the CA, it knows it can trust certificates signed by that CA.

By creating or importing a CA into TNSR, TNSR can use that CA to validate other certificates or sign new certificate requests. These certificates can then be used to identify clients connecting to the RESTconf service or other similar purposes.

A CA can be managed in several ways in TNSR. For example:

- Import a CA generated by another device by copy/paste in the CLI
- Import a CA generated by another device from a file
- Generate a new private key and CSR, then self-sign the CSR and set the CA property. The resulting CA is automatically available as a TNSR CA.

23.4.1 Import a CA

TNSR can import a CA from the terminal with copy/paste, or from a file. When importing a CA, the key is optional for validation but required for signing. To import the key, see [Key Management](#). Import the key with the same name as the CA.

To import a CA from the terminal, use the `enter` command. In this example, a CA named `tnsrca` will be imported from the terminal by TNSR:

```
# pki ca tnsrca enter
Type or paste a PEM-encoded certificate.
Include the lines containing 'BEGIN CERTIFICATE' and 'END CERTIFICATE'
-----BEGIN CERTIFICATE-----
<cert data>
-----END CERTIFICATE-----
tnsr(config)#
```

Next, import the private key using the same name:

```
tnsr(config)# pki private-key tnsrca enter
Type or paste a PEM-encoded private key.
Include the lines containing 'BEGIN PRIVATE KEY' and 'END PRIVATE KEY'
-----BEGIN PRIVATE KEY-----
<key data>
-----END PRIVATE KEY-----
```

Alternately, import the CA and key from the filesystem:

```
tnsr(config)# pki ca otherca import otherca.crt
tnsr(config)# pki private-key otherca import otherca.key
```

23.4.2 Creating a Self-Signed CA

TNSR can also create a self-signed CA instead of importing an external CA. For internal uses, this is generally a good practice since TNSR does not need to rely on public CA entries to determine trust for its own clients.

First, generate a new private key for the CA:

```
tnsr(config)# pki private-key selfca generate
-----BEGIN PRIVATE KEY-----
<key data>
-----END PRIVATE KEY-----
```

Next, create a new CSR for the CA:

```
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name selfca
tnsr(config)# pki signing-request set subject-alt-names add hostname selfca
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request selfca generate
-----BEGIN CERTIFICATE REQUEST-----
<csr data>
-----END CERTIFICATE REQUEST-----
```

Finally, have TNSR self-sign the CSR while setting the CA flag on the resulting certificate:

```
tnsr(config)# pki signing-request selfca sign self enable-ca true
-----BEGIN CERTIFICATE-----
<cert data>
-----END CERTIFICATE-----
```

After signing, the newly created CA is ready for immediate use:

```
tnsr(config)# pki ca list
    tnsrca
    selfca
```

23.4.3 Intermediate CAs

In some cases a CA may rely on another CA. For example, if a root CA signs an intermediate CA and the intermediate CA signs a certificate, then both the root CA and intermediate CA are required by the validation process.

To show this relationship in TNSR, a CA may be appended to another CA:

```
tnsr(config)# pki ca <root ca name> append <intermediate ca name>
```

In the above command, both CA entries must be present in TNSR before using the `append` command.

23.4.4 Using a CA to sign a CSR

A CA in TNSR with a private key present can also sign a client certificate. The typical use case for this is for RESTconf clients which must have a certificate recognized by a known CA associated with the RESTconf service.

First, generate a client private key and CSR:

```
tnsr(config)# pki private-key tnsrclient generate
-----BEGIN PRIVATE KEY-----
<key data>
-----END PRIVATE KEY-----
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name tnsrclient.example.com
tnsr(config)# pki signing-request set subject-alt-names add hostname tnsrclient.example.
↪com
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request tnsrclient generate
-----BEGIN CERTIFICATE REQUEST-----
<csr data>
-----END CERTIFICATE REQUEST-----
```

Then, sign the certificate:

```
tnsr(config)# pki signing-request tnsrclient sign ca-name tnsrca days-valid 365 digest_
↪sha512 enable-ca false
-----BEGIN CERTIFICATE-----
<cert data>
-----END CERTIFICATE-----
```


The `sign` command takes several parameters, each of which has a default safe for use with client certificates in this context. The above example uses these defaults, but specifies them manually to show how the parameters function. The available parameters are:

days-valid

The number of days the resulting certificate will be valid. The default is 365 days (one year). When the certificate expires, it must be signed again for a new term. Certificates with a shorter lifetime are more secure, but longer lifetimes are more convenient.

digest

The hash algorithm used to sign the certificate. The default value is `sha512`.

enable-ca

A boolean value which sets the CA flag in the resulting certificate. If a CSR is signed as a CA, the resulting certificate can then be used to sign other certificates. For end user certificates this is not necessary or desired, so the default is `false`.

23.4.5 Other CA Operations

The remaining basic CA operations allow management of CA entries.

To view a list of all CA entries:

```
tnsr(config)# pki ca list
tnsrca
selfca
```

To view the contents of a CA certificate:

```
tnsr(config)# pki ca tnsrca get
-----BEGIN CERTIFICATE-----
<cert data>
-----END CERTIFICATE-----
```

To delete a CA entry:

```
tnsr(config)# pki ca tnsrca delete
```

BIDIRECTIONAL FORWARDING DETECTION

Bidirectional Forwarding Detection (BFD) is used to detect faults between two routers across a link, even if the physical link does not support failure detection. Even in cases where physical link issues occur and are detected, BFD can coordinate reaction to these failures rather than each component relying on its own failure detection methods.

TNSR uses UDP as a transport for BFD between directly connected routers (single hop/next hop) as described in [RFC 5880](#) and [RFC 5881](#).

Each BFD session monitors one link. Multiple BFD sessions are necessary to detect faults on multiple links. BFD sessions must be manually configured between endpoints as there is no method for automated discovery.

Note: The BFD implementation on TNSR only supports single hop BFD session in the dataplane. As such, BFD can only be configured on directly connected interfaces, between directly connected peers.

BFD supports session authentication using SHA1 for security, and the best practice is to use authentication when possible.

When using BFD, both endpoints transmit “Hello” packets back and forth between each other. If these packets are not received within the expected time frame, with the expected authentication information, the link is considered down. Links may also be administratively configured as down, and will not recover until manually changed.

TNSR currently supports BFD integration with BGP, OSPF, and OSPF6.

24.1 BFD Sessions

A *BFD* session defines a relationship between TNSR and a peer so they can exchange BFD information and detect link faults. These sessions are configured by using the `bfd session <name>` command, which enters `config-bfd` mode, and defines a BFD session using the given word for a name.

Example:

```
tnsr# conf
tnsr(config)# bfd session otherrouter
tnsr(config-bfd)# interface GigabitEthernet0/14/0
tnsr(config-bfd)# local address 203.0.113.2
tnsr(config-bfd)# peer address 203.0.113.25
tnsr(config-bfd)# desired-min-tx 100000
tnsr(config-bfd)# required-min-rx 100000
tnsr(config-bfd)# detect-multiplier 3
tnsr(config-bfd)# exit
tnsr(config)# exit
tnsr#
```

24.1.1 Session Parameters

interface <if-name>

The Ethernet interface on which to enable BFD.

Warning: This interface must be directly connected to the peer (single hop), as the dataplane does not support BFD over multiple hops. It cannot be used with routing protocols running on loopback interfaces, for example.

local address <ip-address>

The local address used as a source for BFD packets. This address must be present on <if-name>.

peer address <ip-address>

The remote BFD peer address. The local and remote peer IP addresses must use the same address family (either IPv4 or IPv6)

desired-min-tx <microseconds>

The desired minimum transmit interval, in microseconds

required-min-rx <microseconds>

The required minimum transmit interval, in microseconds

detect-multiplier <n-packets>

A non-zero value that is, roughly speaking, due to jitter, the number of packets that have to be missed in a row to declare the session to be down. Must be between 1 and 255.

Additional parameters for authentication are covered in *BFD Session Authentication*.

24.1.2 Changing the BFD Administrative State

Under normal conditions the state of a link monitored by BFD is handled automatically. The link state can also be set manually when necessary.

To disable a link and mark it administratively down:

```
tnsr# bfd session <name>
tnsr(config-bfd)# enable false
```

To remove the administrative down and return the link to BFD management:

```
tnsr# bfd session <name>
tnsr(config-bfd)# enable true
```

24.1.3 Viewing BFD Session Status

To see the configuration and status of a BFD session, use the `show bfd session` command:

```
tnsr# show bfd session
Session Number: 0
  Local IP Addr: 203.0.113.2
  Peer  IP Addr: 203.0.113.25
  State: down
  Required Min Rx Interval: 1000000 usec
```

(continues on next page)

(continued from previous page)

```
Desired Min Tx Interval: 100000 usec
Detect Multiplier: 3
BFD Key Id: 123
Configuration Key Id: 14
Authenticated: true
```

24.1.4 Using BFD Sessions

For BFD to function fully, the BFD session status must be consumed by other interested parties. Currently on TNSR this can be BGP, OSPF, or OSPF6 dynamic routing.

BGP

BFD can be enabled for specific BGP neighbors with the `bfd enabled true` command from within `config-bgp-neighbor` mode.

OSPF/OSPF6

BFD can be enabled on specific OSPF interfaces with the `bfd enabled true` command from within `config-ospf[6]-if` mode.

In each case, the BGP neighbor or OSPF/OSPF6 interface must coincide exactly with the settings on a BFD session.

24.2 BFD Session Authentication

TNSR supports authentication for *BFD* sessions. When authentication is enabled, a secret key is used to create a hash of the outgoing packets. The key itself is not sent in the packets, only the hash and the ID of the key. A sequence number is used to help avoid replay attacks.

The receiving peer will check for a key matching the given ID and then compare a hash of the BFD payload against the hash sent by the peer. If it matches and the sequence number is valid, the packet is accepted.

24.2.1 Define BFD Keys

Before a BFD key can be used in a session, it must be defined in the configuration. This is done from `config` mode using the following command:

bfd conf-key-id <conf-key-id>

Defines an internal configuration key identifier and starts configuration of the key. This identifier is an unsigned 32-bit integer for an **internal** unique key in TNSR.

This command enters `config-bfd-key` mode.

Note: Neither the key itself nor this ID are **ever** communicated to peers.

The following commands are available in `config-bfd-key` mode:

authentication type (keyed-sha1|meticulous-keyed-sha1)

Configures the type of authentication TNSR will use with this key. Both available types are based on SHA1, the difference is in how sequence numbers are handled.

keyed-sha1

The sequence number for the session is incremented occasionally.

meticulous-keyed-sha1

The sequence number for the session is incremented with every packet.

secret < (<hex-pair>)[1-20] >

The secret component of this key. Specified as a group of 1 to 20 hex pair values, such as 4a40369b4df32ed0652b548400. This value must be generated outside of TNSR.

To define a new configuration key ID:

```
tnsr(config)# bfd conf-key-id <conf-key-id>
tnsr(config-bfd-key)# authentication type (keyed-sha1|meticulous-keyed-sha1)
tnsr(config-bfd-key)# secret < (<hex-pair>)[1-20] >
```

For example:

```
tnsr(config)# bfd conf-key-id 123456789
tnsr(config-bfd-key)# authentication type meticulous-keyed-sha1
tnsr(config-bfd-key)# secret 4a40369b4df32ed0652b548400
```

24.2.2 Setup BFD Authentication

Configure Session BFD Keys

There are two keys defined for each BFD session, the internal configuration key defined in *Define BFD Keys* and the public key identifier sent to the peer. These values are set within `config-bfd` mode.

conf-key-id <conf-key-id>

Tells BFD which **internal** configuration key to use with this session. Keys are created as described in the previous section, *Define BFD Keys*.

bfd-key-id <bfd-key-id>

The public BFD key ID. An unsigned 8-bit integer (0-255) which is the key ID **carried in BFD packets**, used by the peers to verify authentication.

Warning: Both `conf-key-id` and `bfd-key-id` must be specified, or neither can be present.

Authentication will only be active if both `bfd-key-id` and `conf-key-id` are defined for a BFD session.

Delayed Session Authentication

An additional `delayed` keyword is also supported for BFD session which tells BFD to hold off any authentication action when receiving BFD messages until a peer attempts to authenticate or uses new credentials.

Warning: Only **one** host can have the `delayed` option enabled, otherwise credentials will never update as both peers will be waiting on the other one to act first.

Warning: BFD implementations vary, so authentication changes may disrupt live BFD sessions. The best practice to avoiding disruption when operating with third party BFD implementations is to set `delayed` on the TNSR side.

When adding authentication to an existing BFD session or changing active authentication settings, make the changes first on the node with `delayed` set then configure the peer to match.

Example

To activate authentication, add the chosen identifiers to a BFD session:

```
tnsr(config)# bfd session <bfd-session>
tnsr(config-bfd)# bfd-key-id <bfd-key-id>
tnsr(config-bfd)# conf-key-id <conf-key-id>
tnsr(config-bfd)# delayed (true|false)
tnsr(config-bfd)# exit
```

For example:

```
tnsr(config)# bfd session otherrouter
tnsr(config-bfd)# bfd-key-id 123
tnsr(config-bfd)# conf-key-id 123456789
tnsr(config-bfd)# delayed false
tnsr(config-bfd)# exit
```

24.2.3 View BFD Keys

To view a list of keys and their types, use the `show bfd keys` command:

```
tnsr# show bfd keys
Conf Key  Type                               Use Count
-----
123456789 meticulous-keyed-sha1 1
234567890 keyed-sha1              0
```

To view only one specific key, pass its ID to the same command:

```
tnsr# show bfd keys conf-key-id 123456789
Conf Key  Type                               Use Count
-----
123456789 meticulous-keyed-sha1 1
```

24.3 BFD Example

This example establishes authenticated *BFD* between two routers which use OSPF to exchange routing information.

24.3.1 Configure BFD Authentication Keys

First, configure and check the authentication keys on both routers.

```
r1 tnsr(config)# bfd conf-key-id 123456789
r1 tnsr(config-bfd-key)# authentication type meticulous-keyed-sha1
r1 tnsr(config-bfd-key)# secret 4a40369b4df32ed0652b548400
r1 tnsr(config-bfd-key)# exit
```

```
r2 tnsr(config)# bfd conf-key-id 123456789
r2 tnsr(config-bfd-key)# authentication type meticulous-keyed-sha1
r2 tnsr(config-bfd-key)# secret 4a40369b4df32ed0652b548400
r2 tnsr(config-bfd-key)# exit
```

```
r1 tnsr# show bfd keys
Conf Key  Type                      Use Count
-----
123456789 meticulous-keyed-sha1 1
```

```
r2 tnsr# show bfd keys
Conf Key  Type                      Use Count
-----
123456789 meticulous-keyed-sha1 1
```

24.3.2 Configure BFD Sessions

Next, configure the BFD sessions on both routers using the authentication information configured in the previous section.

```
r1 tnsr(config)# bfd session r1_r2
r1 tnsr(config-bfd)# enable true
r1 tnsr(config-bfd)# interface TenGigabitEthernet6/0/0
r1 tnsr(config-bfd)# local address 203.0.113.2
r1 tnsr(config-bfd)# peer address 203.0.113.27
r1 tnsr(config-bfd)# desired-min-tx 10000000
r1 tnsr(config-bfd)# required-min-rx 10000000
r1 tnsr(config-bfd)# detect-multiplier 3
r1 tnsr(config-bfd)# bfd-key-id 123
r1 tnsr(config-bfd)# conf-key-id 123456789
r1 tnsr(config-bfd)# delayed true
r1 tnsr(config-bfd)# exit
r1 tnsr(config)# exit
```

Note: Note that since this node is configured first, it has `delayed true` set, while the peer will have `false`. Since this is a new session, the difference is minimal, but when making future changes, this distinction is important. See [Setup BFD Authentication](#) for details.

```
r2 tnsr(config)# bfd session r2_r1
r2 tnsr(config-bfd)# enable true
r2 tnsr(config-bfd)# interface TenGigabitEthernet6/0/0
```

(continues on next page)

(continued from previous page)

```
r2 tnsr(config-bfd)# local address 203.0.113.27
r2 tnsr(config-bfd)# peer address 203.0.113.2
r2 tnsr(config-bfd)# desired-min-tx 10000000
r2 tnsr(config-bfd)# required-min-rx 10000000
r2 tnsr(config-bfd)# detect-multiplier 3
r2 tnsr(config-bfd)# bfd-key-id 123
r2 tnsr(config-bfd)# conf-key-id 123456789
r2 tnsr(config-bfd)# delayed false
r2 tnsr(config-bfd)# exit
r2 tnsr(config)# exit
```

24.3.3 Confirm BFD Status

With BFD configured on both nodes, check its status. The status should show a state of **up** and also indicate that the session is authenticated.

```
r1 tnsr# show bfd
Session Name: r1_r2
  Interface: TenGigabitEthernet6/0/0
  Local IP Addr: 203.0.113.2
  Peer  IP Addr: 203.0.113.27
  State: up
  Required Min Rx Interval: 10000000 usec
  Desired Min Tx Interval: 10000000 usec
  Detect Multiplier: 3
  BFD Key Id: 123
  Configuration Key Id: 123456789
  Authenticated: true
```

```
r2 tnsr# show bfd
Session Name: r2_r1
  Interface: TenGigabitEthernet6/0/0
  Local IP Addr: 203.0.113.27
  Peer  IP Addr: 203.0.113.2
  State: up
  Required Min Rx Interval: 10000000 usec
  Desired Min Tx Interval: 10000000 usec
  Detect Multiplier: 3
  BFD Key Id: 123
  Configuration Key Id: 123456789
  Authenticated: true
```


24.3.4 Setup OSPF

Now setup the routing protocol which will utilize the BFD status.

Note: BFD is activated by the `bfd enabled true` command on the `TenGigabitEthernet6/0/0` interface in OSPF. This is the same interface configured in BFD.

```
r1 tnsr(config)# route dynamic ospf
r1 tnsr(config-frr-ospf)# enable
r1 tnsr(config-frr-ospf)# server
r1 tnsr(config-ospf)# ospf router-id 10.2.0.1
r1 tnsr(config-ospf)# interface TenGigabitEthernet6/0/0
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r1 tnsr(config-ospf-if)# ip network broadcast
r1 tnsr(config-ospf-if)# bfd enabled true
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-ospf)# int GigabitEthernet3/0/0
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-ospf)# exit
r1 tnsr(config-frr-ospf)# exit
```

```
r2 tnsr(config)# route dynamic ospf
r2 tnsr(config-frr-ospf)# enable
r2 tnsr(config-frr-ospf)# server
r2 tnsr(config-ospf)# ospf router-id 10.27.0.1
r2 tnsr(config-ospf)# interface TenGigabitEthernet6/0/0
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r2 tnsr(config-ospf-if)# ip network broadcast
r2 tnsr(config-ospf-if)# bfd enabled true
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-ospf)# int GigabitEthernet3/0/0
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-ospf)# exit
r2 tnsr(config-frr-ospf)# exit
```

24.3.5 Check OSPF Status

Check the status of OSPF to see if a neighbor relationship has been formed:

```
r1 tnsr(config)# show route dynamic ospf neighbor
```

| Neighbor ID | Pri | State | Dead Time | Address | Interface | RXmtL |
|-----------------|-----|-------------|-----------|--------------|------------------------|-------|
| ↪ RqstL DBsmL | | | | | | |
| 10.27.0.1 | 1 | Full/Backup | 36.415s | 203.0.113.27 | TenGigabitEthernet6/0/ | |
| ↪ 0:203.0.113.2 | 0 | 0 | 0 | | | |

```
r2 tnsr(config)# show route dynamic ospf neighbor
```

(continues on next page)

(continued from previous page)

| Neighbor ID | Pri | State | Dead Time | Address | Interface | RXmtL |
|-----------------|-----|---------|-----------|-------------|------------------------|-------|
| ↪RqstL DBsmL | | | | | | |
| 10.2.0.1 | 1 | Full/DR | 35.487s | 203.0.113.2 | TenGigabitEthernet6/0/ | |
| ↪0:203.0.113.27 | 1 | 0 | 0 | | | |

24.3.6 Finish Up

Both routers are fully configured to use BFD and OSPF. If the TenGigabitEthernet6/0/0 interface fails, BFD will signal OSPF and the interface will be marked down in the OSPF daemon, and neighbors on that interface will be removed.

USER MANAGEMENT

TNSR includes a `tnsr` user by default. Administrators may create additional users to provide separate workspaces for each user. In this workspace the user may save and load configurations.

Warning: User access is controlled by NACM and the NACM default behavior varies by platform and when the TNSR installation was created. See *NETCONF Access Control Model (NACM)* for details.

25.1 User Configuration

Entering `config-auth` mode requires a username. When modifying an existing user, the username is available for autocompletion. The command will also accept a new username, which it creates when the configuration is committed. Creating a new user requires providing a means of authentication:

```
tnsr(config)# auth user <user-name>
```

A user may be deleted using the `no` form:

```
tnsr(config)# no auth user <user-name>
```

The `exit` command leaves `config-auth` mode:

```
tnsr(config-auth)# exit
tnsr(config)#
```

When exiting `config-auth` mode, TNSR commits changes to the user, which will create or update the entry for the user in the host operating system.

25.2 Authentication Methods

There are two methods for authenticating users: passwords and user keys.

25.2.1 Password Authentication

The password method takes a password entered in plain text, but stores a hashed version of the password in the configuration:

```
tnsr(config-auth)# password <plain text password>
```

Note: The password is hashed by the CLI prior to being passed to the backend. The plain text password is never stored or passed outside the specific CLI instance.

Warning: The password may be between 6 and 256 characters in length, though depending on the operating system default password hashing algorithm and key derivation behavior, the practical limit may be lower.

If the configuration is viewed using the `show configuration running` command, the hashed password will be present.

25.2.2 User Key Authentication

The second method of authentication is by user key. A user key is the same format as created by `ssh-keygen`.

To add a user key for authentication, use the `user-keys` command inside `config-auth` mode:

```
tnsr(config-auth)# user-keys <key-name>
```

The user key is read directly from the CLI. After the command is executed by pressing **Enter**, the CLI will wait for the key to be entered, typically by pasting it into the terminal or by typing. The end of input is indicated by a blank line. The normal CLI features are bypassed during this process.

NETCONF ACCESS CONTROL MODEL (NACM)

NETCONF Access Control Model (NACM) provides a means by which access can be granted to or restricted from groups in TNSR.

NACM is group-based and these groups and group membership lists are maintained in the NACM configuration.

User authentication is not handled by NACM, but by other processes depending on how the user connects. For examples, see *User Management* and *RESTCONF Server*.

See also:

The data model and procedures for evaluating whether a user is authorized to perform a given action are defined in [RFC 8341](#).

Warning: TNSR Does not provide protection against changing the rules in such a way that causes a loss of access. Should a lockout situation occur, see *Regaining Access if Locked Out by NACM*.

26.1 NACM Example

The example configuration in this section is the same default configuration shipped on TNSR version 18.08 mentioned in *NACM Defaults*.

Warning: In the following example, NACM is disabled first and activated at the end of the configuration. This avoids locking out the user when they are in the middle of creating the configuration, in case they unintentionally exit or commit before finishing.

```
tnsr(config)# nacm disable
tnsr(config)# nacm exec-default deny
tnsr(config)# nacm read-default deny
tnsr(config)# nacm write-default deny
tnsr(config)# nacm group admin
tnsr(config-nacm-group)# member root
tnsr(config-nacm-group)# member tnsr
tnsr(config-nacm-group)# exit
tnsr(config)# nacm rule-list admin-rules
tnsr(config-nacm-rule-list)# group admin
tnsr(config-nacm-rule-list)# rule permit-all
tnsr(config-nacm-rule)# module *
```

(continues on next page)

(continued from previous page)

```
tnsr(config-nacm-rule)# access-operations *
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
tnsr(config)# nacm enable
tnsr(config)# exit
```

26.2 NACM Basics

26.2.1 Enable or Disable NACM

Warning: Do not enable NACM unless the rules and groups are correctly and completely configured, otherwise access to TNSR may be cut off. If access is lost, see *Regaining Access if Locked Out by NACM*.

To enable NACM:

```
tnsr(config)# nacm enable
```

To disable NACM:

```
tnsr(config)# nacm disable
```

26.2.2 NACM Default Policy Actions

Alter the default policy for executing commands:

```
tnsr(config)# nacm exec-default <deny|permit>
```

Alter the default policy for reading status output:

```
tnsr(config)# nacm read-default <deny|permit>
```

Alter the default policy for writing configuration changes:

```
tnsr(config)# nacm write-default <deny|permit>
```

26.3 NACM Authorization

26.3.1 NACM Username Mapping

NACM does not authenticate users itself, but it does need to know the username to determine group membership.

The method of authentication determines the username as seen by NACM. For example, users authenticated by username and password (e.g. PAM auth for RESTCONF or the CLI) will have that same username in TNSR.

See also:

For more information on how users are authenticated, see [User Management](#) for CLI access and [RESTCONF Server](#) for access via RESTCONF.

CLI users can check their TNSR username with the `whoami` command.

NACM obeys the following rules to determine a username:

SSH Password

NACM username is the same as the login username

SSH User Key

NACM username is the same as the login username

HTTP Server Password

NACM username is the same as the login username

HTTP Server Client Certificate

NACM username is the Common Name of the user certificate (cn= subject component)

26.3.2 NACM Groups

To create a group, use the `nacm group <group-name>` command:

```
tnsr(config)# nacm group admin
```

This changes to the `config-nacm-group` mode where group members can be defined using the `member <username>` command:

```
tnsr(config-nacm-group)# member root
tnsr(config-nacm-group)# member tnsr
```

The username in this context is the mapped username described in [NACM Authorization](#).

Warning: Host operating system users that were created manually and not managed through TNSR cannot be used as group members. See [User Management](#) for information on managing users in TNSR.

To remove a member, use the `no` form of the command:

```
tnsr(config)# nacm group admin
tnsr(config-nacm-group)# no member tnsr
```

To remove a group, use `no nacm group <group-name>`:

```
tnsr(config)# no nacm group admin
```

26.4 Managing NACM Rules

26.4.1 NACM Rule Lists

NACM rules are contained inside a rule list. A rule list may contain multiple rules, and they are used in the order they are entered. Rule lists are also checked in the order they were created. Consider the order of lists and rules carefully when crafting rule lists.

Create a rule list:

```
tnsr(config)# nacm rule-list ro-rules
```

Set the group to which the rule list applies, use `group <group-name>`:

```
tnsr(config-nacm-rule-list)# group readonly
```

See also:

For information on defining groups, see [NACM Authorization](#).

26.4.2 NACM Rules

When configuring a rule list (`config-nacm-rule-list` mode), the `rule <name>` command defines a new rule:

```
tnsr(config-nacm-rule-list)# rule permit-all
```

After entering this command, the CLI will be in `config-nacm-rule` mode.

From here, a variety of behaviors for the rule can be set, including:

access-operations <name>

The type of operations matched by this rule. Allowed values include:

Multiple types may be specified in a single command.

*

Match all operations

Note: This value cannot be combined with other types as the result would be redundant.

create

Any protocol operation that creates a new data node.

delete

Any protocol operation that removes a data node.

exec

Execution access to the specified protocol operation.

read

Any protocol operation or notification that returns the value of a data node.

update

Any protocol operation that alters an existing data node.

action <deny/permit>

The action to take when this rule is matched, either `deny` to deny access or `permit` to allow access.

comment <text>

Arbitrary text describing the purpose of this rule.

Next, the following types can be used to specify the restriction to be enacted by this rule:

module <*>

The name of the Yang module covered by this rule, for example `netgate-nat`.

The complete list of modules can be viewed in the CLI by entering `module ?` from this mode. The [REST API documentation](#) also contains a list of modules.

path <path-name>

XML path to restrict with this rule. This path must include proper namespace prefixes and may also include key restrictions.

For example, to control access to interface state data (e.g. `show interface output`), use `/ngif:interfaces-state/ngif:interface`

To control access for a single interface, specify its name in the path: `/ngif:interfaces-state/ngif:interface[ngif:name='ipip0']`

rpc <rpc-name>

The name of an RPC call to be restricted by this rule, such as `edit-config`, `get-config`, and so on.

Warning: Users with access to modify the configuration (`edit-config`) should also be granted access to read the same paths (e.g. `get-config`). If a user only has `edit-config` access to a path, the user may receive an access-denied message in the CLI for that path when attempting to use a configuration command which makes a modification. This can happen because validation of certain commands requires reading the configuration to determine if the attempted command contains appropriate values.

26.4.3 NACM Rule Examples

As shown in [NACM Example](#), the following set of commands defines a rule list and then creates a rule to permit access to everything in TNSR:

```
tnsr(config)# nacm rule-list admin-rules
tnsr(config-nacm-rule-list)# group admin
tnsr(config-nacm-rule-list)# rule permit-all
tnsr(config-nacm-rule)# module *
tnsr(config-nacm-rule)# access-operations *
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
```

Using the available `module` and `access-operation`, rules are possible that limit in more fine-grained ways.

This next example will allow a user in the `limited` group to see information from commands like `show`, but not make changes to the configuration:

```
tnsr(config)# nacm rule-list limited-rules
tnsr(config-nacm-rule-list)# group limited
tnsr(config-nacm-rule-list)# rule read-only
```

(continues on next page)

(continued from previous page)

```
tnsr(config-nacm-rule)# module *
tnsr(config-nacm-rule)# access-operations read exec
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
```

Selective restrictions are also possible with rules that limit access to specific modules while allowing access to everything else. In this example, users in the `limited` group may access any module except for NTP.

```
tnsr(config)# nacm rule-list limited-rules
tnsr(config-nacm-rule-list)# group limited
tnsr(config-nacm-rule-list)# rule no-ntp
tnsr(config-nacm-rule)# module netgate-ntp
tnsr(config-nacm-rule)# access-operations *
tnsr(config-nacm-rule)# action deny
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# rule permit-all
tnsr(config-nacm-rule)# module *
tnsr(config-nacm-rule)# access-operations *
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
```

Restricting by path allows fine-grained control over specific areas of configuration and state data. This example denies access to `show interface` commands if a user is in the `limited` group:

```
tnsr(config)# nacm rule-list limited-rules
tnsr(config-nacm-rule-list)# group limited
tnsr(config-nacm-rule-list)# rule no-interface-state
tnsr(config-nacm-rule)# action deny
tnsr(config-nacm-rule)# path /ngif:interfaces-state/ngif:interface
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# rule permit-all
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
```

26.4.4 NACM Rule Processing Order

When consulting defined rule lists, NACM acts in the following manner:

- If NACM is disabled, it skips all checks, otherwise it proceeds
- NACM consults group lists to find which groups contain this user
- NACM checks each rule list in the order they are defined
- NACM checks the group membership for each of these rule lists
- NACM compares the group defined on the rule list to the groups for this user, and if there is a match, it checks rules in the list
- NACM checks the rules in the order they are defined inside the rule list
- NACM compares the current access operation to the rule and if it matches, the rest of the rule is tested

- NACM attempts to match the following criteria, if defined on the rule:
 - The module on the rule name must match the requested module or *.
 - The rpc-name matches the RPC call in the request
 - The path matches the XML path to the requested data
- If the rule is matched, NACM consults the action on the rule and acts as indicated, either permitting or denying access
- NACM repeats these checks until there are no more rules, and then no more rule lists
- If no rules matched, NACM consults the default policies for the attempted operation and takes the indicated action

26.5 View NACM Configuration

The current NACM configuration can be viewed with the `show nacm` command:

```
tnsr# show nacm

NACM
====
NACM Enable: true
Default Read policy : deny
Default Write policy: deny
Default Exec policy : deny

Group: admin
-----
    root
    tnsr

Rule List: admin-rules
-----
Groups:
    admin

Name          Action Op Module Type
-----
permit-all   permit * *
```

This may be narrowed down to only show part of the configuration.

To view all groups:

```
tnsr# show nacm group

NACM
====

Group: admin
-----
    root
```

(continues on next page)

(continued from previous page)

```
tnsr
Group: readonly
-----
    olly
    reed
```

To view a specific group, use `show nacm group <group-name>`:

```
tnsr# show nacm group admin

NACM
====

Group: admin
-----
    root
    tnsr
```

To view all rule lists:

```
tnsr# show nacm rule-list

NACM
====
Rule List: admin-rules
-----
Groups:
    admin

Name          Action Op  Module Type
-----
permit-all  permit *    *

Rule List: ro-rules
-----
Groups:

Name          Action Op  Module Type
-----
ro            permit exec *
read         deny  *      *
```

To view a specific rule list, use `show nacm rule-list <list-name>`:

```
tnsr# show nacm rule-list admin-rules

NACM
====
Rule List: admin-rules
-----
Groups:
    admin
```

(continues on next page)

(continued from previous page)

| Name | Action | Op | Module | Type |
|------------|--------|-----|--------|-------|
| ----- | ----- | --- | ----- | ----- |
| permit-all | permit | * | * | |

26.6 Regaining Access if Locked Out by NACM

If the NACM configuration prevents an administrator from accessing TNSR in a required way, NACM can be disabled or its configuration removed to regain access.

26.6.1 Method 1: Temporarily Disable NACM

With a complicated NACM configuration, the easiest way to regain access is to disable NACM, fix the configuration, and then enable it again. This involves disabling NACM in `/etc/tnsr.xml`, which is copied from one of the following locations, depending on which services are stopped/started: `/etc/tnsr/tnsr-none.xml`, `/etc/tnsr/tnsr-running.xml`, and `/etc/tnsr/tnsr-startup.xml`. The best practice is to edit all three files.

- Stop TNSR
- Edit `/etc/tnsr/tnsr-startup.xml`
- Locate the line with `CLICON_NACM_MODE` and change it to:

```
<CLICON_NACM_MODE>disabled</CLICON_NACM_MODE>
```

- Repeat the edit in `/etc/tnsr/tnsr-none.xml` and `/etc/tnsr/tnsr-running.xml`
- Restart TNSR
- Use the TNSR CLI to fix the broken NACM rules
- Save the new configuration
- Stop TNSR
- Edit `/etc/tnsr/tnsr-startup.xml`
- Locate the line with `CLICON_NACM_MODE` and change it to:

```
<CLICON_NACM_MODE>internal</CLICON_NACM_MODE>
```

- Repeat the edit in `/etc/tnsr/tnsr-none.xml` and `/etc/tnsr/tnsr-running.xml`
- Restart TNSR

TNSR will start with the new, fixed, NACM configuration. If access is still not working properly, repeat the process making changes to NACM until it is, or proceed to the next method to start over.

26.6.2 Method 2: Remove NACM Configuration

- Stop TNSR
- Edit `/var/tnsr/startup_db`
- Remove the entire `<nacm>...</nacm>` section from `startup_db`
- Start TNSR

TNSR will restart without any NACM configuration and it can then be reconfigured from scratch as shown in [NACM Example](#).

26.7 NACM Defaults

TNSR version 18.08 or later includes a default set of NACM rules. These rules allow members of group `admin` to have unlimited access and sets the default policies to `deny`. By default this group includes the users `tnsr` and `root`.

See also:

To see the specific rules from the default configuration, see [NACM Example](#) or view the current NACM configuration as described in [View NACM Configuration](#).

For users of older installations or those who have removed the default NACM configuration, NACM defaults to disabled with no defined groups or rule lists, and with the following default policies:

```
Default Read policy : permit
Default Write policy: deny
Default Exec policy : permit
```

RESTCONF SERVER

TNSR includes a RESTCONF server which can respond to RESTCONF API requests over HTTP or HTTPS.

The RESTCONF server can run in the `host` or `dataplane` namespace (*Networking Namespaces*), and may be active in both namespaces at the same time.

Warning: Though the RESTCONF service is capable of running in the `dataplane` namespace, the sensitive nature of its content means it should not be exposed to insecure networks. The best practice is to only run the RESTCONF service in the `host` namespace.

See also:

For a complete RESTCONF service configuration example, see *RESTCONF Service Setup with Certificate-Based Authentication and NACM*.

27.1 RESTCONF Server Configuration

The server is configured using the `restconf` command to enter `restconf` mode:

```
tnsr# configure
tnsr(config)# restconf
tnsr(config-restconf)#
```

27.1.1 Enable or Disable the RESTCONF Service

The RESTCONF server is enabled and disabled by the `enable (true|false)` command from within `restconf` mode.

To enable the RESTCONF service:

```
tnsr(config-restconf)# enable true
```

To disable the RESTCONF service:

```
tnsr(config-restconf)# enable false
```

27.1.2 RESTCONF Server Parameters

The RESTCONF server must be configured with specific details for where and how the service will run using the following command:

```
tnsr(config-restconf)# server <namespace> <ip-address> <port> <tls>
```

<namespace>

The namespace in which the RESTCONF service will be exposed, either `host` or `dataplane`.

<ip-address>

The IP address of an interface in the chosen namespace upon which the RESTCONF server can be accessed.

<port>

The port number upon which the RESTCONF server will listen for incoming connections. This is typically 443 for TLS (HTTPS) connections and 80 for plain HTTP, but may be any available port.

<tls>

Either `true` or `false` to indicate whether or not the RESTCONF service will utilize TLS when communicating with clients. If enabled, the RESTCONF server must have a server certificate and key available, see [TLS Encryption](#).

For example, to start the RESTCONF service in the `host` namespace on 198.51.100.2, port 443 with TLS enabled, run:

```
tnsr(config-restconf)# server host 198.51.100.2 443 true
```

27.2 TLS Encryption

The RESTCONF server utilizes TLS (HTTPS) to secure communications between the client and server. When configured with a certificate, the RESTCONF server supports both HTTP/1 (TLS) and HTTP/2 (TLS-ALPN) connections.

Warning: Though HTTPS is technically optional, the best practice is to always use encryption in production deployments.

Additionally, the RESTCONF server does not support HTTP/2 without encryption.

TLS requires a server certificate on the TNSR device. This server certificate and its corresponding key must be configured in the RESTCONF server:

```
tnsr(config)# restconf
tnsr(config-restconf)# global server-certificate <cert-name>
tnsr(config-restconf)# global server-key <key-name>
```

See also:

For more information on managing certificates on TNSR, see [Public Key Infrastructure](#).

Additionally, the RESTCONF server definition must also be set to use TLS. See [RESTCONF Server Parameters](#) for details.

27.3 Authentication

The RESTCONF server supports two types of client authentication to protect access to its resources: Client certificate authentication and password authentication:

```
tnsr(config-restconf)# global authentication-type (client-certificate|user)
```

27.3.1 Client Certificate

The most secure means of protecting access to the RESTCONF server is via client certificates:

```
tnsr(config-restconf)# global authentication-type client-certificate
tnsr(config-restconf)# global server-ca-cert-path <ca-name>
```

To verify client certificates, a Certificate Authority (CA) is configured in TNSR and all client certificates must be signed by this CA. The client certificate must be used by the client when attempting to connect to the RESTCONF server. Clients without a certificate are rejected.

See also:

For more information on managing certificates on TNSR, see [Public Key Infrastructure](#).

When using client certificates the Common Name (cn= parameter) of the client certificate is taken as the username. That username is then processed through [NACM](#) to determine group access privileges for the RESTCONF API.

27.3.2 Password

Password authentication for the RESTCONF server is handled via Pluggable Authentication Modules (PAM) support:

```
tnsr(config-restconf)# global authentication-type user
```

Users can be authenticated against any source supported by PAM modules in the operating system.

Once authenticated, the username is processed through [NACM](#) to determine group access privileges for the RESTCONF API.

27.3.3 Managing the RESTCONF Server Process

The RESTCONF server process can be managed using the `service` command:

```
tnsr# configure
tnsr(config)# service restconf <command>
```

Where <command> can be any of:

- start**
Start the RESTCONF server
- stop**
Stop the RESTCONF server
- restart**
Restart (stop and then start) the RESTCONF server

status

Print the status of the RESTCONF server process

MONITORING

Monitoring of a TNSR system, either locally or remotely, can be accomplished in several ways:

- From the CLI, using `show` commands.
- *API Endpoints* which provide state information.
- Through the SNMP service
- Through the Prometheus exporter service (Dataplane statistics only)

See also:

Refer to the [REST API documentation](#) and *RESTCONF Service Setup with Certificate-Based Authentication and NACM* for details and examples for configuration and use of the RESTCONF API.

28.1 Monitoring Interfaces

Each interface has associated counters, which enable traffic volume and error monitoring.

Note: To limit the amount of administrative traffic, VPP only updates these counters every 10 seconds.

There are several commands used to monitor interfaces: `show interface`, `show interface counters`, `interface clear counters`, and `show packet-counters`. Additionally, the counters may be retrieved using RESTCONF.

28.1.1 `show interface`

The `show interface` command prints important traffic volume and error counters specific to each interface. For example:

```
tnsr# show interface

Interface: TenGigabitEthernet6/0/0
  Admin status: up
  Link up, link-speed 1000 Mbps, full duplex
  Link MTU: 1500 bytes
  MAC address: 00:90:0b:7a:8a:67
  IPv4 Route Table: ipv4-VRF:0
  IPv4 addresses:
    203.0.113.2/24
```

(continues on next page)

(continued from previous page)

```
IPv6 Route Table: ipv6-VRF:0
IPv6 addresses:
    2001:db8:0:2::2/64
VLAN tag rewrite: disabled
counters:
    received: 9253580 bytes, 61588 packets, 0 errors
    transmitted: 628148 bytes, 5755 packets, 8 errors
    protocols: 12810 IPv4, 5101 IPv6
    50972 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

The `show interface` command also supports filtering of its output. When the list is filtered, its name, description, and administrative status are printed along with the chosen output.

access-list

Prints the access control lists configured on an interface

counters

Prints the interface traffic counters for an interface

ip [(nat|vrrp-virtual-router)]

Prints the IPv4 addresses present on the interface and the IPv4 route table used by the interface.

nat

Prints the NAT role for an interface (e.g. inside or outside)

vrrp-virtual-router

Prints the IPv4 VRRP status for an interface.

ipv6 [vrrp-virtual-router]

Prints the IPv6 addresses present on the interface and the IPv6 route table used by the interface.

vrrp-virtual-router

Prints the IPv6 VRRP status for an interface.

link

Prints the link status (e.g. up or down), media type and duplex, and MTU

mac-address

Prints the hardware MAC address, if present

subif

Prints *VLAN subinterface* attributes for an interface.

vlan tag-rewrite

Shows VLAN tag rewriting attributes for an interface.

These keywords may be used with the entire list of interfaces, for example:

```
tnsr# show interface ip
```

The filtering may also be applied to a single interface:

```
tnsr# show interface TenGigabitEthernet6/0/0 link
```

28.1.2 show interface counters

The `show interface [<if-name>] counters [verbose]` command displays detailed information on all available interface counters.

Example output:

```
tnsr(config)# show interface TenGigabitEthernet6/0/0 counters
Interface: TenGigabitEthernet6/0/0
counters:
  received: 9253580 bytes, 61588 packets, 0 errors
  transmitted: 628148 bytes, 5755 packets, 8 errors
  protocols: 12810 IPv4, 5101 IPv6
  50972 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

Additional detailed packet counters for transmit and receive of unicast, multicast, and broadcast traffic may be enabled or disabled on a per-interface basis (*Interface Configuration Options*). Add the `verbose` keyword to display these statistics:

```
tnsr(config)# show interface TenGigabitEthernet6/0/0 counters verbose
Interface: TenGigabitEthernet6/0/0
detailed counters:
  received: 9258555 bytes, 61641 packets, 0 errors
  received unicast: 2464 bytes, 18 packets
  received multicast: 2464 bytes, 18 packets
  received broadcast: 622 bytes, 8 packets
  transmitted: 628676 bytes, 5761 packets, 8 errors
  transmitted unicast: 2480 bytes, 18 packets
  transmitted multicast: 2480 bytes, 18 packets
  transmitted broadcast: 0 bytes, 0 packets
  protocols: 12820 IPv4, 5105 IPv6
  51016 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

Counter values take a minimum of 10 seconds to be populated with valid data.

28.1.3 clear interface counters

The `interface clear counters <name>` command clears all counters on a given interface. This command is available in `config` mode. If no specific interface is given, all interfaces will have their counters cleared:

```
tnsr# configure
tnsr(config)# interface clear counters
Counters cleared
tnsr(config)#
```

28.1.4 show packet-counters

The `show packet-counters` command prints packet statistics and error counters taken from the dataplane. These counters show counts of packets that have passed through various aspects of processing, such as encryption, along with various types of packet send/receive errors. The set of counters displayed will vary depending on the set of enabled features, such as NAT, IPsec, and so on.

Example output:

```
tnsr# show packet-counters
```

| Count | Node | Reason |
|--------------|------------------------------|--|
| 624 | dppk-crypto-input | Crypto ops dequeued |
| 624 | dppk-esp-decrypt-post | ESP post pkts |
| 624 | dppk-esp-decrypt | ESP pkts received |
| 622 | esp-encrypt | ESP pkts received |
| 624 | ipsec-if-input | good packets received |
| 304 | ip4-input | Multicast RPF check failed |
| 9 | ip4-arp | ARP requests sent |
| 22 | lldp-input | lldp packets received on disabled |
| ↪ interfaces | | |
| 8 | ethernet-input | no error |
| 2 | ethernet-input | unknown ethernet type |
| 5821 | ethernet-input | unknown vlan |
| 16 | arp-input | ARP request IP4 source address learned |
| 28 | GigabitEthernet0/14/0-output | interface is down |
| 8 | GigabitEthernet3/0/0-output | interface is down |

28.1.5 Interface status via API

If the *RESTCONF API* is enabled, the interface counter data may also be polled that way. For example:

Command:

```
$ curl --cert ~/tnsr/tnsr-myuser.crt \
--key ~/tnsr/tnsr-myuser.key \
--cacert ~/tnsr/tnsr-selfca.crt \
-X GET \
http://tnsr.example.com/restconf/data/netgate-interface:interfaces-state/
↪ interface=TenGigabitEthernet6%2F0%2F0/counters/
```

Output:

```
{
  "netgate-interface:counters": {
    "collect-time": 1563807148,
    "reset-time": 0,
    "detailed-counters": true,
    "rx-bytes": 120317,
    "rx-packets": 736,
    "rx-unicast-bytes": 19775,
    "rx-unicast-packets": 102,
    "rx-multicast-bytes": 97965,
    "rx-multicast-packets": 597,
```

(continues on next page)

(continued from previous page)

```
"rx-broadcast-bytes": 2577,  
"rx-broadcast-packets": 37,  
"rx-ip4": 175,  
"rx-ip6": 57,  
"tx-bytes": 15530,  
"tx-packets": 101,  
"tx-unicast-bytes": 15178,  
"tx-unicast-packets": 95,  
"tx-multicast-bytes": 226,  
"tx-multicast-packets": 3,  
"tx-broadcast-bytes": 126,  
"tx-broadcast-packets": 3,  
"drop": 601,  
"punt": 0,  
"rx-no-buffer": 0,  
"rx-miss": 0,  
"rx-error": 0,  
"tx-error": 21  
}  
}
```

28.2 Simple Network Management Protocol

The Simple Network Management Protocol (SNMP) service on TNSR provides a method through which the router can be monitored by a Network Monitoring System (NMS) or other software which supports SNMP.

SNMP presents information about the router to clients organized in an object identifier (OID) tree which is defined by Management Information Base (MIB) files. SNMP clients can access information by using a numerical OID or by using names looked up from MIB files.

The SNMP daemon currently supports the View-based Access Control Model (VACM). In this model, groups of communities are allowed access to SNMP information defined by views, which grant or limit their access.

Note: Future versions of TNSR will support SNMPv3 for more secure access control.

The SNMP service will respond to requests from host OS management interfaces as well as TNSR interfaces, if allowed by ACLs.

Warning: Access to the SNMP service on UDP port 161 should be limited by ACLs so that only authorized management hosts are able to reach the service.

28.2.1 Enable or Disable the SNMP Service

The SNMP server for the host namespace (*Networking Namespaces*) is enabled and disabled by the `snmp host (disable|enable)` command.

To enable the SNMP service for the host namespace:

```
tnsr(config)# snmp host enable
```

To disable the SNMP service for the host namespace:

```
tnsr(config)# snmp host enable
```

The SNMP service can also run in the dataplane namespace, and may be active in both namespaces at the same time. The dataplane namespace instance of SNMP is configured using the `snmp dataplane (enable|disable)` command.

Warning: Though the SNMP service is capable of running in the dataplane namespace, the sensitive nature of its content means it should not be exposed to insecure networks nor should SNMP traffic be sent over insecure links. The best practice is to only run SNMP in the host namespace.

To enable the SNMP service for the dataplane namespace:

```
tnsr(config)# snmp dataplane enable
```

To disable the SNMP service for the dataplane namespace:

```
tnsr(config)# snmp dataplane disable
```

Control the SNMP Service

The SNMP service is controlled by the `service snmp (host|dataplane) (start|stop|restart|status)` command.

In most cases manual control of the service is unnecessary as the server will start and stop as needed based on the configuration.

TNSR automatically restarts the SNMP service when making changes to the SNMP configuration.

28.2.2 SNMP Configuration

The SNMP configuration is managed using the `snmp` command from `config` mode. This command has several options which are collectively used to define VACM rules to grant access to clients.

Note: TNSR automatically restarts the SNMP service when making changes to the SNMP configuration. The SNMP service will be momentarily unavailable while the service is reloading with the new configuration.

Tip: Basic system information for SNMP such as contact (`sysContact`), location (`sysLocation`), description (`sysDescr`), and hostname (`sysName`) is pulled from the values configured using the `system` command. See *Basic System Information* for information on setting these values.

SNMP Communities

An SNMP community in SNMPv1 and SNMPv2c is similar to a username and password in a single string. The community name is given by a client and checked against communities listed in the SNMP configuration. If the community is known, and the source of the request matches the source defined for the community, then the request continues on to have its access checked further.

Warning: SNMPv1 and SNMPv2c are not encrypted. Only allow access to the SNMP daemon from management networks or similar secure locations.

A **community** entry maps a traditional SNMP community name (e.g. **public**) to a VACM security name:

```
tnsr(config)# [no] snmp community community-name <community-name>
                        source (<src-prefix>|default)
                        security-name <security-name>
```

The following parameters are available:

community-name <community-name>

The name for this community.

Warning: The SNMP community name should be considered as a password. Do not use an easily guessed name, and keep the community name a secret from others. Do not transmit the community name over an insecure network.

source (<src-prefix>|default)

The IPv4 or IPv6 source network from which requests for this community will originate. For example, a management network.

The keyword **default** may also be used for the source, which allows a request from any source.

Warning: The best practice is to limit access by source so that only specific clients may access SNMP information. Avoid using **default** if at all possible.

security-name <security-name>

The VACM security name to which this community should be mapped. This name is then used in groups.

This command may be repeated multiple times. Thus, multiple sources can set be for the same community. It can also be used to setup more complex policies such as different sources for the same community being mapped to different security names, or mapping multiple communities/sources to the same security name.

SNMP Groups

A group defines a VACM group, which is a collection of security names that have the same level of access.

```
tnsr(config)# [no] snmp group group-name <group-name>
                        security-name <security-name>
                        security-model (any|v1|v2c)
```

The following parameters are available:

group-name <group-name>

The name of this group, which is used by access rules.

security-name <security-name>

The security name to add as a member of this group.

Note: In SNMPv1 and SNMPv2, the security name is mapped from a community entry (*SNMP Communities*). In future versions with SNMPv3, this may also be a SNMPv3 security name (e.g. USM username, TSM identity, etc).

security-model (any|v1|v2c)

The source of this security name, based on how its connection was authorized.

This command may be repeated to add multiple members to the same group.

SNMP Views

A view defines a subset of the entire SNMP object identifier (OID) tree. Multiple views with the same name may be defined to build a collection of OIDs to which groups may be granted access.

```
tnsr(config)# [no] snmp view view-name <view-name>
                        view-type (included|excluded)
                        oid <oid>
```

The following parameters are available:

view-name <view-name>

The name of this view. Used in access rules to grant read and write access to portions of the OID tree.

view-type (included|excluded)

Sets the type of view being defined.

included

When set, objects under oid will be included in the view.

excluded

When set, objects under oid will be excluded from the view.

oid <oid>

The base oid under which this view either includes or excludes objects. This may be specified numerically or using names known to the SNMP daemon from MIB files.

For example, the root OID .1 may also be given by its name .iso. Refer to MIB files for details.

This command may be repeated to define complex views which may include and exclude portions of the same OID hierarchy.

SNMP Access Rules

An access rule defines which views may be accessed by a given group. This ties together the other VACM entries, granting access to clients.

```
tnsr(config)# [no] snmp access group-name <group-name>
                        prefix (exact|prefix)
                        model (any|v1|v2c)
                        level (noauth|auth|priv)
                        read <read-view>
                        write <write-view>
```

The following parameters are available:

group-name <group-name>

The name of the group being granted access, as defined by VACM group entries (*SNMP Groups*).

prefix (exact|prefix)

Used by SNMPv3 to control how a context on the rule is applied to the context of the incoming connection. Since SNMPv3 is not yet supported, this must be set to **exact**.

model (any|v1|v2c)

The security model of the client connection, based on how its connection was authorized.

level (auth|noauth|priv)

The minimum security level at which this access rule will be allowed. Since SNMPv3 and transport security are not yet supported, this must be set to **noauth**.

read (<read-view>|none)

The name of the view (*SNMP Views*) to which matching clients will have read access. Use **none** to deny read access.

write (<write-view>|none)

The name of the view (*SNMP Views*) to which matching clients will have write access. Use **none** to deny write access.

28.2.3 SNMP Example

The following example sets up SNMP access for a single community name which can read anything under **.1 (.iso)** in the OID tree, and does not write access.

```
snmp community community-name tnsrmon source 10.2.4.0/24 security-name TNSRMonitor
snmp group group-name ROGroup security-name TNSRMonitor security-model v1
snmp group group-name ROGroup security-name TNSRMonitor security-model v2c
snmp view view-name systemview view-type included oid .1
snmp access group-name ROGroup prefix exact model any level noauth read systemview write_
↪none
```

Following through line by line:

First, map the SNMPv1/SNMPv2c community named **tnsrmon** to the security name **TNSRMonitor** for clients connecting from **10.2.4.0/24**, which in this example is a secure management network.

```
snmp community community-name tnsrmon source 10.2.4.0/24 security-name TNSRMonitor
```

Next, define a group named **ROGroup**, and specify that if the **TNSRMonitor** security name connects using SNMPv1, it is considered a member of this group.

```
snmp group group-name ROGroup security-name TNSRMonitor security-model v1
```

Add another entry to ROGroup for TNSRMonitor if it connects using SNMPv2c

```
snmp group group-name ROGroup security-name TNSRMonitor security-model v2c
```

Now define a view named `systemview` which includes the entire OID tree under `.1`. This could also have been specified by name, e.g. `.iso`.

```
snmp view view-name systemview view-type included oid .1
```

Finally, tie all the entries together by granting access for ROGroup to read from `systemview` when it connects using any security model, but do not specify a write group so that it has no write access.

```
snmp access group-name ROGroup prefix exact model any level noauth read systemview write_
↪none
```

Note: Since SNMPv3 is not yet supported, the values for `prefix` and `level` must be set as shown. See [SNMP Access Rules](#).

28.3 Prometheus Exporter

TNSR includes a [Prometheus](#) exporter which supports statistical data from the dataplane (VPP) only. This data is typically fed into [Grafana](#). When active, the service listens for connections on TCP port 9482.

See also:

Configuring Grafana and its supporting systems is outside the scope of this documentation. Consult its documentation for details.

Warning: The Prometheus service on TNSR does not perform authentication or encryption. Only transmit data across trusted network paths, and do not expose the service to untrusted networks.

Data exported by Prometheus may be sensitive in nature, so protect access to the service with appropriate [standard ACLs](#) if the service is running in the dataplane namespace. Do not open access to the Prometheus port unilaterally. The default host ACL ruleset allows access to the Prometheus port.

28.3.1 Configuring Prometheus

prometheus <namespace> enable

Enables the Prometheus Exporter service in either the `host` or `dataplane` namespace.

Warning: Using the `host` namespace is more secure as limits the exposure of the service to host OS management networks.

After enabling the service, start it as described in [Service Control](#).

prometheus <namespace> disable

Disables the Prometheus Exporter service in the given namespace.

prometheus <namespace> filter <regex> [<regex> [...]]

Adds one or more [regular expression](#) filters which limit the data exposed by the service. For details about how these filters work, see [Prometheus Filtering](#).

no prometheus <namespace> filter <regex>

Removes a filter.

Prometheus Filtering

The data exposed by Prometheus to clients can be limited by filtering. Limiting in this manner can increase performance by reducing the amount of data sent to clients and the amount that clients must process as a consequence. By default, all data in the dataplane statistics segment is exported which can be sizable on large deployments.

Prometheus filters consist of one or more POSIX style [regular expression](#) (“regex”) patterns which will result in data matching any of the given patterns as they are considered to have an implicit boolean “OR” between them.

To see the full list of statistical items which the dataplane can export run the following command in a shell:

```
$ sudo vpp_get_stats ls [<regex pattern>]
```

Note: Though the statistical items in the dataplane appear to be structured similar to a filesystem, matching does not work like shell filesystem globs, but as regular expression patterns only.

Filter patterns **do not** include automatic anchoring. Patterns can match any part of a given string. For example, the pattern /a will match /a, b/a, b/a/c, and so on. Regular expression anchoring can limit this as needed: To only match a string starting with /a use ^/a, to match a string ending in /a, use /a\$, and to match a string exactly anchor it both ways, such as ^/a\$.

Using wildcard style matching in filters must also follow regular expression syntax. The filter ab* matches the a followed by b repeated zero or more times. Thus it will match a, ab, abb, and abbb, but not ac. To match ab followed by anything else, use ab.* which will match ab plus any single character (.) repeated zero or more times.

See also:

Comprehensive coverage of regular expression pattern usage is beyond the scope of this documentation. There are a variety of resources on the Internet which cover regular expression usage and syntax. See [regular expression](#) page on Wikipedia for a good starting point.

Warning: When querying TNSR for Prometheus data, the items returned do not use / as a separator, but _. For example, the dataplane item /sys/vector_rate_per_worker will be in the Prometheus data as _sys_vector_rate_per_worker. Always craft filter expressions to match the **dataplane** version of the desired items, not the format in Prometheus output.

28.3.2 Querying Prometheus Data

The URL for metrics is: `http://<IP address>:9482/metrics`

In the URL, <IP address> is an IP address on an interface in the appropriate namespace. For example, if Prometheus is running in the host namespace, the IP address would be from a [host OS management interface](#) on TNSR.

Note: This service is not meant to be queried by a web browser. Use a client which understands Prometheus data, or a client such as `curl` which will print the data returned by the service when testing.

Note: The Prometheus statistics daemon uses an [AF_INET6](#) socket which can accept connections from both IPv4 and IPv6 clients. When viewing the daemon process, it will show `tcp6`, `IPv6`, or similar strings in the output. This is normal and does not indicate a problem.

```
$ sudo netstat -lnpt | grep prometheus
tcp6      0      0 :::9482          :::*              LISTEN       2985/vpp_
↪prometheus
$ sudo lsof +c15 -iTCP -sTCP:LISTEN | grep prometheus
vpp_prometheus_ 2985 root    3u  IPv6  39319      0t0  TCP *:9482 (LISTEN)
```

The dataplane tracks some metrics served by Prometheus by interface name and others by index. The Prometheus output includes entries which map the index numbers to their corresponding names. This can be used to correlate data in the monitoring system consuming the data:

```
# TYPE _if_names_info gauge
_if_names_info{index="0",name="local0"} 1
_if_names_info{index="1",name="WAN"} 1
_if_names_info{index="2",name="LAN"} 1
_if_names_info{index="3",name="CorpNet"} 1
_if_names_info{index="4",name="DMZ"} 1
_if_names_info{index="5",name="Guest"} 1
```

28.3.3 Protecting Prometheus

As mentioned in the warning at the start of this section, the Prometheus service does not have its own encryption or authentication. As such, the primary ways to protect the service are:

Isolate the service to the appropriate namespace

This is typically the `host` namespace, but some TNSR configurations do not have host interfaces.

Protect the network paths carrying Prometheus data

Use a directly connected secure path, such as a local management network. If the data must be transmitted remotely, encrypt the path between Prometheus and the host collecting its data, for example, with an IPsec tunnel.

Restrict access with ACLs

Limit access to the prometheus server on TCP port 9482 using access lists. When running in the `host` namespace, use [host ACLs](#) and when running in the `dataplane` namespace use [standard ACLs](#).

Note: The default set of host ACLs denies access to the service, but take care when crafting rules to only permit access from authorized hosts or networks.

This example host ACL permits access to the Prometheus service from one IPv4 host, `198.51.100.244`:

```
tnsr(config)# host acl prometheus
tnsr(config-host-acl)# sequence 10
tnsr(config-host-acl)# rule 10
tnsr(config-host-acl-rule)# action permit
tnsr(config-host-acl-rule)# description Allow Prometheus
tnsr(config-host-acl-rule)# match ip protocol tcp
tnsr(config-host-acl-rule)# match ip port destination 9482
```

(continues on next page)

(continued from previous page)

```
tnsr(config-host-acl-rule)# match ip version 4
tnsr(config-host-acl-rule)# match ip address source 198.51.100.244/32
tnsr(config-host-acl-rule)# exit
tnsr(config-host-acl)# exit
tnsr(config)#
```

28.4 IPFIX Exporter

TNSR can send UDP IP Flow Information Export ([IPFIX](#), [RFC 7011](#)) data to an external flow collector. This allows the collector to track connections between hosts routing through TNSR and perform further actions such as connection logging or data analysis.

Note: There are numerous open source and commercial collectors capable of accepting UDP IPFIX data. The settings on TNSR for IPFIX largely depend upon what the collector expects. Consult the collector documentation for details.

Warning: Data exported by IPFIX may be sensitive in nature. IPFIX does not perform authentication or encryption. Only transmit data across trusted network paths.

28.4.1 Configuring IPFIX

The first step is to configure the location of the collector to which TNSR will deliver IPFIX data, and how it delivers that data.

Enter `config-ipfix-exporter` mode from `config` mode using the `ipfix exporter <name>` command where `<name>` is a unique name for the exporter instance.

Note: The dataplane only supports a single exporter instance at this time.

Inside `config-ipfix-exporter` mode, the following commands are available:

checksum (true|false)

Controls whether or not TNSR will calculate UDP checksums for IPFIX flow data.

collector <ip4-addr> port <port>

Sets the IPv4 address and UDP port number to which TNSR will send IPFIX flow data. The default port is typically 4739 but may vary depending upon settings in the collector.

pmtu <mtu>

Sets an upper bound on the size of IPFIX packets between TNSR and the IPFIX collector. Must be within the range 68–1450.

source <ip4-addr>

Sets an alternate IPv4 source address rather than selecting a source address automatically. Useful if, for example, the IPFIX collector or a firewall in between expects traffic to come from a specific address.

template-interval <sec>

Sets the number of seconds after which TNSR will resend template data to the collector. IPFIX does not send the template with every data record to save on bandwidth consumption. Sending the

template periodically allows the format of the data to change as needed, and to ensure the template data is received by the collector properly.

vrf <vrf-name>

Restricts IPFIX data collection to a specific VRF.

The next step is to configure which types of IPFIX data TNSR will send to the collector.

28.4.2 Configuring IPFIX NAT Logging

TNSR is capable of sending NAT data via IPFIX so that a collector can log NAT translations. This allows the collector to observe the pre-NAT and post-NAT connection properties, such as IP addresses and ports.

This is useful for security reasons to track down abuse reports to an internal host, and it is also a legal requirement in certain environments.

In config mode, the following commands configure IPFIX NAT logging:

```
tnsr(config)# nat ipfix logging enable
tnsr(config)# nat ipfix logging domain <domain-id>
tnsr(config)# nat ipfix logging src-port <src-port>
```

nat ipfix logging enable

Enable IPFIX NAT logging

nat ipfix logging domain <domain-id>

The IPFIX observation domain (integer, 1 or higher) which uniquely identifies this TNSR instance to the collector. Should be unique per IPFIX device so the collector can differentiate the source of flow data. Default value is 1.

nat ipfix logging src-port <src-port>

The source port from which TNSR will send the IPFIX NAT logging data. Default value is 4739.

Note: The dataplane only supports a single instance of IPFIX NAT logging (one domain, one source port).

28.4.3 Configuring IPFIX Traffic Logging

IPFIX can also monitor general traffic flows and export this information to a collector. This configuration must be completed in two parts, the Observation Point and the Selection Process.

Note: The entries for these sections should be added in pairs, one of each type, with each entry in the pair using the same name (e.g. `tnsr`).

Configure IPFIX Observation Point

Enter config-ipfix-obs-pt mode by issuing the command `ipfix observation-point <name>` from config mode.

From within config-ipfix-obs-pt mode, the following commands are available:

direction (both|egress|ingress)

The direction of traffic flows which IPFIX will monitor.

both

Monitor both directions of traffic.

egress

Monitor traffic exiting the interface.

ingress

Monitor traffic entering the interface.

interface <if-name>

The interface which IPFIX will monitor for traffic flows.

Configure IPFIX Selection Process

Enter config-ipfix-sel-proc mode by issuing the command `ipfix selection-process <name>`, using the same name as the corresponding observation point, from within config mode.

From within config-ipfix-sel-proc mode, the following commands are available:

selector (all|ipv4|ipv6)

all

Monitor all traffic.

ipv4

Monitor only IPv4 traffic.

ipv6

Monitor only IPv6 traffic.

28.4.4 IPFIX Example

This example exports IPFIX data and NAT logging to 198.51.100.7 from a source of 203.0.113.2 along with other settings expected by the collector. It monitors the interface named WAN for all types of traffic in both directions.

```
tnsr(config)# ipfix exporter tnsr
tnsr(config-ipfix-exporter)# collector 198.51.100.7 port 4739
tnsr(config-ipfix-exporter)# source 203.0.113.2
tnsr(config-ipfix-exporter)# template-interval 20
tnsr(config-ipfix-exporter)# checksum true
tnsr(config-ipfix-exporter)# pmtu 1400
tnsr(config-ipfix-exporter)# exit
tnsr(config)# ipfix observation-point tnsr
tnsr(config-ipfix-obs-pt)# direction both
tnsr(config-ipfix-obs-pt)# interface WAN
tnsr(config-ipfix-obs-pt)# exit
tnsr(config)# ipfix selection-process tnsr
```

(continues on next page)

(continued from previous page)

```
tnsr(config-ipfix-sel-proc)# selector all
tnsr(config-ipfix-sel-proc)# exit
tnsr(config)# nat ipfix logging domain 2
tnsr(config)# nat ipfix logging src-port 54321
tnsr(config)# nat ipfix logging enable
tnsr(config)#
```

TNSR CONFIGURATION EXAMPLE RECIPES

This section is a cookbook full of example recipes which can be used to quickly configure TNSR in a variety of ways. The use cases covered by these recipes are real-world problems encountered by Netgate customers.

These example scenarios pull together concepts discussed in more detail throughout the rest of this documentation to accomplish larger goals.

29.1 RESTCONF Service Setup with Certificate-Based Authentication and NACM

29.1.1 Use Case

RESTCONF is desirable for its ability to implement changes to TNSR remotely using the API, but allowing remote changes to TNSR also raises security concerns. When using RESTCONF, security is extremely important to protect the integrity of the router against unauthorized changes.

Note: RESTCONF deals in JSON output and input, which is easily parsed by a variety of existing libraries for programming and scripting languages.

29.1.2 Example Scenario

In this example, TNSR will be configured to allow access via RESTCONF, but the service will be protected in several key ways:

- The RESTCONF service is configured for TLS to encrypt the transport
- The RESTCONF service is configured to require a client certificate, which is validated against a private Certificate Authority known to TNSR
- NACM determines if the certificate common-name (username) is allowed access to view or make changes via RESTCONF
- The service will run in the host namespace so it is exposed to the management network only, and not to public networks.

| Item | Value |
|------------------------|------------------|
| TNSR Hostname | tnsr.example.com |
| RESTCONF Username | myuser |
| NACM Group Name | admins |
| Additional User | anotheruser |
| Host Interface Address | 198.51.100.2 |

29.1.3 TNSR Setup

Generate Certificates

Create a self-signed Certificate Authority:

```
tnsr(config)# pki private-key selfca generate
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name selfca
tnsr(config)# pki signing-request set subject-alt-names add hostname selfca
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request selfca generate
tnsr(config)# pki signing-request selfca sign self enable-ca true
```

Create a certificate for the user **myuser**, signed by **selfca**:

```
tnsr(config)# pki private-key myuser generate key-length 4096
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name myuser
tnsr(config)# pki signing-request set subject-alt-names add hostname myuser
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request myuser generate
tnsr(config)# pki signing-request myuser sign ca-name selfca days-valid 365 digest_
↪sha512 enable-ca false
```

Create a certificate for the RESTCONF service to use. The common-name should be the hostname of the TNSR router, which should also exist in DNS:

```
tnsr(config)# pki private-key restconf generate key-length 4096
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name tnsr.example.com
tnsr(config)# pki signing-request set subject-alt-names add hostname tnsr.example.com
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request restconf generate
tnsr(config)# pki signing-request restconf sign ca-name selfca days-valid 365 digest_
↪sha512 enable-ca false
```

Setup NACM

Disable NACM while making changes, to avoid locking out the account making the changes:

```
tnsr(config)# nacm disable
```

Set default policies:

```
tnsr(config)# nacm exec-default deny
tnsr(config)# nacm read-default deny
tnsr(config)# nacm write-default deny
```

Setup an admin group containing the default users plus myuser, which will match the common-name of the user certificate created above:

```
tnsr(config)# nacm group admin
tnsr(config-nacm-group)# member root
tnsr(config-nacm-group)# member tnsr
tnsr(config-nacm-group)# member myuser
tnsr(config-nacm-group)# exit
```

Setup rules to permit any action by members of the admin group:

```
tnsr(config)# nacm rule-list admin-rules
tnsr(config-nacm-rule-list)# group admin
tnsr(config-nacm-rule-list)# rule permit-all
tnsr(config-nacm-rule)# module *
tnsr(config-nacm-rule)# access-operations *
tnsr(config-nacm-rule)# action permit
tnsr(config-nacm-rule)# exit
tnsr(config-nacm-rule-list)# exit
```

Enable NACM:

```
tnsr(config)# nacm enable
tnsr(config)# exit
```

Enable RESTCONF

Enable RESTCONF and configure it for TLS on port 443 with client certificate authentication:

```
tnsr(config)# restconf
tnsr(config-restconf)# global authentication-type client-certificate
tnsr(config-restconf)# global server-ca-cert-path selfca
tnsr(config-restconf)# global server-certificate restconf
tnsr(config-restconf)# global server-key restconf
tnsr(config-restconf)# server host 198.51.100.2 443 true
tnsr(config-restconf)# enable true
```

29.1.4 Client Configuration

On TNSR, export the CA certificate, user certificate, and user certificate key. Place the resulting files in a secure place on a client system, in a directory with appropriate permissions, readable only by the user. Additionally, the private key file must only be readable by the user. For this example, the files will be placed in `~/tnsr/`.

First, export the CA certificate. Copy and paste this into a local file, named `tnsr-selfca.crt`:

```
tnsr# pki ca selfca get
-----BEGIN CERTIFICATE-----
[...]
-----END CERTIFICATE-----
```

Next, export the user certificate, copy and paste it and save in a local file named `tnsr-myuser.crt`:

```
tnsr# pki certificate myuser get
-----BEGIN CERTIFICATE-----
[...]
-----END CERTIFICATE-----
```

Finally, export the user certificate private key, copy and paste it and save in a local file named `tnsr-myuser.key`. Remember to protect this file so it is only readable by this user:

```
tnsr# pki private-key myuser get
-----BEGIN PRIVATE KEY-----
[...]
-----END PRIVATE KEY-----
```

This example uses `curl` to access RESTCONF, so ensure it is installed and available on the client computer.

29.1.5 Example Usage

This simple example shows fetching the contents of an ACL from RESTCONF as well as adding a new ACL entry. There are numerous possibilities here, for more details see the [REST API documentation](#).

In this example, there is an existing ACL named `blockbadhosts`. It contains several entries including a default allow rule with a sequence number of `5000`.

These examples are all run from the client configured above.

Note: This is a simple demonstration using `cURL` and shell commands. This makes it easy to demonstrate how the service works, and how RESTCONF URLs are formed, but does not make for a good practical example.

In real-world cases these types of queries would be handled by a program or script that interacts with RESTCONF, manipulating data directly and a lot of the details will be handled by RESTCONF and JSON programming libraries.

Retrieve a specific ACL

Retrieve the entire contents of the blockbadhosts ACL:

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \  
--key ~/tnsr/tnsr-myuser.key \  
--cacert ~/tnsr/tnsr-selfca.crt \  
-X GET \  
https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-  
list=blockbadhosts
```

Output:

```
{  
  "netgate-acl:acl-list": [  
    {  
      "acl-name": "blockbadhosts",  
      "acl-description": "Block bad hosts",  
      "acl-rules": {  
        "acl-rule": [  
          {  
            "sequence": 1,  
            "action": "deny",  
            "ip-version": "ipv4",  
            "src-ip-prefix": "203.0.113.14/32"  
          },  
          {  
            "sequence": 2,  
            "action": "deny",  
            "ip-version": "ipv4",  
            "src-ip-prefix": "203.0.113.15/32"  
          },  
          {  
            "sequence": 555,  
            "action": "deny",  
            "ip-version": "ipv4",  
            "src-ip-prefix": "5.5.5.5/32"  
          },  
          {  
            "sequence": 5000,  
            "acl-rule-description": "Default Permit",  
            "action": "permit",  
            "ip-version": "ipv4"  
          }  
        ]  
      }  
    ]  
  }  
}
```

The cURL parameters and RESTCONF URL can be dissected as follows:

| Item | Value |
|-------------------------------|---------------------------------|
| cURL Client Certificate | --cert ~/tnsr/tnsr-myuser.crt |
| cURL Client Certificate Key | --key ~/tnsr/tnsr-myuser.key |
| cURL CA Cert to validate TLS | --cacert ~/tnsr/tnsr-selfca.crt |
| Request type (GET) | -X GET |
| RESTCONF Server protocol/host | https://tnsr.example.com |
| RESTCONF API location: | /restconf/data/ |
| ACL config area (prefix:name) | netgate-acl:acl-config/ |
| ACL table | acl-table/ |
| ACL List, with restriction | acl-list=blockbadhosts |

Note: Lists of items with a unique key can be restricted as shown above. The API documentation also calls this out as well, showing an optional =**{name}** in the query.

Retrieve a specific rule of a specific ACL

View only the default permit rule of the ACL:

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \
--key ~/tnsr/tnsr-myuser.key \
--cacert ~/tnsr/tnsr-selfca.crt \
-X GET \
https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-
list=blockbadhosts/acl-rules/acl-rule=5000
```

Output:

```
{
  "netgate-acl:acl-rule": [
    {
      "sequence": 5000,
      "acl-rule-description": "Default Permit",
      "action": "permit",
      "ip-version": "ipv4"
    }
  ]
}
```

The query is nearly identical to the previous one, with the following additional components:

| Item | Value |
|----------------------------|---------------|
| ACL rules list | acl-rules/ |
| ACL rule, with restriction | acl-rule=5000 |

Add a new rule to an existing ACL

Insert a new ACL rule entry with the following parameters:

| Item | Value |
|-------------------------|---|
| Request Type | -X PUT (add content) |
| Content Type | -H "Content-Type: application/yang-data+json" |
| ACL Name | blockbadhosts |
| ACL Rule Sequence | 10 |
| ACL Rule Action | deny |
| ACL Rule Source Address | 10.222.111.222/32 |

The new data passed in the `-d` parameter is JSON but with all whitespace removed so it can be more easily expressed on a command line.

Warning: The `Content-Type` header must be set when performing a write operation such as PUT or PATCH. The value of the header must reflect the type of data being sent. These examples use JSON, so the header is set to `application/yang-data+json`. When submitting XML, it would be `application/yang-data+xml`.

The URL is the same as if the query is retrieving the rule in question.

Warning: Note the presence of the sequence number in both the supplied JSON data and in the URL. This must match.

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \
--key ~/tnsr/tnsr-myuser.key \
--cacert ~/tnsr/tnsr-selfca.crt \
-H "Content-Type: application/yang-data+json" \
-X PUT \
-d '{"netgate-acl:acl-rule":[{"sequence": 10,"action":"deny","ip-version":"ipv4","src-
ip-prefix":"10.222.111.222/32"}]}' \
https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-
list=blockbadhosts/acl-rules/acl-rule=10
```

Output: This command has no output when it works successfully.

Retrieve the contents of the ACL again to see that the new rule is now present:

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \
--key ~/tnsr/tnsr-myuser.key \
--cacert ~/tnsr/tnsr-selfca.crt \
-X GET \
https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-
list=blockbadhosts
```

Output:

```
{
  "netgate-acl:acl-list": [
    {
      "acl-name": "blockbadhosts",
      "acl-description": "Block bad hosts",
      "acl-rules": {
        "acl-rule": [
          {
            "sequence": 1,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "203.0.113.14/32"
          },
          {
            "sequence": 2,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "203.0.113.15/32"
          },
          {
            "sequence": 10,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "10.222.111.222/32"
          },
          {
            "sequence": 555,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "5.5.5.5/32"
          },
          {
            "sequence": 5000,
            "acl-rule-description": "Default Permit",
            "action": "permit",
            "ip-version": "ipv4"
          }
        ]
      }
    ]
  }
}
```

Use PATCH to update data

When using the PUT method, the client must supply all data in an entry to be replaced, even when only changing one small part. This makes it difficult to change, for example, the description of an ACL without sending the content of the ACL back in the request.

The PATCH method allows individual values to be replaced without requiring all of the data to be sent. With PATCH, the client need only send the modified values in a query, along with enough information to uniquely identify the entry.

For example, to update the description of the blockbadhosts ACL using PATCH, the client must only include the name of the ACL and the new description. It does not need to include the entire content of the ACL and its rules as it would with a PUT request.

| Item | Value |
|-----------------|---|
| Request Type | -X PATCH (change content) |
| Content Type | -H "Content-Type: application/yang-data+json" |
| ACL Name | blockbadhosts |
| ACL Description | Block packets from bad hosts |

The command is formatted in a similar manner to the PUT request in the previous example.

Warning: The Content-Type header must be set when performing a write operation such as PUT or PATCH. The value of the header must reflect the type of data being sent. These examples use JSON, so the header is set to application/yang-data+json. When submitting XML, it would be application/yang-data+xml

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \
  --key ~/tnsr/tnsr-myuser.key \
  --cacert ~/tnsr/tnsr-selfca.crt \
  -H "Content-Type: application/yang-data+json" \
  -X PATCH \
  -d '{"netgate-acl:acl-list":[{"acl-name": "blockbadhosts","acl-description": "Block
↪ packets from bad hosts"}]}' \
  https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-
↪ list=blockbadhosts/
```

Output: This command has no output when it works successfully.

Retrieve the contents of the ACL again to see that the new description is now present:

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \
  --key ~/tnsr/tnsr-myuser.key \
  --cacert ~/tnsr/tnsr-selfca.crt \
  -X GET \
  https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-
↪ list=blockbadhosts
```

Output:

```
{
  "netgate-acl:acl-list": [
    {
      "acl-name": "blockbadhosts",
      "acl-description": "Block packets from bad hosts",
      "acl-rules": {
        "acl-rule": [
          {
            "sequence": 1,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "203.0.113.14/32"
          },
          {
            "sequence": 2,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "203.0.113.15/32"
          },
          {
            "sequence": 10,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "10.222.111.222/32"
          },
          {
            "sequence": 555,
            "action": "deny",
            "ip-version": "ipv4",
            "src-ip-prefix": "5.5.5.5/32"
          },
          {
            "sequence": 5000,
            "acl-rule-description": "Default Permit",
            "action": "permit",
            "ip-version": "ipv4"
          }
        ]
      }
    }
  ]
}
```

Remove a specific rule from an ACL

Say that entry is no longer needed and it is safe to remove. That can be done with a DELETE request for the URL corresponding to its sequence number:

Command:

```
$ curl -f --cert ~/tnsr/tnsr-myuser.crt \  
--key ~/tnsr/tnsr-myuser.key \  
--cacert ~/tnsr/tnsr-selfca.crt \  
-X DELETE \  
https://tnsr.example.com/restconf/data/netgate-acl:acl-config/acl-table/acl-  
↳list=blockbadhosts/acl-rules/acl-rule=10
```

Output: This does not produce any output if it completed successfully.

Retrieve the contents of the ACL again to confirm it was removed.

29.1.6 Adding More Users

To create additional RESTCONF users, only two actions are required on TNSR: Generate a certificate for the new user, and then add the user to NACM. This example adds a new user named `anotheruser`.

Generate a new user certificate:

```
tnsr(config)# pki private-key anotheruser generate key-length 4096  
tnsr(config)# pki signing-request settings clear  
tnsr(config)# pki signing-request set common-name anotheruser  
tnsr(config)# pki signing-request set subject-alt-names add hostname anotheruser  
tnsr(config)# pki signing-request set digest sha256  
tnsr(config)# pki signing-request anotheruser generate  
tnsr(config)# pki signing-request anotheruser sign ca-name selfca days-valid 365 digest_  
↳sha512 enable-ca false
```

Add this user to the NACM `admin` group:

```
tnsr(config)# nacm group admin  
tnsr(config-nacm-group)# member anotheruser  
tnsr(config-nacm-group)# exit
```

Then, the user certificate can be copied to a new client and used as explained previously.

29.1.7 See Also

Additional TNSR RESTCONF resources:

- [RESTCONF Server](#)
- [API Endpoints](#)
- [REST API documentation](#)
- [RESTCONF API Errors](#)

29.2 TNSR IPsec Hub for pfSense software nodes

Current scenario:

HQ (hub) with 3 branch (spoke) sites, with secure interconnection between their local networks. One of the branch routers is assumed to be BGP capable. Internet access for one of the sites should be provided through the hub node.

Tip: This recipe does not contain configuration examples for IPsec cryptographic acceleration, which can greatly improve the efficiency and performance of IPsec tunnels. The availability of acceleration varies by hardware, so the specifics of acceleration configuration must be customized to the target environment.

For more information, see [IPsec Cryptographic Acceleration](#)

29.2.1 Input Data

The information in this section defines the local configuration which is covered in this recipe. These input values can be substituted by the actual corresponding values for a real-world implementation.

Scenario Topology

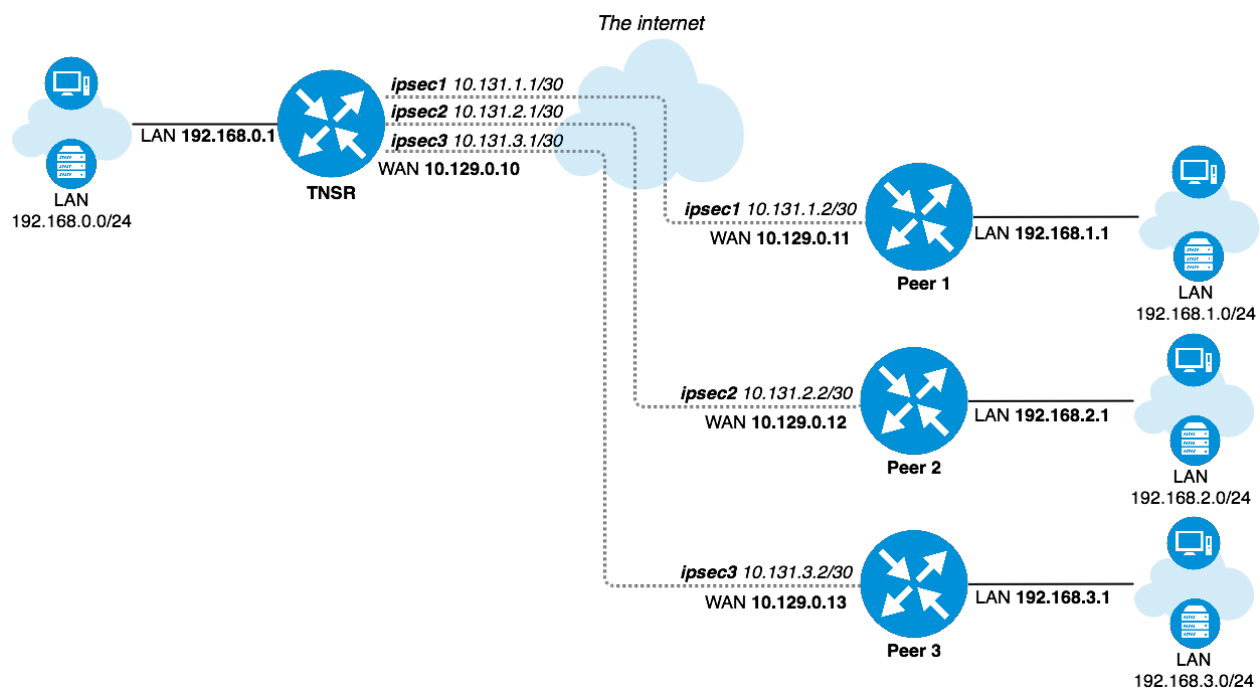


Fig. 1: TNSR IPsec Hub

TNSR and Peer Network Configuration

Table 1: TNSR Setup

| Item | Value |
|-----------------------------|-----------------------|
| VRF Name | default |
| LAN Interface | GigabitEthernetb/0/0 |
| LAN Network | 192.168.0.0/24 |
| LAN IP Address static | 192.168.0.1/24 |
| WAN Interface | GigabitEthernet13/0/0 |
| WAN IP Address DHCP | 10.129.0.10/24 |
| IPsec VTI Peer 1 IP Address | 10.131.1.1/30 |
| IPsec VTI Peer 2 IP Address | 10.131.2.1/30 |
| IPsec VTI Peer 3 IP Address | 10.131.3.1/30 |

Table 2: Peer 1 Network Setup

| Item | Value |
|---------------------------|----------------|
| LAN Interface | LAN |
| LAN Network | 192.168.1.0/24 |
| LAN IP Address static | 192.168.1.1/24 |
| WAN Interface | WAN |
| WAN IP Address DHCP | 10.129.0.11/24 |
| IPsec VTI TNSR IP Address | 10.131.1.2/30 |

Table 3: Peer 2 Network Setup

| Item | Value |
|---------------------------|----------------|
| LAN Interface | LAN |
| LAN Network | 192.168.2.0/24 |
| LAN IP Address static | 192.168.2.1/24 |
| WAN Interface | WAN |
| WAN IP Address DHCP | 10.129.0.12/24 |
| IPsec VTI TNSR IP Address | 10.131.2.2/30 |

Table 4: Peer 3 Network Setup

| Item | Value |
|---------------------------|----------------|
| LAN Interface | LAN |
| LAN Network | 192.168.3.0/24 |
| LAN IP Address static | 192.168.3.1/24 |
| WAN Interface | WAN |
| WAN IP Address DHCP | 10.129.0.13/24 |
| IPsec VTI TNSR IP Address | 10.131.3.2/30 |

TNSR and Peer IPsec Configuration

General IPsec settings are the same for every node.

Table 5: IPsec IKE/Phase 1 Settings

| Item | Value |
|-----------------------|-----------------------|
| Network Interface | WAN Interface |
| IKE type | IKEv2 |
| Authentication method | PSK |
| Pre-Share Key | 01234567 |
| Local identifier | WAN IP Address |
| Remote identifier | Remote WAN IP Address |
| Encryption | AES-128-CBC |
| Hash | SHA1 |
| DH group | 14 (2048 bit modulus) |
| Lifetime | 28800 |

Table 6: IPsec SA/Phase 2 Settings

| Item | Value |
|------------|--------------------|
| Mode | Routed IPsec (VTI) |
| Protocol | ESP |
| Encryption | AES-128-CBC |
| Hash | SHA1 |
| PFS group | 14 (2048) |
| Lifetime | 3600 |

29.2.2 Setup Details

Initial setup

It is assumed that devices have generic default setup, do not have any existing configuration errors, and are ready to be configured.

Note: In this scenario every device obtains its own static IP address on its WAN interface from an external lab gateway which is not a part of the considered scenario.

TNSR Setup

LAN settings

Setup LAN interface with static IP address:

```
tnsr tnsr# configure
tnsr tnsr(config)# interface GigabitEthernetb/0/0
tnsr tnsr(config-interface)# description LAN
tnsr tnsr(config-interface)# ip address 192.168.0.1/24
```

(continues on next page)

(continued from previous page)

```
tnsr tnsr(config-interface)# enable
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

WAN settings

Setup WAN interface for obtaining IP address via DHCP:

```
tnsr tnsr# configure
tnsr tnsr(config)# interface GigabitEthernet13/0/0
tnsr tnsr(config-interface)# description WAN
tnsr tnsr(config-interface)# dhcp client ipv4 hostname tnsr
tnsr tnsr(config-interface)# enable
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

DHCP server

Setup DHCP server on LAN interface with following settings:

Table 7: TNSR DHCP Server Setup

| Item | Value |
|----------------------|--------------------------------|
| DHCP IP address pool | 192.168.0.100 to 192.168.0.199 |
| Default gateway | TNSR LAN IP address |
| DNS | 8.8.8.8 and 1.1.1.1 |

```
tnsr tnsr# configure
tnsr tnsr(config)# dhcp4 server
tnsr tnsr(config-kea-dhcp4)# description LAN DHCP
tnsr tnsr(config-kea-dhcp4)# interface listen GigabitEthernetb/0/0
tnsr tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr tnsr(config-kea-dhcp4)# subnet 192.168.0.0/24
tnsr tnsr(config-kea-subnet4)# interface GigabitEthernetb/0/0
tnsr tnsr(config-kea-subnet4)# pool 192.168.0.100-192.168.0.199
tnsr tnsr(config-kea-subnet4-pool)# exit
tnsr tnsr(config-kea-subnet4)# option routers
tnsr tnsr(config-kea-subnet4-opt)# data 192.168.0.1
tnsr tnsr(config-kea-subnet4-opt)# exit
tnsr tnsr(config-kea-subnet4)# option domain-name-servers
tnsr tnsr(config-kea-subnet4-opt)# data 8.8.8.8, 1.1.1.1
tnsr tnsr(config-kea-subnet4-opt)# exit
tnsr tnsr(config-kea-subnet4)# exit
tnsr tnsr(config-kea-dhcp4)# exit
tnsr tnsr(config)# dhcp4 enable
tnsr tnsr(config)# exit
```

NAT

```
tnsr tnsr# configure
tnsr tnsr(config)# nat global-options nat44 forwarding true
tnsr tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr tnsr(config)# nat global-options nat44 enabled true
tnsr tnsr(config)# nat pool interface GigabitEthernet13/0/0
tnsr tnsr(config)# interface GigabitEthernetb/0/0
tnsr tnsr(config-interface)# ip nat inside
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# interface GigabitEthernet13/0/0
tnsr tnsr(config-interface)# ip nat outside
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

Peer 1 Basic Setup

LAN settings

Setup LAN interface with static IP address.

- Navigate to **Interfaces > LAN**
- Set **IPv4 Configuration Type** to *Static IPv4*
- Set **IPv4 Address** to 192.168.1.1 and mask as 24
- Click **Save**
- Click **Apply Changes**

WAN settings

Setup WAN interface for obtaining an IP address via DHCP. This could also be a static setup, following a similar form to the LAN settings above.

- Navigate to **Interfaces > WAN**
- Set **IPv4 Configuration Type** to *DHCP*
- Click **Save**
- Click **Apply Changes**

DHCP server

Setup DHCP server on LAN interface with following settings:

Table 8: Peer 1 DHCP Server Setup

| Item | Value |
|----------------------|----------------------------------|
| DHCP IP address pool | 192.168.1.100 to 192.168.1.199 |
| Default gateway | LAN IP address (pfSense Default) |
| DNS | LAN IP address (pfSense Default) |

- Navigate to **Services > DHCP Server, LAN** tab
- Set **Range From** as 192.168.1.100 and **To** as 192.168.1.199
- Click **Save**

Peer 2 Basic Setup

LAN settings

Setup LAN interface with static IP address.

- Navigate to **Interfaces > LAN**
- Set **IPv4 Configuration Type** to *Static IPv4*
- Set **IPv4 Address** to 192.168.2.1 and mask as 24
- Click **Save**
- Click **Apply Changes**

WAN settings

Setup WAN interface for obtaining an IP address via DHCP. This could also be a static setup, following a similar form to the LAN settings above.

- Navigate to **Interfaces > WAN**
- Set **IPv4 Configuration Type** to *DHCP*
- Click **Save**
- Click **Apply Changes**

DHCP server

Setup DHCP server on LAN interface with following settings:

Table 9: Peer 2 DHCP Server Setup

| Item | Value |
|----------------------|----------------------------------|
| DHCP IP address pool | 192.168.2.100 to 192.168.2.199 |
| Default gateway | LAN IP address (pfSense Default) |
| DNS | LAN IP address (pfSense Default) |

- Navigate to **Services > DHCP Server, LAN** tab
- Set **Range From** as 192.168.2.100 and **To** as 192.168.2.199
- Click **Save**

Peer 3 Basic Setup

LAN settings

Setup LAN interface with static IP address.

- Navigate to **Interfaces > LAN**
- Set **IPv4 Configuration Type** to *Static IPv4*
- Set **IPv4 Address** to 192.168.3.1 and mask as 24
- Click **Save**
- Click **Apply Changes**

WAN settings

Setup WAN interface for obtaining an IP address via DHCP. This could also be a static setup, following a similar form to the LAN settings above.

- Navigate to **Interfaces > WAN**
- Set **IPv4 Configuration Type** to *DHCP*
- Click **Save**
- Click **Apply Changes**

DHCP server

Setup DHCP server on LAN interface with following settings:

Table 10: Peer 3 DHCP Server Setup

| Item | Value |
|----------------------|----------------------------------|
| DHCP IP address pool | 192.168.3.100 to 192.168.3.199 |
| Default gateway | LAN IP address (pfSense Default) |
| DNS | LAN IP address (pfSense Default) |

- Navigate to **Services > DHCP Server, LAN** tab
- Set **Range From** as 192.168.3.100 and **To** as 192.168.3.199
- Click **Save**

29.2.3 Access between local and remote networks via IPsec

This section describes minimal IPsec and routing settings in order to obtain secure interconnectivity between LAN networks for every device.

This document assumes that devices have generic initial setup successfully completed and are able to reach each other via WAN network.

TNSR

IPsec Configuration

IPsec setup for each pfSense software node

IPsec to Peer 1

Enter config state:

```
tnsr tnsr# configure
```

Creating IPsec instance with id 1:

```
tnsr tnsr(config)# ipsec tunnel 1
tnsr tnsr(config-ipsec-tunnel)# enable
tnsr tnsr(config-ipsec-tunnel)# local-address 10.129.0.10
tnsr tnsr(config-ipsec-tunnel)# remote-address 10.129.0.11
tnsr tnsr(config-ipsec-tunnel)# crypto config-type ike
```

P1 encryption settings:

```
tnsr tnsr(config-ipsec-tunnel)# crypto ike
tnsr tnsr(config-ipsec-crypto-ike)# version 2
tnsr tnsr(config-ipsec-crypto-ike)# lifetime 28800
tnsr tnsr(config-ipsec-crypto-ike)# proposal 1
tnsr tnsr(config-ike-proposal)# encryption aes128
tnsr tnsr(config-ike-proposal)# integrity sha1
tnsr tnsr(config-ike-proposal)# group modp2048
tnsr tnsr(config-ike-proposal)# exit
```

Creating peer IDs:

```
tnsr tnsr(config-ipsec-crypto-ike)# identity local
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.10
tnsr tnsr(config-ike-identity)# exit
tnsr tnsr(config-ipsec-crypto-ike)# identity remote
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.11
tnsr tnsr(config-ike-identity)# exit
```

Authentication:

```
tnsr tnsr(config-ipsec-crypto-ike)# authentication local
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
tnsr tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
```

(continues on next page)

(continued from previous page)

```
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
```

P2 settings:

```
tnsr tnsr(config-ipsec-crypto-ike)# child 1
tnsr tnsr(config-ike-child)# lifetime 3600
tnsr tnsr(config-ike-child)# proposal 1
tnsr tnsr(config-ike-child-proposal)# encryption aes128
tnsr tnsr(config-ike-child-proposal)# integrity sha1
tnsr tnsr(config-ike-child-proposal)# group modp2048
tnsr tnsr(config-ike-child-proposal)# exit
tnsr tnsr(config-ike-child)# exit
tnsr tnsr(config-ipsec-crypto-ike)# exit
tnsr tnsr(config-ipsec-tunnel)# exit
```

Configuring tunnel interface

```
tnsr tnsr(config)# interface ipip1
tnsr tnsr(config-interface)# ip address 10.131.1.1/30
tnsr tnsr(config-interface)# mtu 1400
tnsr tnsr(config-interface)# enable
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

IPsec to Peer 2

Enter config state:

```
tnsr tnsr# configure
```

Creating IPsec instance with id 2:

```
tnsr tnsr(config)# ipsec tunnel 2
tnsr tnsr(config-ipsec-tunnel)# enable
tnsr tnsr(config-ipsec-tunnel)# local-address 10.129.0.10
tnsr tnsr(config-ipsec-tunnel)# remote-address 10.129.0.12
tnsr tnsr(config-ipsec-tunnel)# crypto config-type ike
```

P1 encryption settings:

```
tnsr tnsr(config-ipsec-tunnel)# crypto ike
tnsr tnsr(config-ipsec-crypto-ike)# version 2
tnsr tnsr(config-ipsec-crypto-ike)# lifetime 28800
tnsr tnsr(config-ipsec-crypto-ike)# proposal 1
tnsr tnsr(config-ike-proposal)# encryption aes128
tnsr tnsr(config-ike-proposal)# integrity sha1
tnsr tnsr(config-ike-proposal)# group modp2048
tnsr tnsr(config-ike-proposal)# exit
```

Creating peer ID's:

```
tnsr tnsr(config-ipsec-crypto-ike)# identity local
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.10
tnsr tnsr(config-ike-identity)# exit
tnsr tnsr(config-ipsec-crypto-ike)# identity remote
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.12
tnsr tnsr(config-ike-identity)# exit
```

Authentication:

```
tnsr tnsr(config-ipsec-crypto-ike)# authentication local
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
tnsr tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
```

P2 settings:

```
tnsr tnsr(config-ipsec-crypto-ike)# child 1
tnsr tnsr(config-ike-child)# lifetime 3600
tnsr tnsr(config-ike-child)# proposal 1
tnsr tnsr(config-ike-child-proposal)# encryption aes128
tnsr tnsr(config-ike-child-proposal)# integrity sha1
tnsr tnsr(config-ike-child-proposal)# group modp2048
tnsr tnsr(config-ike-child-proposal)# exit
tnsr tnsr(config-ike-child)# exit
tnsr tnsr(config-ipsec-crypto-ike)# exit
tnsr tnsr(config-ipsec-tunnel)# exit
```

Configuring tunnel interface:

```
tnsr tnsr(config)# interface ipip2
tnsr tnsr(config-interface)# ip address 10.131.2.1/30
tnsr tnsr(config-interface)# mtu 1400
tnsr tnsr(config-interface)# enable
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

IPsec to Peer 3

Enter config state:

```
tnsr tnsr# configure
```

Creating IPsec instance with id 3:

```
tnsr tnsr(config)# ipsec tunnel 3
tnsr tnsr(config-ipsec-tunnel)# enable
tnsr tnsr(config-ipsec-tunnel)# local-address 10.129.0.10
tnsr tnsr(config-ipsec-tunnel)# remote-address 10.129.0.13
tnsr tnsr(config-ipsec-tunnel)# crypto config-type ike
```

P1 encryption settings:

```
tnsr tnsr(config-ipsec-tunnel)# crypto ike
tnsr tnsr(config-ipsec-crypto-ike)# version 2
tnsr tnsr(config-ipsec-crypto-ike)# lifetime 28800
tnsr tnsr(config-ipsec-crypto-ike)# proposal 1
tnsr tnsr(config-ike-proposal)# encryption aes128
tnsr tnsr(config-ike-proposal)# integrity sha1
tnsr tnsr(config-ike-proposal)# group modp2048
tnsr tnsr(config-ike-proposal)# exit
```

Creating peer ID's:

```
tnsr tnsr(config-ipsec-crypto-ike)# identity local
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.10
tnsr tnsr(config-ike-identity)# exit
tnsr tnsr(config-ipsec-crypto-ike)# identity remote
tnsr tnsr(config-ike-identity)# type address
tnsr tnsr(config-ike-identity)# value 10.129.0.13
tnsr tnsr(config-ike-identity)# exit
```

Authentication:

```
tnsr tnsr(config-ipsec-crypto-ike)# authentication local
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
tnsr tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr tnsr(config-ike-authentication)# round 1
tnsr tnsr(config-ike-authentication-round)# type psk
tnsr tnsr(config-ike-authentication-round)# psk 01234567
tnsr tnsr(config-ike-authentication-round)# exit
tnsr tnsr(config-ike-authentication)# exit
```

P2 settings:


```
tnsr tnsr(config-ipsec-crypto-ike)# child 1
tnsr tnsr(config-ike-child)# lifetime 3600
tnsr tnsr(config-ike-child)# proposal 1
tnsr tnsr(config-ike-child-proposal)# encryption aes128
tnsr tnsr(config-ike-child-proposal)# integrity sha1
tnsr tnsr(config-ike-child-proposal)# group modp2048
tnsr tnsr(config-ike-child-proposal)# exit
tnsr tnsr(config-ike-child)# exit
tnsr tnsr(config-ipsec-crypto-ike)# exit
tnsr tnsr(config-ipsec-tunnel)# exit
```

Configuring tunnel interface:

```
tnsr tnsr(config)# interface ipip3
tnsr tnsr(config-interface)# ip address 10.131.3.1/30
tnsr tnsr(config-interface)# mtu 1400
tnsr tnsr(config-interface)# enable
tnsr tnsr(config-interface)# exit
tnsr tnsr(config)# exit
```

Routing

This section describes routing setup. This scenario assumes one of the pfSense software IPsec peers, Peer 1, uses a dynamic routing protocol (BGP) and the remaining two IPsec peers use static routing.

Peer 1 BGP Routing

Enter config state:

```
tnsr tnsr# configure
```

Defining redistributed networks, peer 2 and 3:

```
tnsr tnsr(config)# route dynamic prefix-list VPN-ROUTES
tnsr tnsr(config-prefix-list)# sequence 1 permit 192.168.2.0/23 le 24
tnsr tnsr(config-prefix-list)# exit
tnsr tnsr(config)# route dynamic route-map VPN-ROUTES-MAP
tnsr tnsr(config-route-map)# sequence 1
tnsr tnsr(config-route-map-rule)# policy permit
tnsr tnsr(config-route-map-rule)# match ip address prefix-list VPN-ROUTES
tnsr tnsr(config-route-map-rule)# exit
tnsr tnsr(config-route-map)# exit
```

Setup BGP instance:

```
tnsr tnsr(config)# route dynamic bgp
tnsr tnsr(config-frr-bgp)# server vrf default
tnsr tnsr(config-bgp)# as-number 65000
tnsr tnsr(config-bgp)# router-id 192.168.0.1
tnsr tnsr(config-bgp)# no ebgp-requires-policy
tnsr tnsr(config-bgp)# no network import-check
```

Defining neighbor:

```
tnsr tnsr(config-bgp)# neighbor 10.131.1.2
tnsr tnsr(config-bgp-neighbor)# remote-as 65001
tnsr tnsr(config-bgp-neighbor)# enable
tnsr tnsr(config-bgp-neighbor)# exit
```

Setup peer in certain address-family space:

```
tnsr tnsr(config-bgp)# address-family ipv4 unicast
tnsr tnsr(config-bgp-ip4uni)# neighbor 10.131.1.2
tnsr tnsr(config-bgp-ip4uni-nbr)# activate
tnsr tnsr(config-bgp-ip4uni-nbr)# exit
```

Defining local network in certain address-family space:

```
tnsr tnsr(config-bgp-ip4uni)# network 192.168.0.0/24
```

Defining redistributed networks

```
tnsr tnsr(config-bgp-ip4uni)# redistribute kernel route-map VPN-ROUTES-MAP
tnsr tnsr(config-bgp-ip4uni)# exit
tnsr tnsr(config-bgp)# exit
```

Enabling BGP if one is not enabled:

```
tnsr tnsr(config-frr-bgp)# enable
tnsr tnsr(config-frr-bgp)# exit
```

Better to restart service in order to be sure changes applied effectively:

```
tnsr tnsr(config)# service bgp restart
tnsr tnsr(config)# exit
```

Peer 2 Static Routing

```
tnsr tnsr# configure
tnsr tnsr(config)# route table ipv4-VRF:0
tnsr tnsr(config-route-table)# route 192.168.2.0/24
tnsr tnsr(config-rttbl4-next-hop)# next-hop 0 via 10.131.2.2
tnsr tnsr(config-rttbl4-next-hop)# exit
tnsr tnsr(config-route-table)# exit
tnsr tnsr(config)# exit
```

Peer 3 Static Routing

```
tnsr tnsr# configure
tnsr tnsr(config)# route table ipv4-VRF:0
tnsr tnsr(config-route-table)# route 192.168.3.0/24
tnsr tnsr(config-rttbl4-next-hop)# next-hop 0 via 10.131.3.2
tnsr tnsr(config-rttbl4-next-hop)# exit
tnsr tnsr(config-route-table)# exit
tnsr tnsr(config)# exit
```

Peer 1 Setup

IPsec Settings

Phase 1

- Navigate to **VPN > IPsec**
- Click **Add P1**
- Set **Key Exchange version** to *IKEv2*
- Set **Internet Protocol** to *IPv4*
- Set **Interface** to *WAN*
- Set **Remote Gateway** to *10.129.0.10*
- Set **Authentication Method** to *Mutual PSK*
- Set **My identifier** to *My IP address*
- Set **Peer identifier** to *Peer IP address*
- Set **Pre-Shared Key** to *01234567*
- Set **Encryption**:
 - **Algorithm** to *AES*
 - **Key length** to *128 bit*
 - **Hash** to *SHA1*
 - **DH Group** to *14 (2048 bit)*
- Set **Lifetime** as *28800*
- Click **Save**

Phase 2

- On the newly created Phase 1 entry, click **Show Phase 2 Entries**
- Click **Add P2**
- Set **Mode** to *Routed (VTI)*
- Set **Local Network** to 10.131.2.2 and mask 30
- Set **Remote Network** to 10.131.2.1
- Set **Protocol** to *ESP*
- Set **Encryption Algorithms** to *AES* and *128 bit*
- Uncheck all other **Encryption Algorithms** entries
- Set **Hash Algorithms** to *SHA1*
- Uncheck all other **Hash Algorithms** entries
- Set **PFS key group** to *14 (2048 bit)*
- Set **Lifetime** as 3600
- Click **Save**
- Click **Apply Changes**

Interface

- Navigate to **Interfaces > Interface Assignments**
- From the **Available network ports** list, choose *ipsecNNNN (IPsec VTI)* (The ID number will vary)
- Click **Add**
- Note the newly created interface name, such as OPTX
- Navigate to **Interfaces > OPTX**
- Check **Enable**
- Click **Save**
- Click **Apply Changes**

Routing

- Navigate to **System > Package Manager** and install the FRR package
- Browse to **Services > FRR Global/Zebra**
- Check **Enable FRR**
- Set **Master Password** to any value

Note: This is a requirement for the zebra management daemon to run, this password is not used by clients.

- Check **Enable logging**

- Set **Router ID** to 192.168.1.1

In this case, it is the LAN interface IP address, assuming it will always be available for routing between LAN subnets.

- Click **Save**
- Navigate to the **[BGP]** tab
- Check **Enable BGP Routing**
- Check **Log Adjacency Changes**
- Set **Local AS** to 65001
- Set **Router ID** to 192.168.1.1
- Set **Networks to Distribute** to 192.168.1.0/24
- Click **Save**
- Navigate to the **Advanced** tab
- Check **Disable eBGP Require Policy**
- Click **Save**
- Navigate to the **Neighbors** tab
- Click **Add**
- Set **Name/Address** to 10.131.1.1 (TNSR VTI interface IP address)
- Set **Remote AS** to 65000
- Click **Save**

At this point, routes to 192.168.0.0/24, 192.168.2.0/24, and 192.168.3.0/24 will be learned by BGP and installed in the routing table. If it is not so, check **Status > FRR** on the **BGP** tab. That page contains useful BGP troubleshooting information. Additionally, check the routing log at **Status > System Logs** on the **Routing** tab under **System**.

Firewall

To allow connections into the local LAN from remote IPsec sites, create necessary pass rules under **Firewall > Rules** on the **IPsec** tab. These rules would have a **Source** set to the remote LAN or whichever network is the source of the traffic to allow.

For simplicity, this example has a rule to pass IPv4 traffic from any source to any destination since the only IPsec interface traffic will be from 192.168.0.0/22.

NAT

TNSR will perform NAT for this peer, so outbound NAT is not necessary. It may be left at the default, which will not touch IPsec traffic, or outbound NAT may be disabled entirely which will also prevent LAN subnet traffic from exiting out the WAN unintentionally.

Peer 2 Setup

IPsec Settings

Phase 1

- Navigate to **VPN > IPsec**
- Click **Add P1**
- Set **Key Exchange version** to *IKEv2*
- Set **Internet Protocol** to *IPv4*
- Set **Interface** to *WAN*
- Set **Remote Gateway** to *10.129.0.10*
- Set **Authentication Method** to *Mutual PSK*
- Set **My identifier** to *My IP address*
- Set **Peer identifier** to *Peer IP address*
- Set **Pre-Shared Key** to *01234567*
- Set **Encryption**:
 - **Algorithm** to *AES*
 - **Key length** to *128 bit*
 - **Hash** to *SHA1*
 - **DH Group** to *14 (2048 bit)*
- Set **Lifetime** as *28800*
- Click **Save**

Phase 2

- On the newly created Phase 1 entry, click **Show Phase 2 Entries**
- Click **Add P2**
- Set **Mode** to *Routed (VTI)*
- Set **Local Network** to *10.131.3.2* and mask *30*
- Set **Remote Network** to *10.131.3.1*
- Set **Protocol** to *ESP*
- Set **Encryption Algorithms** to *AES* and *128 bit*
- Uncheck all other **Encryption Algorithms** entries
- Set **Hash Algorithms** to *SHA1*
- Uncheck all other **Hash Algorithms** entries
- Set **PFS key group** to *14 (2048 bit)*
- Set **Lifetime** as *3600*

- Click **Save**
- Click **Apply Changes**

Interface

- Navigate to **Interfaces > Interface Assignments**
- From the **Available network ports** list, choose *ipsecNNNN (IPsec VTI)* (The ID number will vary)
- Click **Add**
- Note the newly created interface name, such as OPTX
- Navigate to **Interfaces > OPTX**
- Check **Enable**
- Click **Save**
- Click **Apply Changes**

Routing

- Navigate to **System > Routing, Static Routes** tab
- Click **Add**
- Set **Destination network** to 192.168.0.0 and mask 23
- Set **Gateway** to the newly created VTI interface gateway, which has an address of 10.131.2.1
- Click **Save**
- Click **Add**
- Set **Destination network** to 192.168.3.0 and mask 24
- Set **Gateway** to the newly created VTI interface gateway, which has an address of 10.131.2.1
- Click **Save**
- Click **Apply Changes**

Firewall

To allow connections into the local LAN from remote IPsec sites, create necessary pass rules under **Firewall > Rules** on the **IPsec** tab. These rules would have a **Source** set to the remote LAN or whichever network is the source of the traffic to allow.

For simplicity, this example has a rule to pass IPv4 traffic from any source to any destination since the only IPsec interface traffic will be from 192.168.0.0/22.

NAT

TNSR will perform NAT for this peer, so outbound NAT is not necessary. It may be left at the default, which will not touch IPsec traffic, or outbound NAT may be disabled entirely which will also prevent LAN subnet traffic from exiting out the WAN unintentionally.

Peer 3 Setup

IPsec Settings

Phase 1

- Navigate to **VPN > IPsec**
- Click **Add P1**
- Set **Key Exchange version** to *IKEv2*
- Set **Internet Protocol** to *IPv4*
- Set **Interface** to *WAN*
- Set **Remote Gateway** to *10.129.0.10*
- Set **Authentication Method** to *Mutual PSK*
- Set **My identifier** to *My IP address*
- Set **Peer identifier** to *Peer IP address*
- Set **Pre-Shared Key** to *01234567*
- Set **Encryption**:
 - **Algorithm** to *AES*
 - **Key length** to *128 bit*
 - **Hash** to *SHA1*
 - **DH Group** to *14 (2048 bit)*
- Set **Lifetime** as *28800*
- Click **Save**

Phase 2

- On the newly created Phase 1 entry, click **Show Phase 2 Entries**
- Click **Add P2**
- Set **Mode** to *Routed (VTI)*
- Set **Local Network** to *10.131.4.2* and mask *30*
- Set **Remote Network** to *10.131.4.1*
- Set **Protocol** to *ESP*
- Set **Encryption Algorithms** to *AES* and *128 bit*

- Uncheck all other **Encryption Algorithms** entries
- Set **Hash Algorithms** to *SHA1*
- Uncheck all other **Hash Algorithms** entries
- Set **PFS key group** to *14 (2048 bit)*
- Set **Lifetime** as 3600
- Click **Save**
- Click **Apply Changes**

Interface

- Navigate to **Interfaces > Interface Assignments**
- From the **Available network ports** list, choose *ipsecNNNN (IPsec VTI)* (The ID number will vary)
- Click **Add**
- Note the newly created interface name, such as OPTX
- Navigate to **Interfaces > OPTX**
- Check **Enable**
- Click **Save**
- Click **Apply Changes**

Routing

- Navigate to **System > Routing, Static Routes** tab
- Click **Add**
- Set **Destination network** to 192.168.0.0 and mask 23
- Set **Gateway** to the newly created VTI interface gateway, which has an address of 10.131.3.1
- Click **Save**
- Click **Add**
- Set **Destination network** to 192.168.2.0 and mask 24
- Set **Gateway** to the newly created VTI interface gateway, which has an address of 10.131.3.1
- Click **Save**
- Click **Apply Changes**

Firewall

To allow connections into the local LAN from remote IPsec sites, create necessary pass rules under **Firewall > Rules** on the **IPsec** tab. These rules would have a **Source** set to the remote LAN or whichever network is the source of the traffic to allow.

For simplicity, this example has a rule to pass IPv4 traffic from any source to any destination since the only IPsec interface traffic will be from 192.168.0.0/22.

NAT

TNSR will perform NAT for this peer, so outbound NAT is not necessary. It may be left at the default, which will not touch IPsec traffic, or outbound NAT may be disabled entirely which will also prevent LAN subnet traffic from exiting out the WAN unintentionally.

Access to the internet for remote network

This section describes minimal routing and NAT settings which provide access to the Internet for one of the remote networks. In current case this is Peer 1 that exchanges routing information with TNSR via BGP.

This document assumes that devices have IPsec setup successfully completed, able to reach each other via IPsec tunnel using path information from the dynamic routing protocol.

TNSR

NAT/PAT

Setup NAT for remote network, in this case PAT is used.

Note: Defining NAT inside interface for internet traffic sourced from Peer 1. Outside interface and PAT were defined earlier.

```
tnsr tnsr# configure
tnsr tnsr(config)# interface ipip1
tnsr tnsr(config-interface)# ip nat inside
tnsr tnsr(config-interface)# exit
```

Peer 1 Policy Route

Routing

Setup access to the internet via IPsec VTI interface with a policy-based routing rule.

- Navigate to **Firewall > Rules**
- Create (or modify existing default pass ipv4 LAN any) rule:
 - Set **Address Family** to **IPv4**
 - Set **Protocol** to **ANY**

- Set **Source** to **LAN net**
- Set **Destination** to **ANY**
- Click **Display Advanced**
- Set **Gateway** to <IPsec interface name>_VTIV4
- Click **Save**

Note: VTI on pfSense software does not support **reply-to**. Despite this policy routing rule on Peer1 which covers all traffic, there must also be kernel routes to remote LANs for the return traffic to find the way back.

29.3 Edge Router Speaking eBGP with Static Redistribution for IPv4 And IPv6

29.3.1 Use Case

Especially in cases where an enterprise is multi-homed with its own block of network addresses, it may become necessary to configure dynamic routing between network service providers. This is accomplished by use of external BGP (eBGP).

In this use case, the enterprise will use TNSR to speak eBGP with two network service providers in order to exchange routes which may be redistributed from static/connected routing.

29.3.2 Example Scenario

In this example, the enterprise using TNSR will have a fictitious autonomous system number (ASN) of 65505. The network service providers in this example will have ASNs of 65510 and 65520. The enterprise using TNSR will redistribute a single /24 network from static into BGP. That network will then be advertised to each of the service providers. The service providers will announce a full routing table to the TNSR instance.

Scenario Topology

Table 11: BGP Router Setup Parameters

| Item | Value |
|------------------------------------|-------------------------|
| VRF Name | default |
| TNSR Autonomous System Number | 65505 |
| ISP_A Autonomous System Number | 65510 |
| ISP_B Autonomous System Number | 65520 |
| IPv4 Network to be announced | 192.0.2.0/24 |
| IPv6 Network to be announced | 2001:db8:a100:1005::/64 |
| TNSR to ISP_A IPv4 Network Address | 203.0.113.8/30 |
| TNSR to ISP_A IPv6 Global Address | 2001:db8:fa00:ffaa::/64 |
| TNSR to ISP_B IPv4 Network Address | 100.64.0.48/30 |
| TNSR to ISP_B IPv6 Global Address | 2001:db8:fb00:ffbb::/64 |

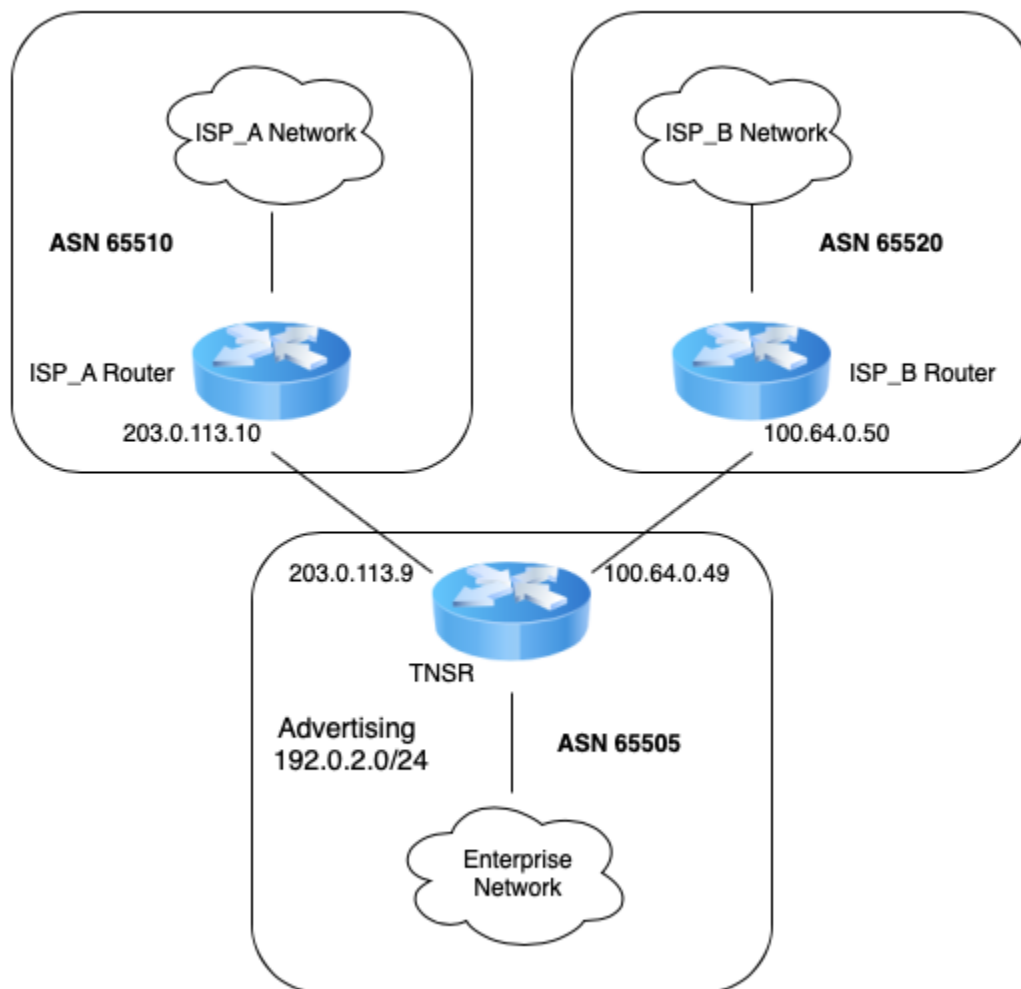
Example: IPv4

Fig. 2: TNSR BGP Router (IPv4)

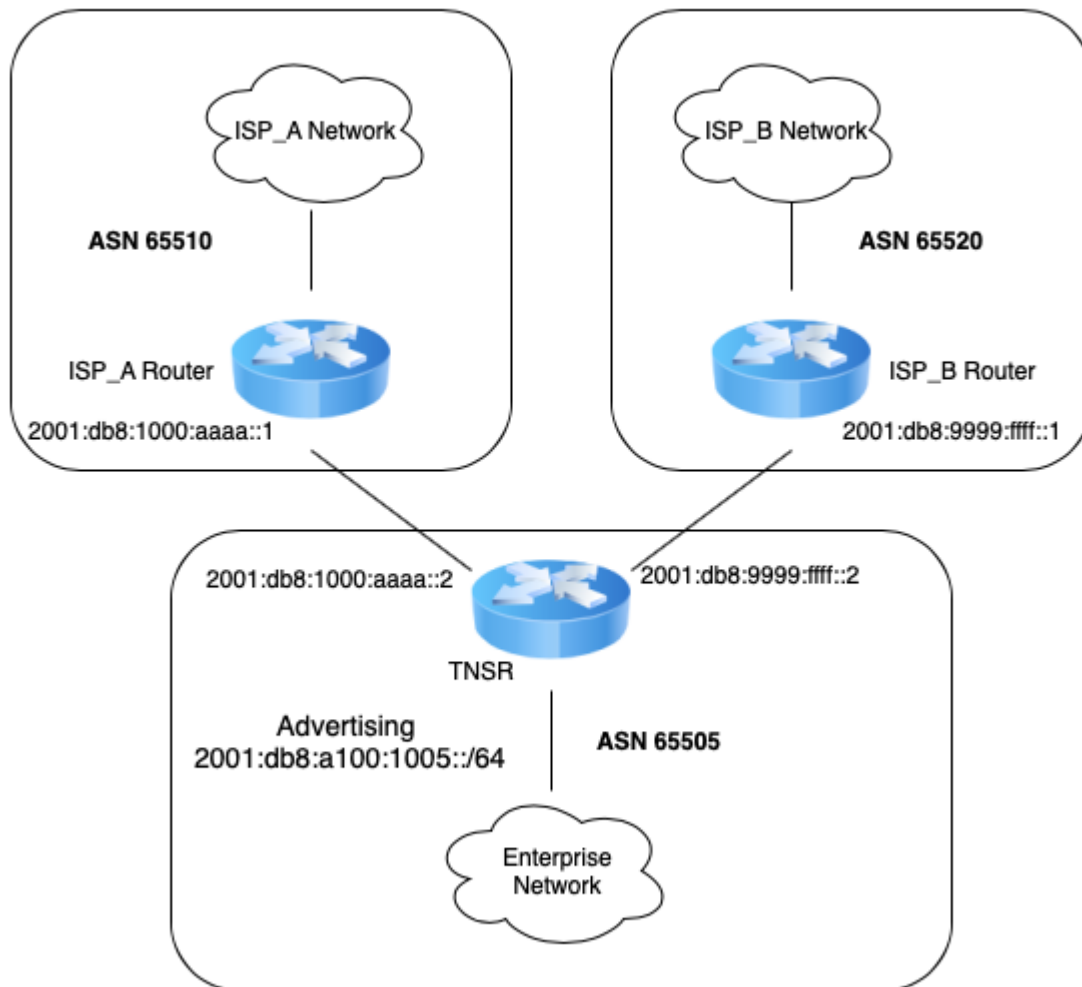
Example: IPv6

Fig. 3: TNSR BGP Router (IPv6)

29.3.3 TNSR Configuration Steps

Step 1: Configure Interfaces

```
tnsr# conf
tnsr(config)# interface GigabitEthernet0/13/0
tnsr(config-interface)# description "To ISP A"
tnsr(config-interface)# ip address 203.0.113.9/30
tnsr(config-interface)# ipv6 address 2001:db8:1000:aaaa::2/64
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)#
tnsr(config)# interface GigabitEthernet0/14/0
tnsr(config-interface)# description "To ISP B"
tnsr(config-interface)# ip address 100.64.0.49/30
tnsr(config-interface)# ipv6 address 2001:db8:9999:ffff::2/64
tnsr(config-interface)# enable
tnsr(config-interface)# exit
tnsr(config)#
```

Step 2: Enable BGP

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# enable
tnsr(config-frr-bgp)# exit
tnsr(config)#
```

Step 3: Create prefix-lists for route export via BGP

```
tnsr(config)# route dynamic prefix-list EXPORT_IPv4
tnsr(config-prefix-list)# description "IPv4 Routes to Export"
tnsr(config-prefix-list)# seq 10 permit 192.0.2.0/24
tnsr(config-prefix-list)# exit
tnsr(config)#
tnsr(config)# route dynamic prefix-list EXPORT_IPv6
tnsr(config-prefix-list)# description "IPv6 Routes to Export"
tnsr(config-prefix-list)# seq 10 permit 2001:db8:a100:1005::/64
tnsr(config-prefix-list)# exit
tnsr(config)#
```

Step 4: Create static route for networks to be advertised in BGP

```
tnsr(config)# route table ipv4-VRF:0
tnsr(config-route-table)# route 192.0.2.0/24
tnsr(config-rttbl4-next-hop)# next-hop 1 via local
tnsr(config-rttbl4-next-hop)# exit
tnsr(config-route-table)# exit
```

```
tnsr(config)# route table ipv6-VRF:0
tnsr(config-route-table)# route 2001:db8:a100:1005::/64
tnsr(config-rttbl6-next-hop)# next-hop 1 via local
tnsr(config-rttbl6-next-hop)# exit
tnsr(config-route-table)# exit
tnsr(config)#
```

Step 5: Configure BGP global options

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server vrf default
tnsr(config-bgp)# as-number 65505
tnsr(config-bgp)# router-id 203.0.113.9
tnsr(config-bgp)# no ebgp-requires-policy
tnsr(config-bgp)# no network import-check
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)# redistribute kernel
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)# address-family ipv6 unicast
tnsr(config-bgp-ip4uni)# redistribute kernel
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)#
```

Step 6: Configure BGP global neighbor options

```
tnsr(config-bgp)# neighbor 203.0.113.10
tnsr(config-bgp-neighbor)# remote-as 65510
tnsr(config-bgp-neighbor)# description "ISP_A IPv4"
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
```

```
tnsr(config-bgp)# neighbor 2001:db8:1000:aaaa::1
tnsr(config-bgp-neighbor)# remote-as 65510
tnsr(config-bgp-neighbor)# description "ISP_A IPv6"
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
```

```
tnsr(config-bgp)# neighbor 100.64.0.50
tnsr(config-bgp-neighbor)# remote-as 65520
tnsr(config-bgp-neighbor)# description "ISP_B IPv4"
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
```

```
tnsr(config-bgp)# neighbor 2001:db8:9999:ffff::1
tnsr(config-bgp-neighbor)# remote-as 65520
tnsr(config-bgp-neighbor)# description "ISP_B IPv6"
tnsr(config-bgp-neighbor)# enable
tnsr(config-bgp-neighbor)# exit
tnsr(config-bgp)#
```

Step 7: Configure BGP neighbor address-family IPv4 unicast options

```
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)# neighbor 203.0.113.10
tnsr(config-bgp-ip4uni-nbr)# prefix-list EXPORT_IPv4 out
tnsr(config-bgp-ip4uni-nbr)# activate
tnsr(config-bgp-ip4uni-nbr)# exit
tnsr(config-bgp-ip4uni)# neighbor 100.64.0.50
tnsr(config-bgp-ip4uni-nbr)# prefix-list EXPORT_IPv4 out
tnsr(config-bgp-ip4uni-nbr)# activate
tnsr(config-bgp-ip4uni-nbr)# exit
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)#
```

Step 8: Configure BGP neighbor address-family IPv6 unicast options

```
tnsr(config-bgp)# address-family ipv6 unicast
tnsr(config-bgp-ip4uni)# neighbor 2001:db8:1000:aaaa::1
tnsr(config-bgp-ip4uni-nbr)# prefix-list EXPORT_IPv6 out
tnsr(config-bgp-ip4uni-nbr)# activate
tnsr(config-bgp-ip4uni-nbr)# exit
tnsr(config-bgp-ip4uni)# neighbor 2001:db8:9999:ffff::1
tnsr(config-bgp-ip4uni-nbr)# prefix-list EXPORT_IPv6 out
tnsr(config-bgp-ip4uni-nbr)# activate
tnsr(config-bgp-ip4uni-nbr)# exit
tnsr(config-bgp-ip4uni)# exit
tnsr(config-bgp)# exit
tnsr(config-frr-bgp)# exit
tnsr(config)#
```

29.4 Service Provider Route Reflectors and Client for iBGP IPv4

29.4.1 Use Case

In large service provider networks it is necessary to divide the routing functionality into two or more layers: a backbone layer and a gateway layer. This allows backbone routers to be focused on core routing and switching to/from other areas of the routing domain, and gateway routers may then be focused on interconnecting other service provider customers.

29.4.2 Example Scenario

In this example, the service provider will have a fictitious autonomous system number (ASN) of 65505. Each network POP, of which only one will be detailed here, will feature 2 backbone routers which will be configured as route-reflectors. These backbone routers will be participating in BGP Cluster ID 100. Other POPs will likely be different Cluster IDs.

There will also be a single gateway router which will be a client of the backbone route-reflectors. Of course, in real world scenarios there would likely be many more gateway routers, each serving a full complement of customers.

Table 12: BGP Route Reflector Setup Parameters

| Item | Value |
|--------------------------------|------------------------------|
| VRF Name | default |
| TNSR Autonomous System Number | 65505 |
| IPv4 Networks to be announced | 192.0.2.0/24, 203.0.113.0/24 |
| BGP Route-Reflector Cluster ID | 100 |

Scenario Topology

29.4.3 TNSR Configuration Steps

Step 1: Configure Interfaces

RR1:

```
rr1 tnsr# conf
rr1 tnsr(config)# interface GigabitEthernet0/13/0
rr1 tnsr(config-interface)# description "To Backbone Network"
rr1 tnsr(config-interface)# ip address 203.0.113.13/30
rr1 tnsr(config-interface)# enable
rr1 tnsr(config-interface)# exit
rr1 tnsr(config)# interface GigabitEthernet0/14/0
rr1 tnsr(config-interface)# description "To RR2 Router"
rr1 tnsr(config-interface)# ip address 203.0.113.21/30
rr1 tnsr(config-interface)# enable
rr1 tnsr(config-interface)# exit
rr1 tnsr(config)# interface GigabitEthernet0/15/0
rr1 tnsr(config-interface)# description "To GW router"
rr1 tnsr(config-interface)# ip address 203.0.113.5/30
rr1 tnsr(config-interface)# enable
rr1 tnsr(config-interface)# exit
rr1 tnsr(config)#
```

RR2:

```
rr2 tnsr# conf
rr2 tnsr(config)# interface GigabitEthernet0/13/0
rr2 tnsr(config-interface)# description "To Backbone Network"
rr2 tnsr(config-interface)# ip address 203.0.113.17/30
rr2 tnsr(config-interface)# enable
rr2 tnsr(config-interface)# exit
```

(continues on next page)

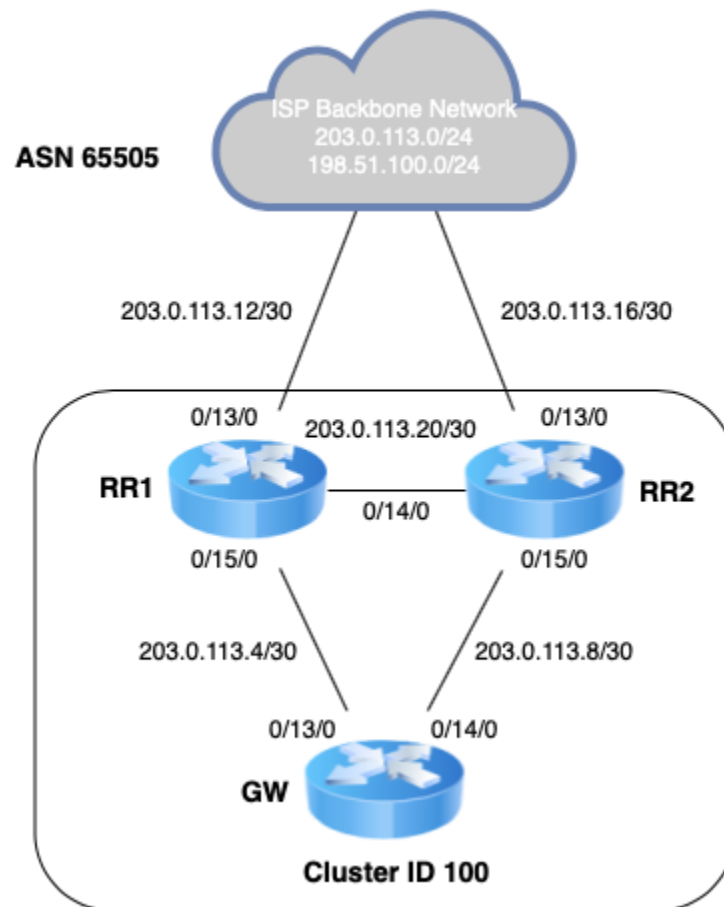
Example: IPv4

Fig. 4: TNSR BGP Route Reflector

(continued from previous page)

```
rr2 tnsr(config)# interface GigabitEthernet0/14/0
rr2 tnsr(config-interface)# description "To RR1 Router"
rr2 tnsr(config-interface)# ip address 203.0.113.22/30
rr2 tnsr(config-interface)# enable
rr2 tnsr(config-interface)# exit
rr2 tnsr(config)# interface GigabitEthernet0/15/0
rr2 tnsr(config-interface)# description "To GW router"
rr2 tnsr(config-interface)# ip address 203.0.113.9/30
rr2 tnsr(config-interface)# enable
rr2 tnsr(config-interface)# exit
rr2 tnsr(config)#
```

GW:

```
gw tnsr# conf
gw tnsr(config)# interface GigabitEthernet0/13/0
gw tnsr(config-interface)# description "To RR1 Router"
gw tnsr(config-interface)# ip address 203.0.113.6/30
gw tnsr(config-interface)# enable
gw tnsr(config-interface)# exit
gw tnsr(config)# interface GigabitEthernet0/14/0
gw tnsr(config-interface)# description "To RR2 Router"
gw tnsr(config-interface)# ip address 203.0.113.10/30
gw tnsr(config-interface)# enable
gw tnsr(config-interface)# exit
gw tnsr(config)# interface GigabitEthernet0/15/0
gw tnsr(config-interface)# desc "To Customer Router"
gw tnsr(config-interface)# ip address 203.0.113.25/30
gw tnsr(config-interface)# enable
gw tnsr(config-interface)# exit
gw tnsr(config)#
```

Step 2: Enable BGP

RR1:

```
rr1 tnsr(config)# route dynamic bgp
rr1 tnsr(config-frr-bgp)# enable
rr1 tnsr(config-frr-bgp)# exit
rr1 tnsr(config)#
```

RR2:

```
rr2 tnsr(config)# route dynamic bgp
rr2 tnsr(config-frr-bgp)# enable
rr2 tnsr(config-frr-bgp)# exit
rr2 tnsr(config)#
```

GW:

```
gw tnsr(config)# route dynamic bgp
gw tnsr(config-frr-bgp)# enable
```

(continues on next page)

(continued from previous page)

```
gw tnsr(config-frr-bgp)# exit
gw tnsr(config)#
```

Step 3: Create prefix-lists for route import into BGP on Route-Reflectors

RR1:

```
rr1 tnsr(config)# route dynamic prefix-list REDISTRIBUTE_IPv4
rr1 tnsr(config-prefix-list)# description "IPv4 Routes to Import"
rr1 tnsr(config-prefix-list)# seq 10 permit 192.0.2.0/24
rr1 tnsr(config-prefix-list)# seq 20 permit 203.0.113.0/24
rr1 tnsr(config-prefix-list)# exit
rr1 tnsr(config)#
```

RR2:

```
rr2 tnsr(config)# route dynamic prefix-list REDISTRIBUTE_IPv4
rr2 tnsr(config-prefix-list)# description "IPv4 Routes to Import"
rr2 tnsr(config-prefix-list)# seq 10 permit 192.0.2.0/24
rr2 tnsr(config-prefix-list)# seq 20 permit 203.0.113.0/24
rr2 tnsr(config-prefix-list)# exit
rr2 tnsr(config)#
```

Step 4: Create route-map for route import into iBGP on route-reflectors

RR1:

```
rr1 tnsr(config)# route dynamic route-map REDISTRIBUTE_IPv4
rr1 tnsr(config-route-map)# sequence 10
rr1 tnsr(config-route-map-rule)# policy permit
rr1 tnsr(config-route-map-rule)# match ip address prefix-list REDISTRIBUTE_IPv4
rr1 tnsr(config-route-map-rule)# set origin igp
rr1 tnsr(config-route-map-rule)# exit
rr1 tnsr(config-route-map)# exit
rr1 tnsr(config)#
```

RR2:

```
rr2 tnsr(config)# route dynamic route-map REDISTRIBUTE_IPv4
rr2 tnsr(config-route-map)# sequence 10
rr2 tnsr(config-route-map-rule)# policy permit
rr2 tnsr(config-route-map-rule)# match ip address prefix-list REDISTRIBUTE_IPv4
rr2 tnsr(config-route-map-rule)# set origin igp
rr2 tnsr(config-route-map-rule)# exit
rr2 tnsr(config-route-map)# exit
rr2 tnsr(config)#
```

Step 5: Create static route for networks to be advertised in BGP

RR1:

```
rr1 tnsr(config)# route table ipv4-VRF:0
rr1 tnsr(config-route-table)# route 192.0.2.0/24
rr1 tnsr(config-rttbl4-next-hop)# next-hop 1 via local
rr1 tnsr(config-rttbl4-next-hop)# exit
rr1 tnsr(config-route-table)# route 203.0.113.0/24
rr1 tnsr(config-rttbl4-next-hop)# next-hop 1 via local
rr1 tnsr(config-rttbl4-next-hop)# exit
rr1 tnsr(config-route-table)# exit
rr1 tnsr(config)#
```

RR2:

```
rr2 tnsr(config)# route table ipv4-VRF:0
rr2 tnsr(config-route-table)# route 192.0.2.0/24
rr2 tnsr(config-rttbl4-next-hop)# next-hop 1 via local
rr2 tnsr(config-rttbl4-next-hop)# exit
rr2 tnsr(config-route-table)# route 203.0.113.0/24
rr2 tnsr(config-rttbl4-next-hop)# next-hop 1 via local
rr2 tnsr(config-rttbl4-next-hop)# exit
rr2 tnsr(config-route-table)# exit
rr2 tnsr(config)#
```

Step 6: Configure BGP global options

RR1:

```
rr1 tnsr(config)# route dynamic bgp
rr1 tnsr(config-frr-bgp)# server vrf default
rr1 tnsr(config-bgp)# as-number 65505
rr1 tnsr(config-bgp)# router-id 203.0.113.21
rr1 tnsr(config-bgp)# cluster-id 100
rr1 tnsr(config-bgp)# no ebgp-requires-policy
rr1 tnsr(config-bgp)# no network import-check
rr1 tnsr(config-bgp)# address-family ipv4 unicast
rr1 tnsr(config-bgp-ip4uni)# redistribute kernel route-map REDISTRIBUTE_IPv4
rr1 tnsr(config-bgp-ip4uni)# exit
rr1 tnsr(config-bgp)#
```

RR2:

```
rr2 tnsr(config)# route dynamic bgp
rr2 tnsr(config-frr-bgp)# server vrf default
rr2 tnsr(config-bgp)# as-number 65505
rr2 tnsr(config-bgp)# router-id 203.0.113.22
rr2 tnsr(config-bgp)# cluster-id 100
rr2 tnsr(config-bgp)# no ebgp-requires-policy
rr2 tnsr(config-bgp)# no network import-check
rr2 tnsr(config-bgp)# address-family ipv4 unicast
rr2 tnsr(config-bgp-ip4uni)# redistribute kernel route-map REDISTRIBUTE_IPv4
```

(continues on next page)

(continued from previous page)

```
rr2 tnsr(config-bgp-ip4uni)# exit
rr2 tnsr(config-bgp)#
```

GW:

```
gw tnsr(config)# route dynamic bgp
gw tnsr(config-frr-bgp)# server vrf default
gw tnsr(config-bgp)# as-number 65505
gw tnsr(config-bgp)# router-id 203.0.113.6
gw tnsr(config-bgp)# no ebgp-requires-policy
gw tnsr(config-bgp)# no network import-check
gw tnsr(config-bgp)#
```

Step 7: Configure iBGP peer-group for backbone route-reflectors and add neighbor

RR1:

```
rr1 tnsr(config-bgp)# neighbor iBGP
rr1 tnsr(config-bgp-neighbor)# remote-as 65505
rr1 tnsr(config-bgp-neighbor)# description "iBGP Sessions"
rr1 tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/14/0
rr1 tnsr(config-bgp-neighbor)# enable
rr1 tnsr(config-bgp-neighbor)# exit
rr1 tnsr(config-bgp)# neighbor 203.0.113.22
rr1 tnsr(config-bgp-neighbor)# peer-group iBGP
rr1 tnsr(config-bgp-neighbor)# enable
rr1 tnsr(config-bgp-neighbor)# exit
```

RR2:

```
rr2 tnsr(config-bgp)# neighbor iBGP
rr2 tnsr(config-bgp-neighbor)# remote-as 65505
rr2 tnsr(config-bgp-neighbor)# description "iBGP Sessions"
rr2 tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/14/0
rr2 tnsr(config-bgp-neighbor)# enable
rr2 tnsr(config-bgp-neighbor)# exit
rr2 tnsr(config-bgp)# neighbor 203.0.113.21
rr2 tnsr(config-bgp-neighbor)# peer-group iBGP
rr2 tnsr(config-bgp-neighbor)# enable
rr2 tnsr(config-bgp-neighbor)# exit
```

Step 8: Configure RR-CLIENT peer-group for route-reflector clients and add neighbor

RR1:

```
rr1 tnsr(config-bgp)# neighbor RR-CLIENT
rr1 tnsr(config-bgp-neighbor)# remote-as 65505
rr1 tnsr(config-bgp-neighbor)# description "RR-Client Sessions"
rr1 tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/15/0
rr1 tnsr(config-bgp-neighbor)# enable
```

(continues on next page)

(continued from previous page)

```
rr1 tnsr(config-bgp-neighbor)# exit
rr1 tnsr(config-bgp)# neighbor 203.0.113.6
rr1 tnsr(config-bgp-neighbor)# peer-group RR-CLIENT
rr1 tnsr(config-bgp-neighbor)# enable
rr1 tnsr(config-bgp-neighbor)# exit
rr1 tnsr(config-bgp)#
```

RR2:

```
rr2 tnsr(config-bgp)# neighbor RR-CLIENT
rr2 tnsr(config-bgp-neighbor)# remote-as 65505
rr2 tnsr(config-bgp-neighbor)# description "RR-Client Sessions"
rr2 tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/15/0
rr2 tnsr(config-bgp-neighbor)# enable
rr2 tnsr(config-bgp-neighbor)# exit
rr2 tnsr(config-bgp)# neighbor 203.0.113.10
rr2 tnsr(config-bgp-neighbor)# peer-group RR-CLIENT
rr2 tnsr(config-bgp-neighbor)# enable
rr2 tnsr(config-bgp-neighbor)# exit
rr2 tnsr(config-bgp)#
```

Step 9: Configure both peer-group address-family options on route-reflectors

RR1:

```
rr1 tnsr(config-bgp)# address-family ipv4 unicast
rr1 tnsr(config-bgp-ip4uni)# neighbor iBGP
rr1 tnsr(config-bgp-ip4uni-nbr)# next-hop-self
rr1 tnsr(config-bgp-ip4uni-nbr)# activate
rr1 tnsr(config-bgp-ip4uni-nbr)# exit
rr1 tnsr(config-bgp-ip4uni)# neighbor RR-CLIENT
rr1 tnsr(config-bgp-ip4uni-nbr)# route-reflector-client
rr1 tnsr(config-bgp-ip4uni-nbr)# activate
rr1 tnsr(config-bgp-ip4uni-nbr)# exit
rr1 tnsr(config-bgp-ip4uni)# exit
rr1 tnsr(config-bgp)#
```

RR2:

```
rr2 tnsr(config-bgp)# address-family ipv4 unicast
rr2 tnsr(config-bgp-ip4uni)# neighbor iBGP
rr2 tnsr(config-bgp-ip4uni-nbr)# next-hop-self
rr2 tnsr(config-bgp-ip4uni-nbr)# activate
rr2 tnsr(config-bgp-ip4uni-nbr)# exit
rr2 tnsr(config-bgp-ip4uni)# neighbor RR-CLIENT
rr2 tnsr(config-bgp-ip4uni-nbr)# route-reflector-client
rr2 tnsr(config-bgp-ip4uni-nbr)# activate
rr2 tnsr(config-bgp-ip4uni-nbr)# exit
rr2 tnsr(config-bgp-ip4uni)# exit
rr2 tnsr(config-bgp)#
```

Step 10: Configure iBGP on gateway router to both route-reflectors

GW:

```
gw tnsr(config-bgp)# neighbor 203.0.113.5
gw tnsr(config-bgp-neighbor)# remote-as 65505
gw tnsr(config-bgp-neighbor)# description "RR1 Session"
gw tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/13/0
gw tnsr(config-bgp-neighbor)# enable
gw tnsr(config-bgp-neighbor)# exit
gw tnsr(config-bgp)# neighbor 203.0.113.9
gw tnsr(config-bgp-neighbor)# remote-as 65505
gw tnsr(config-bgp-neighbor)# description "RR2 Session"
gw tnsr(config-bgp-neighbor)# update-source GigabitEthernet0/14/0
gw tnsr(config-bgp-neighbor)# enable
gw tnsr(config-bgp-neighbor)# exit
gw tnsr(config-bgp)# address-family ipv4 unicast
gw tnsr(config-bgp-ip4uni)# neighbor 203.0.113.5
gw tnsr(config-bgp-ip4uni-nbr)# activate
gw tnsr(config-bgp-ip4uni-nbr)# exit
gw tnsr(config-bgp-ip4uni)# neighbor 203.0.113.9
gw tnsr(config-bgp-ip4uni-nbr)# activate
gw tnsr(config-bgp-ip4uni-nbr)# exit
gw tnsr(config-bgp-ip4uni)# exit
gw tnsr(config-bgp)#
```

29.5 LAN + WAN with NAT (Basic SOHO Router Including DHCP and DNS Resolver)

29.5.1 Use Case

A typical use case for TNSR is a device that sits between a local area network (LAN) in an office or home and a wide area network (WAN) such as the Internet.

At a minimum, such a TNSR instance routes traffic between the LAN and the WAN. In many cases, it provides additional services that are useful for a LAN, including:

- DHCP to provide hosts in the LAN with IP addresses.
- DNS to respond to name resolution queries from hosts in the LAN
- NAT (Network Address Translation), to map one public IPv4 address to internal (private) IP addresses assigned to hosts on the LAN.

29.5.2 Example Scenario

This example configures TNSR with basic the basic functions mentioned earlier: DHCP, DNS, and NAT

| Item | Value |
|-------------------------|-----------------------|
| Local PC | DHCP: 172.16.1.100/24 |
| TNSR Local Interface | GigabitEthernet0/14/2 |
| TNSR Local Address | 172.16.1.1/24 |
| TNSR Internet Interface | GigabitEthernet0/14/1 |
| TNSR Internet Address | 203.0.113.2/24 |
| Remote DNS | 8.8.8.8, 8.8.4.4 |

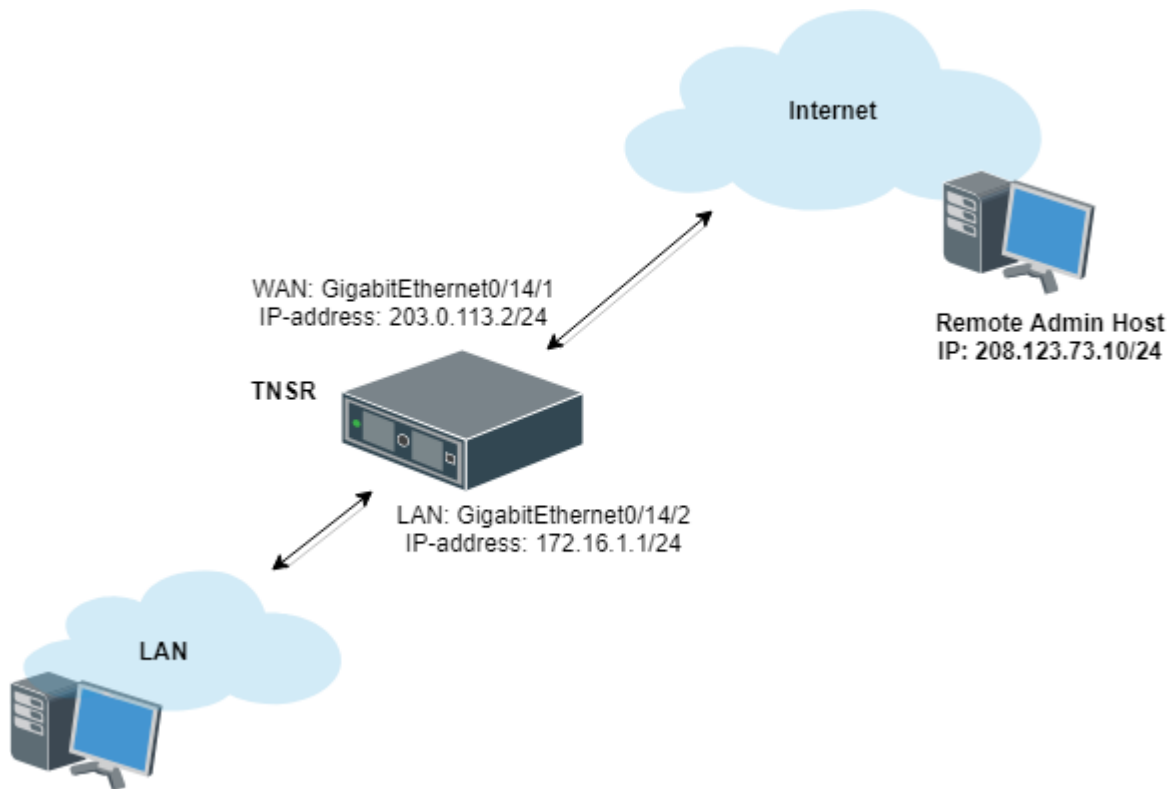


Fig. 5: Basic SOHO Router Example

29.5.3 TNSR Configuration

Basic Connectivity

First, there is the basic interface configuration of TNSR to handle IP connectivity:

```
tnsr(config)# interface GigabitEthernet0/14/2
tnsr(config-interface)# ip address 172.16.1.1/24
tnsr(config-interface)# description Local
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

```
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# ip address 203.0.113.2/24
tnsr(config-interface)# description Internet
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

DHCP

Next, configure the DHCP server and DHCP pool on TNSR:

```
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)# description LAN DHCP Server
tnsr(config-kea-dhcp4)# interface listen GigabitEthernet0/14/2
tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr(config-kea-dhcp4)# option domain-name
tnsr(config-kea-dhcp4-opt)# data example.com
tnsr(config-kea-dhcp4-opt)# exit
tnsr(config-kea-dhcp4)# subnet 172.16.1.0/24
tnsr(config-kea-subnet4)# pool 172.16.1.100-172.16.1.245
tnsr(config-kea-subnet4-pool)# exit
tnsr(config-kea-subnet4)# interface GigabitEthernet0/14/2
tnsr(config-kea-subnet4)# option domain-name-servers
tnsr(config-kea-subnet4-opt)# data 172.16.1.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 172.16.1.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-dhcp4)# exit
tnsr(config)# dhcp4 enable
```

The above example configures `example.com` as the domain name supplied to all clients. For the specific subnet in the example, the TNSR IP address inside the subnet is supplied by DHCP as the default gateway for clients, and DHCP will instruct clients to use the DNS Resolver daemon on TNSR at `172.16.1.1` for DNS.

Outbound NAT

Now configure Outbound NAT:

```
tnsr(config)# nat global-options nat44 forwarding true
tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr(config)# nat global-options nat44 enabled true
tnsr(config)# nat pool addresses 203.0.113.2
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# ip nat outside
tnsr(config-interface)# exit
tnsr(config)# interface GigabitEthernet0/14/2
tnsr(config-interface)# ip nat inside
tnsr(config-interface)# exit
tnsr(config)#
```

DNS Resolver

Finally, configure a DNS Resolver in forwarding mode:

```
tnsr# configure
tnsr(config)# unbound server
tnsr(config-unbound)# interface 127.0.0.1
tnsr(config-unbound)# interface 172.16.1.1
tnsr(config-unbound)# outgoing-interface 203.0.113.2
tnsr(config-unbound)# access-control 172.16.1.0/24 allow
tnsr(config-unbound)# forward-zone .
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.8.8
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.4.4
tnsr(config-unbound-fwd-zone)# exit
tnsr(config-unbound)# exit
tnsr(config)# unbound enable
```

This example enables the Unbound DNS service and configures it to listen on localhost as well as 172.16.1.1 (GigabitEthernet0/14/2, labeled LAN in the example). It uses 203.0.113.2, which is the example WAN interface address, for outgoing queries. The example also allows clients inside that subnet, 172.16.1.0/24, to perform DNS queries and receive responses. It will send all DNS queries to the upstream DNS servers 8.8.8.8 and 8.8.4.4.

29.5.4 Local PC Configuration

No configuration is necessary on the Local PC, it will pull all its required settings from DHCP.

29.6 Using Access Control Lists (ACLs)

29.6.1 Use Case

A standard ACL works with IPv4 or IPv6 traffic at layer 3. The name of an ACL is arbitrary so it may be named in a way that makes its purpose obvious.

ACLs consist of one or more rules, defined by a sequence number that determines the order in which the rules are applied. A common practice is to start numbering at a value higher than 0 or 1, and to leave gaps in the sequence so that rules may be added later. For example, the first rule could be 10, followed by 20.

29.6.2 Example Scenario

This example configures TNSR with an ACL that allows SSH, ICMP and HTTP/HTTPS connections only from a specific Remote Admin Host:

| Item | Value |
|-------------------------|-----------------------|
| Local PC | DHCP: 172.16.1.100/24 |
| TNSR Local Interface | GigabitEthernet0/14/2 |
| TNSR Local Address | 172.16.1.1/24 |
| TNSR Internet Interface | GigabitEthernet0/14/1 |
| TNSR Internet Address | 203.0.113.2/24 |
| Remote Admin Host | 208.123.73.10/24 |

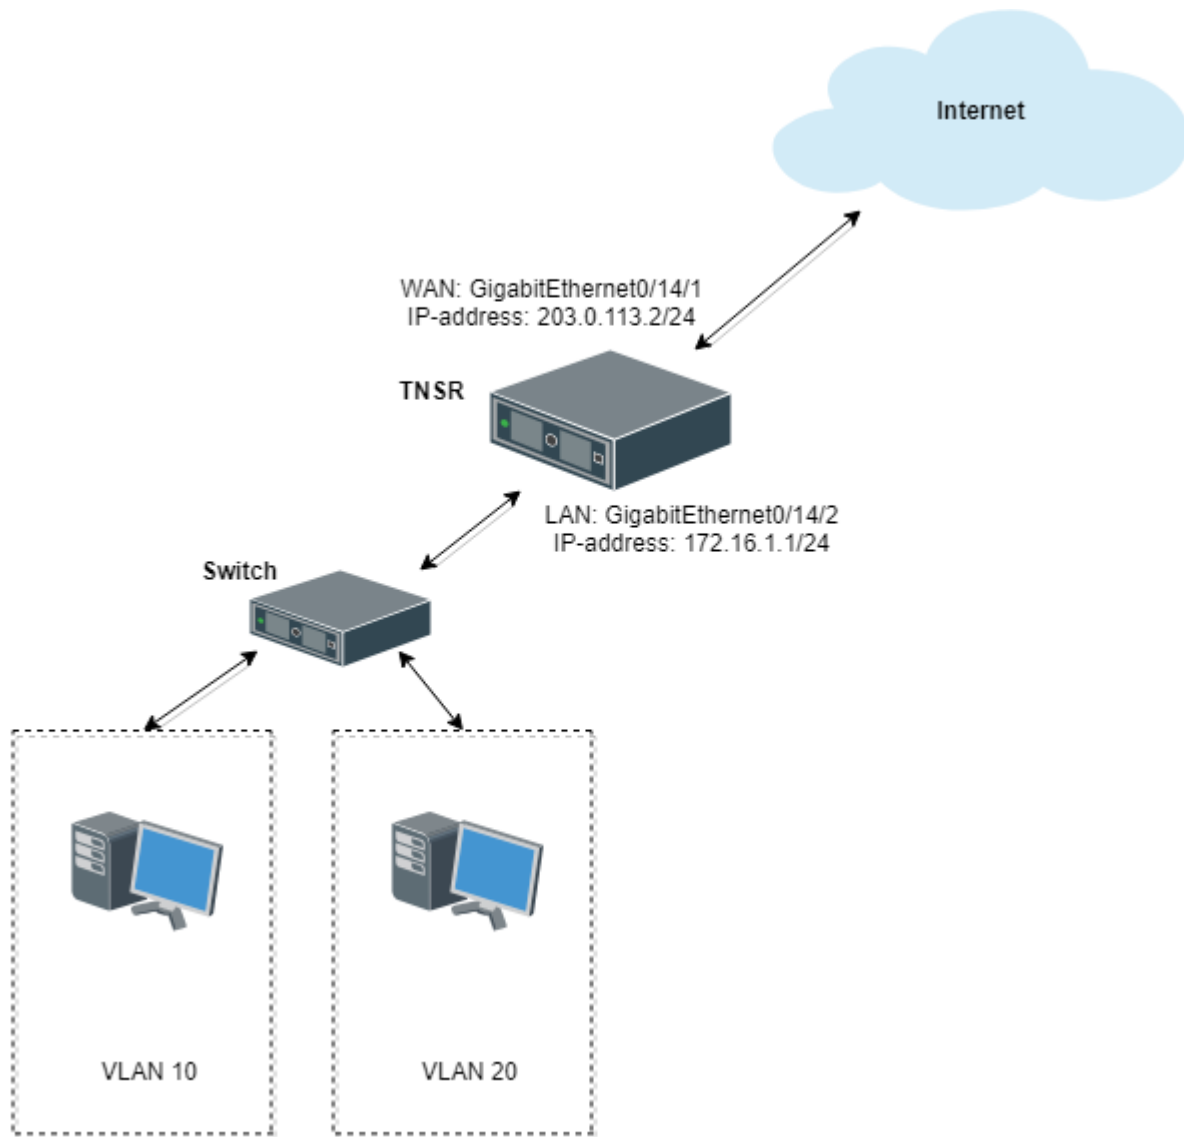


Fig. 6: ACL Example Scenario

29.6.3 TNSR Configuration

```
tnsr(config)# acl WAN_protecting_acl
tnsr(config-acl)# rule 10
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination address 203.0.113.2/32
tnsr(config-acl-rule)# destination port 22
tnsr(config-acl-rule)# source ip address 208.123.73.10/32
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 20
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination address 203.0.113.2/32
tnsr(config-acl-rule)# destination port 80
tnsr(config-acl-rule)# source ip address 208.123.73.10/32
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 30
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination address 203.0.113.2/32
tnsr(config-acl-rule)# destination port 443
tnsr(config-acl-rule)# source ip address 208.123.73.10/32
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 40
tnsr(config-acl-rule)# action deny
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination port 22
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 50
tnsr(config-acl-rule)# action deny
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination port 80
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# rule 60
tnsr(config-acl-rule)# action deny
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# destination port 443
tnsr(config-acl-rule)# protocol tcp
tnsr(config-acl-rule)# exit
tnsr(config-acl)# exit
tnsr(config-acl)# rule 70
tnsr(config-acl-rule)# action permit
tnsr(config-acl-rule)# ip-version ipv4
tnsr(config-acl-rule)# exit
tnsr(config)# int GigabitEthernet0/14/1
tnsr(config-interface)# access-list input acl WAN_protecting_acl sequence 10
tnsr(config-interface)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config)#
```

Rules 10-30 allow SSH, HTTP and HTTPs access to the WAN IP address from the Remote Admin Host. Then Rules 40-60 block SSH, HTTPS and HTTPs on the WAN IP address from all other IP addresses. Finally, rule 70 allows all other incoming traffic.

29.7 Inter-VLAN Routing

29.7.1 Use Case

Inter-VLAN routing is a process of forwarding network traffic from one VLAN to another VLAN using a router or layer 3 device.

TNSR will automatically route traffic between directly connected networks provided that hosts on each network send their traffic to TNSR. Thus, this recipe focuses primarily on configuring TNSR to act as the default gateway for multiple VLANs as that is a typical deployment for this use case.

29.7.2 Example Scenario

This example configures TNSR with VLANs:

| Item | Value |
|-------------------------|--------------------------|
| TNSR Internet Interface | GigabitEthernet0/14/1 |
| TNSR Internet Address | 203.0.113.2/24 |
| TNSR Local Interface | GigabitEthernet0/14/2 |
| TNSR VLAN 10 Interface | GigabitEthernet0/14/2.10 |
| TNSR VLAN 10 Address | 172.16.10.1/24 |
| TNSR VLAN 20 Interface | GigabitEthernet0/14/2.20 |
| TNSR VLAN 20 Address | 172.16.20.1/24 |

Hosts on VLAN 10 and VLAN 20 will use TNSR as their default gateway with addresses assigned by DHCP, and DNS handled by Unbound on TNSR. When attempting to reach the Internet through TNSR, hosts on VLAN 10 and VLAN 20 will have outbound NAT applied. Hosts in VLAN 10 can reach hosts in VLAN 20 automatically, and vice versa, provided that they each use TNSR as their default gateway.

Note: While this example recipe covers the default gateway scenario it is also possible to achieve this goal in other more advanced ways. For example, static routes or dynamic routing protocols can direct specific traffic to TNSR. Those are beyond the scope of this recipe.

Tip: *ACLs* can filter traffic between interfaces to limit exposure between the VLANs. Limiting traffic allowed between local networks is the best practice for security where possible.

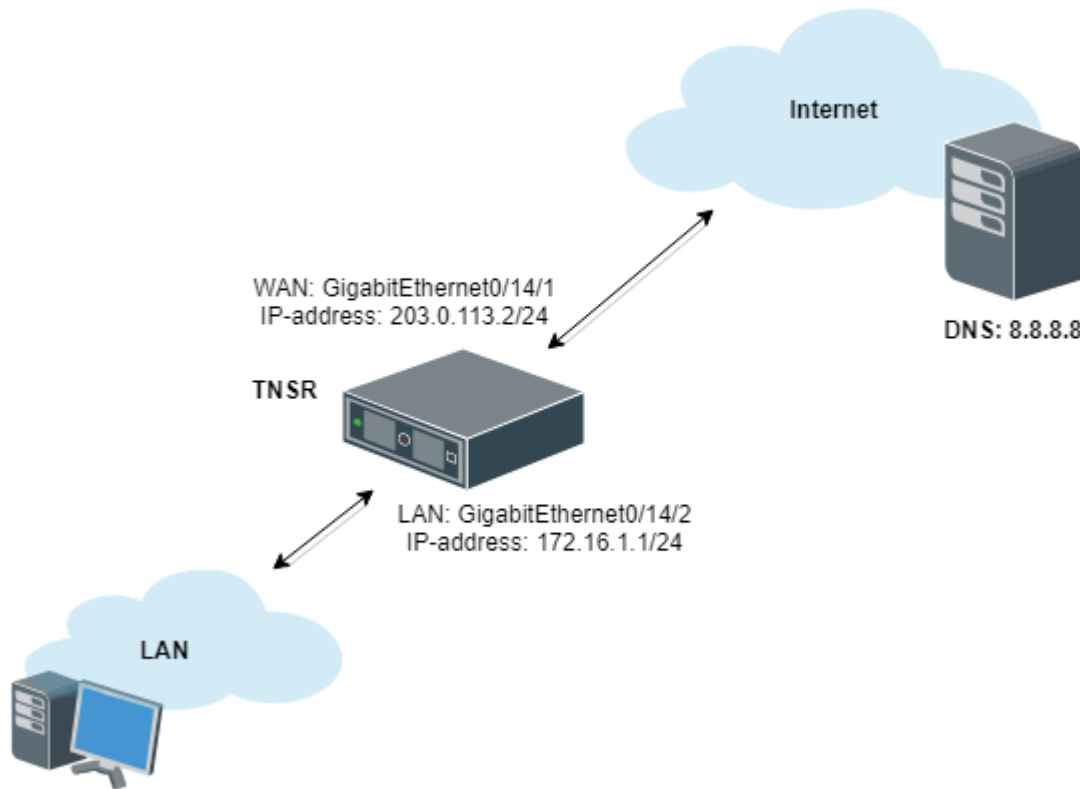


Fig. 7: Inter-VLAN Routing Example

29.7.3 TNSR Configuration

A few pieces of information are necessary to create *VLAN Subinterfaces*, also known as “subif”s:

- The parent interface which will carry the tagged traffic, e.g. GigabitEthernet3/0/0
- The subinterface ID number, which is a positive integer that uniquely identifies this subif on the parent interface. It is commonly set to the same value as the VLAN tag
- The VLAN tag used by the subif to tag outgoing traffic, and to use for identifying incoming traffic bound for this subif. This is an integer in the range 1–4095, inclusive. This VLAN must also be tagged on the corresponding switch configuration for the port used by the parent interface.

Create Subinterfaces

First, create subinterfaces for VLAN 10 and VLAN 20:

```
tnsr(config)# interface subif GigabitEthernet0/14/2 10
tnsr(config-subif)# dot1q 10
tnsr(config-subif)# exact-match
tnsr(config-subif)# exit
```

```
tnsr(config)# interface subif GigabitEthernet0/14/2 20
tnsr(config-subif)# dot1q 20
tnsr(config-subif)# exact-match
tnsr(config-subif)# exit
```

The subif interface appears with the parent interface name and the subif id, joined by a ..

Configure Interfaces

At this point, subinterface behaves identically to a regular interface in that it may have an IP address, routing, and so on:

```
tnsr(config)# interface GigabitEthernet0/14/2.10
tnsr(config-interface)# ip address 172.16.10.1/24
tnsr(config-interface)# description VLAN10
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

```
tnsr(config)# interface GigabitEthernet0/14/2.20
tnsr(config-interface)# ip address 172.16.20.1/24
tnsr(config-interface)# description VLAN20
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

Configure DHCP

Next, configure the DHCP server and DHCP pool on TNSR for each VLAN.

For VLAN 10:

```
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)# description LAN DHCP Server
tnsr(config-kea-dhcp4)# interface listen GigabitEthernet0/14/2.10
tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr(config-kea-dhcp4)# option domain-name
tnsr(config-kea-dhcp4-opt)# data example.com
tnsr(config-kea-dhcp4-opt)# exit
tnsr(config-kea-dhcp4)# subnet 172.16.10.0/24
tnsr(config-kea-subnet4)# pool 172.16.10.100-172.16.10.245
tnsr(config-kea-subnet4-pool)# exit
tnsr(config-kea-subnet4)# interface GigabitEthernet0/14/2.10
tnsr(config-kea-subnet4)# option domain-name-servers
tnsr(config-kea-subnet4-opt)# data 172.16.10.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 172.16.10.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-dhcp4)# exit
```

And for VLAN 20:

```
tnsr(config)# dhcp4 server
tnsr(config-kea-dhcp4)# interface listen GigabitEthernet0/14/2.20
tnsr(config-kea-dhcp4)# lease lfc-interval 3600
tnsr(config-kea-dhcp4)# subnet 172.16.20.0/24
tnsr(config-kea-subnet4)# pool 172.16.20.100-172.16.20.245
tnsr(config-kea-subnet4-pool)# exit
```

(continues on next page)

(continued from previous page)

```
tnsr(config-kea-subnet4)# interface GigabitEthernet0/14/2.20
tnsr(config-kea-subnet4)# option domain-name-servers
tnsr(config-kea-subnet4-opt)# data 172.16.20.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-subnet4)# option routers
tnsr(config-kea-subnet4-opt)# data 172.16.20.1
tnsr(config-kea-subnet4-opt)# exit
tnsr(config-kea-dhcp4)# exit
tnsr(config)# dhcp4 enable
```

Configure Outbound NAT

Now configure Outbound NAT:

```
tnsr(config)# nat global-options nat44 forwarding true
tnsr(config)# nat global-options nat44 endpoint-dependent true
tnsr(config)# nat global-options nat44 enabled true
tnsr(config)# nat pool addresses 203.0.113.2
tnsr(config)# interface GigabitEthernet0/14/1
tnsr(config-interface)# ip nat outside
tnsr(config-interface)# exit
tnsr(config)# interface GigabitEthernet0/14/2.10
tnsr(config-interface)# ip nat inside
tnsr(config-interface)# exit
tnsr(config)# interface GigabitEthernet0/14/2.20
tnsr(config-interface)# ip nat inside
tnsr(config-interface)# exit
tnsr(config)#
```

Configure DNS Resolver

Finally, configure a DNS Resolver in forwarding mode:

```
tnsr# configure
tnsr(config)# unbound server
tnsr(config-unbound)# interface 127.0.0.1
tnsr(config-unbound)# interface 172.16.10.1
tnsr(config-unbound)# interface 172.16.20.1
tnsr(config-unbound)# outgoing-interface 203.0.113.2
tnsr(config-unbound)# access-control 172.16.10.0/24 allow
tnsr(config-unbound)# access-control 172.16.20.0/24 allow
tnsr(config-unbound)# forward-zone .
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.8.8
tnsr(config-unbound-fwd-zone)# nameserver address 8.8.4.4
tnsr(config-unbound-fwd-zone)# exit
tnsr(config-unbound)# exit
tnsr(config)# unbound enable
```

Now there are two VLANs on the physical “LAN” port and interface GigabitEthernet0/14/2 now works as trunk port between TNSR and downstream L2/L3 switch.

This switch must be configured to match the expected VLAN tags and it must also have access ports configured for clients on each VLAN.

29.8 GRE ERSPAN Example Use Case

Encapsulated Remote Switched Port Analyzer (ERSPAN) is a type of GRE tunnel which allows a remote Intrusion Detection System (IDS) or similar packet inspection device to receive copies of packets from a local interface. This operates similar to a local mirror or span port on a switch, but in a remote capacity.

A typical use case for this is central packet inspection or a case where a remote site has plenty of bandwidth available, but no suitable local hardware for inspecting packets.

On TNSR, this is accomplished by configuring an ERSPAN GRE tunnel and then configuring a span to link the ERSPAN tunnel a local interface. From that point on, a copy of every packet on the interface being spanned is sent across GRE.

Note: The receiving end does not need to support ERSPAN, a standard GRE tunnel will suffice.

See also:

In environments which do not allow GRE traffic, such as Azure, VXLAN interfaces may be used instead. See [VXLAN SPAN Example](#).

29.8.1 Example Scenario

In this example, copies of packets from a local TNSR interface will be copied to a remote IDS for inspection.

| Item | Value |
|--------------------------|------------------------------|
| Local Server: | 172.29.193.47/24 |
| TNSR Local Interface: | VirtualFunctionEthernet0/6/0 |
| TNSR Local Address: | 172.29.193.60/24 |
| TNSR Internet Interface: | VirtualFunctionEthernet0/7/0 |
| TNSR Internet Address: | 172.29.194.142/24 |
| IDS Address: | 172.29.194.90/24 |

29.8.2 TNSR Configuration

First, there is the basic interface configuration of TNSR to handle IP connectivity:

```
tnsr(config)# interface VirtualFunctionEthernet0/6/0
tnsr(config-interface)# ip address 172.29.193.160/24
tnsr(config-interface)# description Local
tnsr(config-interface)# enable
tnsr(config-interface)# exit

tnsr(config)# interface VirtualFunctionEthernet0/7/0
tnsr(config-interface)# ip address 172.29.194.142/24
tnsr(config-interface)# description Internet
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

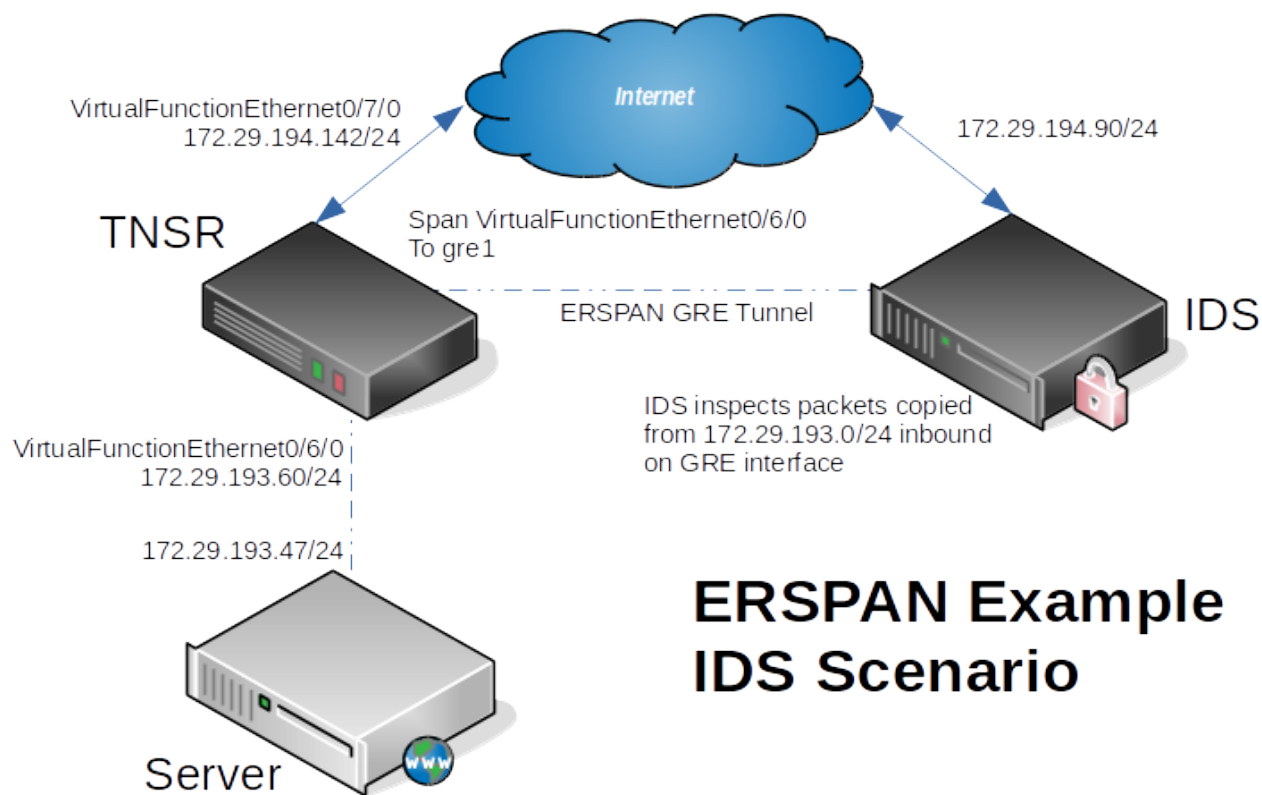


Fig. 8: ERSPAN Example

Next, configure the GRE tunnel on TNSR:

```
tnsr(config)# gre gre1
tnsr(config-gre)# destination 172.29.194.90
tnsr(config-gre)# source 172.29.194.142
tnsr(config-gre)# tunnel-type erspan session-id 1
tnsr(config-gre)# instance 1
tnsr(config-gre)# exit

tnsr(config)# interface gre1
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

Finally, configure a SPAN that ties the local interface to the GRE interface:

```
tnsr(config)# span VirtualFunctionEthernet0/6/0
tnsr(config-span)# onto gre1 hw both
tnsr(config-span)# exit
```

29.8.3 Server Configuration

No configuration is necessary on the server. Any packet it sends which flows through TNSR will automatically be copied across the ERSPAN tunnel to the IDS.

29.8.4 IDS Configuration

The IDS must support GRE interfaces and also must support inspecting packets on GRE interfaces. The IDS does not need to explicitly support ERSPAN to receive copies of packets from TNSR.

At a minimum, take the following steps on the IDS:

- Configure a GRE tunnel between the IDS and TNSR, it does not need to have an address internal to the GRE tunnel.
- Configure the IDS software to inspect packets on the GRE interface

29.9 OSPF Router with Multiple Areas and Summarization

29.9.1 Example Scenario

This recipe demonstrates two routers which handle traffic for multiple local networks. Though it is a simple configuration, multiple areas are used so that routes for each site may be summarized.

Summarization reduces the number of routes that each neighbor must advertise and reduces the number of routes that each neighbor must maintain in its local database. As networks grow, this becomes an important factor when resources are constrained. This example allows for significant future expansion with little or no increase in OSPF database complexity for peers.

In modern networking environments, most implementations like TNSR are capable of handling many thousands of routes in a single area. Even so, using multiple areas with summarization can be easier for administrators to manage and troubleshoot.

Since each of these routers is connected to more than one area, each becomes an Area Border Router (ABR). As such, they are capable of route summarization using Type 3 Link State Advertisement (LSA) messages.

Note: This example ignores external connectivity, only focusing on the relationship between two routers and their component networks.

Additionally, since each of these routers is not connected to other routers outside the backbone network, their local areas can be considered stub areas and the local interfaces can be configured as passive interfaces.

See also:

For a simpler example involving a single area, see [OSPF Example](#).

Scenario Topology

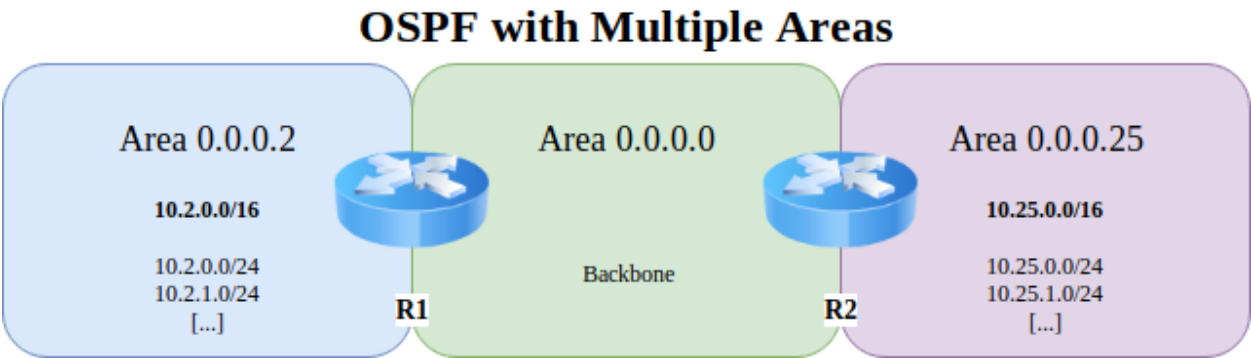


Fig. 9: TNSR OSPF with ABR

Scenario Information

Note: This scenario uses a physical interface for the backbone between the two peers, but OSPF can also work with other types of interfaces such as VPNs. Most of these can be used without special accommodation, but some like WireGuard require specific adjustments to function properly. See [WireGuard VPN with OSPF Dynamic Routing](#) for details.

Table 13: Shared Information

| Item | Value |
|--------------------|---------------|
| OSPF Backbone Area | 0.0.0.0 |
| Backbone Network | 172.16.0.0/24 |

Table 14: Router 1 Information

| Item | Value |
|--------------------------|--|
| Backbone Address | 172.16.0.2/24 |
| Local Router ID | 10.2.0.1 |
| Local OSPF Area | 0.0.0.2 |
| Active Interfaces (Cost) | TenGigabitEthernet6/0/0 (5) |
| Passive Interfaces | TenGigabitEthernet6/0/1, TenGigabitEthernet8/0/0 |
| Local Networks | 10.2.0.0/24, 10.2.1.0/24 |
| Local Network Summary | 10.2.0.0/16 |

Table 15: Router 2 Information

| Item | Value |
|--------------------------|--|
| Backbone Address | 172.16.0.25/24 |
| Local Router ID | 10.25.0.1 |
| Local OSPF Area | 0.0.0.25 |
| Active Interfaces (Cost) | GigabitEthernet3/0/0 (5) |
| Passive Interfaces | GigabitEthernet0/13/0, GigabitEthernet0/14/0 |
| Local Networks | 10.25.0.0/24, 10.25.1.0/24 |
| Local Network Summary | 10.25.0.0/16 |

29.9.2 TNSR Configuration Steps

Configure Interfaces on R1

```

r1 tnsr# conf
r1 tnsr(config)# interface TenGigabitEthernet6/0/0
r1 tnsr(config-interface)# description "To Backbone"
r1 tnsr(config-interface)# ip address 172.16.0.2/24
r1 tnsr(config-interface)# mtu 1500
r1 tnsr(config-interface)# enable
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
r1 tnsr(config)# interface TenGigabitEthernet6/0/1
r1 tnsr(config-interface)# description "Local Network 1"
r1 tnsr(config-interface)# ip address 10.2.0.1/24
r1 tnsr(config-interface)# enable
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
r1 tnsr(config)# interface TenGigabitEthernet8/0/0
r1 tnsr(config-interface)# description "Local Network 2"
r1 tnsr(config-interface)# ip address 10.2.1.1/24
r1 tnsr(config-interface)# enable
r1 tnsr(config-interface)# exit
r1 tnsr(config)#

```

Configure Interfaces on R2

```

r2 tnsr# conf
r2 tnsr(config)# interface GigabitEthernet3/0/0
r2 tnsr(config-interface)# description "To Backbone"
r2 tnsr(config-interface)# ip address 172.16.0.25/24
r1 tnsr(config-interface)# mtu 1500
r2 tnsr(config-interface)# enable
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
r2 tnsr(config)# interface GigabitEthernet0/13/0
r2 tnsr(config-interface)# description "Local Network 1"
r2 tnsr(config-interface)# ip address 10.25.0.1/24

```

(continues on next page)

(continued from previous page)

```
r2 tnsr(config-interface)# enable
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
r2 tnsr(config)# interface GigabitEthernet0/14/0
r2 tnsr(config-interface)# description "Local Network 2"
r2 tnsr(config-interface)# ip address 10.25.1.1/24
r2 tnsr(config-interface)# enable
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
```

Configure OSPF on R1

```
r1 tnsr(config)# route dynamic ospf
r1 tnsr(config-frr-ospf)# server vrf default
r1 tnsr(config-ospf)# ospf router-id 10.2.0.1
r1 tnsr(config-ospf)# passive-interface TenGigabitEthernet6/0/1
r1 tnsr(config-ospf)# passive-interface TenGigabitEthernet8/0/0
r1 tnsr(config-ospf)# area 0.0.0.2
r1 tnsr(config-ospf-area)# stub
r1 tnsr(config-ospf-area)# range 10.2.0.0/16
r1 tnsr(config-ospf-area)# exit
r1 tnsr(config-ospf)# exit
r1 tnsr(config-frr-ospf)# interface TenGigabitEthernet6/0/1
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.2
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-frr-ospf)# interface TenGigabitEthernet8/0/0
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.2
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-frr-ospf)# interface TenGigabitEthernet6/0/0
r1 tnsr(config-ospf-if)# ip address * cost 5
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-frr-ospf)# enable
r1 tnsr(config-frr-ospf)# exit
r1 tnsr(config)#
```

Configure OSPF on R2

```
r2 tnsr(config)# route dynamic ospf
r2 tnsr(config-frr-ospf)# server vrf default
r2 tnsr(config-ospf)# ospf router-id 10.25.0.1
r2 tnsr(config-ospf)# passive-interface GigabitEthernet0/13/0
r2 tnsr(config-ospf)# passive-interface GigabitEthernet0/14/0
r2 tnsr(config-ospf)# area 0.0.0.25
r2 tnsr(config-ospf-area)# stub
r2 tnsr(config-ospf-area)# range 10.25.0.0/16
r2 tnsr(config-ospf-area)# exit
r2 tnsr(config-ospf)# exit
r2 tnsr(config-frr-ospf)# interface GigabitEthernet0/13/0
```

(continues on next page)

(continued from previous page)

```
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.25
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-frr-ospf)# interface GigabitEthernet0/14/0
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.25
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-frr-ospf)# interface GigabitEthernet3/0/0
r2 tnsr(config-ospf-if)# ip address * cost 5
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-frr-ospf)# enable
r2 tnsr(config-frr-ospf)# exit
```

Notes

This scenario can easily be adjusted to connect with other local routers handling additional networks inside the local ranges. To do so, remove the `stub` configuration for the local area and `passive-interface` directives for interfaces which will communicate with local routers. Then configure the other routers as needed.

29.10 WireGuard VPN with OSPF Dynamic Routing

This recipe builds upon the basic [WireGuard Site-to-Site Example](#) and the [OSPF recipe](#) to demonstrate a WireGuard VPN setup that exchanges dynamic routing information using OSPF.

WireGuard has special peer routing requirements which prevent a normal OSPF configuration from working as laid out in the other OSPF examples. WireGuard interfaces are non-broadcast so OSPF cannot automatically locate neighbors using multicast.

Note: BGP works with WireGuard without special handling, so the existing BGP examples are still valid for scenarios involving WireGuard.

29.10.1 Environment

To keep things simple, this recipe uses the same environment described out in [Example WireGuard Configuration](#).

The OSPF configuration is similar to the [OSPF recipe](#).

The bulk of the configuration is identical to that found in [WireGuard Site-to-Site Example](#) so while much of the commands are copied here, refer back to that example for more information on each section.

Note: Some basic setup is omitted from this recipe for brevity. Refer back to [Zero-to-Ping: Getting Started](#) or individual sections for things like basic interface, default route, DHCP, and DNS configuration.

29.10.2 Configure WireGuard

This is a brief summary of the WireGuard configuration demonstrated in *WireGuard Site-to-Site Example*. Refer back to that document for details.

Configure WireGuard on R1

```
r1 tnsr(config)# interface wireguard 1
r1 tnsr(config-wireguard)# description WireGuard P2P - R1-R2
r1 tnsr(config-wireguard)# source-address 203.0.113.2
r1 tnsr(config-wireguard)# port 51820
r1 tnsr(config-wireguard)# private-key base64 IPbehUo58KvYl/
↪qmA+50bAaWeXgB+eP+8QqmDkLV9XA=
r1 tnsr(config-wireguard)# peer 1
r1 tnsr(config-wireguard-peer)# description R2
r1 tnsr(config-wireguard-peer)# endpoint-address 203.0.113.25
r1 tnsr(config-wireguard-peer)# port 51820
r1 tnsr(config-wireguard-peer)# allowed-prefix 0.0.0.0/0
r1 tnsr(config-wireguard-peer)# public-key base64 kIGM3jonly43ZiCh9YryxNNfda/
↪Qh5d1aBHSfKZbYTA=
r1 tnsr(config-wireguard-peer)# exit
r1 tnsr(config-wireguard)# exit
r1 tnsr(config)# interface wg1
r1 tnsr(config-interface)# enable
r1 tnsr(config-interface)# description WireGuard P2P - R1-R2
r1 tnsr(config-interface)# ip address 10.2.111.1/30
r1 tnsr(config-interface)# exit
r1 tnsr(config)# tunnel next-hops wg1
r1 tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.2 ipv4-next-hop-address ↪
↪203.0.113.25
r1 tnsr(config-tunnel-nh-if)# exit
```

There are two notable differences here vs the setup in *WireGuard Site-to-Site Example*:

- The allowed-prefix for the peer is 0.0.0.0/0 – this is safe as this WireGuard tunnel only has a single peer, so any traffic on this WireGuard interface must be going to/from the single peer. This allows the peers to use whichever routes OSPF exchanges without having to list each network statically.
- There is no manual static route as the routes will be handled via OSPF.

Configure WireGuard on R2

Now configure WireGuard on R2 in a similar manner, with the same deviations from the example:

```
r2 tnsr(config)# interface wireguard 1
r2 tnsr(config-wireguard)# description WireGuard P2P - R2-R1
r2 tnsr(config-wireguard)# source-address 203.0.113.25
r2 tnsr(config-wireguard)# port 51820
r2 tnsr(config-wireguard)# private-key base64 ↪
↪EIe79EjECubUeIw+6EKkX0Le0IoFgxM33ydRyr2IJWE=
r2 tnsr(config-wireguard)# peer 1
r2 tnsr(config-wireguard-peer)# description R1
r2 tnsr(config-wireguard-peer)# endpoint-address 203.0.113.2
```

(continues on next page)

(continued from previous page)

```

r2 tnsr(config-wireguard-peer)# port 51820
r2 tnsr(config-wireguard-peer)# allowed-prefix 0.0.0.0/0
r2 tnsr(config-wireguard-peer)# public-key base64 K/
↪l2cD3PCCioSnerIe7t0SAqyRQ8dB1LAoeiJqn0uiY=
r2 tnsr(config-wireguard-peer)# exit
r2 tnsr(config-wireguard)# exit
r2 tnsr(config)# interface wg1
r2 tnsr(config-interface)# enable
r2 tnsr(config-interface)# description WireGuard P2P - R2-R1
r2 tnsr(config-interface)# ip address 10.2.111.2/30
r2 tnsr(config-interface)# exit
r2 tnsr(config)# tunnel next-hops wg1
r2 tnsr(config-tunnel-nh-if)# ipv4-tunnel-destination 10.2.111.1 ipv4-next-hop-address↪
↪203.0.113.2
r2 tnsr(config-tunnel-nh-if)# exit

```

At this point the WireGuard tunnel should be capable of connecting and pinging between the wgX interfaces on the peers, but not between the local networks yet.

29.10.3 Configure OSPF

Now it's time to setup the dynamic routing in OSPF. This summarizes the example configuration from the [OSPF ABR recipe](#) except with WireGuard as the active OSPF interface instead of a physical port.

Configure OSPF on R1

First, setup OSPF with the appropriate areas, interfaces, etc. This part is nearly identical to the example but it uses the wg1 WireGuard interface as the backbone connection.

```

r1 tnsr(config)# route dynamic ospf
r1 tnsr(config-frr-ospf)# server vrf default
r1 tnsr(config-ospf)# ospf router-id 10.2.0.1
r1 tnsr(config-ospf)# passive-interface LAN
r1 tnsr(config-ospf)# neighbor 10.2.111.2
r1 tnsr(config-ospf)# area 0.0.0.2
r1 tnsr(config-ospf-area)# stub
r1 tnsr(config-ospf-area)# range 10.2.0.0/23
r1 tnsr(config-ospf-area)# exit
r1 tnsr(config-ospf)# exit
r1 tnsr(config-frr-ospf)# interface LAN
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.2
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-frr-ospf)# interface wg1
r1 tnsr(config-ospf-if)# ip address * cost 5
r1 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r1 tnsr(config-ospf-if)# ip network non-broadcast
r1 tnsr(config-ospf-if)# exit
r1 tnsr(config-frr-ospf)#
r1 tnsr(config-frr-ospf)# enable
r1 tnsr(config-frr-ospf)# exit

```

The above example is complete but contains two key differences, which are:

First, the WireGuard interface must be set to **non-broadcast**:

```
r1 tnsr(config-frr-ospf)# interface wg1
r1 tnsr(config-ospf-if)# ip network non-broadcast
```

Second, the WireGuard address of the peer must be explicitly configured as a neighbor since OSPF cannot automatically discover neighbors on non-broadcast interfaces.

```
r1 tnsr(config-ospf)# neighbor 10.2.111.2
```

Configure OSPF on R2

Now configure OSPF on R2 in a similar manner, with the same deviations from the example:

```
r2 tnsr(config)# route dynamic ospf
r2 tnsr(config-frr-ospf)# server vrf default
r2 tnsr(config-ospf)# ospf router-id 10.25.0.1
r2 tnsr(config-ospf)# passive-interface LAN
r2 tnsr(config-ospf)# neighbor 10.2.111.1
r2 tnsr(config-ospf)# area 0.0.0.25
r2 tnsr(config-ospf-area)# stub
r2 tnsr(config-ospf-area)# range 10.25.0.0/23
r2 tnsr(config-ospf-area)# exit
r2 tnsr(config-ospf)# exit
r2 tnsr(config-frr-ospf)# interface LAN
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.25
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-frr-ospf)# interface wg1
r2 tnsr(config-ospf-if)# ip address * cost 5
r2 tnsr(config-ospf-if)# ip address * area 0.0.0.0
r2 tnsr(config-ospf-if)# ip network non-broadcast
r2 tnsr(config-ospf-if)# exit
r2 tnsr(config-frr-ospf)# enable
r2 tnsr(config-frr-ospf)# exit
```

At this point the routers should start forming an OSPF neighbor adjacency and exchanging routes.

29.10.4 Check Status

Ping the VPN Peer

First, ping between the WireGuard interfaces to validate peer-to-peer VPN connectivity:

```
r1 tnsr# ping 10.2.111.2 source 10.2.111.1 count 5
PING 10.2.111.2 (10.2.111.2) from 10.2.111.1 : 56(84) bytes of data.
64 bytes from 10.2.111.2: icmp_seq=1 ttl=64 time=3.46 ms
64 bytes from 10.2.111.2: icmp_seq=2 ttl=64 time=0.247 ms
64 bytes from 10.2.111.2: icmp_seq=3 ttl=64 time=0.236 ms
64 bytes from 10.2.111.2: icmp_seq=4 ttl=64 time=0.259 ms
64 bytes from 10.2.111.2: icmp_seq=5 ttl=64 time=0.230 ms
```

(continues on next page)

(continued from previous page)

```

--- 10.2.111.2 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4063ms
rtt min/avg/max/mdev = 0.230/0.887/3.464/1.288 ms

```

Testing one direction is likely sufficient, but there is no harm in repeating the test from the other perspective.

If the ping fails, ensure the two peers can communicate outside of WireGuard, check the WireGuard configuration completely, and also check the tunnel next-hop configuration.

Tip: If the external TNSR interface (e.g. “WAN”) on one or both routers has ACLs restricting traffic, ensure that the ACLs are configured to allow the WireGuard UDP traffic to pass.

Check OSPF

First check if the two peers have formed a full neighbor adjacency.

A working setup will have output similar to the following:

```

r1 tnsr# show route dynamic ospf neighbor
VRF Name: default

```

| Neighbor ID | Pri | State | Dead Time | Address | Interface |
|---------------------|-----|---------|-----------|------------|----------------|
| → RXmtL RqstL DBsmL | | | | | |
| 10.25.0.1 | 1 | Full/DR | 39.699s | 10.2.111.2 | wg1:10.2.111.1 |
| → 0 | 0 | 0 | | | |

```

r2 tnsr# show route dynamic ospf neighbor
VRF Name: default

```

| Neighbor ID | Pri | State | Dead Time | Address | Interface |
|---------------------|-----|-------------|-----------|------------|----------------|
| → RXmtL RqstL DBsmL | | | | | |
| 10.2.0.1 | 1 | Full/Backup | 36.141s | 10.2.111.1 | wg1:10.2.111.2 |
| → 0 | 0 | 0 | | | |

If there are no neighbors listed then the two peers cannot communicate. If the neighbors are listed but with a different status (e.g. `ExStart`, `Other`) then it is possible they are still negotiating. Give them a few moments and check again. If the status is not progressing, then something must be incorrect in the OSPF or interface settings. Ensure the setup matches and try again.

Check Routes

If both neighbors show a `Full` adjacency they should also be exchanging routes. If they exchanged routes, each peer will have a route in its table that matches the summary route configured in the stub area in OSPF on the peer.

For example:

```

r1 tnsr# show route table ipv4-VRF:0
Route Table ipv4-VRF:0 AF: ipv4 ID: 0
-----
[...]

```

(continues on next page)

(continued from previous page)

```
10.25.0.0/23      via 10.2.111.2      wg1 weight 1 preference 20
[...]
```

```
r2 tnsr# show route table ipv4-VRF:0
Route Table ipv4-VRF:0  AF: ipv4  ID: 0
-----
[...]
10.2.0.0/23      via 10.2.111.1      wg1 weight 1 preference 20
[...]
```

If the two peers have a full adjacency but the routes are missing, double check the tunnel next-hop configuration for the WireGuard peers. If that is not correct OSPF will drop routes as it will believe the neighbor is not directly connected.

Ping from LAN to LAN

With the routes in the table it should be possible to ping between the local networks on each side:

```
r1 tnsr# ping 10.25.0.1 source 10.2.0.1 count 5
PING 10.25.0.1 (10.25.0.1) from 10.2.0.1 : 56(84) bytes of data.
64 bytes from 10.25.0.1: icmp_seq=1 ttl=64 time=0.300 ms
64 bytes from 10.25.0.1: icmp_seq=2 ttl=64 time=0.223 ms
64 bytes from 10.25.0.1: icmp_seq=3 ttl=64 time=0.217 ms
64 bytes from 10.25.0.1: icmp_seq=4 ttl=64 time=0.205 ms
64 bytes from 10.25.0.1: icmp_seq=5 ttl=64 time=0.262 ms

--- 10.25.0.1 ping statistics ---
5 packets transmitted, 5 received, 0% packet loss, time 4094ms
rtt min/avg/max/mdev = 0.205/0.241/0.300/0.034 ms
```

Testing one direction is likely sufficient, but there is no harm in repeating the test from the other perspective.

29.11 TNSR Remote Office With Existing IPsec Hub

In this example, remote offices with a [Netgate SG-5100](#) running TNSR will be configured for site-to-site VPN to an existing IPsec Head-End at a central headquarters location.

Workers at remote offices will need Direct Internet Access (DIA) and corporate intranet access from their location using IPSec IKEv2 with Pre-Shared Key and secured crypto methods (AES128/SHA1/DH2048). Direct Internet Access also needs to be made available to a guest network through distinct VLANs so that guest and staff devices can be isolated.

The TNSR Remote Office Deployment will be completed in the following high level steps:

29.11.1 Step 1: Prepare for Deployment

Before the deployment can begin, it is important to gather all needed hardware, software, and parameters in advance.

Prerequisites

- Internet connectivity with a compatible *ISP*.
- *ISP CPE* in routed mode (no NAT), bridged mode, or half bridge mode (PPPoE), if supported by the ISP and CPE.

Note: If the CPE does not support routed or bridged modes, then enable CPE features such as 1:1 NAT or “*DMZ*” mode mapping the external address of the CPE to an internal address to be used by TNSR. IPsec passthrough mode in the CPE, if present, can also be helpful if the CPE must perform NAT.

- Create a reference diagram that shows the logical topology.
- Review the *TNSR Zero-to-Ping documentation*.
- A fixed (static) IP address for the TNSR outside interface.
- Use NAT-T (traversal) support to configure a private IP the TNSR outside interface.
- Management (web login, admin access) of the ISP modem.

Notes

- IPsec tunnels work best on a fixed public IP address, changes to IP addresses require updates to configurations.

Reference Diagram

Create and maintain a reference diagram to support the deployment, as shown in the example below:

Remote Office Deployment Parameters

Define and document the deployment parameters for the initial remote office setup, as shown in the example below:

Table 16: Base Deployment Parameters

| Parameter | Value |
|---------------------------|---------------------|
| TNSR Hostname | siteX-rtr1 |
| TNSR Outside Interface IP | 192.168.0.53/24 |
| TNSR Outside Public IP | 203.0.113.65/24 |
| Guest LAN Name | guest220 |
| Guest LAN IP | 192.168.220.1/24 |
| Guest DHCP Range | 100-199 |
| Guest DNS IP | 1.1.1.1,9.9.9.9 |
| Corporate LAN Name | corp89 |
| Corporate LAN IP | 172.21.89.1/24 |
| Corporate DHCP Range | 100-199 |
| Corporate DNS IP | 10.10.10.75,1.1.1.1 |

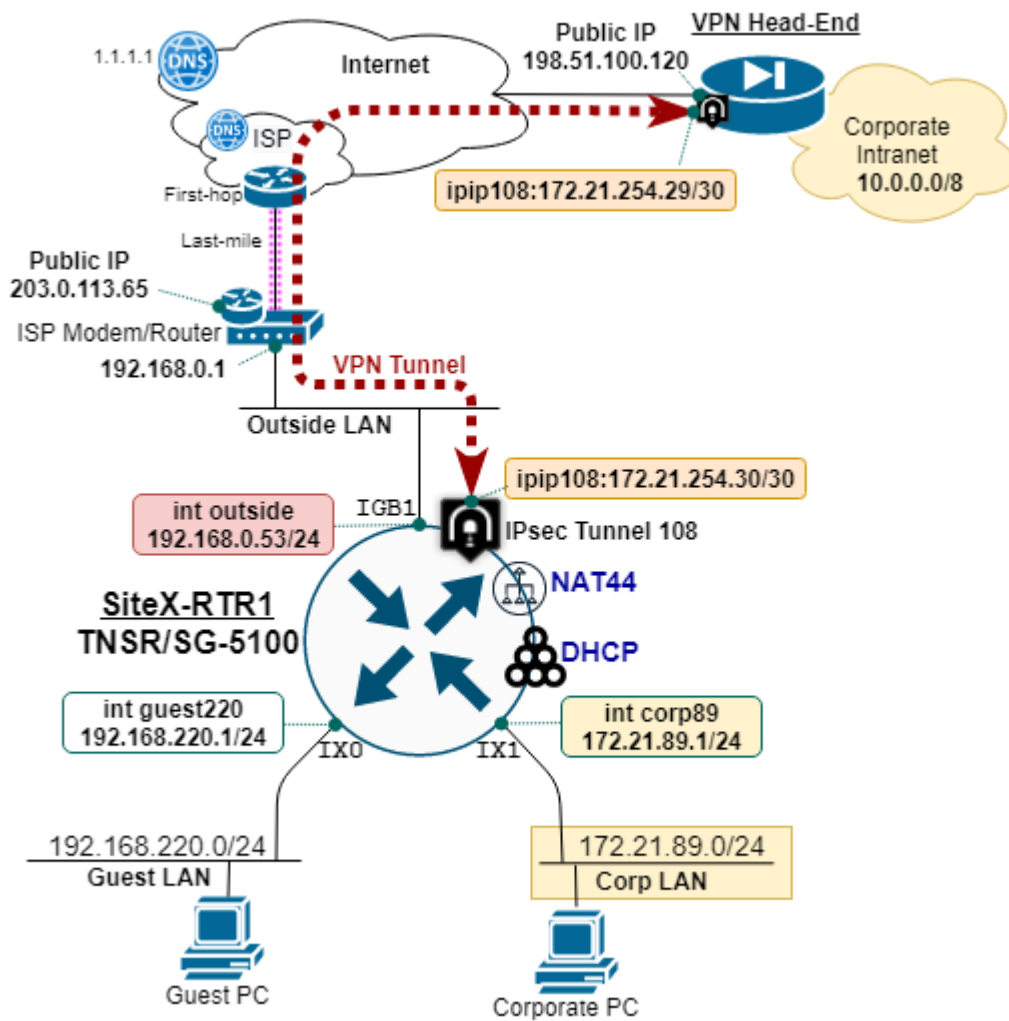


Fig. 10: TNSR remote office reference diagram

In this example, the Remote Office is deployed behind an ISP cable modem performing NAT. TNSR uses NAT-T to *float* the encrypted traffic up to UDP port 4500. This ensures the external NAT device (i.e. ISP site modem/router) does not block the IPsec traffic.

- TNSR Outside IP is different than the ISP Modem Public IP address.
- ISP cable modem provides NAT for inside devices, which includes the TNSR outside interface.

IPsec VPN Tunnel Parameters

Define and document the parameters for the corporate IPsec tunnel and IP routing configuration, as shown in the example below:

Table 17: IPsec VPN Tunnel Parameters

| Parameter | Value |
|-----------------------|------------------|
| TNSR Outside IP | 192.168.0.53/24 |
| TNSR Public IP | 203.0.113.65/24 |
| IPsec Tunnel Peer IP | 198.51.100.120 |
| IPsec Tunnel ID | 108 |
| IPsec IKEv2 Crypto | AES128/SHA1/DH14 |
| IPsec IKEv2 Authen | PRE-SHARED-KEY |
| IPsec Child SA Crypto | AES128GCM16/DH14 |
| IPsec Tunnel IP | 172.21.254.30/30 |
| IPsec Tunnel Next-hop | 172.21.254.29 |
| Corporate IP Block | 10.0.0.0/8 |

29.11.2 Step 2: Initial Setup Tasks

Use the following diagram to support the initial setup tasks.

Ethernet Ports Connections

Use RJ45 ethernet cables to connect the **SG-5100 network ports** to the **outside**, **corp89**, and **guest220** networks.

Table 18: Assign (and label) SG-5100 Interfaces

| Port Label | VPP Name | OS Name | Assignment/name |
|------------|-------------------------|---------|------------------|
| IGB0 | n/a | enp3s0 | HostOS Interface |
| IGB1 | GigabitEthernet4/0/0 | vpp1 | outside |
| IX0 | TenGigabitEthernet6/0/0 | vpp2 | guest220 |
| IX1 | TenGigabitEthernet6/0/1 | vpp3 | corp89 |
| IX2 | TenGigabitEthernet8/0/0 | vpp4 | unassigned |
| IX3 | TenGigabitEthernet8/0/1 | vpp5 | unassigned |

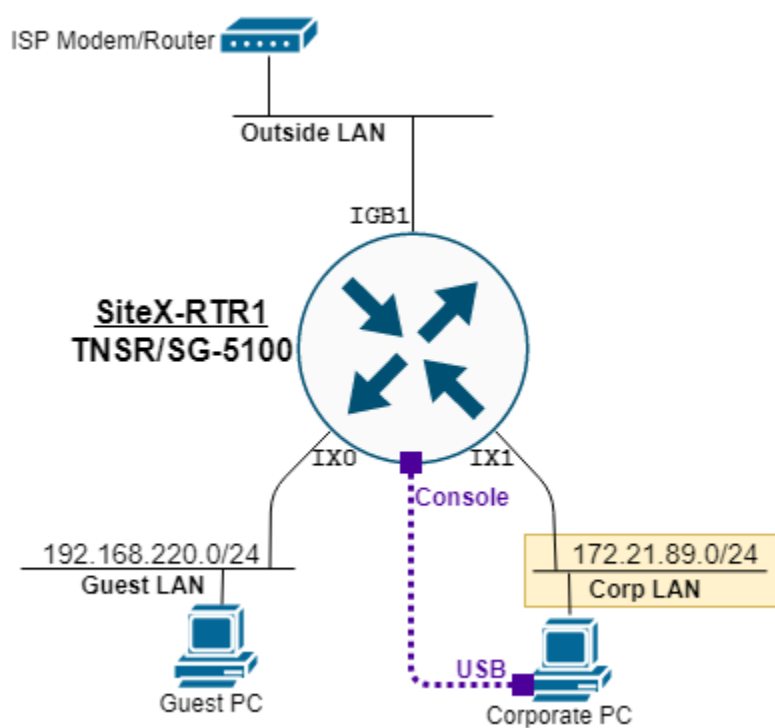


Fig. 11: TNSR remote office setup diagram

HostOS Interface Notes

- Configuration of the HostOS interface is outside the scope of this guide, see [Edit the Host Interface Configuration](#).
- Do not connect the HostOS interface to the same subnet, or broadcast domain, used by TNSR VPP interfaces as it may produce unexpected results.
- More information at [Host Interfaces](#).

Initial TNSR Setup

Boot up the SG-5100 appliance and [connect to the console](#). Once connected, hit return to get a clear login prompt, and log in with the default TNSR user credentials.

Change Default Password

It is important to change the default password on the `tnsr` user before proceeding:

```
localhost tnsr# host shell passwd
Changing password for user tnsr.
Changing password for tnsr.
(current) UNIX password:
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
localhost tnsr#
```

Set Hostname

Set the TNSR hostname and save the configuration:

```
localhost tnsr# config
localhost tnsr(config)# system name sitex-rtr1
sitex-rtr1 tnsr(config)# configuration copy running startup
sitex-rtr1 tnsr(config)# exit
sitex-rtr1 tnsr#
```

Configure Dataplane

Enable selected network and crypto devices on the TNSR dataplane and then restart it, as shown in the config fragment below:

```
dataplane dpdk dev 0000:04:00.0 network name outside
dataplane dpdk dev 0000:06:00.0 network name guest220
dataplane dpdk dev 0000:06:00.1 network name corp89
dataplane dpdk dev 0000:01:00.0 crypto
#
service dataplane restart
```

Note: When enabling the crypto hardware device (QAT) on the console port or during system boot, it is normal for a number of log messages to display as it initializes, these can typically be ignored. For example:

```
[ 836.798096] c3xxxvf 0000:01:01.4: enabling device (0000 -> 0002)
[ 836.804235] DMAR: 64bit 0000:01:01.4 uses identity mapping
[ 836.839343] c3xxxvf 0000:01:01.0: Failed to register crypto algs
[ 836.859227] c3xxxvf: probe of 0000:01:01.0 failed with error -14
[ 836.865313] c3xxxvf 0000:01:01.1: enabling device (0000 -> 0002)
[ 836.871718] DMAR: 64bit 0000:01:01.1 uses identity mapping
[ 836.877853] c3xxxvf 0000:01:01.4: Failed to register crypto algs
[ 836.897244] c3xxxvf: probe of 0000:01:01.4 failed with error -14
```

Inspect an interface with the `show interface` command. As seen below, the **outside** interface is still in **Admin down** state, no IP address is assigned, and no packets have been seen.

```
sitex-rt1 tnsr(config)# show interface outside
Interface: outside
  Admin status: down
  Link down, unknown duplex
  Link MTU: 9206 bytes
  MAC address: 00:90:0b:7c:06:0d
  IPv4 Route Table: ipv4-VRF:0
  IPv6 Route Table: ipv6-VRF:0
  VLAN tag rewrite: disable
  counters:
    received: 0 bytes, 0 packets, 0 errors
    transmitted: 0 bytes, 0 packets, 0 errors
    protocols: 0 IPv4, 0 IPv6
    0 drops, 0 punts, 0 rx miss, 0 rx no buffer
```

Note that the default MTU is large. Set the MTU to the size to match the environment (typically 1500).

Save and Reboot

Save the configuration:

```
configuration copy running startup
```

And then reboot:

```
host shell sudo reboot
```

Watch the console logs as the system boots up, then log in as the `tnsr` user with the new password that was set earlier.

29.11.3 Step 3: TNSR IP Configuration

Use the following diagram to support the configuration to provide IP connectivity for the remote office.

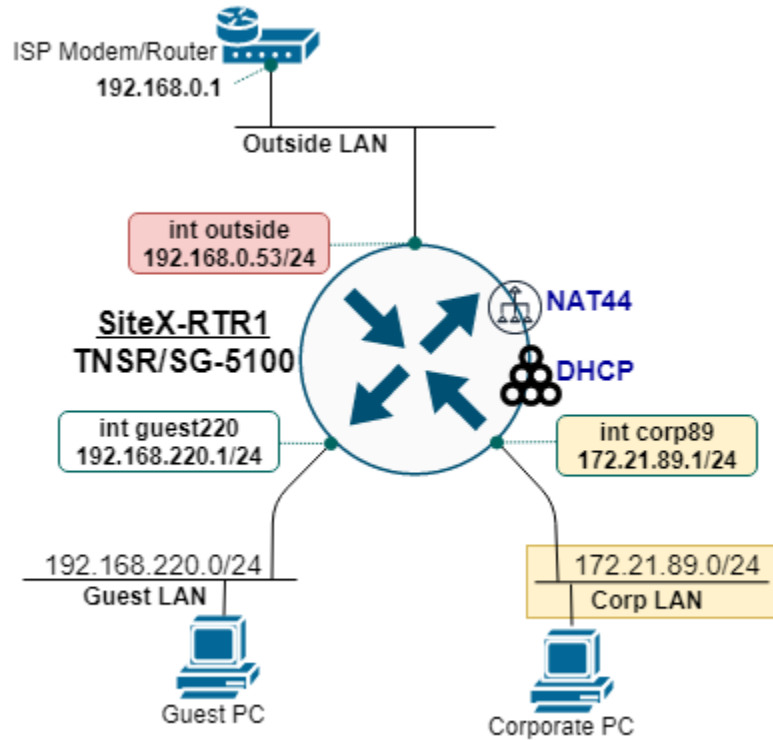


Fig. 12: TNSR remote office IP diagram

There are two inside IP subnets: **corp89** and **guest220**.

- TNSR provides DHCP service to both inside subnets, **corp89** and **guest220**, each using a DHCP address range of 100–199.
- DNS on the **corp89** DHCP includes an internal DNS address for access to the intranet.

Table 19: IP Assignments

| Interface Name | IP Address | IP Gateway | NAT |
|----------------|------------------|-------------|--------------|
| outside | 192.168.0.53/24 | 192.168.0.1 | outside/pool |
| corp89 | 172.21.89.1/24 | n/a | inside |
| guest220 | 192.168.220.1/24 | n/a | inside |

Configure Interface IP Addressing and NAT

Configuration for the interfaces includes setting the MTU and the IP address, enabling NAT, then the interfaces itself, as shown below:

```
# NAT global options must come first
nat global-options nat44 forwarding true
nat global-options nat44 endpoint-dependent true
nat global-options nat44 enabled true

# outside interface
interface outside
  mtu 1500
  ip address 192.168.0.53/24
  ip nat outside
  enable
  exit
#
# corp89 interface
interface corp89
  mtu 1500
  ip address 172.21.89.1/24
  ip nat inside
  enable
  exit
#
# guest220 interface
interface guest220
  mtu 1500
  ip address 192.168.220.1/24
  ip nat inside
  enable
  exit
#
# enable outside interface IP as NAT pool (PAT)
nat pool interface outside
```

Use `show interface` and `show interface ip` to inspect the status of the interfaces.

Configure DHCP Pools

Configure the DHCP server for both inside interfaces, **corp89** and **guest220**:

```
dhcp4 server
  interface listen corp89
  subnet 172.21.89.0/24
    pool 172.21.89.100-172.21.89.199
  exit
  interface corp89
    option routers
      data 172.21.89.1
    exit
    option domain-name-server
```

(continues on next page)

(continued from previous page)

```
data 10.10.10.75,1.1.1.1
exit
exit
# next DHCP for guest220
interface listen guest220
subnet 192.168.220.0/24
pool 192.168.220.100-192.168.220.199
exit
interface guest220
option routers
data 192.168.220.1
exit
option domain-name-server
data 1.1.1.1,9.9.9.9
exit
exit
exit
# enable the DHCP4 server
dhcp4 enable
```

Devices on the **corp89** and **guest220** interfaces should now be able to pull an IP address from the TNSR DHCP server, and use the internet (via NAT.)

Configure IP Default Route

When using a static IP configuration on the outside interface, it is necessary to add an IP Default Route.

```
route table ipv4-VRF:0
route 0.0.0.0/0
next-hop 0 via 192.168.0.1
exit
exit
```

Devices on **corp89** and **guest220** should now be able to ping the internet.

29.11.4 Step 4: Protect the Outside Interface with ACLs

Before proceeding with the VPN IPsec site-to-site tunnel, it is critical to apply Access Control Lists (ACLs) to the **outside** interface.

The reason being, if the **outside** interface is exposed to the internet, it will be frequently probed by bots attempting to login using weak credentials. This can be seen by inspecting **lastb** from the root user:

```
$ sudo lastb | head -100
```

Multiple ACLs can be applied to an input or output queue on an interface, as ordered by sequence. This offers a modular and scalable approach to ACLs for a given interface.

Output ACL - Reflect

The reflect ACL is a special action that permits output traffic and also permits the return, or input, traffic to match the IP flow.

Create an ACL named `outbound-reflect` and apply it:

```
acl outbound-reflect
  rule 5
    desc reflect permit outbound traffic AND permit return traffic on input
    action reflect
    ip-version ipv4
    exit
  exit
#
# Apply to interface as output ACL
interface outside
  access-list output acl outbound-reflect sequence 10
  exit
```

Input ACL - DHCP Response

If using `dhcp client ipv4` on the outside interface, be sure to permit DHCP responses on destination port UDP 68 by creating an ACL named `dhcp-outside` and applying it:

```
acl dhcp-outside
  rule 1
    desc DHCP Response to client on outside interface
    action permit
    ip-version ipv4
    protocol udp
    source port 67
    destination port 68
    exit
  exit
#
# Apply ACL to interface Access-List
interface outside
  access-list input acl dhcp-outside sequence 5
  exit
```

Input ACL - SSH-Outside

To only permit inbound SSH access from specified IP hosts, create an ACL rule named `ssh-outside` and apply it. In this example, **rule 221** permits a block of IP addresses from corporate headquarters and **rule 222** permits a single IP address for assistance from a service provider:

```
acl ssh-outside
  rule 221
    desc Allow SSH from HQ
    action permit
    ip-version ipv4
```

(continues on next page)

(continued from previous page)

```
protocol tcp
destination port 22
source address 198.51.100.0/24
exit
rule 222
desc Allow SSH from service provider
action permit
ip-version ipv4
protocol tcp
destination port 22
source address 192.0.2.88/32
exit
exit
#
# Apply to outside interface as input ACL
interface outside
access-list input acl ssh-outside sequence 10
exit
```

Then validate that only the specified IP addresses are able to SSH to the outside IP address of TNSR.

Note: A NAT static mapping from outside addresses to inside addresses on port 22 (SSH) may be required.

```
nat static mapping tcp local 172.21.89.1 22 external outside 22 out-to-in-only
```

NAT port forwarding is covered in [Step 6: Port Forwarding with NAT](#).

Input ACL - IPsec-Outside

Configure an ACL, named `ipsec-outside`, to permit three (3) types of IPsec traffic:

1. IP Protocol UDP; Destination Port 500: IKEv2 Message Exchange
2. IP Protocol UDP; Destination Port 4500: NAT-T *floats* IPsec to UDP 4500

```
acl ipsec-outside
rule 11
desc Permit ESP
action permit
ip-version ipv4
source address 198.51.100.120/32
protocol 50
exit
rule 12
desc IKEv2 - UDP 500
action permit
ip-version ipv4
source address 198.51.100.120/32
protocol udp
destination port 500
exit
```

(continues on next page)

(continued from previous page)

```
rule 12
  desc IPsec with NAT-T - UDP 4500
  action permit
  ip-version ipv4
  source address 198.51.100.120/32
  protocol udp
  destination port 4500
  exit
exit
# Apply ACL to interface Access-List
interface outside
  access-list input acl ipsec-outside sequence 20
  exit
```

29.11.5 Step 5: Corporate VPN with IPsec Tunnel

An IPsec IKEv2 VPN tunnel is configured between the remote office and the VPN head end at the corporate office.

IPsec Deployment Parameters

The IPsec tunnel is built with the following parameters:

- IP address of each tunnel endpoint, both the remote office and VPN head end.
- Local and Remote Identity and Pre-Shared Key (PSK).
- Compatible Phase 1 Proposal: AES128, SHA1, DH14.
- Compatible Phase 2 Proposal: AES128GCM16, DH14.
- IP address assigned to the tunnel interface, typically a /30 subnet.
- IP route to direct corporate traffic over IPsec tunnel via next-hop IP.

The parameters for this deployment were captured at *IPsec VPN Tunnel Parameters*.

In this example, the Remote Office TNSR is behind NAT on the ISP cable mode, and using a Private IP address.

- TNSR Outside IP: 192.168.0.53
- TNSR Public IP: 203.0.113.65

The NAT-T feature of TNSR will recognize there is a NAT device translation in the path (traversal) and *float* the VPN tunnel traffic to UDP port 4500. This ensures the external NAT devices does not block the IPsec (VPN) traffic.

TNSR NAT Inbound Forwarding of IKE and ESP Packets

By default, TNSR will block inbound traffic on the outside NAT interface. To permit the IPsec traffic, add `nat static` mappings to forward the inbound IPsec traffic to TNSR.

```
nat static mapping udp local 192.168.0.53 500 external outside 500
nat static mapping udp local 192.168.0.53 4500 external outside 4500
```

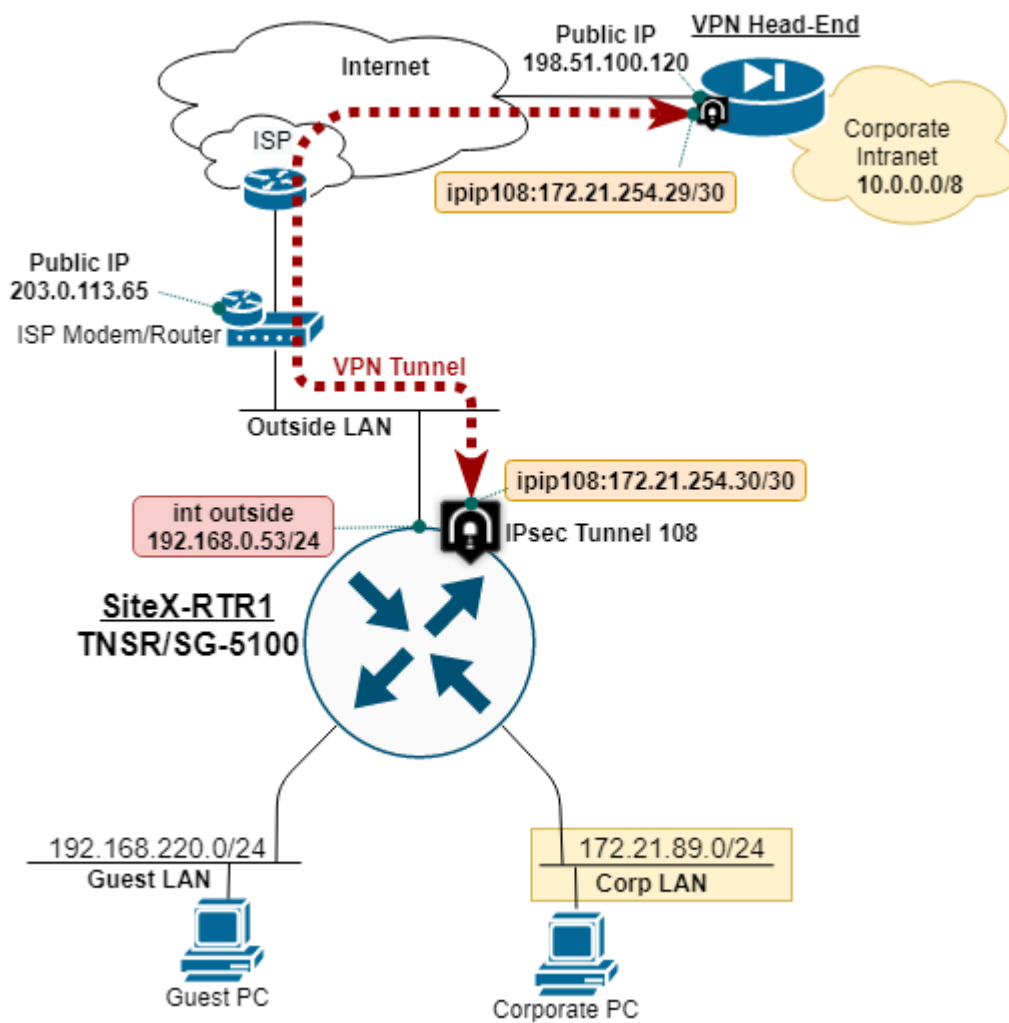


Fig. 13: TNSR remote office IPsec VPN diagram

Note: These accessible UDP ports should be protected by an ACL, to includes source addresses in the rules when possible.

Configure IPsec Tunnel

Configure the IPsec tunnel on the remote office TNSR:

```
ipsec tunnel 108
  enable
  local-address 192.168.0.53
  remote-address 198.51.100.120
  crypto config-type ike
  crypto ike
    version 2
    lifetime 28800
    proposal 1
      encryption aes128
      integrity sha1
      group modp2048
    exit
  identity local
    type address
    value 203.0.113.65
  exit
  identity remote
    type address
    value 198.51.100.120
  exit
  authentication local
    round 1
      type psk
      psk AD78PPQMP00
    exit
  exit
  authentication remote
    round 1
      type psk
      psk AD78PPQMP00
    exit
  exit
  child 1
    lifetime 3600
    proposal 1
      encryption aes128gcm16
      no integrity
      group modp2048
    exit
  exit
  exit
  exit
#
```

Configure IP Tunnel Address and MTU

Configure a static IP address on the IPsec tunnel, and set the `ip mtu` to account for IPsec overhead:

```
interface ipip108
  ip address 172.21.254.30/30
  mtu 1400
  enable
  exit
#
```

To test, ping the other end of the IPsec tunnel with:

```
ping 172.21.254.29 source 172.21.254.30 count 5
```

Use this test to confirm if the IPsec Tunnel is *load-bearing*.

Configure IP Route to Corporate

Configure a static IP route to direct corporate traffic over the IPsec tunnel via the next-hop on the IPsec tunnel:

```
route table ipv4-VRF:0
  route 10.0.0.0/8
    next-hop 0 via 172.21.254.29
  exit
exit
#
```

Save changes:

```
configuration copy running startup
```

29.11.6 Step 6: Port Forwarding with NAT

This section shows an example of a single inbound *Network Address Translation* (NAT) port forward, also known as NAT pinholes or port mapping, to access an internal web host.

Although VPN connections are preferred, sometimes it is desired, or necessary, to provide direct access to an internal networked device.

Use good judgement AND action when permitting access to the network connected device from the outside.

Good practices on internet accessible devices:

- Change all default passwords
- Only provide access to needed ports
- Update firmware to latest and periodically
- Include source addresses in ACLs (access control lists) rules whenever possible
- Don't use low grade-dog-food networked products - if the vendor does not put their name on the product, definitely avoid it

With due diligence (see above), NAT port forwarding can be used to provide specific outside access to inside networked devices.

In this recipe, we setup NAT port forwarding to an internal system with a web interface to provide remote access to a support technician.

NAT Port Forwarding

Define NAT port forwarding rule:

```
nat static mapping tcp local 172.21.89.12 8443 external outside 8443
```

Permit Port Forward Traffic with ACL

Traffic that is port forwarded by NAT must also be permitted by the outside access control list (ACL). The ACL is created and applied to input queue access-list on the outside interface.

```
acl http-outside
  rule 10
    desc Permit from Corp to TCP-8443
    action permit
    ip-version ipv4
    source address 198.51.100.0/24
    protocol tcp
    destination port 8443
    exit
  exit
#
# Apply ACL to interface Access-List
interface outside
  access-list input acl http-outside sequence 101
  exit
```

The internal web host is should now be accessible from permitted IP addresses. Test to confirm that the configuration is correct.

29.11.7 Step 7: SNMP Monitoring

SNMP is used to monitor the remote office from an external location.

Configure SNMP Server

Configure and enable the SNMP server on TNSR, as shown in the example below:

```
snmp community community-name PlzzaGuy source 198.51.100.0/24 security-name tnsrsnmp
snmp group group-name ROGroup security-name tnsrsnmp security-model v2c
snmp view view-name systemview view-type included oid .1
snmp access group-name ROGroup prefix exact model any level noauth read systemview write_
↪none
#
snmp host enable
```

Enable Port Forward to SNMP

If needed, setup static mapping from an outside UDP port to the SNMP port on TNSR:

```
nat static mapping udp local 192.168.0.53 161 external outside 161
```

Permit SNMP Polling with ACL

To permit access to the SNMP server from the outside, create an ACL rule named `snmp-outside` and apply it:

```
acl snmp-outside
rule 11
  desc Permit to SNMP
  action permit
  ip-version ipv4
  protocol udp
  source address 198.51.100.0/24
  destination port 161
  exit
exit
#
# Apply ACL to interface Access-List
interface outside
  access-list input acl snmp-outside sequence 102
  exit
```

29.12 VRRP with Outside NAT

This example is a two-node [VRRP](#) cluster with internal and external [VR](#) address and NAT.

See also:

For an example without NAT, see [VRRP Example](#).

In this example, the WAN-side VR address (203.0.113.254) is used for outbound NAT from the internal private subnet 10.2.0.0/24. Clients will use the LAN-side VR address (10.2.0.1) as their gateway.

Interface tracking is included in the example to protect against a single failure of either WAN or LAN.

See also:

See [VRRP Configuration](#) for more information on how the commands in the example function.

29.12.1 Required Information

These tables contain all required information to configure the cluster.

The information in this first table is related to the setup in general, not a specific cluster node.

Table 20: Example Basic VRRP Configuration Related Information

| Item | Value |
|-----------------------|---------------|
| Upstream Gateway | 203.0.113.1 |
| Shared WAN VR Address | 203.0.113.254 |
| NAT Pool Address | 203.0.113.254 |
| Shared LAN VR Address | 10.2.0.1 |
| LAN Client Gateway | 10.2.0.1 |

This information is for the primary node, which in this example is called **R1**.

Table 21: Example Basic VRRP Configuration for R1

| Item | Value |
|----------------------|----------------|
| R1 WAN Interface | 0000:06:00.0 |
| R1 WAN IP Address | 203.0.113.2/24 |
| R1 WAN VR ID | 220 |
| R1 WAN VR Priority | 254 |
| R1 LAN Interface | 0000:06:00.1 |
| R1 LAN IP Address | 10.2.0.2/24 |
| R1 LAN VR ID | 210 |
| R1 LAN VR Priority | 254 |
| R1 Priority Decrease | 240 (14) |

This information is for the secondary node, which in this example is called **R2**. Note that the interface addresses are different than **R1**, but the same VR address is used.

Table 22: Example Basic VRRP Configuration for R2

| Item | Value |
|----------------------|----------------|
| R2 WAN Interface | 0000:06:00.0 |
| R2 WAN IP Address | 203.0.113.3/24 |
| R2 WAN VR ID | 220 |
| R2 WAN VR Priority | 100 |
| R2 LAN Interface | 0000:06:00.1 |
| R2 LAN IP Address | 10.2.0.3/24 |
| R2 LAN VR ID | 210 |
| R2 LAN VR Priority | 100 |
| R2 Priority Decrease | 90 (10) |

29.12.2 Example Configuration

The configuration commands in this section show how the settings from the table above are applied to each node. Some additional VRRP settings are shown in the commands but not the tables, but they are using the default values, shown for emphasis.

First, set the **R1** interface names:

```
r1 tnsr(config)# dataplane dpdk dev 0000:06:00.0 network name WAN
r1 tnsr(config)# dataplane dpdk dev 0000:06:00.1 network name LAN
r1 tnsr(config)# service dataplane restart
```

Now configure the **R1** WAN interface:

```
r1 tnsr(config)# int WAN
r1 tnsr(config-interface)# ip address 203.0.113.2/24
r1 tnsr(config-interface)# ip vrrp-virtual-router 220
r1 tnsr(config-vrrp4)# preempt true
r1 tnsr(config-vrrp4)# accept-mode true
r1 tnsr(config-vrrp4)# v3-advertisement-interval 100
r1 tnsr(config-vrrp4)# priority 254
r1 tnsr(config-vrrp4)# track-interface LAN priority-decrement 240
r1 tnsr(config-vrrp4)# virtual-address 203.0.113.254
r1 tnsr(config-vrrp4)# exit
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
```

Next, configure the **R1** LAN interface:

```
r1 tnsr(config)# int LAN
r1 tnsr(config-interface)# ip address 10.2.0.2/24
r1 tnsr(config-interface)# ip vrrp-virtual-router 210
r1 tnsr(config-vrrp4)# preempt true
r1 tnsr(config-vrrp4)# accept-mode true
r1 tnsr(config-vrrp4)# v3-advertisement-interval 100
r1 tnsr(config-vrrp4)# priority 254
r1 tnsr(config-vrrp4)# track-interface WAN priority-decrement 240
r1 tnsr(config-vrrp4)# virtual-address 10.2.0.1
r1 tnsr(config-vrrp4)# exit
r1 tnsr(config-interface)# exit
r1 tnsr(config)#
```

Configure NAT on **R1**:

```
r1 tnsr(config)# nat global-options nat44 forwarding true
r1 tnsr(config)# nat global-options nat44 endpoint-dependent true
r1 tnsr(config)# nat global-options nat44 enabled true
r1 tnsr(config)# nat pool address 203.0.113.254
r1 tnsr(config)# int WAN
r1 tnsr(config-interface)# ip nat outside
r1 tnsr(config-interface)# exit
r1 tnsr(config)# int LAN
r1 tnsr(config-interface)# ip nat inside
r1 tnsr(config-interface)# exit
```

R1 is now complete.

Set the **R2** interface names:

```
r2 tnsr(config)# dataplane dpdk dev 0000:06:00.0 network name WAN
r2 tnsr(config)# dataplane dpdk dev 0000:06:00.1 network name LAN
r2 tnsr(config)# service dataplane restart
```

Configure the **R2** WAN interface:

```
r2 tnsr(config)# int WAN
r2 tnsr(config-interface)# ip address 203.0.113.3/24
```

(continues on next page)

(continued from previous page)

```
r2 tnsr(config-interface)# ip vrrp-virtual-router 220
r2 tnsr(config-vrrp4)# preempt true
r2 tnsr(config-vrrp4)# accept-mode true
r2 tnsr(config-vrrp4)# v3-advertisement-interval 100
r2 tnsr(config-vrrp4)# priority 100
r2 tnsr(config-vrrp4)# track-interface LAN priority-decrement 90
r2 tnsr(config-vrrp4)# virtual-address 203.0.113.254
r2 tnsr(config-vrrp4)# exit
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
```

Next, configure the **R2** LAN interface:

```
r2 tnsr(config)# int LAN
r2 tnsr(config-interface)# ip address 10.2.0.3/24
r2 tnsr(config-interface)# ip vrrp-virtual-router 210
r2 tnsr(config-vrrp4)# preempt true
r2 tnsr(config-vrrp4)# accept-mode true
r2 tnsr(config-vrrp4)# v3-advertisement-interval 100
r2 tnsr(config-vrrp4)# priority 100
r2 tnsr(config-vrrp4)# track-interface WAN priority-decrement 90
r2 tnsr(config-vrrp4)# virtual-address 10.2.0.1
r2 tnsr(config-vrrp4)# exit
r2 tnsr(config-interface)# exit
r2 tnsr(config)#
```

Finally, configure NAT on **R2**:

```
r2 tnsr(config)# nat global-options nat44 forwarding true
r2 tnsr(config)# nat global-options nat44 endpoint-dependent true
r2 tnsr(config)# nat global-options nat44 enabled true
r2 tnsr(config)# nat pool address 203.0.113.254
r2 tnsr(config)# int WAN
r2 tnsr(config-interface)# ip nat outside
r2 tnsr(config-interface)# exit
r2 tnsr(config)# int LAN
r2 tnsr(config-interface)# ip nat inside
r2 tnsr(config-interface)# exit
```

At this point, the interface and VRRP configuration is complete for both nodes.

LAN clients in 10.2.0.0/24 can use the LAN VR address of 10.2.0.1 as their default gateway. When traffic exits WAN, NAT will translate the source address to 203.0.113.254.

29.13 Enabling the Serial Console

TNSR can utilize a serial console on hardware containing a serial port, either directly in hardware or virtualized through a feature such as IPMI for Serial Over LAN (SOL).

Note: Certain Netgate hardware models may ship with the hardware serial console already active. Try to access the console before performing additional steps.

Netgate appliances equipped with IPMI ship with default BIOS settings enabled for SOL operation. This applies to the 1537, 1541 and future models containing IPMI devices.

Warning: Modifying the kernel command line incorrectly can result in a system that does not boot. Take a backup before starting, and only make the changes listed in this document.

29.13.1 Backup the Kernel Boot Configuration

Enabling the serial console requires adding arguments to the kernel command line.

Backup the existing grub configuration file:

```
cp /boot/grub2/grub.cfg ./grub.cfg.bak
```

29.13.2 Edit the Kernel Boot Configuration

Edit `/etc/default/grub` with text editor (e.g. `vi`). The file should look like this:

```
GRUB_TIMEOUT=5
GRUB_DISTRIBUTOR="$(sed 's, release .*$,,g' /etc/system-release)"
GRUB_DEFAULT=saved
GRUB_DISABLE_SUBMENU=true
GRUB_TERMINAL_OUTPUT="console"
GRUB_CMDLINE_LINUX="crashkernel=auto resume=/dev/mapper/cl-swap rd.lvm.lv=cl/root rd.lvm.
↪lv=cl/swap selinux=0"
GRUB_DISABLE_RECOVERY="true"
GRUB_ENABLE_BLSCFG=true
GRUB_CMDLINE_LINUX_DEFAULT="intel_iommu=on iommu=pt sdhci.debug_quirks2=0x40"
```

Find the `GRUB_CMDLINE_LINUX_DEFAULT` line and append the console settings. For IPMI SOL, the terminal device will be `ttyS1`. For a hardware serial console, it would be `ttyS0`. This example will use `ttyS1`.

This example enables both SOL on `ttyS1` and the VGA console on `tty0`. Add `console=ttyS1,115200n8 console=tty0` to the end of the `GRUB_CMDLINE_LINUX_DEFAULT` line as shown:

```
GRUB_CMDLINE_LINUX_DEFAULT="intel_iommu=on iommu=pt sdhci.debug_quirks2=0x40
↪console=ttyS1,115200n8 console=tty0"
```

Note: Adding entries for these two consoles results in boot messages being displayed on both SOL and iKVM/VGA output.

29.13.3 Rebuild the Kernel Boot Configuration

Build a new `grub.cfg` using the following command:

```
sudo grub2-mkconfig -o /boot/grub2/grub.cfg
```

Reboot the system normally and the new settings will take effect.

29.13.4 Accessing the Serial Console

IPMI Serial Over LAN

There are multiple methods which can connect to the serial console.

The simplest method is to use the `ipmiconsole` tool which is part of the [freeipmi](#) package.

```
ipmiconsole -h <IPMI address> -u <username> -P
```

To exit the IPMI console press the following keys in sequence: `&`, `..`

Alternately, use `ssh` to connect to the IPMI controller then launch the serial console utility:

```
ssh <username>@<IPMI address>
cd system1
cd sol1
start
```

To exit the SOL console press the following keys in sequence: `Esc`, `Enter`, `Shift+T`.

Hardware Serial Console

To access the hardware serial console, a serial cable connection must be established between the client and the device. This varies widely by hardware and may be a USB port, DB9 port, RJ45 style port, and may also involve a null modem adapter. Check the hardware device manual for details.

On the client device, use standard serial client software such as `screen`, `cu`, `PuTTY`, `minicom`, or others to access the console. Consult the serial client software documentation for additional details.

For devices sold by Netgate, the hardware manual contains information about accessing the serial console which covers hardware and software. For an example, see the manual for the [Netgate 5100](#).

29.14 Changing Credentials and Keys

Organizations may have guidelines about how often to change credentials such as passwords and encryption keys. Different types of credentials and keys are stored in various places, and changing them can range from trivial or cumbersome depending on the type and how TNSR uses them.

These types of guidelines can vary widely based on various industry recommendations, certification standards, and other criteria. Due to these variations, this document won't make any specific commentary on timing of such changes.

- *User Accounts*
 - *Passwords*

- *User Keys (ssh)*
- *Certificate Data and Private Keys*
 - *CA*
 - *Certificates*
- *RESTCONF Server*
- *VPNs*
 - *IPsec*
 - *WireGuard*
- *Dynamic Routing*
 - *BGP Neighbor Password*
 - *OSPF message-digest-key*
 - *OSPF authentication-key*
 - *RIP Key*
- *BFD Keys*
- *SNMP*
 - *SNMP Communities*

29.14.1 User Accounts

Local user accounts on TNSR can be managed from within TNSR or in the OS. Users in the OS directly can be updated by following procedures in the OS documentation. Users created from within TNSR can be updated using the TNSR CLI or RESTCONF.

See also:

User Management

Passwords

To change the password for a user created in the TNSR CLI, use the following sequence of commands:

```
tnsr# configure
tnsr(config)# auth user <user-name>
tnsr(config-auth)# password <plain text password>
tnsr(config-auth)# exit
tnsr(config)#
```

User Keys (ssh)

To update an SSH key for a user, either add a new key with a new name or replace the existing key.

```
tnsr# configure
tnsr(config)# auth user <user-name>
tnsr(config-auth)# user-keys <key-name>
[pasted key data]

tnsr(config-auth)# exit
tnsr(config)#
```

29.14.2 Certificate Data and Private Keys

CA and Certificates have built-in expiration dates after which they must be generated again. For certificates, this is fairly low impact, but for a CA this can be more cumbersome as it also means re-creating the entire certificate structure.

The examples here show replacing an existing CA or certificate with a new copy. Another tactic is to create a new entry with a distinct name instead, though that is no different than creating a new certificate as described in [Public Key Infrastructure](#).

CA

Fully changing the private key and certificate requires erasing and regenerating all of its components.

First remove the old entries if they still exist in TNSR:

```
tnsr(config)# pki private-key selfca delete
tnsr(config)# pki signing-request selfca delete
tnsr(config)# pki certificate selfca delete
```

Note: Deleting the signing request is optional, but this is a good time to review and update the CA data.

Now create the CA again.

First, generate a new private key:

```
tnsr(config)# pki private-key selfca generate
```

Next, reconfigure the signing request if it was removed:

```
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name selfca
tnsr(config)# pki signing-request set subject-alt-names add hostname selfca
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request selfca generate
```

Finally, self-sign the CA:

```
tnsr(config)# pki signing-request selfca sign self enable-ca true
```

Afterward, erase and re-create all of the certificates signed by this CA again.

Certificates

Fully changing the private key and certificate requires erasing and regenerating all of its components.

First remove the old entries if they still exist in TNSR:

```
tnsr(config)# pki private-key myuser delete
tnsr(config)# pki signing-request myuser delete
tnsr(config)# pki certificate myuser delete
```

Note: Deleting the signing request is optional, but this is a good time to review and update the certificate data.

Now create the certificate again.

First, generate a new private key:

```
tnsr(config)# pki private-key myuser generate key-length 4096
```

Next, reconfigure the signing request if it was removed:

```
tnsr(config)# pki signing-request settings clear
tnsr(config)# pki signing-request set common-name myuser
tnsr(config)# pki signing-request set subject-alt-names add hostname myuser
tnsr(config)# pki signing-request set digest sha256
tnsr(config)# pki signing-request myuser generate
```

Finally, sign the certificate with a CA, such as the one re-created in the above example:

```
tnsr(config)# pki signing-request myuser sign ca-name selfca days-valid 365 digest_
↪sha512 enable-ca false
```

Copy the key and certificate output and securely distribute the certificate data to the user.

Alternately, to retain the private key and only renew the certificate, delete the old certificate and re-sign it. This assumes the signing request was still present.

```
tnsr(config)# pki certificate myuser delete
tnsr(config)# pki signing-request myuser sign ca-name selfca days-valid 365 digest_
↪sha512 enable-ca false
```

29.14.3 RESTCONF Server

First generate a new copy of the server certificate as described in *Certificate Data and Private Keys*, then restart the RESTCONF server:

```
tnsr(config)# service restconf restart
```

29.14.4 VPNs

For optimal security, changing VPN keys periodically is a good practice. The practicality of doing so largely depends on the size of the VPN (e.g. a simple two-site point-to-point link vs a remote access setup with dozens of users)

In any case, the most important thing is to coordinate the change with the remote peer(s) so all parties are using the correct keys.

IPsec

Changing pre-shared key values is fairly simple but must be done in a coordinated fashion. As soon as one side changes the key, the other side will fail to negotiate the tunnel the next time it attempts to authenticate.

To change the key, update both the local and remote authentication rounds:

```
tnsr(config)# ipsec tunnel 0
tnsr(config-ipsec-tunnel)# crypto ike
tnsr(config-ipsec-crypto-ike)# authentication local
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# psk mynewsupersecretkey
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
tnsr(config-ipsec-crypto-ike)# authentication remote
tnsr(config-ike-auth)# round 1
tnsr(config-ike-auth-round)# psk mynewsupersecretkey
tnsr(config-ike-auth-round)# exit
tnsr(config-ike-auth)# exit
tnsr(config-ipsec-crypto-ike)# exit
tnsr(config-ipsec-tunnel)# exit
tnsr(config)#
```

WireGuard

Changing pre-shared key values is fairly simple but must be done in a coordinated fashion. As soon as one side changes the key, the tunnel will fail.

Local Key

First, generate a new key from a shell prompt:

```
$ wg genkey | tee new.prv.key | wg pubkey > new.pub.key
$ cat new.prv.key
cALe8VHTm6tbe7pon0Ktc0W8z3tC6mbkfEUV6HSGcUo=
$ cat new.pub.key
nPF7L6SV9xJB1pq3hZon4INbRoI7N2nUSQtKF3/fVFw=
```

Then add the new key into the configuration:

```
tnsr(config)# interface wireguard 1
tnsr(config-wireguard)# private-key base64 cALe8VHTm6tbe7pon0Ktc0W8z3tC6mbkfEUV6HSGcUo=
tnsr(config-wireguard)# exit
```

Finally, deliver the new **public** key to the remote peer(s) so they can update their configuration(s).

Peer Key

If a peer sends a new public key, replace the existing key for the peer with the new key:

```
tnsr(config)# interface wireguard 1
tnsr(config-wireguard)# peer 1
tnsr(config-wireguard-peer)# public-key base64 SATd3LG2A+h7YA8a3+SB7z/
↪0ipG7mkE1yEavdczKthI=
tnsr(config-wireguard-peer)# exit
tnsr(config-wireguard)# exit
```

29.14.5 Dynamic Routing

Various components of dynamic routing utilize authentication mechanisms to ensure they are communicating with the correct peers. In most cases these are optional.

When updating these authentication parameters, both sides will need to start using the new credentials at the same time.

BGP Neighbor Password

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)# server vrf <vrf-name>
tnsr(config-bgp)# neighbor <peer>
tnsr(config-bgp-neighbor)# password <new-password>
tnsr(config-bgp-neighbor)# exit
tnsr(config-bgp)# exit
tnsr(config-frr-bgp)# exit
```

OSPF message-digest-key

Change the credentials for OSPF instances using MD5 HMAC digest authentication as follows:

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# interface <if>
tnsr(config-ospf-if)# ip address (*|<addr>) message-digest-key key-id <id> md5-key <key>
tnsr(config-ospf-if)# exit
tnsr(config-frr-ospf)# exit
```

OSPF authentication-key

Change the credentials for OSPF instances using simple password-based authentication as follows:

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)# interface <if>
tnsr(config-ospf-if)# ip address (*|<addr>) authentication-key <key>
tnsr(config-ospf-if)# exit
tnsr(config-frr-ospf)# exit
```


RIP Key

Change the RIP key chain string as follows:

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)# key-chain <name>
tnsr(config-rip-key-chain)# key <key-id> string <key-string>
tnsr(config-rip-key-chain)# exit
tnsr(config-frr-rip)# exit
```

29.14.6 BFD Keys

To update the secret on an existing key:

```
tnsr(config)# bfd conf-key-id <conf-key-id>
tnsr(config-bfd-key)# secret <new secret>
```

29.14.7 SNMP

SNMP Communities

An SNMP community in SNMPv1 and SNMPv2c is similar to a username and password in a single string, and as such it may need to be changed. The community name cannot be changed in-place, so define a new community with the same parameters as the old entry, then remove the old entry. Repeat as needed for additional sources or other parameters.

```
tnsr(config)# snmp community community-name <community-name>
                        source (<src-prefix>|default)
                        security-name <security-name>
tnsr(config)# no snmp community community-name <old-community>
```

ADVANCED CONFIGURATION

The items in this section can be used to control lower-level behavior of the dataplane and host operating system in various ways. These can help to increase performance and efficiency for large workloads.

30.1 Dataplane Configuration

For the majority of cases the default dataplane configuration is sufficient, but certain cases may require adjustments. These are often covered in more detail throughout the documentation, and relevant sections will be linked where appropriate.

These commands are all available in `config` mode (*Configuration Mode*).

Warning: The dataplane service requires a restart to enable configuration changes described in this section. The CLI prints a warning to remind users to perform this action after changing settings. Restart the dataplane from `config` mode using the following command:

```
tnsr# configure
tnsr(config)# service dataplane restart
```

Details of dataplane configuration items can be found in the following sections:

30.1.1 DPDK Configuration

Commands in this section configure hardware settings for *DPDK* devices.

dataplane dpdk dev <pci-id> (crypto|crypto-vf)

Configures *QAT* devices for cryptographic acceleration. See *Setup QAT Compatible Hardware* for details.

dataplane dpdk dev (<pci-id>|<vmbus-uuid>) network [name <name>] [num-rx-queues [<rq>]] [num-tx-queues [<tq>]] [num-rx-desc [<rd>]] [num-tx-desc [<td>]] [tso (off|on)] [devargs <name>=<value>]

Configures a manually approved list of network interface PCI devices or Hyper-V/Azure VMBUS device UUIDs and their options. Typically the dataplane will automatically attempt to use eligible interfaces, but this command overrides that behavior by explicitly listing devices which will be used by the dataplane.

See also:

See *Setup NICs in Dataplane* for more information and examples for adding devices in this manner.

Warning: Adding devices in this way is not compatible with dataplane dpdk blacklist, but when devices are listed manually via dataplane dpdk dev denying in that way is unnecessary.

name <name>

Sets a custom name for a network device in TNSR instead of the automatically generated name (<Link Speed><Bus Location>). For example device 0000:06:00.0 can have a custom name of WAN instead of the default GigabitEthernet6/0/0. Used for convenience and to make interface names self-documenting.

See also:

See [Customizing Interface Names](#) for additional details including limitations on names.

num-rx-queues [<rq>] num-tx-queues [<tq>]

Receive and transmit queue sizes for this device.

num-rx-desc [<rd>] [num-tx-desc [<td>]

Receive and transmit descriptor sizes for this device. Certain network cards, such as Fortville models, may need the descriptors set to 2048 to avoid dropping packets at high loads.

tso (on|off)

TCP segmentation offload (TSO). When enabled on hardware which supports TSO, packet data is offloaded to hardware in large quantities and the hardware handles segmentation into MTU-sized chunks rather than performing segmentation in software. This results in improved throughput as shifting the per-packet processing to hardware reduces the burden on the network stack. Disabled by default.

Note: The default values for these configuration options can be set by dataplane dpdk dev default network <options>. These default values are used by the dataplane when an interface does not have a specific value set. The name option must be unique for each interface and thus does not support a default value.

devargs <name>=<value>

Configures a device argument name and value pair with those components separated by =. Device arguments enable or control optional features on a device. For example, dataplane dpdk dev 0000:06:00.0 network devargs disable_source_pruning=1.

A single command can only set one name and value pair. However, it is possible to set multiple device arguments by running the command multiple times each one with a different device argument name and value pair.

Note: The combined length of a each name=value pair must be 128 bytes or less.

See also:

Each driver supports a different set of arguments. Look in the [DPDK NIC Drivers Documentation](#) for information on the arguments supported by a specific poll mode driver (PMD).

A few examples of DPDK documentation pages for PMDs with configuration options are:

- [I40E PMD Arguments](#)
- [MLX4 PMD Arguments](#)
- [MLX5 PMD Arguments](#)
- [Virtio PMD Arguments](#)

dataplane dpdk blacklist <vendor-id>:<device-id>

Prevents the dataplane from automatically attaching to any device which matches a specific PCI vendor and device identifier. Useful for preventing the dataplane from attaching to hardware devices which are known to be incompatible.

Warning: Listing devices in this way is not compatible with `dataplane dpdk dev`.

dataplane dpdk blacklist (<pci-id>|<vmbus-uuid>)

Similar to the previous form, but explicitly prevents the dataplane from attaching to a specific PCI device or Hyper-V/Azure VMBUS device UUID.

Warning: Listing devices in this way is not compatible with `dataplane dpdk dev`.

dataplane dpdk decimal-interface-names

Disabled by default. When set, interface names automatically generated by the dataplane will use decimal values for bus location values rather than hexadecimal values. Linux uses decimal values when forming interface names (e.g. `enp0s20f1`), so administrators may find using decimal values more familiar.

For example, device ID `0000:00:14.1` (`enp0s20f1` in the host OS) would normally be `GigabitEthernet0/14/1` since the value 14 in the bus slot is in hexadecimal. With `decimal-interface-names` set, the name would be `GigabitEthernet0/20/1` instead.

dataplane dpdk iova-mode (pa|va)

Manually configures the IO Virtual Addresses (IOVA) mode used by DPDK when performing hardware IO from user space. Hardware must use IO addresses, but it cannot utilize user space virtual addresses directly. These IO addresses can be either physical addresses (PA) or virtual addresses (VA). No matter which mode is set, these are abstracted to TNSR as IOVA addresses so it does not need to use them directly.

In most cases the default IOVA mode selected by DPDK is optimal.

Warning: When the `vfio-pci UIO` driver is active, IOVA must be explicitly set to `pa` since the automatic selection of `va` will fail with that driver.

See also:

For more detail on IOVA, consult [the DPDK documentation](#).

pa

Physical Address mode. IOVA addresses used by DPDK correspond to physical addresses, and both physical and virtual memory layouts match. This mode is safest from the perspective of the hardware, and is the mode chosen by default. Most hardware supports PA mode at a minimum.

The primary downside of PA mode is that memory fragmentation in physical space must also be reflected in virtual memory space.

va

Virtual Address mode. IOVA addresses do not follow the layout of physical memory; Physical memory is changed to match the virtual memory instead. Because virtual memory appears as one continuous segment, large memory allocations are more likely to succeed.

The primary downside of VA mode is that it relies on kernel support and the availability of IOMMU.

dataplane dpdk log-level (alert|critical|debug|emergency|error|info|notice|warning)

Sets the log level for messages generated by DPDK. The default log level is **notice**.

dataplane dpdk no-multi-seg

Disables multi-segment buffers for network devices. Can improve performance, but disables jumbo MTU support.

Required for Mellanox devices.

Warning: This option is not currently compatible with Intel X552 10G network interfaces. When enabled on incompatible hardware this option can lead to instability such as dataplane crashes while under load.

dataplane dpdk no-pci

Disables scanning of the PCI bus for interface candidates when the dataplane starts. By default, interfaces which are administratively down in the host OS can be selected for use by the dataplane.

dataplane dpdk no-tx-checksum-offload

Disables transmit checksum offloading of TCP/UDP for network devices.

dataplane dpdk tcp-udp-checksum

Enables receive checksum offloading of TCP/UDP for network devices. Disabled by default.

dataplane dpdk uio-driver [<driver-name>]

Configures the UIO driver for interfaces. See *Setup NICs in Dataplane*.

30.1.2 Default Ethernet MTU

The Maximum Transmission Unit (MTU) can be set on interfaces individually, and a common default value can be set in the dataplane as well. Setting the default value allows interfaces to use the proper MTU for the environment without using a manually configured value on every interface.

The `dataplane ethernet default-mtu <size>` command sets the default MTU for Ethernet interfaces, in bytes. Valid values are from 64 to 9000.

Warning: Any interface that will contain an IPv6 address **must** have an MTU of 1280 or higher. This includes both the default MTU and MTU values set on interfaces directly.

See also:

See *Interface Configuration Options* for information on setting the MTU on an interface directly.

30.1.3 CPU Workers and Affinity

The dataplane has a variety of commands to fine-tune how it uses available CPU resources on the host. These commands control CPU cores TNSR will use, both the number of cores and specific cores.

See also:

Cores defined here may also be pinned to interface receive (RX) queues, provided that cores are defined using either the `corelist-workers` or `coremask-workers` methods. See [Interface Configuration Options](#) for details.

Warning: When adding workers, tuning memory values may be required, especially for the statistics segment. See [Memory Usage and Tuning](#) for details.

Default Worker Behavior

The host operating system and daemons reserve core 0 by default, unless another core is reserved elsewhere and core 0 is reassigned. For example, if `skip-cores` is set to a value other than 0, and core 0 is assigned to another task, then the host OS will use one of the other available skipped cores.

Note: Core 0 could be used as a last resort by automatic assignment (e.g. `workers` with `skip-cores` or default `main-core`) if no other cores are available.

The dataplane reserves core 1 by default. Workers may not be assigned to core 1 unless the dataplane is moved to a different core using `main-core` as detailed in the next section. An exception to this is a single core system in which case, the `main-core` would be 0 since it is the only available core.

The dataplane does not use any additional cores by default until configured using one of the available methods (`workers`, `corelist-workers`, `coremask-workers`).

Determining the Number of Workers

When workers are configured, the workers handle traffic while the main thread handles coordination and other tasks. As such, workers can improve the total potential throughput significantly at a cost of increased memory requirements.

Given that the host OS and dataplane should each run on their own core, ideally the amount of cores used by workers should be 2 less than the total number of cores. However, it is possible for the host OS and main thread to share a core, leaving all but one core available for workers.

On systems with smaller numbers of cores (e.g. 4), having the host OS and main thread on the same core allows the remaining cores to all be used by workers to process traffic, which can potentially offer a significant speed increase on those platforms.

If the host OS core includes CPU-intensive daemons such as strongSwan (IPsec) or FRR (BGP, OSPF), the main core could be bogged down as a result. The load on the daemons can vary significantly depending on the configuration and usage. The only way to know for certain if a configuration would be better with the extra worker in this case or not is to test each scenario in the same environment.

Worker Configuration

dataplane cpu corelist-workers <first> [- <last>]

Defines a specific list of CPU cores to be used by the dataplane. The command supports adding single cores to the list at a time, or ranges of cores. Run the command multiple times with different core numbers or ranges to define the full list of cores to utilize. When removing items with **no**, the command accepts a specific core to remove from the list.

dataplane cpu coremask-workers <mask>

Similar to **corelist-workers**, but the cores are defined as a hexadecimal mask instead of a list. For example, **0x000000000000C0000C**

dataplane cpu main-core <n>

Assigns the main dataplane process to a specific CPU core. The default core is 1.

Core 0 is used by the operating system. Ideally the main dataplane process should use a separate core, but core 0 can be shared with the main dataplane process if there is enough CPU power to spare on that core.

dataplane cpu skip-cores <n>

Defines the number of cores to skip when creating additional worker threads, in the range of 0 to the highest available core number. The first <n> cores will not be used by worker threads.

Note: This does not affect the core used by the main thread, which is set by **dataplane cpu main-core <n>**. A skipped core can, however, be used by the host OS instead of core 0.

Warning: This option is incompatible with *interface RX queue core pinning*. To utilize interface RX queue core pinning, define a list of cores using either **corelist-workers** or **coremask-workers** instead.

dataplane cpu workers <n>

Defines the number of worker threads to create for the dataplane. The placement of workers on CPU cores is handled automatically but can be influenced by **skip-cores**.

Note: The number of worker threads is in addition to the main process. For example, with a worker count of 4, the dataplane will use one main process with four worker threads, for a total of five threads.

The maximum value for **workers** is 1 less than the total number of available cores.

Warning: This option is incompatible with *interface RX queue core pinning*. To utilize interface RX queue core pinning, define a list of cores using either **corelist-workers** or **coremask-workers** instead.

Note: The **workers**, **corelist-workers** and **coremask-workers** methods are all mutually exclusive. Only one of these methods of defining workers is allowed in the configuration at any time.

Worker Example

This example sets four additional worker threads, and instructs the dataplane to skip one core when assigning worker threads to cores:

```
tnsr(config)# dataplane cpu workers 4
tnsr(config)# dataplane cpu skip-cores 1
tnsr(config)# service dataplane restart
```

Worker Status

The *show dataplane cpu threads* command displays the current dataplane process list, including the core usage and process IDs. This output corresponds to the example above:

```
tnsr(config)# show dataplane cpu threads
ID Name      Type      PID  LCore Core Socket
-----
0 vpp_main    2330      1    0    0
1 vpp_wk_0    workers 2346    2    2    0
2 vpp_wk_1    workers 2347    3    3    0
3 vpp_wk_2    workers 2348    4    4    0
4 vpp_wk_3    workers 2349    5    5    0
```

The output includes the following columns:

id

Dataplane thread ID.

name

Name of the dataplane process.

type

The type of thread, which will be blank for the main process.

pid

The host OS process ID for each thread.

LCore

The logical core used by the process.

Core

The CPU core used by the process.

Socket

The CPU socket associated with the core used by the process.

30.1.4 Buffers

The commands in this section control the amount of memory pre-allocated by the dataplane for buffers.

Buffers per NUMA

Systems with multiple CPU sockets and Non-uniform memory access (NUMA) capabilities may need specific tuning to ensure that enough buffer space is available for the number of separate NUMA nodes. The number of NUMA nodes is typically the number of populated CPU sockets. Specifically, the scenarios which require tuning typically involve a large number of interfaces combined with multiple CPU worker threads.

Note: This refers to separate hardware CPUs, not a single CPU with multiple cores.

The dataplane buffers `buffers-per-numa <buffers-per-numa>` command allocates the given number of buffers for each CPU socket (e.g. 16384).

Default Data Size

The dataplane buffers `default-data-size <default-data-size>` controls the default size of each buffer, in bytes (e.g. 2048).

30.1.5 Memory

Commands in this section configure memory allocation for the dataplane.

dataplane main-heap-size heap-size [<size>]

Defines the amount of memory to be allocated for the main memory heap. This includes ACL data and the dataplane FIB (IPv4 and IPv6), among other uses.

For more information, see [Memory Usage and Tuning](#).

Note: When tuning this value, also consider increasing the [Statistics Segment](#) heap-size.

dataplane memory main-heap-page-size (default|4k|2m|1g)

Defines the memory page size for the main heap.

dataplane ip6 hash-buckets [<size>]

Defines the number of IPv6 forwarding table hash buckets. The default is 65536.

30.1.6 Statistics Segment

These commands configure the statistics segment parameters for the dataplane. This feature enables local access to dataplane statistics via shared memory.

See also:

For more information on how to make use of this feature, see the VPP documentation for the example [stat_client](#).

dataplane statseg heap-size <heap-size>[kKmMgG]

Size of shared memory allocation for stats segment, in bytes. This value can be suffixed with K (kilobytes), M (megabytes), or G (gigabytes) in upper or lowercase. Default value is 96M.

Note: This value may need to be increased to accommodate large amounts of routes in routing tables, especially with multiple workers. The default value of 96M can safely accommodate approximately 1.8 million routes with no worker threads.

See *Statistics Segment Memory Sizing* for details.

The statistics segment is used to maintain counters for routes, and when multiple worker threads are used, these counters are maintained in each thread. Each counter consumes 16 bytes, and there are two counters for each route. When computing these memory requirements, also keep in mind that the main thread counts in addition to each worker thread. For example, with two worker threads, there are actually three threads total.

The total memory required for route counters alone will be: $\text{<routes> * <threads> * 2 counters * 16 Bytes}$. Additionally, when new memory is being allocated, it must be in a contiguous segment approximately 1.5x the size calculated above. This can negatively impact memory allocation in cases where usage of the statistics segment has become fragmented after repeated allocations and reallocations. All these factors combined mean that when using a large number of routes with multiple worker threads, this value should be given a generous increase over expected normal values.

The dataplane may crash and state that it is out of memory if this value is set too low.

See also:

For additional advice on selecting an appropriate value, see *Statistics Segment Memory Sizing*.

dataplane statseg per-node-counters enable

Enables per-graph-node performance statistics.

dataplane statseg socket-name <socket-name>

Absolute path to UNIX domain socket for stats segment. The default path is `/run/vpp/stats.sock`.

30.1.7 Logging

The following commands fine-tune how logging is performed by the dataplane.

dataplane logging default-log-level (alert|crit|debug|disabled|emerg|err|info|notice|warn)

This command defines the level of logging to include in the VPP log, which is an in-memory circular log buffer, or disabled to disable the log buffer. (Default: notice)

dataplane logging default-syslog-log-level (alert|crit|debug|disabled|emerg|err|info|notice|warn)

This command defines the level of logging to include when logging through syslog, or disabled to disable syslog logging. (Default: warning)

dataplane logging size <message-count>

Size of the messages queue for the in-memory circular log buffer. (Default: 512 messages)

dataplane logging unthrottle-time <seconds>

The amount of time between the last and current log messages, in seconds. If messages repeat more often, they are replaced with `--- message(s) throttled ---`. (Default: 3 seconds)

30.1.8 Linux-cp Configuration

Linux-cp is an interface between the dataplane and the operating system which interacts with daemons, interfaces, routing, and more. There are a few parameters which can fine-tune behavior of Linux-cp:

dataplane linux-cp nl-rx-buffer-size <n>

Specifies the size (in bytes) of the receive buffer used by the netlink socket on which Linux-cp listens for kernel networking announcements. The default socket buffer size is determined by the kernel `sysctl /proc/sys/net/core/rmem_default`, which is around 200kB. When very large amounts of routes are received via BGP (e.g. a full internet route feed of about 800k routes), the kernel can easily send a large burst of messages which quickly fill up this buffer causing it to overflow.

Linux-cp explicitly sets its receive buffer to a larger size (128MB) by default. This parameter can tune it even higher.

dataplane linux-cp nl-batch-size <n>

Specifies the maximum number of incoming netlink messages (e.g. route, interface, or address changes) which will be processed by the main dataplane (VPP) thread at a time. Default value is 2048 messages.

Messages are processed in batches so that processing of a large burst of messages will not monopolize the CPU for an extended period of time, causing other tasks to be delayed.

dataplane linux-cp nl-batch-delay-ms <n>

Specifies the time to wait between completing processing of one batch and starting processing of the next batch.

Default value is 50 milliseconds. 50 ms between batches implies that a maximum of 20 batches could be processed in one second by default.

Batch processing is intended to make the size of the socket buffer less important. The socket buffer could be increased to be very large and still will be stressed by increasing the number of routes being added. With batch processing of messages, TNSR splits this process into two separate phases: Reading incoming messages from the socket and processing those messages. The socket needs to be read regularly to avoid filling or overflowing the buffer. Processing each message takes time and CPU resources to complete. To prevent message processing from causing delays in reading the socket, whenever there is data available to read on the socket, TNSR will read all of the available messages. The messages will be processed by a separate scheduled task. The batch size and batch delay can be used to tune how much time can be spent on processing messages in order to ensure that there is enough time to read additional incoming messages.

When tuning these parameters, configure at least one worker thread. Without worker threads this processing shares a CPU with packet processing and forwarding. If there is a large number of routes being added, the processing of those routes will compete with packet processing for CPU time and it is more likely that the netlink socket buffer will fill. Worker threads allow route processing to occur in the main thread and packet processing to occur in the workers and there will be no contention for CPU resources between the two.

30.2 Host Memory Management Configuration

TNSR has commands to tweak a few common host OS memory management parameters.

These are:

sysctl vm nr_hugepages <u64>

Virtual memory, maximum number of huge pages. This controls allocations of huge areas of contiguous memory, which is used to keep TNSR in memory, rather than swapping. Each huge page is 2MB by default, and the default number of huge pages is 1024. Multiplying the values yields 2GB of

RAM set aside. This value can be tweaked lower for systems with less memory or higher for systems with more available memory and larger workloads.

sysctl vm max_map_count <u64>

Virtual memory, maximum map count. This controls the number of memory map areas available to a given process. With workloads requiring larger amounts of memory, this may need increased to allow sufficient levels of memory allocation operations to succeed. The default value is 3096.

sysctl kernel shmmem <u64>

Maximum size, in bytes, of a single shared memory segment in the kernel. Default value is 2147483648 (2GB).

To view the current active values of these parameters, use `show sysctl`:

```
tnsr# show sysctl
vm/nr_hugepages = 1024
vm/max_map_count = 3096
kernel/shmmax = 2147483648
```

30.3 IP Reassembly

IP reassembly deals with packet fragments, which can be problematic for certain routing, access control, and related tasks which require packet header information. When a packet is fragmented, only the first fragment carries full header information such as TCP/UDP port data. This can lead to problems with processing fragmented packets which involve NAT, for example, which requires that port data.

30.3.1 IP Reassembly Types

TNSR supports two types of IP reassembly: Full Reassembly and Shallow Virtual Reassembly.

Full Reassembly

Full reassembly is more common and the type of reassembly found most often networking platforms. When performing full reassembly, the router waits until all fragments of a packet arrive, and then it acts on that packet to apply ACLs, NAT, and so on, before delivering the packet further.

This means that fragmented packets must be held in a buffer, consuming memory, for a long enough time to allow later fragments to arrive in a reasonable window. This not only consumes memory required for the buffer, but adds latency since all fragments must arrive before the entire packet can be acted upon.

Shallow Virtual Reassembly

Shallow Virtual Reassembly (SVR) does not reassemble fragmented packets, but retains the L4 information so that later fragments can have operations applied using the L4 data from the initial fragment. For example, MAP-T and MAP-E BR rely on the destination port of incoming IPv4 packets to determine the destination CE. Tracking the ports from the first fragment and populating that data into the buffer opaque data of later fragments allows MAP to figure out the correct destination address for future fragments without having to reassemble the entire packet.

Note: Some features of TNSR, such as NAT and MAP, require SVR to function and when those features are active, TNSR will implicitly enable SVR.

30.3.2 IP Reassembly Options

IP reassembly is enabled on a per-interface basis using the `ip reassembly enable` (IPv4) or `ipv6 reassembly enable` (IPv6) commands from within `config-interface` mode. The type may also be set to `full` or `virtual` in a similar manner, see *Interface Configuration Options* for details.

The fragment reassembly behavior in TNSR can be fine-tuned globally using the commands `ip reassembly <type> <address-family> <name> <value>`.

Type

Sets options for either `full` or `virtual` reassembly types. See *IP Reassembly Types* for details on how these modes operate.

full

Options used when performing full reassembly of packet fragments.

virtual

Options used when performing Shallow Virtual Reassembly for retaining fragment information.

Address Family

Sets whether these parameters refer to `ipv4` or `ipv6`.

Name and Value

expire-walk-interval <expire-walk-interval-ms>

The interval, in milliseconds, at which TNSR will check for fragments to expire. Decreasing this will consume more CPU time but will allow TNSR to be more proactive in cleaning up expired fragments. Increasing this will allow expired fragments to be held longer, but may be more likely to overrun the value of `max-reassemblies`. Default value is `10000` (10 seconds).

max-reassemblies <max>

The maximum number of active reassemblies TNSR will maintain at any given time. Increasing this value will consume more resources, but it will also allow TNSR to reassemble a greater number of fragments at a time. Default value is `1024`.

Note: In `full` reassembly mode, new fragment reassembly sessions are not created by TNSR when the limit has been reached, which enforces this limit.

In `virtual` mode, this limit is enforced by removing older sessions. If a fragment for a new packet arrives on an interface and a new reassembly session cannot be created because this limit has been reached, the last created session will be erased and a new one will be created for the current fragment.

max-reassembly-length <length>

The maximum number of fragments TNSR will consider for each reassembly. Increasing this value will consume more resources and can potentially slow down processing as TNSR will wait for more fragments to arrive when attempting to reassemble packets. Default value is `3`.

timeout <timeout-ms>

The timeout value, in milliseconds, after which TNSR will consider a reassembly attempt expired. Increasing this value will cause fragments to be held longer waiting on the remaining pieces, which means they are more likely to be successfully reassembled on slower networks, at the cost of consuming more resources. Default value is `100` milliseconds. When this value is increased, the `max-reassemblies` value may also

need increased to accommodate the higher volume of fragments that TNSR will need to hold.

30.3.3 IP Reassembly Status

To view the current IP reassembly status, use the `show ip reassembly [(full|virtual) [(ipv4|ipv6)]]` command.

On its own, `show ip reassembly` will display the status of all types for both IPv4 and IPv6.

```
tnsr# show ip reassembly
full ipv4 reassembly:
  Timeout:                100 ms
  Expire walk interval:    10000 ms
  Maximum reassemblies:    1024
full ipv6 reassembly:
  Timeout:                100 ms
  Expire walk interval:    10000 ms
  Maximum reassemblies:    1024
virtual ipv4 reassembly:
  Timeout:                100 ms
  Expire walk interval:    10000 ms
  Maximum reassemblies:    1024
virtual ipv6 reassembly:
  Timeout:                100 ms
  Expire walk interval:    10000 ms
  Maximum reassemblies:    1024
```

To limit the output by type, add the `full` or `virtual` keyword, optionally followed by `ipv4` or `ipv6` to view the status only for a specific address family.

TROUBLESHOOTING

This section contains commonly encountered issues with TNSR and methods to resolve them.

31.1 Memory Usage and Tuning

The TNSR dataplane consumes memory for a variety of reasons, and as one might expect, memory requirements increase depending on the workload.

For the sake of maximum speed, the dataplane will crash when it runs out of memory rather than performing checks and calculations each time it attempts to allocate additional memory. Since that is not a desirable outcome in production, the best practice is to determine the proper memory needs before deploying which also includes testing in a simulated workload comparable to the real production environment.

This document serves as a guide for determining how much memory the dataplane will use in a variety of scenarios as well as testing to determine if the chosen sizes are sufficient for a given workload.

The default values are sufficient in cases where there are a small number of routes in the routing table (e.g. less than 10,000) and for some cases above that level as well. Tuning is primarily required for environments where the router will have over 100,000 routes in the routing table, but the specific level depends on the TNSR configuration, hardware, and environment.

Tip: If there is any uncertainty, the testing procedures laid out in this document can help determine if tuning is necessary. See [Testing and Validating Memory Requirements](#)

This document covers memory tuning but there are also CPU usage concerns, especially when using large numbers of routes with dynamic routing. See [Working with Large BGP Tables](#) for details and [CPU Workers and Affinity](#) for information on configuring additional CPU workers.

31.1.1 Routing

When handling large numbers of routes in the TNSR FIB, typically from BGP peers, there are multiple considerations when calculating the correct memory size parameters. These include:

- Number of worker threads
- Number of routes
- Address family of routes (IPv4 or IPv6)
- Prefix length of IPv4 routes

These are explained in more detail in the next sections.

The primary values which may need adjusted are:

- Statistics segment memory size, which holds counters for values in the route tables.
- Main heap memory size, which holds the actual routing tables.
- Linux-cp netlink socket buffer size, which exchanges routes between the dataplane and operating system.

Statistics Segment Memory Sizing

Statistics segment memory usage increases proportionally for each worker thread because each worker thread maintains its own separate counters. This means that the total amount of memory allocated to the statistics segment is divided equally between all workers. Therefore, any increase in worker threads must be accompanied by a corresponding increase in statistics segment memory size to handle the same number of routes.

As mentioned in *Statistics Segment* the formula for calculating a ballpark value for the statistics segment memory size is $\text{<routes> * <threads> * 2 counters * 16 Bytes}$. While that is a good baseline value, the table in *Maximum Route Counts by Statistics Segment Size and Number of Workers* was created from simulated load testing (*Testing and Validating Memory Requirements*) that is closer to real-world experience and can be used as a guide to choose an appropriate statistics segment memory size for a given number of workers and expected total number of routes.

Table 1: Maximum Route Counts by Statistics Segment Size and Number of Workers

| Workers | Statistics Segment Size | | | | | |
|---------|-------------------------|--------|--------|--------|-------|-------|
| | 96 MB* | 128 MB | 256 MB | 512 MB | 1 GB | 2 GB |
| 0 | 1.8M | 1.8M | 4.5M | 9.1M | 15.7M | |
| 1 | 895.1K | 1.0M | 2.1M | 4.7M | 10.2M | 17.7M |
| 2 | 578.3K | 827.5K | 1.6M | 3.2M | 7.2M | 14.6M |
| 3 | 474.7K | 631.7K | 1.3M | 3.0M | 4.8M | 10.6M |
| 4 | 420.9K | 497.9K | 1.1M | 2.2M | 4.4M | 8.5M |
| 5 | 324.8K | 487.2K | 907.7K | 1.9M | 3.6M | 6.9M |
| 6 | 300.0K | 421.7K | 809.2K | 1.5M | 3.3M | 6.3M |

Note: * denotes the default allocation size.

Example

For example, say a router will use 4 worker threads and wants to use a full BGP feed from an upstream peer. As of this writing a full BGP feed may consist of approximately 900,000 IPv4 prefixes and 140,000 IPv6 prefixes for a total of around 1,040,000 routes. These numbers are rounded up a bit to give some extra headroom for expansion, and should likely be increased further. If a router needs to handle approximately 1.1M routes with 4 workers, it will need a minimum of 256MB allocated to the statistics segment:

```
tnsr(config)# dataplane statseg heap-size 256M
tnsr(config)# service dataplane restart
```


Main Heap Memory Sizing

Dataplane *main heap* memory usage for routes in the IPv4 and IPv6 FIBs is not impacted by adding worker threads as there is only a single copy of each FIB in memory.

IPv4 FIB memory usage varies more than statistics segment memory usage. Since it uses the main heap, memory which is dynamically allocated for other objects in VPP at runtime can impact the amount of memory that can be used to store routes in the FIB. IPv6 FIB memory usage also varies more than the statistics segment, but less than IPv4 FIB.

IPv4 FIB memory usage varies based on the length of the prefix. This is due to the design of the data structure which is used to store IPv4 routes. Routes with longer masks can cause more memory to be allocated than routes with shorter masks. For example, storing a /25 prefix requires more memory to be allocated than storing a /24 prefix. IPv6 FIB memory usage is not affected by the length of a prefix. There was no difference in memory usage between IPv6 routes with different mask lengths.

Given those factors, the tables *Maximum IPv4 Route Counts by Heap Size and Prefix Length* and *Maximum IPv6 Route Counts by Heap Size* can aid in determining a minimum main heap size which can accommodate the desired number of routes in the FIB.

Table 2: Maximum IPv4 Route Counts by Heap Size and Prefix Length

| Prefix length | Main Heap Size | | | | | |
|---------------|----------------|-------|-------|--------|--------|--------|
| | 1 GB* | 2 GB | 4 GB | 6 GB | 8 GB | 10 GB |
| <= 24 | 2.25M | 4.10M | 8.86M | 13.16M | 17.87M | 25.11M |
| 25 | 403k | 984k | 1.84M | 2.78M | 4.19M | 4.13M |
| 26 | 719k | 1.62M | 3.67M | 5.47M | 8.24M | 8.40M |
| 27 | 1.47M | 2.21M | 4.89M | 10.38M | 10.96M | 10.96M |
| 28 | 1.75M | 3.53M | 6.48M | 11.99M | 14.91M | 22.03M |
| 29 | 2.05M | 3.92M | 9.66M | 13.06M | 16.71M | 22.44M |

Table 3: Maximum IPv6 Route Counts by Heap Size

| Main Heap | 1 GB* | 2 GB | 4 GB | 6 GB | 8 GB | 10 GB |
|-------------|-------|-------|-------|--------|--------|--------|
| IPv6 Routes | 2.05M | 3.76M | 7.47M | 11.52M | 15.57M | 22.21M |

Note: * denotes the default allocation size.

Example

Continuing the previous example of 900,000 IPv4 prefixes and 140,000 IPv6 prefixes, going by the worst case scenario of every IPv4 route being a /25, that translates to approximately 4GB of main heap for IPv4 and 1GB for IPv6. Since other parts of the dataplane consume main heap memory as well, 6GB is a reasonable minimum for that scenario:

```
tnsr(config)# tnsr(config)# dataplane ip heap-size 6G
tnsr(config)# service dataplane restart
```

Linux-cp Netlink Socket Buffer Sizing

Dataplane memory allocation is one part of handling large numbers of routes, but the routes must also be passed between the operating system FIB and the dataplane. For example, this is the mechanism which exchanges routes between the dynamic routing daemon (FRR) and the dataplane.

When dealing with large numbers of routes received in a short time frame, the *netlink socket buffer* used to exchange these routes may be overrun. If this happens, routes may be lost which leads to a mismatch between the operating system and dataplane FIBs.

The default size of the netlink socket buffer is 128MB which is typically sufficient for around 2M routes but varies depending on hardware and other aspects of the configuration and environment.

Unlike the values discussed earlier in this document, the requirements for the netlink socket buffer are not consistent enough to create tables from which a value can be determined. Configure the other values appropriately and then continue on to *Testing and Validating Memory Requirements*. The validation process for the netlink socket buffer size is explained in that section. If that process determines the size is insufficient, increase it until the tests no longer fail.

Example

Though the example used so far would likely work within the default value, this will double the default to 256MB so there is room to spare. The size value in this command is specified in bytes, so multiply $256 * 1024 * 1024$ for a total of 268435456 bytes.

```
tnsr(config)# dataplane linux-cp nl-rx-buffer-size 268435456
tnsr(config)# service dataplane restart
```

Testing and Validating Memory Requirements

TNSR includes a route testing utility at `/usr/bin/route-test`. This utility adds IPv4 or IPv6 routes quickly via netlink, which is the same method used by the dynamic routing daemon (FRR/zebra) to add routes it receives via BGP.

This utility can aid in validating memory parameters and help in tuning `linux-cp` parameters such as the netlink socket buffer size (*Linux-cp Configuration*).

For IPv4 routes, the default behavior of the utility is to add /24 routes sequentially starting at `1.0.0.0/24`. It skips the loopback prefix (`127/8`) and the prefix which contains the gateway address used with the routes. It stops when it reaches the end of multicast address space (`224/8`).

For IPv6 routes, the default behavior is to add /64 routes sequentially starting at `2000::/64`. It skips the prefix which contains the gateway address used with the routes and stops when it reaches the end of global unicast address space (`4000::/3`).

After selecting appropriate sizes for the statistics segment (*Statistics Segment Memory Sizing*) and main heap (*Main Heap Memory Sizing*) based on the tables in those sections, use `route-test` to add the expected number of routes. This process will validate that the memory allocations are sufficient to support that number of routes.

Route Test Utility Usage

The syntax for this utility is:

```
# /usr/bin/route-test -h
/usr/bin/route-test -g <gateway_address> -n <num_routes> [-h] [-6] [-l <len>]
-h - Display this message
-6 - Add IPv6 routes (IPv4 by default)
-n <number_of_routes>
-g <gateway_address>
-l <prefix_length>
```

To use the utility, supply a gateway address and a number of routes to add. For example, the following command will add 1M routes which use 198.51.100.2 as the next-hop/gateway address.

```
$ sudo dp-exec route-test -g 198.51.100.2 -n 1000000
```

Note: For the routes to be added successfully, TNSR must be configured so that the next hop address can be resolved. In this example, TNSR must know how to reach 198.51.100.2. This could be accomplished by configuring 198.51.100.1/24 on an interface and bringing it up.

The routes are added to the linux kernel route table via netlink, thus the program must be run as a privileged user, which is why the example command is run via `sudo`. Alternately, it could be run in a root shell without `sudo`.

The utility must be run in the dataplane network namespace for the routes to be added to the dataplane FIB by the `linux-nl` plugin, which is the reason to run it using `dp-exec` (*Namespaces in Shell Commands*). The `dp-exec` command can be omitted by opening a shell in the dataplane namespace from the TNSR CLI:

```
tnsr# dataplane shell sudo bash
# route-test -g 198.51.100.2 -n 1000000
```

Or:

```
tnsr# dataplane shell sudo route-test -g 198.51.100.2 -n 1000000
```

The utility adds /24 routes by default for IPv4. There are a finite number of unicast /24 prefixes available (around 14M) as shown in *Counts of unicast prefixes*. Routes with other prefix lengths can be added via the `-l <len>` argument. The argument `-l 25` will instruct the utility to add /25 routes (1.0.0.0/25, 1.0.0.128/25, 1.0.1.0/25, etc.) instead.

Table 4: Counts of unicast prefixes

| Prefix length | Available unicast prefixes |
|---------------|----------------------------|
| 24 | 14.54M |
| 23 | 7.27M |
| 22 | 3.63M |
| 21 | 1.81M |
| 20 | 909k |
| 19 | 454k |
| 18 | 227k |
| 17 | 113k |
| 16 | 56k |
| 15 | 28k |
| 14 | 14k |
| 13 | 7k |
| 12 | 3551 |
| 11 | 1775 |
| 10 | 887 |
| 9 | 443 |
| 8 | 221 |

If an expected distribution of routes is known by prefix length (e.g. 2M total routes will be comprised of 1M /24, 500k /23, 250k /22, 250k /21), the program can be run several times in succession with different values of `-l <len>` to simulate that distribution. This is a valuable exercise due to the way data is structured in the main heap to optimize the speed of FIB lookups. Routes with higher prefix length may consume more memory on the main heap than routes with a lower length. For example, a /27 route may cause additional memory to be consumed beyond what is required for a /24 route. This behavior does not apply to the statistics segment or IPv6 routes, it only applies to IPv4 routes in the main heap.

Tip: The best practice is to validate memory parameters using a distribution similar to what will be seen in production use if that data is available, or to use the worst case. If /27 routes are the longest prefix length expected to be received via BGP, use `-l 27` to add /27 routes in order to the memory allocations.

Interpreting Test Results

When all iterations of `route-test` are complete, validate that routes were added to the FIB by running `sudo vppctl show ip fib summary` from a shell. This will display the counts of IPv4 routes of each length. `sudo vppctl show ip6 fib summary` shows similar statistics for IPv6 routes, though memory consumption is not tied to prefix length for IPv6 routes the way it is for IPv4 routes.

If the dataplane (VPP) crashes while running `route-test`, add 25% to the size of the main heap (*Main Heap Memory Sizing*) and statistics segment (*Statistics Segment Memory Sizing*) and repeat the test.

In addition to testing memory allocation, running this tool also exercises the Linux-cp netlink socket buffer. If `sudo vppctl show ip fib summary` or `sudo vppctl show ip6 fib summary` shows a lower count of routes than requested during the test, the netlink socket buffer may have overflowed and the kernel may have had to drop some of the route announcements it was trying to send and the socket buffer size may need to be increased.

In addition to checking the route counts, check the logs using `sudo vppctl show log` and by inspecting the contents of `/var/log/messages` for error messages about the socket overflowing.

If the socket overflows during the tests, increase the size of the socket buffer (*Linux-cp Netlink Socket Buffer Sizing*).

31.1.2 NAT

Increasing the number of NAT sessions per thread (*NAT Sizing Options*) requires additional increases in main heap memory based on the number of worker threads and NAT mode (*NAT Modes*).

See also:

- *NAT Modes*
- *NAT Sizing Options*
- *NAT Session Timeout Duration*
- *CPU Workers and Affinity*

The amount of memory consumed per session depends on the NAT mode. Endpoint-dependent NAT mode consumes slightly more memory per session than endpoint-independent mode. The memory consumed per session increases in a linear manner as session limits increase, with each session consuming approximately the same amount of memory on average:

- Endpoint-independent NAT mode: 228 Bytes per session
- Endpoint-dependent NAT mode: 353 Bytes per session

Multiply the value for the NAT mode by the `max-translations-per-thread` NAT configuration value and the number of worker threads to reach a minimum safe starting value for the amount of memory required by NAT in the main heap.

`<nat mode session size> * <max-translations-per-thread> * <workers>`

The table *NAT Memory by Sessions per Thread and NAT Mode* below has memory usage values based on several single-thread session counts for easy estimation.

Table 5: NAT Memory by Sessions per Thread and NAT Mode

| Translations | NAT44 EI Mode | NAT44 ED Mode |
|--------------|---------------|---------------|
| 128,000 | 29.2 M | 45.2 M |
| 256,000 | 58.4 M | 90.4 M |
| 512,000 | 116.7 M | 180.7 M |
| 1,000,000 | 228.0 M | 353.0 M |
| 2,000,000 | 456.0 M | 706.0 M |
| 4,000,000 | 912.0 M | 1412.0 M |

Note: This calculation only accounts for NAT. The main thread itself uses memory plus the routing table size increases main heap memory usage. Thus, the actual requirement is likely to be higher than this calculated minimum.

An alternate tactic to reduce maximum session requirements and associated memory requirements is to reduce the NAT session timeout. Shorter sessions are removed from memory faster than longer sessions, and thus are less likely to exist concurrently with other sessions. The exact values depend upon the environment and types of connections passing through TNSR. See *NAT Session Timeout Duration* for details on the various timer values.

31.2 Services do not receive traffic on an interface with NAT enabled

When NAT is enabled, by default TNSR will drop traffic that doesn't match an existing NAT session or static NAT rule. This includes traffic for services on TNSR such as IPsec and BGP. To allow this traffic, see [NAT Forwarding](#).

31.3 NAT session limits / “Create NAT session failed” error

The default limit for NAT sessions per IP address in the dataplane is 10240. If the number of sessions from a client IP address, including TNSR itself, exceeds that value, then new connections will fail. This value can be changed in Endpoint-independent NAT mode by using the `nat global-options nat44 max-translations-per-user` command as described in [NAT Sizing Options](#).

31.4 ACL rules do not match NAT traffic as expected

When NAT is active, [ACL](#) rules are always processed before NAT on interfaces where NAT is applied, in any direction. This behavior is different from some other products, such as pfSense. See [ACL and NAT Interaction](#) for details.

31.5 ACL entries do not have any effect on bridge loopback (BVI) interfaces

This is expected behavior when traffic is forwarded between interfaces on the same bridge, as packets can never arrive on the loopback interface in this scenario. ACLs must be applied to the hardware interfaces if the packets only travel within a bridge.

See also:

[Using ACLs with Bridges](#)

31.6 Some Traffic to the host OS management interface is dropped

TNSR includes a default set of Netfilter rules which secure the management interface. Only certain ports are allowed by default. See [Default Allowed Traffic](#) for details. To allow more traffic, create host ACLs as described in [Host ACLs](#).

To view the current Netfilter rules from within the TNSR CLI, use:

```
tnsr# show host ruleset
```

To view the current Netfilter rules from a shell prompt, use:

```
$ sudo nft list table inet tnsr_filter
```

The Netfilter service can also be controlled through the shell if necessary when troubleshooting host OS connectivity by using the `nftables` service in `systemd`:

To stop the Netfilter service:

```
$ sudo service nftables stop
```

To start the Netfilter service:

```
$ sudo service nftables start
```

31.7 Unrecognized routes in a routing table

TNSR automatically populates routing tables with necessary entries that may not appear to directly correspond with manually configured addresses. See *Common Routes* for details.

31.8 OSPF Neighbors Stuck in ExStart State

When attempting to form an adjacency between two *OSPF (Open Shortest Path First v2 (OSPF))* neighbors, if the neighbor status appears to be stuck in the ExStart state, the most likely cause is an MTU mismatch between the routers.

To solve this problem, adjust the MTU values of the interfaces actively participating in OSPF on all routers to match. If this is not possible, try using the `mtu-ignore` option on active OSPF interfaces.

31.9 Large packets fail to pass over IPsec

Encapsulated packets which are larger than the `default-data-size` buffer will be dropped by the dataplane. On older versions of TNSR this may even result in a dataplane crash. The size of this buffer is 2048 by default, which will pass packets up to approximately 2000 bytes. Since the default MTU is 1500, this issue is not apparent in many cases. However, when attempting to pass jumbo frames over IPsec, this becomes a problem. To pass 9000 byte frames over IPsec, increase the buffer size to 16384 and restart the dataplane.

```
tnsr(config)# dataplane buffers default-data-size 16384
tnsr(config)# service dataplane restart
```

31.10 Associating TNSR Interfaces with Shell Interfaces

Interfaces in TNSR will have names such as `GigabitEthernet3/0/0` or custom names such as `WAN`. When working in the shell in the dataplane namespace the interfaces will appear as different names, such as `vpp1`. To help correlate the relationship between TNSR interfaces and those seen in the shell, TNSR adds its interface names as an alias, visible with the `dp-exec ip link` command:

```
$ dp-exec ip link
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN mode DEFAULT group_
↪ default qlen 1000
   link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
2: myroutes: <NOARP,MASTER,UP,LOWER_UP> mtu 65536 qdisc noqueue state UP mode DEFAULT_
↪ group default qlen 1000
   link/ether 06:04:b5:50:f7:2c brd ff:ff:ff:ff:ff:ff
41: vpp1: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UNKNOWN mode DEFAULT_
↪ group default qlen 1000
   link/ether 00:90:0b:7d:17:ce brd ff:ff:ff:ff:ff:ff
   alias GigabitEthernet6/0/0
42: vpp2: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc mq state UNKNOWN mode DEFAULT_
```

(continues on next page)

(continued from previous page)

```
↪group default qlen 1000
  link/ether 00:90:0b:7d:17:cf brd ff:ff:ff:ff:ff:ff
  alias GigabitEthernet3/0/0
```

In the output above, the vpp1 interface alias is GigabitEthernet6/0/0 indicating that it corresponds to the TNSR interface GigabitEthernet6/0/0.

31.11 Troubleshooting DHCP Client

When a TNSR interface is acting as a DHCP client, TNSR uses the `dhclient systemd` service in the `dataplane` namespace to manage the interface address. This provides additional troubleshooting options such as DHCP client status, logs, and service control.

First determine the exact name of the service instance. The general form of the service name is `dhclient-dataplane@<shell interface name>.service`. To find the shell interface name which corresponds to a TNSR interface, see [Associating TNSR Interfaces with Shell Interfaces](#). This example assumes vpp1 as the interface resulting in a service name of `dhclient-dataplane@vpp1.service`.

To view the status of the service and a small portion of the logs, use:

```
$ dp-exec sudo systemctl status dhclient-dataplane@vpp1.service
```

To view more of the logs, use:

```
$ dp-exec sudo journalctl -xeu dhclient-dataplane@vpp1.service
```

To control the service, use:

```
$ dp-exec sudo systemctl <command> dhclient-dataplane@vpp1.service
```

Where `<command>` is `stop`, `start`, or `restart`. In most cases when troubleshooting, a `restart` command is ideal as it will stop and start the service which triggers the client to attempt to obtain an address again. If the client still could not obtain an address, check the logs again for more information.

31.12 Locked out by NACM Rules

If TNSR access is lost due to the [NACM](#) configuration, access can be regained by following the directions in [Regaining Access if Locked Out by NACM](#).

31.13 How to gain access to the root account

By default, the `root` account has interactive login disabled, which is the best practice. This can be changed by resetting the root password using `sudo` from another administrator account, or in the ISO installer. See [Default Accounts and Passwords](#) for details.

31.14 IPsec packets are dropped or fail to pass with QAT enabled

There is a known incompatibility between [QAT](#) and VT-d on some platforms which can prevent IPsec traffic from passing when QAT acceleration is enabled. See [VT-d/IOMMU](#) for details.

31.15 Console DMA / PTE Read access Error Messages

Errors similar to the following may appear on the console:

```
[110772.063766] DMAR: [DMA Read] Request device [04:01.0] fault addr 406482000
[fault reason 06] PTE Read access is not set
[110773.059440] DMAR: DRHD: handling fault status reg 102
```

The cause is likely an incompatibility between an enabled QAT device and VT-d in the BIOS. See [VT-d/IOMMU](#) for details.

31.16 Console Messages Obscure Prompts

When connected to the console of a TNSR device, such as the serial console, the kernel may output messages to the terminal which obscure prompts or other areas of the screen. This is normal and an expected effect when using the console directly.

To work around this intended behavior, use one of the following methods:

- Press **Ctrl-L** to clear or redraw the screen without the messages.
- Press **Enter** to receive a new prompt.
- Run `sudo dmesg -D` from a shell prompt or with the TNSR host `shell` command, which will disable kernel output to all consoles.
- Connect to the TNSR device using SSH instead of the console.

31.17 Console Terminal Size

When connected to the console of a TNSR device via serial connection, the size of the terminal may not properly be detected by the TNSR CLI. This can result in unexpected behavior, such as auto complete printing exceedingly long lines.

To correct this behavior, manually set the size of the terminal with `stty`, for example: `stty cols 80`. This can be run on a shell prompt before starting the TNSR CLI or placed in `~/.bash_profile` or similar shell startup files.

For a more complete workaround, use the following script instead which will detect the terminal size dynamically rather than hardcoding a specific value:

Listing 1: Download: `resizewin.sh`

```
1 #!/bin/sh
2 old=$(stty -g)
3 stty raw -echo min 0 time 5
4 printf '\0337\033[r\033[999;999H\033[6n\0338' > /dev/tty
5 IFS='[;R' read -r _ rows cols _ < /dev/tty
```

(continues on next page)

(continued from previous page)

```

6 stty "$old"
7 stty cols "$cols" rows "$rows"

```

Create a copy of that script on the TNSR system, make it executable, and then run it from a shell startup script. For example:

```

$ chmod u+x resizewin.sh
$ echo "~/resizewin.sh" >> ~/.bash_profile

```

31.18 Dataplane Packet Tracing

TNSR offers a means to trace packet actions through the dataplane. This is different from a packet capture in that a packet capture looks at the *contents* of a packet while a trace inspects how a packet flows through the dataplane. A trace shows basic information about a packet and the actions taken on the packet by the dataplane along the way.

31.18.1 Trace Capture

A trace capture records the actions taken by the dataplane on a given number of packets. The trace includes packet header data such as IP addresses, MAC addresses, and so on as well as which actions were taken by the dataplane (i.e. which dataplane nodes processed the packet). This gives a view of how a packet flowed through the dataplane, including whether or not the dataplane dropped a packet or allowed it to egress.

```
trace capture node <input-node> [maximum <max>] [verbose] [pre-clear]
```

node <input-node>

The dataplane input node to capture on. For a list, enter `trace capture node ?`. The most common choice is `dppk-input`.

maximum <max>

The maximum number of packets to include in the trace.

Note: When using a *Trace Filter*, set the maximum value here larger than the maximum value on the filter. The filter will restrict matches within the total packets traced. If the trace capture maximum is too low, the filter can never reach its own maximum value unless every packet in the trace happens to match.

verbose

Include additional data in the trace output.

pre-clear

Clear the packet trace buffer before starting this trace.

To manually clear the packet trace buffer, use `trace clear`.

31.18.2 Trace Filter

Filtering restricts the trace output to match only packets which involve a specific dataplane graph node. There are numerous graph nodes for a variety of purposes.

```
trace filter (exclude|include) node <graph-node> [maximum <max>]
```

(exclude|include)

Action for this filter.

exclude

Match packets which do not include a given node.

include

Match packets which include the given node.

node <graph-node>

A graph node name. Use `trace filter <action> node ?` for a list.

maximum <max>

The maximum number of packets matching this filter to include in the output.

Note: Filters are also restricted by the total size of the trace capture. A trace capture can stop before it reaches the `maximum` value on the filter if it reaches its own `maximum` value first.

For example, an `include` filter may result in an empty trace if no packets in the trace capture match the filter before the capture reaches its maximum number of packets. Similarly, an `exclude` filter may result in an empty trace if the filter matches and excludes all packets in the trace capture.

```
trace filter none
```

Clear all trace filters.

31.18.3 View a Trace

Trace results are stored in a temporary buffer in memory. To view the trace, use:

```
show trace [maximum <max>]
```

maximum <max>

The maximum number of packets to display from the trace

After viewing the results, the trace can be discarded by clearing the buffer with `trace clear`.

31.19 Capturing Packets on Dataplane Interfaces

Dataplane interfaces do not pass traffic in a way that traditional utilities such as `tcpdump` can handle. There are ways to trace and capture packets in the dataplane itself using `vppctl` but these do not offer the familiarity and flexibility of `tcpdump`. However, there is a way to tap into these interfaces so that packets can be captured using `tcpdump` using `tap` and `span` interfaces.

Warning: Do not leave this in place longer than necessary, as it will likely degrade overall performance.

First, setup a tap interface. The name can be anything that isn't already in use as an interface name in the shell (not in TNSR). For convenience, this example calls it `capture` with an instance ID of 30:

```
tnsr(config)# interface tap capture
tnsr(config-tap)# instance 30
tnsr(config-tap)# exit
tnsr(config)# interface tap30
tnsr(config-interface)# enable
tnsr(config-interface)# exit
```

The tap interface creates a link between the dataplane and the host OS, but it still needs to be fed packets to be captured. For that, configure a span between the TNSR interface (WAN, in this example) and the tap interface created above:

```
tnsr(config)# span WAN
tnsr(config-span)# onto tap30 hw both
tnsr(config-span)# exit
```

Warning: This technique does not work on VLAN subinterfaces. To capture on a subinterface, create a span to the parent interface and filter by VLAN ID in `tcpdump`.

Now start a shell prompt in the dataplane namespace and run `tcpdump` on the interface named `capture`. This can be done from the `dataplane shell` command in TNSR or at a shell prompt using `dp-exec`:

```
tnsr# dataplane shell sudo tcpdump -ni capture
```

```
$ sudo dp-exec tcpdump -ni capture
```

The usual `tcpdump` options, syntax, and filtering are possible from there.

When finished, remove the span and tap interface configuration:

```
tnsr(config)# no span WAN
tnsr(config)# no interface tap30
tnsr(config)# no interface tap capture
```

31.20 RESTCONF API Errors

Errors returned by the TNSR *RESTCONF API* may come from either the *RESTCONF Server* or *API Endpoints*.

The RESTCONF service may not return a response body in all error cases, but it will return a proper HTTP response code. When using scripts to interact with the API, test the return code first before inspecting the response body.

When using `curl` to interact with the API, use `curl -f` to exit with a non-zero error when the server sends back an HTTP error code. The response body is suppressed by `curl -f` when it detects an error code, however, `curl -f` will print the HTTP error code and text instead. On `curl` version 7.76.0 and later, use `curl --fail-with-body` which will exit with a non-zero status, print the HTTP error, and print the response body if one is present.

The following list includes common errors and their resolutions:

Error code 404 / Not Found

Error returned by the HTTP server when the URL does not exist. For example, if the client intended to use the API but requested a URL that did not start with `/restconf/data/`.

Error code 415 / Unsupported Media Type

Error returned by the HTTP server (nginx) when the client did not submit a proper content type with a PUT or PATCH request (e.g. `Content-Type: application/yang-data+json`)

api-path keys do not match data keys

Error returned by the API when a client attempted a PUT or PATCH operation without fully qualifying the target. For example, the client tried to PATCH but the submitted data did not contain enough information to uniquely identify a target.

Instance does not exist

Error returned by the API when a client requests an entry from a valid area but where a specific entry does not exist.

Unknown element

Error returned by the API when a client requests data from an invalid container.

'<name>': Expected prefix:name

Error returned by the API when a RESTCONF URL does not include the namespace prefix.

No such yang module prefix

Error returned by the API when the module name (e.g. `netgate:<something>`) does not exist.

31.21 Diagnosing Service Issues

If a service will not stay running and the logs indicate that it is crashing, additional debugging information can be obtained from core dumps.

By default, core dumps are disabled for services. These can be individually enabled as needed by the following command:

```
tnsr(config)# service (backend|bgp|dataplane|dhcp4|http|ike|ntp|restconf|snmp|unbound)
                    coredump (enable|disable)
```

The resulting core files will be written under `/var/lib/systemd/coredump/`.

31.22 Debugging TNSR

The following commands enable debugging information in various aspects of TNSR. These should only be used under direction of Netgate.

debug cli [level <n>]

Enable debugging in `clixon` and `cligen` at the given level.

debug tnsr (clear|set|value) <flags>

Enable debugging in TNSR. The `set` or `clear` command may be repeated multiple times to add or remove individual flag values. The `value` command may be used to directly set the value. The `<flags>` value is the logical or of all desired debugging flags.

The following flag values are available:

| Flag | Value |
|-------------------|------------|
| TDBG_NONE | 0x00000000 |
| TDBG_FRR | 0x00000001 |
| TDBG_HOST | 0x00000002 |
| TDBG_KEA | 0x00000004 |
| TDBG_VPP | 0x00000008 |
| TDBG_NTP | 0x00000010 |
| TDBG_STRONGSWAN | 0x00000020 |
| TDBG_UNBOUND | 0x00000040 |
| TDBG_HTTP | 0x00000080 |
| TDBG_DELAYED_NODE | 0x00001000 |
| TDBG_DEP_GRAPH | 0x00002000 |
| TDBG_TRANSACTION | 0x00004000 |
| TDBG_ACL | 0x00010000 |
| TDBG_BGP | 0x00020000 |
| TDBG_BRIDGE | 0x00040000 |
| TDBG_INTF | 0x00080000 |
| TDBG_NEIGHBOR | 0x00100000 |
| TDBG_SUBIF | 0x00200000 |
| TDBG_SYSCTL | 0x00400000 |
| TDBG_GRE | 0x00800000 |
| TDBG_LOOPBACK | 0x01000000 |
| TDBG_ROUTE | 0x02000000 |
| TDBG_SPAN | 0x04000000 |
| TDBG_MAP | 0x08000000 |

debug vmgmt (clear|set|value) <flags>

Enable VPP Mgmt library debug. The **set** or **clear** command may be repeated multiple times to add or remove individual flag values. The **value** command may be used to directly set the value. The <flags> value is the logical or of all desired debugging flags.

The following flag values are available:

| Flag | Value |
|----------------|--------|
| VDBG_NONE | 0x0000 |
| VDBG_API_SETUP | 0x0001 |
| VDBG_API_MSG | 0x0002 |
| VDBG_ACL | 0x0004 |
| VDBG_BRIDGE | 0x0008 |
| VDBG_INTF | 0x0010 |
| VDBG_NAT | 0x0020 |
| VDBG_TAP | 0x0040 |
| VDBG_MEMIF | 0x0080 |
| VDBG_LLDP | 0x0100 |
| VDBG_GRE | 0x0200 |
| VDBG_MAP | 0x0400 |
| VDBG_ROUTE | 0x0800 |

no debug (cli|tnsr|vmgmt)

Removes all debugging.

31.23 Diagnostic Information for Support

When contacting [Netgate TAC](#), support representatives may require information about the configuration and state of a TNSR installation. TNSR includes a utility, `tnsr-diag`, which gathers diagnostic information automatically. The archive it produces can then be included in communications with Netgate support.

The command to collect this data may be run from a shell using `sudo tnsr-diag`, or from within the TNSR CLI using `host shell sudo tnsr-diag`.

For example:

```
tnsr# host shell sudo tnsr-diag
Collecting...
Diagnostic data stored at /tmp/tnsr-diag-primary-2020-08-07-135437.zip
```

As shown in the example output above, the data is stored in a compressed archive in `/tmp` named `tnsr-diag-<hostname>-<timestamp>.zip`. This file may be copied from the TNSR device using `scp`.

Warning: The archive generated by this utility may contain sensitive information about the router configuration and environment. Review its contents before transmitting the information, and always use a secure communications method.

COMMANDS

32.1 Mode List

| Internal Name | Prompt | Mode Description |
|--------------------------|---------------------------|--|
| access_list | config-access-list | Dynamic Routing Accesss List |
| acl | config-acl | Access Control List |
| acl_rule | config-acl-rule | ACL Rule |
| aspath | config-aspath | AS Path ordered rule |
| auth | config-user | User Authentication |
| bfd | config-bfd | Bidirectional Forwarding Detection |
| bfd_key | config-bfd-key | BFD key |
| bgp | config-bgp | BGP server |
| bgp_ip4multi | config-bgp-ip4multi | BGP IPv4 Multicast Address Family |
| bgp_ip4multi_nbr | config-bgp-ip4multi-nbr | BGP IPv4 Multicast Address Family Neighbor |
| bgp_ip4uni | config-bgp-ip4uni | BGP IPv4 Unicast Address Family |
| bgp_ip4uni_nbr | config-bgp-ip4uni-nbr | BGP IPv4 Unicast Address Family Neighbor |
| bgp_ip6multi | config-bgp-ip6multi | BGP IPv6 Multicast Address Family |
| bgp_ip6multi_nbr | config-bgp-ip6multi-nbr | BGP IPv6 Multicast Address Family Neighbor |
| bgp_ip6uni | config-bgp-ip6uni | BGP IPv6 Unicast Address Family |
| bgp_ip6uni_nbr | config-bgp-ip6uni-nbr | BGP IPv6 Unicast Address Family Neighbor |
| bgp_neighbor | config-bgp-neighbor | BGP Neighbor |
| bond | config-bond | Interface bonding |
| bridge | config-bridge | Bridge |
| community_list | config-community-list | BGP community list |
| config | config | Configuration |
| dns_resolver | config-dns-resolver | DNS Resolver |
| frr_bgp | config-frr-bgp | Dynamic Routing BGP |
| frr_ospf | config-frr-ospf | Dynamic Routing OSPF |
| frr_ospf6 | config-frr-ospf6 | Dynamic Routing OSPF6 |
| gre | config-gre | Generic Route Encapsulation |
| host_acl | config-host-acl | Host Access List |
| host_acl_rule | config-host-acl-rule | Host Access List Rule |
| host_if | config-host-if | Host interface |
| ike_authentication | config-ike-auth | IKE peer authentication |
| ike_authentication_round | config-ike-auth-round | IKE peer authentication round |
| ike_child | config-ike-child | IKE child SA |
| ike_child_proposal | config-ike-child-proposal | IKE child SA proposal |
| ike_identity | config-ike-identity | IKE peer identity |
| ike_proposal | config-ike-proposal | IKE proposal |

continues on next page

Table 1 – continued from previous page

| Internal Name | Prompt | Mode Description |
|-----------------------------|------------------------------------|--------------------------------|
| interface | config-interface | Interface |
| ipfix_exporter | config-ipfix-exporter | IPFIX Exporter |
| ipfix_observation_point | config-ipfix-obs-pt | IPFIX Observation Point |
| ipfix_selection_process | config-ipfix-sel-proc | IPFIX Selection Process |
| ipsec_crypto_ike | config-ipsec-crypto-ike | IKE |
| ipsec_crypto_manual | config-crypto-manual | IPsec static keying |
| ipsec_tunnel | config-ipsec-tunnel | IPsec tunnel |
| kea_dhcp4 | config-kea-dhcp4 | DHCP4 Server |
| kea_dhcp4_log | config-kea-dhcp4-log | DHCP4 Log |
| kea_dhcp4_log_out | config-kea-dhcp4-log-out | DHCP4 Log output |
| kea_dhcp4_opt | config-kea-dhcp4-opt | DHCP4 option |
| kea_dhcp4_optdef | config-kea-dhcp4-optdef | DHCP4 option definition |
| kea_subnet4 | config-kea-dhcp4-subnet4 | DHCP4 subnet4 |
| kea_subnet4_opt | config-kea-subnet4-opt | DHCP4 subnet4 option |
| kea_subnet4_pool | config-kea-subnet4-pool | DHCP4 subnet4 pool |
| kea_subnet4_pool_opt | config-kea-subnet4-pool-opt | DHCP4 subnet4 pool option |
| kea_subnet4_reservation | config-kea-subnet4-reservation | DHCP4 subnet4 host reservation |
| kea_subnet4_reservation_opt | config-kea-subnet4-reservation-opt | DHCP4 subnet4 host res option |
| loopback | config-loopback | Loopback interface |
| macip | config-macip | MAC/IP access control list |
| macip_rule | config-macip-rule | MACIP Rule |
| map | config-map | MAP-E/MAP-T |
| map_param | config-map-param | MAP-E/MAP-T global parameter |
| master | | Initial, privileged |
| memif | config-memif | Memif interface |
| nacm_group | config-nacm-group | NACM group |
| nacm_rule | config-nacm-rule | NACM rule |
| nacm_rule_list | config-nacm-rule-list | NACM rule list |
| ntp | config-ntp | NTP |
| ntp_restrict | config-ntp-restrict | NTP restriction |
| ntp_server | config-ntp-server | NTP server |
| ospf | config-ospf | Dynamic routing OSPF Server |
| ospf_if | config-ospf-if | Dynamic routing OSPF Interface |
| ospf6 | config-ospf6 | Dynamic routing OSPF Server |
| ospf6_if | config-ospf6-if | Dynamic routing OSPF Interface |
| prefix_list | config-pref-list | Dynamic routing prefix list |
| restconf | config-restconf | RESTCONF server configuration |
| route_dynamic_manager | config-route-dynamic-manager | Dynamic routing manager |
| route_map | config-route-map | Route Map |
| route_map_rule | config-route-map-rule | Route Map Rule |
| route_table | config-route-table | Static Route Table |
| rttbl4_next_hop | config-rttbl4-next-hop | IPv4 Next Hop |
| rttbl6_next_hop | config-rttbl6-next-hop | IPv6 Next Hop |
| span | config-span | SPAN |
| subif | config-subif | Sub-interface VLAN |
| tap | config-tap | Tap |
| tunnel_nh_if | config-tunnel-nh-if | Tunnel Next Hop |
| unbound | config-unbound | Unbound DNS Server |
| unbound_fwd_zone | config-unbound-fwd-zone | Unbound forward-zone |
| unbound_local_host | config-unbound-local-host | Unbound local host override |

continues on next page

Table 1 – continued from previous page

| Internal Name | Prompt | Mode Description |
|--------------------|---------------------------|-----------------------------|
| unbound_local_zone | config-unbound-local-zone | Unbound local zone override |
| vrrp4 | config-vrrp4 | IPv4 VRRP |
| vrrp6 | config-vrrp6 | IPv6 VRRP |
| vxlan | config-vxlan | VXLAN |
| wireguard | config-wireguard | WireGuard instances |
| wireguard_peer | config-wireguard-peer | WireGuard peer instances |

32.2 Master Mode Commands

```
tnsr# configure [terminal]
tnsr# debug cli [level <n>]
tnsr# debug tnsr (clear|set|value) <flags>
tnsr# debug vmgmt (clear|set|value) <flags>
tnsr# no debug (cli|tnsr|vmgmt)
tnsr# exit
tnsr# ls [-l]
tnsr# [(host|dataplane)] ping (<dest-host>|<dest-ip>) [ipv4|ipv6]
    [interface <if-name>] [source <src-addr>] [count <count>]
    [packet-size <bytes>] [ttl <ttl-hops>] [timeout <wait-sec>]
    [buffered] [interval <seconds:0.000001-6000>]
tnsr# pwd
tnsr# (host|dataplane) shell [<command>]
tnsr# [(host|dataplane)] traceroute (<dest-host>|<dest-ip>) [ipv4|ipv6]
    [interface <if-name>] [source <src-addr>] [packet-size <bytes>]
    [no-dns] [ttl <ttl-hops>] [waittime <wait-sec>] [buffered]
tnsr# whoami
```

32.2.1 Package Management Commands

```
tnsr# package cache-clean
tnsr# package (info|list) [available|installed|updates] [<pkg-glob>]
tnsr# package install <pkg-glob>
tnsr# package reinstall <pkg-glob>
tnsr# package remove <pkg-glob>
tnsr# package search <term>
tnsr# package upgrade <pkg-glob>
```

32.2.2 Public Key Infrastructure Commands

```
tnsr# pki ca list
tnsr# pki ca <name> (append <source-name>|delete|enter|get|import <file>)
tnsr# pki certificate list
tnsr# pki certificate <name> (delete|enter|get|import <file>)
tnsr# pki private-key list
tnsr# pki private-key <name> (delete|enter|get|import <file>)
tnsr# pki private-key <name> generate [key-length (2048|3072|4096)]
tnsr# pki signing-request list
tnsr# pki signing-request <name> (delete|generate|get|sign (ca-name <ca>|self))
tnsr# pki signing-request set (city|common-name|country|org|org-unit|state) <text>
tnsr# pki signing-request set digest (sha224|sha256|sha384|sha512)
tnsr# pki signing-request settings (clear|show)
tnsr# pki signing-request set subject-alt-names add
      (email|hostname|ipv4-address|ipv6-address|uri) <value>
tnsr# pki signing-request set subject-alt-names clear
tnsr# pki signing-request set subject-alt-names delete <name>
```

32.2.3 Packet Trace Commands

```
tnsr# trace capture node <input-node> [maximum <max>] [verbose] [pre-clear]
tnsr# trace clear
tnsr# trace filter (exclude|include) node <graph-node> [maximum <max>]
tnsr# trace filter none
tnsr# show trace [maximum <max>]
```

32.3 Config Mode Commands

```
tnsr(config)# [no] acl <acl-name>
tnsr(config)# [no] auth user <user-name>
tnsr(config)# bfd conf-key-id <conf-key-id>
tnsr(config)# bfd session <bfd-session>
tnsr(config)# [no] cli history-config (enable|disable)
tnsr(config)# [no] cli history-config lines [<count>]
tnsr(config)# [no] cli option (auto-discard|check-delete-thresholds)
tnsr(config)# configuration candidate clear
tnsr(config)# configuration candidate commit
tnsr(config)# configuration candidate discard
tnsr(config)# configuration candidate load <filename> [(replace|merge)]
tnsr(config)# configuration candidate validate
tnsr(config)# configuration copy candidate startup
tnsr(config)# configuration copy running (candidate|startup)
tnsr(config)# configuration copy startup candidate
tnsr(config)# configuration history (enable|disable)
tnsr(config)# [no] configuration history autosave-period <num>
tnsr(config)# configuration history version (load|save) <version-name>
tnsr(config)# no configuration history [storage]
tnsr(config)# no configuration history version <version-name>
```

(continues on next page)

(continued from previous page)

```

tnsr(config)# configuration rollback timer start minutes <minutes> config-source_
↳(running|startup|<filename>)
tnsr(config)# configuration rollback timer restart minutes <minutes>
tnsr(config)# configuration rollback (trigger|cancel)
tnsr(config)# configuration save (candidate|running) <filename>
tnsr(config)# [no] dataplane buffers buffers-per-numa [<buffers-per-numa>]
tnsr(config)# [no] dataplane buffers default-data-size [<default-data-size>]
tnsr(config)# [no] dataplane cpu corelist-workers [<core-first> [- <core-last>]]
tnsr(config)# [no] dataplane cpu coremask-workers <coremask-workers>
tnsr(config)# [no] dataplane cpu main-core <main-core>
tnsr(config)# [no] dataplane cpu skip-cores <skip-cores>
tnsr(config)# [no] dataplane cpu workers <workers>
tnsr(config)# dataplane dpdk dev <pci-id> (crypto|crypto-vf)
tnsr(config)# dataplane dpdk dev (<pci-id>|<vmbus-uuid>) network
    [num-rx-queues [<num-rx-queues>]] [num-tx-queues [<num-tx-queues>]]
    [num-rx-desc [<num-rx-desc>]] [num-tx-desc [<num-tx-desc>]]
    [tso (off|on)] [devargs <name>=<value>]
tnsr(config)# dataplane dpdk dev default network
    [num-rx-queues [<num-rx-queues>]] [num-tx-queues [<num-tx-queues>]]
    [num-rx-desc [<num-rx-desc>]] [num-tx-desc [<num-tx-desc>]]
    [tso (off|on)] [devargs <name>=<value>]
tnsr(config)# dataplane dpdk dev (<pci-id>|<vmbus-uuid>) network name <name>
tnsr(config)# no dataplane dpdk dev (<pci-id>|<vmbus-uuid>|default) [name] [num-rx-
↳queues] [num-tx-queues]
    [num-rx-desc] [num-tx-desc] [devargs <name>=<value>]
tnsr(config)# dataplane dpdk blacklist <vendor-id>:<device-id>
tnsr(config)# dataplane dpdk blacklist (<pci-id>|<vmbus-uuid>)
tnsr(config)# [no] dataplane dpdk decimal-interface-names
tnsr(config)# dataplane dpdk iova-mode (pa|va)
tnsr(config)# [no] dataplane dpdk iova-mode
tnsr(config)# [no] dataplane dpdk log-level_
↳(alert|critical|debug|emergency|error|info|notice|warning)
tnsr(config)# [no] dataplane dpdk no-multi-seg
tnsr(config)# [no] dataplane dpdk no-pci
tnsr(config)# [no] dataplane dpdk no-tx-checksum-offload
tnsr(config)# [no] dataplane dpdk tcp-udp-checksum
tnsr(config)# [no] dataplane dpdk uio-driver [<uio-driver>]
tnsr(config)# [no] dataplane ethernet default-mtu <size>
tnsr(config)# [no] dataplane ip6 hash-buckets [<size>]
tnsr(config)# [no] dataplane linux-cp nl-rx-buffer-size <n>
tnsr(config)# [no] dataplane linux-cp nl-batch-size <n>
tnsr(config)# [no] dataplane linux-cp nl-batch-delay-ms <n>
tnsr(config)# [no] dataplane logging (default-log-level|default-syslog-log-level)
    (alert|crit|debug|disabled|emerg|err|info|notice|warn)
tnsr(config)# [no] dataplane logging size <message-count>
tnsr(config)# [no] dataplane logging unthrottle-time <seconds>
tnsr(config)# [no] dataplane memory main-heap-size <heap-size>[kKmMgG]
tnsr(config)# [no] dataplane memory main-heap-page-size (default|4k|2m|1g)
tnsr(config)# [no] dataplane statseg heap-size <heap-size>[kKmMgG]
tnsr(config)# [no] dataplane statseg per-node-counters enable
tnsr(config)# [no] dataplane statseg socket-name <socket-name>
tnsr(config)# debug cli [level <n>]

```

(continues on next page)

(continued from previous page)

```

tnsr(config)# debug tnsr (clear|set|value) <flags>
tnsr(config)# debug vmgmt (clear|set|value) <flags>
tnsr(config)# no debug (cli|tnsr|vmgmt)
tnsr(config)# dhcp4 (enable|disable)
tnsr(config)# [no] dhcp4 server
tnsr(config)# exit
tnsr(config)# [no] gre <gre-name>
tnsr(config)# [no] host acl <acl-name>
tnsr(config)# [no] host interface <host-if-name>
tnsr(config)# [no] interface <if-name>
tnsr(config)# interface clear counters [<interface>]
tnsr(config)# [no] interface bond <instance>
tnsr(config)# [no] interface bridge domain <domain-id>
tnsr(config)# [no] interface loopback <name>
tnsr(config)# [no] interface memif socket <socket-id> (filename <file>|interface <if-id>)
tnsr(config)# [no] interface subif <interface> <subid>
tnsr(config)# [no] interface tap <host-name>
tnsr(config)# [no] ip reassembly (full|virtual) (ipv4|ipv6) expire-walk-interval [
↪<interval-ms>]
tnsr(config)# [no] ip reassembly (full|virtual) (ipv4|ipv6) max-reassemblies [<max>]
tnsr(config)# [no] ip reassembly (full|virtual) (ipv4|ipv6) max-reassembly-length [
↪<length>]
tnsr(config)# [no] ip reassembly (full|virtual) (ipv4|ipv6) timeout [<timeout-ms>]
tnsr(config)# [no] ipfix exporter
tnsr(config)# [no] ipfix observation-point <name>
tnsr(config)# [no] ipfix selection-process <name>
tnsr(config)# [no] ipsec tunnel <tunnel-num>
tnsr(config)# [no] lldp system-name <system-name>
tnsr(config)# [no] lldp tx-hold <transmit-hold>
tnsr(config)# [no] lldp tx-interval <transmit-interval>
tnsr(config)# [no] macip <macip-name>
tnsr(config)# nacm (enable|disable)
tnsr(config)# no nacm enable
tnsr(config)# [no] nacm exec-default (deny|permit)
tnsr(config)# [no] nacm group <group-name>
tnsr(config)# [no] nacm read-default (deny|permit)
tnsr(config)# [no] nacm rule-list <rule-list-name>
tnsr(config)# [no] nacm write-default (deny|permit)
tnsr(config)# [no] nat global-options nat44 enabled (true|false)
tnsr(config)# [no] nat global-options nat44 endpoint-dependent (true|false)
tnsr(config)# [no] nat global-options nat44 forwarding (true|false)
tnsr(config)# [no] nat global-options nat44 max-translations-per-thread <n>
tnsr(config)# [no] nat global-options nat44 max-translations-per-user <n>
tnsr(config)# [no] nat global-options nat44 max-users-per-thread <n>
tnsr(config)# [no] nat global-options nat44 out2in-dpo (true|false)
tnsr(config)# [no] nat global-options nat44 static-mapping-only (true|false)
tnsr(config)# [no] nat global-options timeouts (icmp|tcp_established|tcp_transitory|udp)
↪<seconds>
tnsr(config)# [no] nat ipfix logging enable
tnsr(config)# [no] nat ipfix logging domain <domain-id>
tnsr(config)# [no] nat ipfix logging src-port <src-port>
tnsr(config)# [no] nat nat64 map <domain-name>

```

(continues on next page)

(continued from previous page)

```

tnsr(config)# [no] nat nat64 map parameters
tnsr(config)# [no] nat pool address <ip-first> [- <ip-last>] [twice-nat] [route-table
↳<rt-tbl-name>]
tnsr(config)# [no] nat pool interface <if-name> [twice-nat]
tnsr(config)# [no] nat static mapping (icmp|udp|tcp) local <ip-local> [<port-local>]
                        external (<ip-external>|<if-name>) [<port-external>]
                        [twice-nat] [out-to-in-only] [route-table <rt-tbl-name>]
tnsr(config)# [no] neighbor <interface> <ip-address> <mac-address> [no-adj-route-table-
↳entry]
tnsr(config)# ntp (enable|disable)
tnsr(config)# no ntp enable
tnsr(config)# ntp namespace (host|dataplane)
tnsr(config)# no ntp namespace
tnsr(config)# [no] ntp server
tnsr(config)# prometheus (host|dataplane) (enable|disable)
tnsr(config)# no prometheus (host|dataplane)
tnsr(config)# [no] prometheus (host|dataplane) filter <regex> [<regex> [...]]
tnsr(config)# reboot (now|<minutes>) [force]
tnsr(config)# reboot cancel
tnsr(config)# restconf
tnsr(config)# [no] route dynamic access-list <access-list-name>
tnsr(config)# route dynamic bgp
tnsr(config)# route dynamic manager
tnsr(config)# route dynamic ospf
tnsr(config)# route dynamic ospf6
tnsr(config)# [no] route dynamic prefix-list <prefix-list-name>
tnsr(config)# [no] route dynamic route-map <route-map-name>
tnsr(config)# no route dynamic route-map [<route-map-name>]
tnsr(config)# [no] route table <name>
tnsr(config)# service
↳
↳(backend|bgp|dataplane|dhcp4|ike|ntp|ospf|ospf6|restconf|rip|snmp|unbound)
    coredump (enable|disable)
tnsr(config)# service bgp (start|stop|restart|status)
tnsr(config)# service dataplane (start|stop|restart|status)
tnsr(config)# service dhcp4 (start|stop|reload|status)
tnsr(config)# service ntp (dataplane|host) (start|stop|restart|status)
tnsr(config)# service prometheus (dataplane|host) (start|stop|restart|status)
tnsr(config)# service restconf (start|stop|restart|status)
tnsr(config)# service snmp (dataplane|host) (start|stop|restart|status)
tnsr(config)# service ssh (dataplane|host) (start|stop|restart|status)
tnsr(config)# service unbound (start|stop|status|restart)
tnsr(config)# snmp (host|dataplane) (enable|disable)
tnsr(config)# [no] snmp access group-name <group-name>
                        prefix (exact|prefix)
                        model (any|v1|v2c)
                        level (noauth|auth|priv)
                        read <read-view>
                        write <write-view>
tnsr(config)# snmp community community-name <community-name>
                        source (<src-prefix>|default)
                        security-name <security-name>

```

(continues on next page)

(continued from previous page)

```
tnsr(config)# snmp group group-name <group-name>
                        security-name <security-name>
                        security-model (any|v1|v2c)
tnsr(config)# snmp view view-name <view-name>
                        view-type (included|excluded)
                        oid <oid>
tnsr(config)# [no] span <if-name-src>
tnsr(config)# ssh dataplane (enable|disable)
tnsr(config)# [no] sysctl vm nr_hugepages <u64>
tnsr(config)# [no] sysctl vm max_map_count <u64>
tnsr(config)# [no] sysctl kernel shmmem <u64>
tnsr(config)# [no] system contact <text>
tnsr(config)# [no] system description <text>
tnsr(config)# [no] system location <text>
tnsr(config)# [no] system name <text>
tnsr(config)# [no] system dns-resolver (dataplane|host)
tnsr(config)# [no] unbound server
tnsr(config)# unbound (enable|disable)
tnsr(config)# no unbound enable
tnsr(config)# [no] vxlan <vxlan-name>
```

32.4 Show Commands in Both Master and Config Modes

```
tnsr# show acl [<acl-name>]
tnsr# show bfd
tnsr# show bfd keys [conf-key-id <conf-key-id>]
tnsr# show bfd sessions [conf-key-id <conf-key-id> | peer-ip-addr <peer-addr>]
tnsr# show cli
tnsr# show clock
tnsr# show configuration [(candidate|running|startup) [(xml|json|cli [<section>])]]
tnsr# show configuration history (config|versions)
tnsr# show configuration history log [<entry-name>]
tnsr# show configuration history version-diff <old-version> <new-version>
tnsr# show configuration rollback timer
tnsr# show dataplane cpu threads
tnsr# show gre [<tunnel-name>]
tnsr# show host acl [<acl-name> [rule <seq>]]
tnsr# show host interface (<name>|ipv4|ipv6|link)
tnsr# show host ruleset
tnsr# show interface [<if-name>]
      [(access-list|bonding|counters|ip [(nat|vrrp-virtual-router)])|
      ipv6 [vrrp-virtual-router]|link|mac-address|rx-queues|subif|vlan tag-rewrite)]
tnsr# show interface bridge domain [<bdi>]
tnsr# show interface loopback [<loopback-name>]
tnsr# show interface memif [<id>]
tnsr# show interface bond [<id>]
tnsr# show interface lacp [<if-name>]
tnsr# show interface tap
tnsr# show ip reassembly [(full|virtual) [(ipv4|ipv6)]]
tnsr# show ipsec tunnel [<tunnel_number> [child|ike|verbose]]
```

(continues on next page)

(continued from previous page)

```
tnsr# show kea [(keactrl|dhcp4) [config-file]]
tnsr# show kea dhcp4 leases
tnsr# show macip [<macip-name>]
tnsr# show map [<map-domain-name>]
tnsr# show nacm [group [<group-name>] | rule-list [<rule-list-name>]]
tnsr# show nat [config|interface-sides|static-mappings]
tnsr# show nat dynamic (addresses|interfaces)
tnsr# show nat sessions [verbose]
tnsr# show neighbor [interface <if-name>]
tnsr# show ntp [(associations|peers) [associd <id>]]
tnsr# show ntp config-file
tnsr# show packet-counters
tnsr# show route dynamic access-list [<access-list-name>]
tnsr# show route dynamic bgp as-path [<as-path-name>]
tnsr# show route dynamic bgp community-list [<community-list-name>]
tnsr# show route dynamic bgp config [<as-number>]
tnsr# show route dynamic bgp [vrf <vrf-name>] (ipv4|ipv6) neighbors [<peer>]
    [advertised-routes|dampened-routes|flap-statistics|prefix-counts|
    received|received-routes|routes]]
tnsr# show route dynamic bgp [vrf <vrf-name>] (ipv4|ipv6) network <prefix>
tnsr# show route dynamic bgp [vrf <vrf-name>] [(ipv4|ipv6)] summary
tnsr# show route dynamic bgp [vrf <vrf-name>] neighbors [<peer>]
tnsr# show route dynamic bgp [vrf <vrf-name>] nexthop [detail]
tnsr# show route dynamic bgp [vrf <vrf-name>] peer-group <peer-group-name>
tnsr# show route dynamic manager
tnsr# show route dynamic ospf [vrf <vrf-name>] [(border-routers|config|interface|
    neighbor [detail]|route|router-info)]
tnsr# show route dynamic ospf [vrf <vrf-name>] database [(asbr-summary|external|
    max-age|network|nssa-external|opaque-area|opaque-as|opaque-link|router|
    self-originate|summary)]
tnsr# show route dynamic ospf6 [vrf <vrf-name>] area [<area-id>]
tnsr# show route dynamic ospf6 [vrf <vrf-name>] [(area|border-routers|config|
    database|interface|linkstate|neighbor [detail]|route-table|spf)]
tnsr# show route dynamic prefix-list [<prefix-list-name>]
tnsr# show route dynamic rip [vrf <vrf-name>] [(config|status)]
tnsr# show route dynamic route-map [<route-map-name>]
tnsr# show route [table <route-table-name> [<prefix> [exact]]] [all]
tnsr# show span
tnsr# show sysctl
tnsr# show system
tnsr# show tunnel next-hops [<tunnel-interface>]
tnsr# show unbound [config-file]
tnsr# show version
tnsr# show wireguard [<instance>]
tnsr# show vxlan [<vxlan-name>]
```


32.5 Access Control List Modes

32.5.1 Enter Access Control List Mode

```
tnsr(config)# acl <acl-name>
tnsr(config-acl)#
```

32.5.2 Access Control List Mode Commands

```
tnsr(config-acl)# rule <seq-number>
```

32.5.3 Remove Access Control List

```
tnsr(config)# no acl <acl-name>
```

32.5.4 Enter ACL Rule Mode

```
tnsr(config-acl)# rule <seq-number>
tnsr(config-acl-rule)#
```

32.5.5 ACL Rule Mode Commands

```
tnsr(config-acl-rule)# action (deny|permit|reflect)
tnsr(config-acl-rule)# ip-version (ipv4|ipv6)
tnsr(config-acl-rule)# no action [deny|permit|reflect]
tnsr(config-acl-rule)# destination address <ip-prefix>
tnsr(config-acl-rule)# no destination address [<ip-prefix>]
tnsr(config-acl-rule)# [no] destination port (any|<first> [- <last>])
tnsr(config-acl-rule)# [no] icmp type (any|<type-first> [- <type-last>])
tnsr(config-acl-rule)# [no] icmp code (any|<code-first> [- <code-last>])
tnsr(config-acl-rule)# protocol (any|icmp|icmpv6|tcp|udp|<proto-number>)
tnsr(config-acl-rule)# no protocol
tnsr(config-acl-rule)# source address <ip-prefix>
tnsr(config-acl-rule)# no source address [<ip-prefix>]
tnsr(config-acl-rule)# [no] source port (any|<first> [- <last>])
tnsr(config-acl-rule)# [no] tcp flags mask <mask> value <value>
tnsr(config-acl-rule)# [no] tcp flags value <value> mask <mask>
```

32.5.6 Remove ACL Rule

```
tnsr(config-acl)# no rule <seq>
```

32.6 MACIP ACL Mode

32.6.1 Enter MACIP ACL Mode

```
tnsr(config)# macip <macip-name>
tnsr(config-macip)#
```

32.6.2 MACIP ACL Mode Commands

```
tnsr(config-macip)# rule <seq>
```

32.6.3 Remove MACIP ACL

```
tnsr(config-macip)# no macip <macip-name>
```

32.6.4 Enter MACIP ACL Rule Mode

```
tnsr(config-macip)# rule <seq-number>
tnsr(config-macip-rule)#
```

32.6.5 MACIP Rule Mode Commands

```
tnsr(config-macip-rule)# action (deny|permit)
tnsr(config-macip-rule)# no action [deny|permit]
tnsr(config-macip-rule)# ip-version (ipv4|ipv6)
tnsr(config-macip-rule)# address <ip-prefix>
tnsr(config-macip-rule)# no address [<ip-prefix>]
tnsr(config-macip-rule)# mac address <mac-address> [mask <mac-mask>]
tnsr(config-macip-rule)# mac mask <mac-mask> [address <mac-address>]
tnsr(config-macip-rule)# no mac
tnsr(config-macip-rule)# no mac address [<mac-address>] [mask [<mac-mask>]]
tnsr(config-macip-rule)# no mac mask [<mac-mask>] [address [<mac-address>]]
```

32.6.6 Remove MACIP ACL Rule

```
tnsr(config-macip)# no rule <seq-number>
```

32.7 GRE Mode

32.7.1 Enter GRE Mode

```
tnsr(config)# gre <gre-name>
tnsr(config-gre)#
```

32.7.2 GRE Mode Commands

```
tnsr(config-gre)# encapsulation route-table <rt-table-name>
tnsr(config-gre)# instance <id>
tnsr(config-gre)# destination <ip-address>
tnsr(config-gre)# source <ip-address>
tnsr(config-gre)# tunnel-type erspan session-id <session-id>
tnsr(config-gre)# tunnel-type (l3|teb)
```

32.7.3 Remove GRE Instance

```
tnsr(config)# no gre <gre-name>
```

32.8 Interface Mode

32.8.1 Enter Interface mode

```
tnsr(config)# interface <if-name>
tnsr(config-interface)#
```

32.8.2 Interface Mode Commands

```
tnsr(config-interface)# access-list (input|output) acl <acl-name> sequence <number>
tnsr(config-interface)# access-list macip <macip-name>
tnsr(config-interface)# no access-list
tnsr(config-interface)# no access-list acl <acl-name>
tnsr(config-interface)# no access-list macip [<macip-name>]
tnsr(config-interface)# no access-list [(input|output) [acl <acl-name> [sequence <number>
↪]]]
tnsr(config-interface)# bond <instance> [long-timeout] [passive]
tnsr(config-interface)# [no] bond <instance>
```

(continues on next page)

(continued from previous page)

```

tnsr(config-interface)# bridge domain <bridge-domain-id> [bvi <bvi>] [shg <shg>]
tnsr(config-interface)# description <string-description>
tnsr(config-interface)# detailed-stats (enable|disable)
tnsr(config-interface)# [no] dhcp client ipv4 [hostname <host-name>]
tnsr(config-interface)# disable
tnsr(config-interface)# [no] enable
tnsr(config-interface)# [no] ip address <ip-prefix>
tnsr(config-interface)# ip mtu <mtu>
tnsr(config-interface)# no ip mtu [<mtu>]
tnsr(config-interface)# [no] ip nat (inside|outside|none)
tnsr(config-interface)# [no] ip reassembly enable
tnsr(config-interface)# [no] ip reassembly type (full|virtual)
tnsr(config-interface)# ip tcp mss <mss-value> (Tx|Rx|TxRx)
tnsr(config-interface)# no ip tcp mss [<mss-value> [Tx|Rx|TxRx]]
tnsr(config-interface)# [no] ip vrrp-virtual-router <vrid>
tnsr(config-interface)# [no] ipv6 address <ipv6-prefix>
tnsr(config-interface)# ipv6 mtu <mtu>
tnsr(config-interface)# no ipv6 mtu [<mtu>]
tnsr(config-interface)# [no] ipv6 reassembly enable
tnsr(config-interface)# [no] ipv6 reassembly type (full|virtual)
tnsr(config-interface)# ipv6 tcp mss <mss-value> (Tx|Rx|TxRx)
tnsr(config-interface)# no ipv6 tcp mss [<mss-value> [Tx|Rx|TxRx]]
tnsr(config-interface)# [no] ipv6 vrrp-virtual-router <vrid>
tnsr(config-interface)# lldp port-name <port-name>
tnsr(config-interface)# lldp management ipv4 <ip-address>
tnsr(config-interface)# lldp management ipv6 <ipv6-address>
tnsr(config-interface)# lldp management oid <oid>
tnsr(config-interface)# map (disable|enable|translate)
tnsr(config-interface)# no map (enable|translate)
tnsr(config-interface)# mac-address <mac-address>
tnsr(config-interface)# mtu <mtu>
tnsr(config-interface)# no mtu [<mtu>]
tnsr(config-interface)# rx-queue <queue_num> cpu <core-id>
tnsr(config-interface)# no rx-queue [<queue_num> [cpu <core-id>]]
tnsr(config-interface)# vlan tag-rewrite (disable|pop-1|pop-2)
tnsr(config-interface)# vlan tag-rewrite push-1 (dot1ad|dot1q) <tag1>
tnsr(config-interface)# vlan tag-rewrite push-2 (dot1ad|dot1q) <tag1> <tag2>
tnsr(config-interface)# vlan tag-rewrite (translate-1-1|translate-2-1) (dot1ad|dot1q)
↪ <tag1>
tnsr(config-interface)# vlan tag-rewrite (translate-1-2|translate-2-2) (dot1ad|dot1q)
↪ <tag1> <tag2>
tnsr(config-interface)# vrf <vrf-name>

```

32.8.3 Remove Interface

```
tnsr(config)# no interface <if-name>
```

32.9 Loopback Mode

32.9.1 Enter Loopback Mode

```
tnsr(config)# interface loopback <loopback-name>  
tnsr(config-loopback)#
```

32.9.2 Loopback Mode Commands

```
tnsr(config-loopback)# instance <u16>  
tnsr(config-loopback)# mac-address <mac-addr>  
tnsr(config-loopback)# description <rest>
```

32.9.3 Remove Loopback interface

```
tnsr(config)# no interface <loop<n>>  
tnsr(config)# no interface loopback <loopback-name>
```

32.10 Bridge Mode

32.10.1 Enter Bridge Mode

```
tnsr(config)# interface bridge <bdi>  
tnsr(config-bridge)#
```

32.10.2 Bridge Mode commands

```
tnsr(config-bridge)# [no] arp entry ip <ip-addr> mac <mac-addr>  
tnsr(config-bridge)# [no] arp term  
tnsr(config-bridge)# [no] description <text>  
tnsr(config-bridge)# [no] flood  
tnsr(config-bridge)# [no] forward  
tnsr(config-bridge)# [no] learn  
tnsr(config-bridge)# [no] mac-age <mins>  
tnsr(config-bridge)# [no] rewrite  
tnsr(config-bridge)# [no] uu-flood
```

32.10.3 Remove Bridge

```
tnsr(config)# no interface bridge <bdi>
```

32.11 NAT Commands in Configure Mode

```
tnsr(config)# [no] nat global-options nat44 forwarding (true|false)
tnsr(config)# [no] nat global-options timeouts (icmp|tcp_established|tcp_transitory|udp)
↳<seconds>
tnsr(config)# [no] nat ipfix logging enable
tnsr(config)# [no] nat ipfix logging domain <domain-id>
tnsr(config)# [no] nat ipfix logging src-port <src-port>
tnsr(config)# [no] nat nat64 map <domain-name>
tnsr(config)# [no] nat nat64 map parameters
tnsr(config)# [no] nat pool address <ip-first> [- <ip-last>] [twice-nat] [route-table
↳<rt-tbl-name>]
tnsr(config)# [no] nat pool interface <if-name> [twice-nat]
tnsr(config)# [no] nat static mapping (icmp|udp|tcp) local <ip-local> [<port-local>]
external (<ip-external>|<if-name>) [<port-external>]
[twice-nat] [out-to-in-only] [route-table <rt-tbl-name>]
```

32.12 Tap Mode

32.12.1 Enter Tap Mode

```
tnsr(config)# interface tap <tap-name>
tnsr(config-tap)#
```

32.12.2 Tap Mode commands

```
tnsr(config-tap)# [no] host bridge <bridge-name>
tnsr(config-tap)# [no] host ipv4 gateway <ipv4-addr>
tnsr(config-tap)# [no] host ipv4 prefix <ipv4-prefix>
tnsr(config-tap)# [no] host ipv6 gateway <ipv6-addr>
tnsr(config-tap)# [no] host ipv6 prefix <ipv6-prefix>
tnsr(config-tap)# [no] host mac-address <host-mac-address>
tnsr(config-tap)# [no] host name-space <netns>
tnsr(config-tap)# [no] instance <instance>
tnsr(config-tap)# [no] mac-address <mac-address>
tnsr(config-tap)# [no] rx-ring-size <size>
tnsr(config-tap)# [no] tx-ring-size <size>
```

32.12.3 Remove Tap

```
tnsr(config)# no interface tap <tap-name>
```

32.13 BFD Key Mode

32.13.1 Enter BFD Key Mode

```
tnsr(config)# bfd conf-key-id <conf-key-id>  
tnsr(config-bfd-key)#
```

32.13.2 BFD Key Mode Commands

```
tnsr(config-bfd-key)# authentication type (keyed-sha1|meticulous-keyed-sha1)  
tnsr(config-bfd-key)# secret < (<hex-pair>)[1-20] >
```

32.13.3 Remove BFD Key Configuration

```
tnsr(config)# no bfd conf-key-id <conf-key-id>
```

32.14 BFD Mode

32.14.1 Enter BFD Mode

```
tnsr(config)# bfd session <bfd-session>  
tnsr(config-bfd)#
```

32.14.2 BFD Mode Commands

```
tnsr(config-bfd)# [no] bfd-key-id <bfd-key-id>  
tnsr(config-bfd)# [no] conf-key-id <conf-key-id>  
tnsr(config-bfd)# delayed (true|false)  
tnsr(config-bfd)# desired-min-tx <microseconds>  
tnsr(config-bfd)# detect-multiplier <n-packets>  
tnsr(config-bfd)# disable  
tnsr(config-bfd)# [no] enable (true|false)  
tnsr(config-bfd)# interface <if-name>  
tnsr(config-bfd)# local address <ip-address>  
tnsr(config-bfd)# peer address <ip-address>  
tnsr(config-bfd)# remote address <ip-address>  
tnsr(config-bfd)# required-min-rx <microseconds>
```

32.14.3 Remove BFD Configuration

```
tnsr(config)# no bfd session <bfd-session>
```

32.14.4 Change BFD Admin State

```
tnsr# bfd session <bfd-session>  
tnsr(config-bfd)# enable false  
tnsr(config-bfd)# enable true  
tnsr(config-bfd)#
```

32.14.5 Change BFD Authentication

```
tnsr(config)# bfd session <bfd-session>  
tnsr(config-bfd)# bfd-key-id <bfd-key-id>  
tnsr(config-bfd)# conf-key-id <conf-key-id>  
tnsr(config-bfd)# delayed (true|false)
```

32.15 Host Interface Mode

32.15.1 Enter Host Interface Mode

```
tnsr(config)# host interface <if-name>  
tnsr(config-host-if)#
```

32.15.2 Host Interface Mode Commands

```
tnsr(config-host-if)# [no] description <text>  
tnsr(config-host-if)# disable  
tnsr(config-host-if)# [no] enable  
tnsr(config-host-if)# [no] ip address <ipv4-prefix>  
tnsr(config-host-if)# [no] ipv6 address <ipv6-prefix>  
tnsr(config-host-if)# mtu <mtu-value>
```

32.15.3 Remove Host Interface

```
tnsr(config)# no host interface <if-name>
```


32.16 IPsec Tunnel Mode

32.16.1 Enter IPsec Tunnel Mode

```
tnsr(config)# ipsec tunnel <tunnel-num>
tnsr(config-ipsec-tunnel)#
```

32.16.2 IPsec Tunnel Mode Commands

```
tnsr(config-ipsec-tunnel)# enable
tnsr(config-ipsec-tunnel)# disable
tnsr(config-ipsec-tunnel)# crypto config-type (ike|manual)
tnsr(config-ipsec-tunnel)# crypto (ike|manual)
tnsr(config-ipsec-tunnel)# [no] local-address <ip-address>
tnsr(config-ipsec-tunnel)# [no] remote-address (<ip-address>|<hostname>)
```

32.16.3 Remove IPsec Tunnel

```
tnsr(config)# no ipsec tunnel <tunnel-num>
```

32.17 IKE mode

32.17.1 Enter IKE mode

```
tnsr(config-ipsec-tunnel)# crypto ike
tnsr(config-ipsec-crypto-ike)#
```

32.17.2 IKE Mode Commands

```
tnsr(config-ipsec-crypto-ike)# [no] authentication (local|remote)
tnsr(config-ipsec-crypto-ike)# [no] child <name>
tnsr(config-ipsec-crypto-ike)# [no] identity (local|remote)
tnsr(config-ipsec-crypto-ike)# lifetime <seconds>
tnsr(config-ipsec-crypto-ike)# no lifetime
tnsr(config-ipsec-crypto-ike)# [no] proposal <number>
tnsr(config-ipsec-crypto-ike)# version (0|1|2)
tnsr(config-ipsec-crypto-ike)# no version
tnsr(config-ipsec-crypto-ike)# [no] udp-encapsulation
```

32.17.3 Remove IKE configuration

```
tnsr(config-ipsec-tunnel)# no crypto ike
```

32.18 IKE Peer Authentication Mode

32.18.1 Enter IKE Peer Authentication Mode

```
tnsr(config-ipsec-crypto-ike)# authentication (local|remote)
tnsr(config-ike-auth)#
```

32.18.2 IKE Peer Authentication Mode Commands

```
tnsr(config-ike-auth)# [no] round (1|2)
```

32.18.3 Remove IKE Peer Authentication Configuration

```
tnsr(config-ipsec-crypto-ike)# no authentication (local|remote)
```

32.19 IKE Peer Authentication Round Mode

32.19.1 Enter IKE Peer Authentication Round Mode

```
tnsr(config-ike-auth)# round (1|2)
tnsr(config-ike-auth-round)#
```

32.19.2 IKE Peer Authentication Round Mode Commands

```
tnsr(config-ike-auth-round)# type psk
tnsr(config-ike-auth-round)# no type
tnsr(config-ike-auth-round)# psk <pre-shared-key>
tnsr(config-ike-auth-round)# no psk
```

32.19.3 Remove IKE Peer Authentication Round Configuration

```
tnsr(config-ike-auth)# no round (1|2)
```

32.20 IKE Child SA Mode

32.20.1 Enter IKE Child SA Mode

```
tnsr(config-ipsec-crypto-ike)# child <name>  
tnsr(config-ike-child)#
```

32.20.2 IKE Child SA Mode Commands

```
tnsr(config-ike-child)# lifetime <seconds>  
tnsr(config-ike-child)# no lifetime  
tnsr(config-ike-child)# [no] proposal <number>
```

32.20.3 Remove IKE Child SA

```
tnsr(config-ipsec-crypto-ike)# no child <name>
```

32.21 IKE Child SA Proposal Mode

32.21.1 Enter IKE Child SA Proposal Mode

```
tnsr(config-ike-child)# proposal <number>  
tnsr(config-ike-child-proposal)#
```

32.21.2 IKE Child SA Proposal Mode Commands

```
tnsr(config-ike-child-proposal)# encryption <crypto-algorithm>  
tnsr(config-ike-child-proposal)# no encryption  
tnsr(config-ike-child-proposal)# integrity <integrity-algorithm>  
tnsr(config-ike-child-proposal)# no integrity  
tnsr(config-ike-child-proposal)# group <pfs-group>  
tnsr(config-ike-child-proposal)# no group  
tnsr(config-ike-child-proposal)# sequence-number (esn|noesn)  
tnsr(config-ike-child-proposal)# no sequence-number
```

32.21.3 Remove IKE Child SA Proposal

```
tnsr(config-ike-child)# no proposal <number>
```

32.22 IKE Peer Identity Mode

32.22.1 Enter IKE Peer Identity Mode

```
tnsr(config-ipsec-crypto-ike)# identity (local|remote)
tnsr(config-ike-identity)#
```

32.22.2 IKE Peer Identity Mode Commands

```
tnsr(config-ike-identity)# type (none|address|email|fqdn|dn|key-id)
tnsr(config-ike-identity)# no type
tnsr(config-ike-identity)# value <identity>
tnsr(config-ike-identity)# no value
```

32.22.3 Remove IKE Peer Identity Configuration

```
tnsr(config-ipsec-crypto-ike)# no identity (local|remote)
```

32.23 IKE Proposal Mode

32.23.1 Enter IKE Proposal Mode

```
tnsr(config-ipsec-crypto-ike)# proposal <number>
tnsr(config-ike-proposal)#
```

32.23.2 IKE Proposal Mode Commands

```
tnsr(config-ike-proposal)# encryption <crypto-algorithm>
tnsr(config-ike-proposal)# no encryption
tnsr(config-ike-proposal)# integrity <integrity-algorithm>
tnsr(config-ike-proposal)# no integrity
tnsr(config-ike-proposal)# prf <prf-algorithm>
tnsr(config-ike-proposal)# no prf
tnsr(config-ike-proposal)# group <diffie-hellman-group>
tnsr(config-ike-proposal)# no group
```

32.23.3 Remove IKE Proposal Configuration

```
tnsr(config-ipsec-crypto-ike)# no proposal <number>
```

32.24 Map Mode

32.24.1 Enter Map Mode

```
tnsr(config)# nat nat64 map <domain-name>
```

32.24.2 Map Mode Commands

```
tnsr(config-map)# [no] description <desc>
tnsr(config-map)# [no] embedded-address bit-length <ea-width>
tnsr(config-map)# [no] ipv4 prefix <ip4-prefix>
tnsr(config-map)# [no] ipv6 prefix <ip6-prefix>
tnsr(config-map)# [no] ipv6 source <ip6-src>
tnsr(config-map)# [no] mtu <mtu-val>
tnsr(config-map)# [no] port-set length <psid-length>
tnsr(config-map)# [no] port-set offset <psid-offset>
tnsr(config-map)# [no] rule port-set <psid> ipv6-destination <ip6-address>
```

32.24.3 Remove Map Entry

```
tnsr(config)# [no] nat nat64 map <domain-name>
```

32.25 Map Parameters Mode

32.25.1 Enter Map Parameters Mode

```
tnsr(config)# nat nat64 map parameters
```

32.25.2 Map Parameters Mode Commands

```
tnsr(config-map-param)# [no] fragment (inner|outer)
tnsr(config-map-param)# [no] fragment ignore-df
tnsr(config-map-param)# [no] icmp source-address <ipv4-address>
tnsr(config-map-param)# [no] icmp6 unreachable-msgs (disable|enable)
tnsr(config-map-param)# [no] pre-resolve (ipv4|ipv6) next-hop <ip46-address>
tnsr(config-map-param)# [no] security-check (disable|enable)
tnsr(config-map-param)# [no] security-check fragments (disable|enable)
tnsr(config-map-param)# [no] traffic-class copy (disable|enable)
tnsr(config-map-param)# [no] traffic-class tc <tc-value>
```

32.26 memif Mode

32.26.1 Enter memif Mode

```
tnsr(config)# interface memif socket <socket-id> interface <if-id>
tnsr(config-memif)#
```

32.26.2 memif mode Commands

```
tnsr(config-memif)# buffer-size <u16>
tnsr(config-memif)# mac-address <mac-addr>
tnsr(config-memif)# mode (ethernet|ip|punt/inject)
tnsr(config-memif)# ring-size <power-of-2>
tnsr(config-memif)# role server
tnsr(config-memif)# role client [rx-queues <u8>|tx-queues <u8>]
tnsr(config-memif)# secret <string-24>
```

32.26.3 Remove memif Interface

```
tnsr(config)# no interface memif socket <socket-id> interface <if-id>
```

32.27 Dynamic Routing Access List Mode

32.27.1 Enter Dynamic Routing Access List Mode

```
tnsr(config)# route dynamic access-list <access-list-name>
tnsr(config-access-list)#
```

32.27.2 Dynamic Routing Access List Mode Commands

```
tnsr(config-access-list)# [no] remark <text>
tnsr(config-access-list)# sequence <seq> (permit|deny) <ip-prefix>
tnsr(config-access-list)# no sequence <seq> [(permit|deny) [<ip-prefix>]]
```

32.27.3 Remove Dynamic Routing Access List

```
tnsr(config)# no route dynamic access-list <access-list-name>
```

32.28 Dynamic Routing Prefix List Mode

32.28.1 Enter Dynamic Routing Prefix List Mode

```
tnsr(config)# route dynamic prefix-list <pl-name>
tnsr(config-pref-list)#
```

32.28.2 Dynamic Routing Prefix List Mode Commands

```
tnsr(config-pref-list)# [no] description <text>
tnsr(config-pref-list)# sequence <seq> (permit|deny) <prefix> [ge <lower-bound>] [le
↪<upper-bound>]
tnsr(config-pref-list)# no sequence <seq> [(permit|deny) <prefix> [ge <lower-bound>] [le
↪<upper-bound>]]
```

32.28.3 Remove Dynamic Routing Prefix List

```
tnsr(config)# no route dynamic prefix-list <pl-name>
```

32.29 Dynamic Routing Route Map Mode

32.29.1 Enter Dynamic Routing Route Map

```
tnsr(config)# route dynamic route-map <route-map-name>
tnsr(config-route-map)#
```

32.29.2 Dynamic Routing Route Map Mode Commands

```
tnsr(config-route-map)# [no] description <string>
tnsr(config-route-map)# [no] sequence <number>
```

32.29.3 Remove Dynamic Routing Route Map

```
tnsr(config-route-map)# no route dynamic route-map <route-map-name>
```

32.29.4 Enter Dynamic Routing Route Map Rule Mode

```
tnsr(config-route-map)# sequence <number>
tnsr(config-route-map-rule)#
```

32.29.5 Dynamic Routing Route Map Rule Mode Commands

```
tnsr(config-route-map-rule)# [no] description <string>
tnsr(config-route-map-rule)# [no] policy (deny|permit)

tnsr(config-route-map-rule)# [no] match as-path <as-path-name>
tnsr(config-route-map-rule)# [no] match community <comm-list-name> [exact-match]
tnsr(config-route-map-rule)# [no] match extcommunity <extcomm-list-name>
tnsr(config-route-map-rule)# [no] match interface <if-name>
tnsr(config-route-map-rule)# [no] match ip address access-list <access-list-name>
tnsr(config-route-map-rule)# [no] match ip address prefix-list <prefix-list-name>
tnsr(config-route-map-rule)# [no] match ip next-hop access-list <access-list-name>
tnsr(config-route-map-rule)# [no] match ip next-hop <ipv4-address>
tnsr(config-route-map-rule)# [no] match ip next-hop prefix-list <prefix-list-name>
tnsr(config-route-map-rule)# [no] match ipv6 address access-list <access-list-name>
tnsr(config-route-map-rule)# [no] match ipv6 address prefix-list <prefix-list-name>
tnsr(config-route-map-rule)# [no] match large-community <large-comm-list-name>
tnsr(config-route-map-rule)# [no] match local-preference <preference-uint32>
tnsr(config-route-map-rule)# [no] match metric <metric-uint32>
tnsr(config-route-map-rule)# [no] match origin (egp|igp|incomplete)
tnsr(config-route-map-rule)# [no] match peer <peer-ip-address>
tnsr(config-route-map-rule)# [no] match probability <percent>
tnsr(config-route-map-rule)# [no] match source-protocol <src-protocol>
tnsr(config-route-map-rule)# [no] match tag <value-(1-4294967295)>

tnsr(config-route-map-rule)# [no] set aggregator as <asn> ip address <ipv4-address>
tnsr(config-route-map-rule)# [no] set as-path exclude <string-of-as-numbers>
tnsr(config-route-map-rule)# [no] set as-path prepend <string-of-as-numbers>
tnsr(config-route-map-rule)# [no] set as-path prepend last-as <asn>
tnsr(config-route-map-rule)# [no] set atomic-aggregate
tnsr(config-route-map-rule)# [no] set community none
tnsr(config-route-map-rule)# [no] set community <community-value> [additive]
tnsr(config-route-map-rule)# [no] set comm-list <community-list-name> delete
tnsr(config-route-map-rule)# [no] set extcommunity (rt|soo) <extcommunity-list-name>
tnsr(config-route-map-rule)# [no] set forwarding-address <ipv6-address>
tnsr(config-route-map-rule)# [no] set ip next-hop <ipv4-address>|peer-address|unchanged
tnsr(config-route-map-rule)# [no] set ipv4 vpn next-hop (<ipv4-address>|<ipv6-address>)
tnsr(config-route-map-rule)# [no] set ipv6 next-hop global <ipv6-address>
tnsr(config-route-map-rule)# [no] set ipv6 next-hop local <ipv6-address>
tnsr(config-route-map-rule)# [no] set ipv6 next-hop peer-address
tnsr(config-route-map-rule)# [no] set ipv6 next-hop prefer-global
tnsr(config-route-map-rule)# [no] set ipv6 vpn next-hop (<ipv4-address>|<ipv6-address>)
tnsr(config-route-map-rule)# [no] set large-community none
tnsr(config-route-map-rule)# [no] set large-community <large-community-value> [additive]
tnsr(config-route-map-rule)# [no] set large-comm-list <large-comm-list-name> delete
tnsr(config-route-map-rule)# [no] set local-preference <preference>
```

(continues on next page)

(continued from previous page)

```
tnsr(config-route-map-rule)# [no] set metric [+]<metric-uint32>
tnsr(config-route-map-rule)# [no] set metric-type (type-1|type-2)
tnsr(config-route-map-rule)# [no] set origin (egp|igp|unknown)
tnsr(config-route-map-rule)# [no] set originator <ipv4-addr>
tnsr(config-route-map-rule)# [no] set src <ip-address>
tnsr(config-route-map-rule)# [no] set tag <tag-(1-4294967295)>
tnsr(config-route-map-rule)# [no] set weight <weight>

tnsr(config-route-map-rule)# [no] call <rt-map-name>

tnsr(config-route-map-rule)# [no] on-match next
tnsr(config-route-map-rule)# [no] on-match goto <sequence>
```

32.29.6 Remove Dynamic Routing Route Map Rule

```
tnsr(config-route-map-rule)# no sequence <sequence>
```

32.30 Dynamic Routing BGP Mode

32.30.1 Enter Dynamic Routing BGP Mode

```
tnsr(config)# route dynamic bgp
tnsr(config-frr-bgp)#
```

32.30.2 Dynamic Routing BGP Mode Commands

```
tnsr(config-frr-bgp)# [no] as-path <as-path-name>
tnsr(config-frr-bgp)# [no] community-list <comm-list-name> (standard|expanded)
                                [extended|large]
tnsr(config-frr-bgp)# disable
tnsr(config-frr-bgp)# [no] enable
tnsr(config-frr-bgp)# [no] option debug (allow-martians|nht|update-groups)
tnsr(config-frr-bgp)# [no] option debug as4 [segment]
tnsr(config-frr-bgp)# [no] option debug bestpath <ipv6-prefix>
tnsr(config-frr-bgp)# [no] option debug keepalive [<peer>]
tnsr(config-frr-bgp)# [no] option debug neighbor-events [<peer>]
tnsr(config-frr-bgp)# [no] option debug updates
                                [in <peer>|out <peer>|prefix (<ipv4-prefix>|<ipv6-
↪ prefix>)]
tnsr(config-frr-bgp)# [no] option debug zebra [prefix (<ipv4-prefix>|<ipv6-prefix>)]
tnsr(config-frr-bgp)# [no] route-map delay-timer <interval-sec>
tnsr(config-frr-bgp)# [no] server vrf <vrf-name>
tnsr(config-frr-bgp)# session clear [vrf <vrf-name>] (*|<peer>|<asn>) [soft]
```

32.31 Dynamic Routing BGP Server Mode

32.31.1 Enter Dynamic Routing BGP Server Mode

```
tnsr(config-frr-bgp)# server vrf <vrf-name>
tnsr(config-bgp)#
```

32.31.2 Dynamic Routing BGP Server Mode Commands

```
tnsr(config-bgp)# [no] address-family (ipv4|ipv6) (unicast|multicast)
tnsr(config-bgp)# [no] always-compare-med
tnsr(config-bgp)# [no] as-number <asn>
tnsr(config-bgp)# [no] bestpath as-path (confed|ignore|multipath-relax|as-set|no-as-set)
tnsr(config-bgp)# [no] bestpath compare-routerid
tnsr(config-bgp)# [no] bestpath med [confed|missing-as-worst]
tnsr(config-bgp)# [no] client-to-client reflection
tnsr(config-bgp)# [no] cluster-id (<ipv4>|<value>)
tnsr(config-bgp)# [no] coalesce-time <value>
tnsr(config-bgp)# [no] confederation identifier <asn>
tnsr(config-bgp)# [no] confederation peer <asn>
tnsr(config-bgp)# [no] dampening [penalty <value> [reuse <value> [suppress <value>
    [maximum <value>]]]]
tnsr(config-bgp)# [no] deterministic-med
tnsr(config-bgp)# [no] disable-ebgp-connected-route-check
tnsr(config-bgp)# [no] ebgp-requires-policy
tnsr(config-bgp)# [no] ipv4-unicast-enabled
tnsr(config-bgp)# [no] listen limit <value>
tnsr(config-bgp)# [no] listen range (<ip4-prefix>|<ip6-prefix>) peer-group <peer-group-
    name>
tnsr(config-bgp)# [no] log-neighbor-changes
tnsr(config-bgp)# [no] max-med administrative [<med>]
tnsr(config-bgp)# [no] max-med on-startup period <seconds> [<med>]
tnsr(config-bgp)# [no] neighbor <peer>
tnsr(config-bgp)# [no] network import-check
tnsr(config-bgp)# [no] route-reflector allow-outbound-policy
tnsr(config-bgp)# [no] router-id <router-id>
tnsr(config-bgp)# [no] timers keep-alive <interval> hold-time <hold-time>
tnsr(config-bgp)# [no] update-delay <delay>
tnsr(config-bgp)# [no] write-quanta <packets>
```

32.31.3 Remove Dynamic Routing BGP Server

```
tnsr(config-frr-bgp)# no server vrf <vrf-name>
```

32.32 Dynamic Routing BGP Neighbor Mode

32.32.1 Enter Dynamic Routing BGP Neighbor Mode

```
tnsr(config-bgp)# neighbor <peer>
tnsr(config-bgp-neighbor)#
```

32.32.2 Dynamic Routing BGP Neighbor Mode Commands

```
tnsr(config-bgp-neighbor)# [no] advertisement-interval <interval>
tnsr(config-bgp-neighbor)# [no] bfd enabled (true|false)
tnsr(config-bgp-neighbor)# [no] capability (dynamic|extended-nexthop)
tnsr(config-bgp-neighbor)# [no] description <string>
tnsr(config-bgp-neighbor)# disable
tnsr(config-bgp-neighbor)# [no] disable-connected-check
tnsr(config-bgp-neighbor)# [no] dont-capability-negotiate
tnsr(config-bgp-neighbor)# [no] ebgp-multihop [hop-maximum <hops>]
tnsr(config-bgp-neighbor)# [no] enable
tnsr(config-bgp-neighbor)# [no] enforce-first-as
tnsr(config-bgp-neighbor)# [no] local-as <asn> [no-prepend [replace-as]]
tnsr(config-bgp-neighbor)# [no] override-capability
tnsr(config-bgp-neighbor)# [no] passive
tnsr(config-bgp-neighbor)# [no] password <line>
tnsr(config-bgp-neighbor)# [no] peer-group [<peer-group-name>]
tnsr(config-bgp-neighbor)# [no] port <port>
tnsr(config-bgp-neighbor)# [no] remote-as <asn>
tnsr(config-bgp-neighbor)# [no] solo
tnsr(config-bgp-neighbor)# [no] strict-capability-match
tnsr(config-bgp-neighbor)# [no] timers keepalive <interval> holdtime <hold>
tnsr(config-bgp-neighbor)# [no] timers connect <seconds>
tnsr(config-bgp-neighbor)# [no] ttl-security hops <hops>
tnsr(config-bgp-neighbor)# [no] update-source (<if-name>|<ip-address>)
```

32.32.3 Remove Dynamic Routing BGP Neighbor

```
tnsr(config-bgp)# no neighbor <peer>
```

32.33 Dynamic Routing BGP Address Family Mode

32.33.1 Enter Dynamic Routing BGP Address Family Mode

```
tnsr(config-bgp)# address-family ipv4 unicast
tnsr(config-bgp-ip4uni)#
```

```
tnsr(config-bgp)# address-family ipv4 multicast
tnsr(config-bgp-ip4multi)#
```

```
tnsr(config-bgp)# address-family ipv6 unicast
tnsr(config-bgp-ip6uni)#
```

```
tnsr(config-bgp)# address-family ipv6 multicast
tnsr(config-bgp-ip6multi)#
```

32.33.2 Dynamic Routing BGP IPv4 Unicast Address Family Mode Commands

```
tnsr(config-bgp-ip4uni)# [no] aggregate-address <ipv4-prefix> [as-set] [summary-only]
tnsr(config-bgp-ip4uni)# [no] distance external <extern> internal <intern> local <local>
tnsr(config-bgp-ip4uni)# [no] distance administrative <dist> prefix <ipv4-prefix>
                             [access-list <access-list-name>]
tnsr(config-bgp-ip4uni)# [no] maximum-paths <non-ibgp-paths> [igbp <ibgp-paths>
                             [equal-cluster-length]]
tnsr(config-bgp-ip4uni)# [no] neighbor <existing-neighbor>
tnsr(config-bgp-ip4uni)# [no] network <ipv4-prefix> [route-map <route-map>]
tnsr(config-bgp-ip4uni)# [no] redistribute <route-source> [metric <val>|route-map <route-
↪map-name>]
tnsr(config-bgp-ip4uni)# [no] redistribute ospf [metric <val>|route-map <route-map-name>]
tnsr(config-bgp-ip4uni)# [no] redistribute table id <kernel-table-id> [metric <val>|
                             route-map <route-map-name>]
tnsr(config-bgp-ip4uni)# [no] table-map <route-map-name>
```

32.33.3 Dynamic Routing BGP IPv4 Multicast Address Family Mode Commands

```
tnsr(config-bgp-ip4multi)# [no] aggregate-address <ipv4-prefix> [as-set] [summary-only]
tnsr(config-bgp-ip4multi)# [no] distance external <extern> internal <intern> local
↪<local>
tnsr(config-bgp-ip4multi)# [no] distance administrative <dist> prefix <ipv4-prefix>
                             [access-list <access-list-name>]
tnsr(config-bgp-ip4multi)# [no] neighbor <existing-neighbor>
tnsr(config-bgp-ip4multi)# [no] network <ipv4-prefix> [route-map <route-map>]
tnsr(config-bgp-ip4multi)# [no] table-map <route-map-name>
```

32.33.4 Dynamic Routing BGP IPv6 Unicast Address Family Mode Commands

```
tnsr(config-bgp-ip6uni)# [no] aggregate-address <ipv6-prefix> [as-set] [summary-only]
tnsr(config-bgp-ip6uni)# [no] distance external <extern> internal <intern> local <local>
tnsr(config-bgp-ip6uni)# [no] distance administrative <dist> prefix <ipv6-prefix>
                             [access-list <access-list-name>]
tnsr(config-bgp-ip6uni)# [no] maximum-paths <non-ibgp-paths> [igbp <ibgp-paths>
                             [equal-cluster-length]]
tnsr(config-bgp-ip6uni)# [no] neighbor <existing-neighbor>
tnsr(config-bgp-ip6uni)# [no] network <ipv6-prefix> [route-map <route-map>]
tnsr(config-bgp-ip6uni)# [no] redistribute <route-source> [metric <val>|route-map <route-
↪map-name>]
tnsr(config-bgp-ip6uni)# [no] redistribute ospf [metric <val>|route-map <route-map-name>]
```

(continues on next page)

(continued from previous page)

```
tnsr(config-bgp-ip6uni)# [no] redistribute table id <kernel-table-id> [metric <val>|
                                route-map <route-map-name>]
tnsr(config-bgp-ip6uni)# [no] table-map <route-map-name>
```

32.33.5 Dynamic Routing BGP IPv6 Multicast Address Family Mode Commands

```
tnsr(config-bgp-ip6multi)# [no] distance external <extern> internal <intern> local
↪<local>
tnsr(config-bgp-ip6multi)# [no] distance administrative <dist> prefix <ipv6-prefix>
                                access-list <access-list-name>
tnsr(config-bgp-ip6multi)# [no] neighbor <existing-neighbor>
tnsr(config-bgp-ip6multi)# [no] network <ipv6-prefix> [route-map <route-map>]
```

32.33.6 Remove Dynamic Routing BGP Address Family

```
tnsr(config-bgp)# no address-family (ipv4|ipv6) (unicast|multicast)
```

32.34 Dynamic Routing BGP Address Family Neighbor Mode

Note: Though the samples below indicate IPv4 unicast, the same syntax is used for all address families.

32.34.1 Enter Dynamic Routing BGP Address Family Neighbor Mode

```
tnsr(config-bgp-ip4uni)# neighbor <existing-neighbor>
tnsr(config-bgp-ip4uni-nbr)#
```

32.34.2 Dynamic Routing BGP Address Family Neighbor Mode Commands

```
tnsr(config-bgp-ip4uni-nbr)# [no] activate
tnsr(config-bgp-ip4uni-nbr)# [no] addpath-tx-all-paths
tnsr(config-bgp-ip4uni-nbr)# [no] addpath-tx-bestpath-per-as
tnsr(config-bgp-ip4uni-nbr)# [no] allowas-in [<occurrence>|origin]
tnsr(config-bgp-ip4uni-nbr)# [no] as-override
tnsr(config-bgp-ip4uni-nbr)# [no] attribute-unchanged [as-path|next-hop|med]
tnsr(config-bgp-ip4uni-nbr)# [no] capability orf prefix-list (send|receive|both)
tnsr(config-bgp-ip4uni-nbr)# [no] default-originate [route-map <route-map>]
tnsr(config-bgp-ip4uni-nbr)# [no] distribute-list <access-list-name> (in|out)
tnsr(config-bgp-ip4uni-nbr)# [no] filter-list <aspath-name> (in|out)
tnsr(config-bgp-ip4uni-nbr)# [no] maximum-prefix limit <val>
tnsr(config-bgp-ip4uni-nbr)# [no] maximum-prefix restart <val>
tnsr(config-bgp-ip4uni-nbr)# [no] maximum-prefix threshold <val>
tnsr(config-bgp-ip4uni-nbr)# [no] maximum-prefix warning-only
```

(continues on next page)

(continued from previous page)

```
tnsr(config-bgp-ip4uni-nbr)# [no] next-hop-self [force]
tnsr(config-bgp-ip4uni-nbr)# [no] prefix-list <prefix-list-name> (in|out)
tnsr(config-bgp-ip4uni-nbr)# [no] remove-private-AS [all] [replace-AS]
tnsr(config-bgp-ip4uni-nbr)# [no] route-map <name> (in|out)
tnsr(config-bgp-ip4uni-nbr)# [no] route-reflector-client
tnsr(config-bgp-ip4uni-nbr)# [no] route-server-client
tnsr(config-bgp-ip4uni-nbr)# [no] send-community (standard|large|extended)
tnsr(config-bgp-ip4uni-nbr)# [no] soft-reconfiguration inbound
tnsr(config-bgp-ip4uni-nbr)# [no] unsuppress-map <route-map>
tnsr(config-bgp-ip4uni-nbr)# [no] weight <weight>
```

32.34.3 Remove Dynamic Routing BGP Address Family Neighbor

```
tnsr(config-bgp-ip4uni)# no neighbor <existing-neighbor>
```

32.35 Dynamic Routing BGP Community List Mode

32.35.1 Enter Dynamic Routing BGP Community List Mode

```
tnsr(config-frr-bgp)# community-list <name> (standard|expanded) [normal|extended|large]
tnsr(config-community-list)#
```

32.35.2 Dynamic Routing BGP Community List Mode Commands

```
tnsr(config-community-list)# description <text>
tnsr(config-community-list)# sequence <seq> (permit|deny) <community-value>
tnsr(config-community-list)# no description [<text>]
tnsr(config-community-list)# no sequence <seq> [(permit|deny) <community-value>]
```

32.35.3 Remove Dynamic Routing BGP Community List

```
tnsr(config-frr-bgp)# no community-list <name> (standard|expanded) [extended|large]
```

32.36 Dynamic Routing BGP AS Path Mode

32.36.1 Enter Dynamic Routing BGP AS Path Mode

```
tnsr(config-frr-bgp)# as-path <as-path-name>
tnsr(config-aspath)#
```

32.36.2 Dynamic Routing BGP AS Path Mode Commands

```
tnsr(config-aspath)# [no] rule <seq> (permit|deny) <pattern>
```

32.36.3 Remove Dynamic Routing BGP AS Path

```
tnsr(config-frr-bgp)# no as-path <as-path-name>
```

32.37 Dynamic Routing OSPF Mode

32.37.1 Enter Dynamic Routing OSPF Mode

```
tnsr(config)# route dynamic ospf
tnsr(config-frr-ospf)#
```

32.37.2 OSPF Mode Commands

```
tnsr(config-frr-ospf)# [no] enable
tnsr(config-frr-ospf)# disable
tnsr(config-frr-ospf)# [no] debug (event|nssa|sr|te)
tnsr(config-frr-ospf)# [no] debug (ism|nsm) (events|status|timers)
tnsr(config-frr-ospf)# [no] debug lsa (flooding|generate|install|refresh)
tnsr(config-frr-ospf)# [no] debug packet (dd|hello|ls-acknowledgment|ls-request|ls-
↪update)
                                (send|recv) [detail]
tnsr(config-frr-ospf)# [no] debug zebra (interface|redistribute)
tnsr(config-frr-ospf)# [no] interface <if-name>
tnsr(config-frr-ospf)# [no] server vrf <vrf-name>
```

32.38 Dynamic Routing OSPF Server Mode

32.38.1 Entering OSPF Server Mode

```
tnsr(config-frr-ospf)# server vrf <vrf-name>
tnsr(config-ospf)#
```

32.38.2 OSPF Server Mode Commands

```
tnsr(config-ospf)# [no] area <area-id>
tnsr(config-ospf)# [no] auto-cost reference-bandwidth <bw>
tnsr(config-ospf)# [no] capability opaque-lsa
tnsr(config-ospf)# [no] compatible rfc-1583-compatibility
tnsr(config-ospf)# [no] default-information originate
    (always|metric <val>|route-map <map>|type <type>)
tnsr(config-ospf)# [no] default-metric <val>
tnsr(config-ospf)# [no] distance [(external|inter-area|intra-area)] <dist>
tnsr(config-ospf)# [no] distribution-list out
    (bgp|connected|kernel|static|table)
    access-list <name>
tnsr(config-ospf)# [no] log-adjacency-changes [detail]
tnsr(config-ospf)# [no] max-metric router-lsa administrative
tnsr(config-ospf)# [no] max-metric router-lsa (on-shutdown|on-startup) <seconds>
tnsr(config-ospf)# [no] neighbor <ip4-address> [(poll-interval <interval>|priority <prio>
↪)]
tnsr(config-ospf)# [no] ospf abr-type (cisco|ibm|shortcut|standard)
tnsr(config-ospf)# [no] ospf router-id <router-id>
tnsr(config-ospf)# [no] ospf write-multiplier <write>
tnsr(config-ospf)# [no] passive-interface <if-name> [<ip4-address>]
tnsr(config-ospf)# [no] pce address
    (<ip4-address>|domain <asn>|flags <bits>|neighbor <asn>|scope
↪<bits>)
tnsr(config-ospf)# [no] redistribute
    (bgp|connected|kernel|ospf|static|table)
    [(metric <val>|route-map <map>|type <type>)]
tnsr(config-ospf)# [no] refresh timer <time>
tnsr(config-ospf)# [no] router-info as
tnsr(config-ospf)# [no] timers lsa min-arrival <min>
tnsr(config-ospf)# [no] timers throttle lsa all <delay>
tnsr(config-ospf)# [no] timers throttle spf (delay|initial-hold|maximum-hold) <val>
```

32.38.3 Remove OSPF Server Configuration

```
tnsr(config-frr-ospf)# no server
```

32.39 Dynamic Routing OSPF Interface Mode

32.39.1 Enter Dynamic Routing OSPF Interface Mode

```
tnsr(config-frr-ospf)# interface <if-name>
tnsr(config-ospf-if)#
```


32.39.2 Dynamic Routing OSPF Interface Mode Commands

```
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) area <area-id>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) authentication [message-
↪digest|null]
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) authentication-key <key>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) cost <link-cost>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) dead-interval minimal hello
↪<multiplier>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) dead-interval <time>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) hello-interval <interval>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) message-digest-key key-id <id>
md5-key <key>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) mtu-ignore
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) retransmit-interval <interval>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) priority <priority>
tnsr(config-ospf-if)# [no] ip address (*|<ip4-address>) transmit-delay <delay>
tnsr(config-ospf-if)# [no] ip bfd enabled (true|false)
tnsr(config-ospf-if)# [no] ip network
(broadcast|non-broadcast|point-to-multipoint|point-to-point)
```

32.39.3 Remove Dynamic Routing OSPF Interface

```
tnsr(config-ospf)# no interface <if-name>
```

32.40 Dynamic Routing OSPF Area Mode

32.40.1 Enter Dynamic Routing OSPF Area Mode

```
tnsr(config-ospf)# area <area-id>
tnsr(config-ospf-area)#
```

32.40.2 Dynamic Routing OSPF Area Mode Commands

```
tnsr(config-ospf-area)# authentication [message-digest]
tnsr(config-ospf-area)# default-cost <cost>
tnsr(config-ospf-area)# export-list <acl-name>
tnsr(config-ospf-area)# filter-list (in|out) prefix-list <prefix-list-name>
tnsr(config-ospf-area)# import-list <acl-name>
tnsr(config-ospf-area)# nssa [(no-summary|translate (always|candidate|never))]]
tnsr(config-ospf-area)# range <prefix> [cost <val>|not-advertise|substitute <sub-prefix>]
tnsr(config-ospf-area)# shortcut (default|disable|enable)
tnsr(config-ospf-area)# stub [no-summary]
tnsr(config-ospf-area)# virtual-link <router-id>
```

32.40.3 Remove Dynamic Routing OSPF Area

```
tnsr(config-ospf)# no area <area-id>
```

32.41 Dynamic Routing OSPF6 Mode

32.41.1 Enter Dynamic Routing OSPF6 Mode

```
tnsr(config)# route dynamic ospf6
tnsr(config-frr-ospf6)#
```

32.41.2 OSPF6 Mode Commands

```
tnsr(config-frr-ospf6)# [no] enable
tnsr(config-frr-ospf6)# disable
tnsr(config-frr-ospf6)# [no] debug (abr|asbr|flooding|interface)
tnsr(config-frr-ospf6)# [no] debug border-routers (area <area-id>|router <router-id>)
tnsr(config-frr-ospf6)# [no] debug lsa (as-external|inter-prefix|inter-router|intra-
→prefix|link|network|router|unknown) (examine|flooding|originate)
tnsr(config-frr-ospf6)# [no] debug message (dd|hello|ls-acknowledgment|ls-request|ls-
→update|unknown) (recv|send)
tnsr(config-frr-ospf6)# [no] debug neighbor [(event|state)]
tnsr(config-frr-ospf6)# [no] debug route [(inter-area|intra-area|memory|table)]
tnsr(config-frr-ospf6)# [no] debug spf (database|process|time)
tnsr(config-frr-ospf6)# [no] debug zebra [(recv|send)]
tnsr(config-frr-ospf6)# [no] interface <if-name>
tnsr(config-frr-ospf6)# [no] server vrf <vrf-name>
```

32.42 Dynamic Routing OSPF6 Server Mode

32.42.1 Entering OSPF6 Server Mode

```
tnsr(config-frr-ospf6)# server vrf <vrf-name>
tnsr(config-ospf6)#
```

32.42.2 OSPF6 Server Mode Commands

```
tnsr(config-ospf6)# [no] area <area-id>
tnsr(config-ospf6)# [no] auto-cost reference-bandwidth <bw>
tnsr(config-ospf6)# [no] distance [(external|inter-area|intra-area)] <dist>
tnsr(config-ospf6)# [no] interface <if-name> area <area-id>
tnsr(config-ospf6)# [no] log-adjacency-changes [detail]
tnsr(config-ospf6)# [no] ospf6 router-id <router-id>
tnsr(config-ospf6)# [no] redistribute
```

(continues on next page)

(continued from previous page)

```
(bgp|connected|kernel|static|table) [route-map <map>]
tnsr(config-ospf6)# [no] stub-router administrative
tnsr(config-ospf6)# [no] timers lsa min-arrival <min>
tnsr(config-ospf6)# [no] timers throttle spf (delay|initial-hold|maximum-hold) <val>
```

32.42.3 Remove OSPF6 Server Configuration

```
tnsr(config-frr-ospf6)# no server
```

32.43 Dynamic Routing OSPF6 Interface Mode

32.43.1 Enter Dynamic Routing OSPF6 Interface Mode

```
tnsr(config-frr-ospf6)# interface <if-name>
tnsr(config-ospf6-if)#
```

32.43.2 Dynamic Routing OSPF6 Interface Mode Commands

```
tnsr(config-ospf6-if)# [no] advertise prefix-list <name>
tnsr(config-ospf6-if)# [no] bfd enabled (true|false)
tnsr(config-ospf6-if)# [no] cost outgoing <outgoing-cost>
tnsr(config-ospf6-if)# [no] dead-interval <time>
tnsr(config-ospf6-if)# [no] hello-interval <interval>
tnsr(config-ospf6-if)# [no] instance-id <value>
tnsr(config-ospf6-if)# [no] mtu <value>
tnsr(config-ospf6-if)# [no] mtu-ignore
tnsr(config-ospf6-if)# [no] network (broadcast|point-to-point)
tnsr(config-ospf6-if)# [no] passive
tnsr(config-ospf6-if)# [no] priority <priority>
tnsr(config-ospf6-if)# [no] retransmit-interval <interval>
tnsr(config-ospf6-if)# [no] transmit-delay <delay>
```

32.43.3 Remove Dynamic Routing OSPF6 Interface

```
tnsr(config-ospf6)# no interface <if-name>
```

32.44 Dynamic Routing OSPF6 Area Mode

32.44.1 Enter Dynamic Routing OSPF6 Area Mode

```
tnsr(config-ospf6)# area <area-id>
tnsr(config-ospf6-area)#
```

32.44.2 Dynamic Routing OSPF6 Area Mode Commands

```
tnsr(config-ospf6-area)# range <prefix> [cost <val>|not-advertise]
tnsr(config-ospf6-area)# stub [no-summary]
```

32.44.3 Remove Dynamic Routing OSPF6 Area

```
tnsr(config-ospf6)# no area <area-id>
```

32.45 Dynamic Routing RIP Mode

32.45.1 Enter Dynamic Routing RIP Mode

```
tnsr(config)# route dynamic rip
tnsr(config-frr-rip)#
```

32.45.2 RIP Mode Commands

```
tnsr(config-frr-rip)# [no] enable
tnsr(config-frr-rip)# disable
tnsr(config-frr-rip)# [no] debug (events|zebra)
tnsr(config-frr-rip)# [no] debug packet (send|recv)
tnsr(config-frr-rip)# [no] key-chain <name>
tnsr(config-frr-rip)# [no] interface <if-name>
tnsr(config-frr-rip)# [no] server vrf <vrf-name>
```

32.46 Dynamic Routing RIP Server Mode

32.46.1 Entering RIP Server Mode

```
tnsr(config-frr-rip)# server vrf <vrf-name>
tnsr(config-rip)#
```

32.46.2 RIP Server Mode Commands

```
tnsr(config-rip)# [no] allow-ecmp
tnsr(config-rip)# [no] default-information originate
tnsr(config-rip)# [no] distance default <value>
tnsr(config-rip)# [no] distance <prefix> distance <value> [access-list <acl-name>]
tnsr(config-rip)# [no] distribution-list interface (*|<if-name>)
                        (access-list|prefix-list) (in|out) <name>
tnsr(config-rip)# [no] neighbor <ip4-address>
tnsr(config-rip)# [no] network (interface <if-name>|prefix <prefix>)
tnsr(config-rip)# [no] offset-list (*|<if-name>) (in|out) <acl-name>
tnsr(config-rip)# [no] passive-interface (default|<if-name>) [<ip4-address>]
tnsr(config-rip)# [no] redistribute (bgp|connected|kernel|ospf|static)
                        [(metric <value>|route-map <name>)]
tnsr(config-rip)# [no] route prefix <ip4-prefix>
tnsr(config-rip)# [no] route-map-filter interface (default|<if-name>) (in|out) route-map
-><name>
tnsr(config-rip)# [no] timers (garbage-collection|table-update|timeout) <value>
tnsr(config-rip)# [no] version (1|2)
```

32.46.3 Remove RIP Server Configuration

```
tnsr(config-frr-rip)# no server
```

32.47 Dynamic Routing RIP Interface Mode

32.47.1 Enter Dynamic Routing RIP Interface Mode

```
tnsr(config-rip)# interface <if-name>
tnsr(config-rip-if)#
```

32.47.2 Dynamic Routing RIP Interface Mode Commands

```
tnsr(config-rip-if)# [no] authentication key-chain
tnsr(config-rip-if)# [no] authentication mode (md5|text) [auth-length (old-ripd|rfc)]
tnsr(config-rip-if)# [no] authentication string <auth-string>
tnsr(config-rip-if)# [no] receive version (1|2|both)
tnsr(config-rip-if)# [no] send version (1|2|both)
tnsr(config-rip-if)# [no] split-horizon [poisoned-reverse]
tnsr(config-rip-if)# [no] v2-broadcast
```

32.47.3 Remove Dynamic Routing RIP Interface

```
tnsr(config-rip)# no interface <if-name>
```

32.48 Dynamic Routing RIP Key Chain Mode

32.48.1 Enter Dynamic Routing RIP Key Chain Mode

```
tnsr(config-rip)# key-chain <name>  
tnsr(config-rip-key-chain)#
```

32.48.2 Dynamic Routing RIP Key Chain Mode Commands

```
tnsr(config-rip-key-chain)# [no] key <key-id> string <key-string>
```

32.48.3 Remove Dynamic Routing RIP Key Chain

```
tnsr(config-rip)# no key-chain <name>
```

32.49 Dynamic Routing Manager Mode

32.49.1 Enter Dynamic Routing Manager Mode

```
tnsr(config)# route dynamic manager  
tnsr(config-route-dynamic-manager)#
```

32.49.2 Dynamic Routing Manager Mode Commands

```
tnsr(config-route-dynamic-manager)# [no] debug (events|fpm|nht)  
tnsr(config-route-dynamic-manager)# [no] debug kernel [msgdump [send|receive]]  
tnsr(config-route-dynamic-manager)# [no] debug packet [send|receive] [detail]  
tnsr(config-route-dynamic-manager)# [no] debug rib [detailed]  
tnsr(config-route-dynamic-manager)# [no] log file <filename> [<level>]  
tnsr(config-route-dynamic-manager)# [no] log syslog [<level>]
```

32.50 Route Table Mode

32.50.1 Enter Route Table Mode

```
tnsr(config)# route table <name>
tnsr(config-route-table)#
```

32.50.2 Route Table Mode Commands

```
tnsr(config-route-table)# [no] description <rest-of-line>
tnsr(config-route-table)# [no] id <n>
tnsr(config-route-table)# [no] route <destination-prefix>
```

32.50.3 Remove Route Table

```
tnsr(config-route-table)# no route table <name>
```

32.51 Route Table Next Hop Mode

32.51.1 Enter Route Table Next Hop Mode

```
tnsr(config-route-table)# route <destination-prefix>
tnsr(config-rttbl46-next-hop)#
```

32.51.2 Route Table Next Hop Mode Commands

```
tnsr(config-rttbl46-next-hop)# [no] description <rest-of-line>
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> via <ip46-addr>
    [<if-name>|<next-hop-table <route-table-name>>]
    [weight <multi-path-weight>]
    [resolve-via-host] [resolve-via-attached]

tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> via drop
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> via local
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> via null-send-unreach
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> via null-send-prohibit
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> classify <classify-table-name>
tnsr(config-rttbl46-next-hop)# [no] next-hop <hop-id> lookup [in] route-table <route-
↪table-name>
tnsr(config-rttbl46-next-hop)# [no] priority <admin-priority>
```

32.51.3 Remove Route Table Next Hop

```
tnsr(config-rttbl46-next-hop)# no next-hop <hop-id>
```

32.52 SPAN Mode

32.52.1 Enter SPAN Mode

```
tnsr(config)# span <if-name-src>  
tnsr(config-span)#
```

32.52.2 SPAN Mode Commands

```
tnsr(config-span)# onto <if-name-dst> (hw|l2) (rx|tx|both|disabled)
```

32.52.3 Remove Single SPAN Destination

```
tnsr(config-span)# no onto <if-name-dst> [(hw|l2)]
```

32.52.4 Remove SPAN

```
tnsr(config)# no span <if-name-src>
```

32.53 VXLAN Mode

32.53.1 Enter VXLAN Mode

```
tnsr(config)# vxlan <tunnel-name>  
tnsr(config-vxlan)#
```

32.53.2 VXLAN Mode Commands

```
tnsr(config-vxlan)# [no] destination <ip-addr>  
tnsr(config-vxlan)# [no] encapsulation (ipv4|ipv6) route-table <rt-table-name>  
tnsr(config-vxlan)# [no] instance <id>  
tnsr(config-vxlan)# [no] multicast interface <if-name>  
tnsr(config-vxlan)# [no] source <ip-addr>  
tnsr(config-vxlan)# [no] vni <u24>
```


32.53.3 Remove VXLAN Tunnel

```
tnsr(config)# no vxlan [<tunnel-name>]
```

32.54 User Authentication Configuration Mode

32.54.1 Enter User Authentication Configuration Mode

```
tnsr(config)# auth user <user-name>  
tnsr(config-user)#
```

32.54.2 User Authentication Mode Commands

```
tnsr(config-user)# [no] password <user-password>  
tnsr(config-user)# [no] user-keys <key-name>
```

32.54.3 Remove User

```
tnsr(config)# no auth user <user-name>
```

32.55 NTP Configuration Mode

32.55.1 Enter NTP Configuration Mode

```
tnsr(config)# ntp server  
tnsr(config-ntp)#
```

32.55.2 NTP Mode Commands

```
tnsr(config-ntp)# [no] disable monitor  
tnsr(config-ntp)# [no] enable monitor  
tnsr(config-ntp)# [no] driftfile <file-path>  
tnsr(config-ntp)# [no] interface sequence <seq> (drop|ignore|listen)  
                        (all|interface <if-name>|prefix <ip-prefix>)  
tnsr(config-ntp)# [no] logconfig sequence <seq> (add|delete|set)  
                        (all|clock|peer|sync|sys) (all|events|info|statistics|status)  
tnsr(config-ntp)# [no] restrict (default|<fqdn>|<ip-prefix>|source)  
tnsr(config-ntp)# [no] server (address <ip-address>|host <fqdn>)  
tnsr(config-ntp)# [no] statsdir <directory-path>  
tnsr(config-ntp)# [no] tinker panic <n-secs>  
tnsr(config-ntp)# [no] tos orphan <stratum>
```

32.55.3 Remove NTP Server

```
tnsr(config)# no ntp server
```

32.56 NTP Restrict Mode

32.56.1 Enter NTP Restrict Mode

```
tnsr(config-ntp)# restrict (default|<fqdn>|<ip-prefix>|source)
```

32.56.2 NTP Restrict Mode Commands

```
tnsr(config-ntp-restrict)# kod  
tnsr(config-ntp-restrict)# limited  
tnsr(config-ntp-restrict)# nomodify  
tnsr(config-ntp-restrict)# nopeer  
tnsr(config-ntp-restrict)# noquery  
tnsr(config-ntp-restrict)# noserve  
tnsr(config-ntp-restrict)# notrap
```

32.56.3 Remove NTP Restriction

```
tnsr(config-ntp)# no restrict (default|<fqdn>|<ip-prefix>|source)
```

32.57 NTP Upstream Server Mode

32.57.1 Enter NTP Upstream Server Mode

```
tnsr(config-ntp)# server (address <ip-address>|host <fqdn>)
```

32.57.2 NTP Upstream Server Mode Commands

```
tnsr(config-ntp-server)# iburst  
tnsr(config-ntp-server)# maxpoll <power-of-2-sec>  
tnsr(config-ntp-server)# noselect  
tnsr(config-ntp-server)# operational-mode (pool|server)  
tnsr(config-ntp-server)# prefer
```

32.57.3 Remove NTP Upstream Server

```
tnsr(config-ntp)# no server (address <ip-address>|host <fqdn>)
```

32.58 NACM Group Mode

32.58.1 Enter NACM Group Mode

```
tnsr(config)# nacm group <group-name>  
tnsr(config-nacm-group)#
```

32.58.2 NACM Group Mode Commands

```
tnsr(config-nacm-group)# [no] member <user-name>
```

32.58.3 Remove NACM Group

```
tnsr(config)# no nacm group <group-name>
```

32.59 NACM Rule-list Mode

32.59.1 Enter NACM Rule-list Mode

```
tnsr(config)# nacm rule-list <rule-list-name>  
tnsr(config-nacm-rule-list)#
```

32.59.2 NACM Rule-list Mode Commands

```
tnsr(config-nacm-rule-list)# [no] group (*|<group-name>)  
tnsr(config-nacm-rule-list)# [no] rule <rule-name>
```

32.59.3 Remove NACM Rule-list

```
tnsr(config)# no nacm rule-list <rule-list-name>
```

32.60 NACM Rule Mode

32.60.1 Enter NACM Rule Mode

```
tnsr(config-nacm-rule-list)# rule <rule-name>
tnsr(config-nacm-rule)#
```

32.60.2 NACM Rule Mode Commands

```
tnsr(config-nacm-rule)# [no] access-operations *
tnsr(config-nacm-rule)# [no] access-operations [create] [read] [update] [delete] [exec]
tnsr(config-nacm-rule)# [no] action (deny|permit)
tnsr(config-nacm-rule)# [no] module (*|<module-name>)
tnsr(config-nacm-rule)# [no] comment <rest>
tnsr(config-nacm-rule)# [no] rpc (*|<rpc-name>)
tnsr(config-nacm-rule)# [no] notification (*|<notification-name>)
tnsr(config-nacm-rule)# [no] path <node-id>
```

32.60.3 Remove NACM Rule

```
tnsr(config-nacm-rule-list)# no rule <rule-name>
```

32.61 DHCP IPv4 Server Config Mode

32.61.1 Enter DHCP IPv4 Server Mode

```
tnsr(config)# [no] dhcp4 server
tnsr(config)# dhcp4 {disable|enable}
tnsr(config)# no dhcp4 enable
tnsr(config-kea-dhcp4)#
```

32.61.2 DHCP IPv4 Server Mode Commands

```
tnsr(config-kea-dhcp4)# [no] decline-probation-period <seconds>
tnsr(config-kea-dhcp4)# [no] description <desc>
tnsr(config-kea-dhcp4)# [no] echo-client-id <boolean>
tnsr(config-kea-dhcp4)# [no] interface listen <if-name>
tnsr(config-kea-dhcp4)# [no] interface listen *
tnsr(config-kea-dhcp4)# [no] interface socket (raw|udp)
tnsr(config-kea-dhcp4)# [no] lease filename <filename>
tnsr(config-kea-dhcp4)# [no] lease lfc-interval <seconds>
tnsr(config-kea-dhcp4)# [no] lease persist <boolean>
tnsr(config-kea-dhcp4)# [no] logging <logger-name>
tnsr(config-kea-dhcp4)# [no] match-client-id <boolean>
```

(continues on next page)

(continued from previous page)

```
tnsr(config-kea-dhcp4)# [no] next-server <ipv4-address>
tnsr(config-kea-dhcp4)# [no] option <dhcp4-option>
tnsr(config-kea-dhcp4)# [no] option-def <name>
tnsr(config-kea-dhcp4)# [no] rebind-timer <seconds>
tnsr(config-kea-dhcp4)# [no] renew-timer <seconds>
tnsr(config-kea-dhcp4)# [no] valid-lifetime <seconds>
```

32.61.3 Remove DHCP IPv4 Server Configuration

```
tnsr(config)# no dhcp4 server
```

32.62 DHCP4 Subnet4 Mode

32.62.1 Enter DHCP4 Subnet4 Mode

```
tnsr(config-kea-dhcp4)# subnet <ipv4-prefix>
tnsr(config-kea-subnet4)#
```

32.62.2 DHCP4 Subnet4 Mode Commands

```
tnsr(config-kea-subnet4)# [no] id <uint32>
tnsr(config-kea-subnet4)# [no] option <dhcp4-option>
tnsr(config-kea-subnet4)# [no] pool <ipv4-prefix>|<ipv4-range>
tnsr(config-kea-subnet4)# [no] interface <if-name>
```

32.62.3 Remove DHCP4 IPv4 Subnet4 Configuration

```
tnsr(config-kea-dhcp4)# no subnet <ipv4-prefix>|<ipv4-range>
```

32.63 DHCP4 Subnet4 Pool Mode

32.63.1 Enter DHCP4 Subnet4 Pool Mode

```
tnsr(config-kea-subnet4)# pool <ipv4-prefix>|<ipv4-range>
tnsr(config-kea-subnet4-pool)#
```

32.63.2 DHCP4 Subnet4 Pool Mode Commands

```
tnsr(config-kea-subnet4-pool)# [no] option <dhcp4-option>
```

32.63.3 Remove DHCP4 IPv4 Subnet4 Pool

```
tnsr(config-kea-subnet4)# no pool <ipv4-prefix>|<ipv4-range>
```

32.64 DHCP4 Subnet4 Reservation Mode

32.64.1 Enter DHCP4 Subnet4 Reservation Mode

```
tnsr(config-kea-subnet4)# reservation <ipv4-address>  
tnsr(config-kea-subnet4-reservation)#
```

32.64.2 DHCP4 Subnet4 Reservation Mode Commands

```
tnsr(config-kea-subnet4-reservation)# [no] hostname <hostname>  
tnsr(config-kea-subnet4-reservation)# mac-address <mac-address>  
tnsr(config-kea-subnet4-reservation)# [no] option <dhcp4-option>
```

32.64.3 Remove DHCP4 IPv4 Subnet4 Reservation

```
tnsr(config-kea-subnet4)# no reservation <ipv4-address>
```

32.65 Kea DHCP4, Subnet4, Pool, or Reservation Option Mode

32.65.1 Enter DHCP4 Option Mode

```
tnsr(config-kea-*)# option <dhcp4-option|option-def-nam>  
tnsr(config-kea-*-opt)#
```

32.65.2 DHCP4 Option Mode Commands

```
tnsr(config-kea-*-opt)# [no] always-send <boolean>  
tnsr(config-kea-*-opt)# [no] csv-format <boolean>  
tnsr(config-kea-*-opt)# [no] data <option-data>  
tnsr(config-kea-*-opt)# [no] space <space-name>
```

32.65.3 Remove DHCP4 Option Configuration

```
tnsr(config-kea-*)# no option <dhcp4-option>
```

32.66 Kea DHCP4 Option Definition Mode

32.66.1 Enter DHCP4 Option Definition Mode

```
tnsr(config-kea-dhcp4)# option-def <name>  
tnsr(config-kea-dhcp4-optdef)#
```

32.66.2 DHCP4 Option Definition Mode Commands

```
tnsr(config-kea-dhcp4-optdef)# array <array-val>  
tnsr(config-kea-dhcp4-optdef)# code <code-val>  
tnsr(config-kea-dhcp4-optdef)# encapsulate <encap>  
tnsr(config-kea-dhcp4-optdef)# record-types <types>  
tnsr(config-kea-dhcp4-optdef)# space <space-name>  
tnsr(config-kea-dhcp4-optdef)# type <type>
```

32.66.3 Remove DHCP4 Option Definition

```
tnsr(config-kea-dhcp4)# no option-def <name>
```

32.67 DHCP4 Log Mode

32.67.1 Enter DHCP4 Log Mode

```
tnsr(config-kea-dhcp4)# logging <logger-name>  
tnsr(config-kea-dhcp4-log)#
```

32.67.2 DHCP4 Log Mode Commands

```
tnsr(config-kea-dhcp4-log)# [no] debug-level <level>  
tnsr(config-kea-dhcp4-log)# [no] output <location>  
tnsr(config-kea-dhcp4-log)# [no] severity (debug|error|fatal|info|warn)
```

32.67.3 Remove DHCP4 Log Configuration

```
tnsr(config-kea-dhcp4)# no logging <logger-name>
```

32.68 DHCP4 Log Output Mode

32.68.1 Enter DHCP4 Log Output Mode

```
tnsr(config-kea-dhcp4-log)# output <location>
tnsr(config-kea-dhcp4-log-out)#
```

32.68.2 DHCP4 Log Output Mode Commands

```
tnsr(config-kea-dhcp4-log-out)# [no] flush (false|true)
tnsr(config-kea-dhcp4-log-out)# [no] maxsize <size>
tnsr(config-kea-dhcp4-log-out)# [no] maxver <rotate>
```

32.68.3 Remove DHCP4 Log Output Configuration

```
tnsr(config-kea-dhcp4-log)# no output [<location>]
```

32.69 Unbound Server Mode

32.69.1 Enter Unbound Server Mode

```
tnsr(config)# unbound server
tnsr(config-unbound)#
```

32.69.2 Unbound Server Mode Commands

```
tnsr(config-unbound)# [no] caps-for-id
tnsr(config-unbound)# [no] do-ip4
tnsr(config-unbound)# [no] do-ip6
tnsr(config-unbound)# [no] do-tcp
tnsr(config-unbound)# [no] do-udp
tnsr(config-unbound)# [no] edns reassembly size <s>
tnsr(config-unbound)# [no] forward-zone <zone-name>
tnsr(config-unbound)# [no] harden (dnssec-stripped|glue)
tnsr(config-unbound)# [no] hide (version|identity)
tnsr(config-unbound)# [no] host cache (num-hosts <num> | slabs <s> | ttl <t>)
tnsr(config-unbound)# [no] interface <ip4-address>
tnsr(config-unbound)# [no] jostle timeout <t>
```

(continues on next page)

(continued from previous page)

```
tnsr(config-unbound)# [no] key cache slabs <s>
tnsr(config-unbound)# [no] key prefetch
tnsr(config-unbound)# [no] message cache (size <s> | slabs <s>)
tnsr(config-unbound)# [no] message prefetch
tnsr(config-unbound)# [no] outgoing-interface <ip-address>
tnsr(config-unbound)# [no] port outgoing range <n>
tnsr(config-unbound)# [no] rrset cache (size <s> | slabs <s>)
tnsr(config-unbound)# [no] rrset-message cache ttl (minimum <min> | maximum <max>)
tnsr(config-unbound)# [no] serve-expired
tnsr(config-unbound)# [no] socket receive-buffer size <s>
tnsr(config-unbound)# [no] tcp buffers (incoming <n> | outgoing <n>)
tnsr(config-unbound)# [no] thread (num-queries <n> | num-threads <n> |
                                unwanted-reply-threshold <threshold>)
tnsr(config-unbound)# [no] verbosity <level-0..5>
```

32.69.3 Remove Unbound Server

```
tnsr(config)# no unbound server
```

32.70 Unbound Forward-Zone Mode

32.70.1 Enter Unbound Forward-Zone Mode

```
tnsr(config-unbound)# forward-zone <zone-name>
tnsr(config-unbound-fwd-zone)#
```

32.70.2 Unbound Forward-Zone Mode Commands

```
tnsr(config-unbound-fwd-zone)# [no] forward-first
tnsr(config-unbound-fwd-zone)# [no] forward-tls-upstream
tnsr(config-unbound-fwd-zone)# [no] nameserver address <ip-address> [port <port>] [auth-
→name <name>]
tnsr(config-unbound-fwd-zone)# [no] nameserver host <host-name>
```

32.70.3 Remove Unbound Forward-Zone

```
tnsr(config-unbound)# no forward-zone <zone-name>
```

32.71 Subif Mode

32.71.1 Enter Subif Mode

```
tnsr(config)# interface subif <if-name> <subid>
tnsr(config-subif)#
```

32.71.2 Subif Mode Commands

```
tnsr(config-subif)# default
tnsr(config-subif)# dot1q (<outer-vlan-id>|any)
tnsr(config-subif)# exact-match
tnsr(config-subif)# inner-dot1q (inner-vlan-id|any)
tnsr(config-subif)# outer-dot1ad (<outer-vlan-id>|any)
tnsr(config-subif)# outer-dot1q (<outer-vlan-id>|any)
```

32.71.3 Remove Subif

```
tnsr(config)# no interface subif <if-name> <subid>
```

32.72 Bond Mode

32.72.1 Enter Bond Mode

```
tnsr(config)# interface bond <instance>
tnsr(config-bond)#
```

32.72.2 Bond Mode Commands

```
tnsr(config-bond)# [no] load-balance (12|123|134)
tnsr(config-bond)# [no] mode (round-robin|active-backup|xor|broadcast|lacp)
tnsr(config-bond)# [no] mac-address <mac-address>
```

32.72.3 Remove Bond

```
tnsr(config)# no interface bond <instance>
```

32.73 Host ACL Mode

32.73.1 Enter Host ACL Mode

```
tnsr(config)# host acl <acl-name>
tnsr(config-host-acl)#
```

32.73.2 Host ACL Mode Commands

```
tnsr(config-host-acl)# [no] description <text>
tnsr(config-host-acl)# [no] rule <rule-seq>
tnsr(config-host-acl)# [no] sequence <acl-seq>
```

32.73.3 Remove Host ACL

```
tnsr(config)# no host acl <acl-name>
```

32.74 Host ACL Rule Mode

32.74.1 Enter Host ACL Rule Mode

```
tnsr(config-host-acl)# rule <rule-seq>
tnsr(config-host-acl-rule)#
```

32.74.2 Host ACL Rule Mode Commands

```
tnsr(config-host-acl-rule)# [no] action (deny|permit)
tnsr(config-host-acl-rule)# [no] description <text>
tnsr(config-host-acl-rule)# [no] match input-interface <host-interface>
tnsr(config-host-acl-rule)# [no] match ip address (source|destination) <prefix>
tnsr(config-host-acl-rule)# [no] match ip icmp type
                                (address-mask-reply|address-mask-request|destination-
↪ unreachable|
                                echo-reply|echo-request|info-reply|info-request|parameter-
↪ problem|
                                redirect|router-advertisement|router-solicitation|source-
↪ quench|
                                time-exceeded|timestamp-reply|timestamp-request) [code
↪ <code>]
tnsr(config-host-acl-rule)# [no] match ip icmpv6 type
                                (destination-unreachable|echo-reply|echo-request|
                                mld-listener-query|mld-listener-reduction|mld-listener-
↪ report|
                                nd-neighbor-advert|nd-neighbor-solicit|nd-redirect|
```

(continues on next page)

(continued from previous page)

```

nd-router-advert|nd-router-solicit|packet-too-big|
parameter-problem|router-renumbering|time-exceeded) [code
↪<code>]
tnsr(config-host-acl-rule)# [no] match ip port (source|destination) <port-num>
tnsr(config-host-acl-rule)# [no] match ip port (source|destination) range start <low-
↪port-num>
[end <high-port-num>]
tnsr(config-host-acl-rule)# [no] match ip protocol (icmp|tcp|udp|<proto-number>)
tnsr(config-host-acl-rule)# [no] match ip tcp flag (ack|cwr|ece|fin|psh|rst|syn|urg)
tnsr(config-host-acl-rule)# [no] match ip version (4|6)
tnsr(config-host-acl-rule)# [no] match mac address (source|destination) <mac>

```

32.74.3 Remove Host ACL Rule

```
tnsr(config-host-acl)# no rule <rule-seq>
```

32.75 VRRP Mode

32.75.1 Enter VRRP Mode

IPv4:

```
tnsr(config-interface)# ip vrrp-virtual-router <vrid>
tnsr(config-vrrp4)#
```

IPv6:

```
tnsr(config-interface)# ipv6 vrrp-virtual-router <vrid>
tnsr(config-vrrp6)#
```

32.75.2 VRRP Mode Commands

```

tnsr(config-vrrp46)# [no] accept-mode (false|true)
tnsr(config-vrrp46)# [no] preempt (false|true)
tnsr(config-vrrp46)# [no] priority <priority>
tnsr(config-vrrp46)# [no] track-interface <interface> priority-decrement <value>
tnsr(config-vrrp46)# [no] v3-advertisement-interval <advertise-interval-centi-sec>
tnsr(config-vrrp46)# [no] virtual-address <ipv4-address>

```

32.75.3 Remove VRRP

IPv4:

```
tnsr(config-interface)# no ip vrrp-virtual-router [<vrid>]
```

IPv6:

```
tnsr(config-interface)# no ipv6 vrrp-virtual-router [<vrid>]
```

32.76 DNS Resolver Mode

32.76.1 Enter DNS Resolver Mode

```
tnsr(config)# system dns-resolver (dataplane|host)
tnsr(config-dns-resolver)#
```

32.76.2 DNS Resolver Mode Commands

```
tnsr(config-dns-resolver)# [no] search <domain>
tnsr(config-dns-resolver)# [no] server <name> <ip-addr>
```

32.76.3 Remove DNS Resolver Configuration

```
tnsr(config)# no system dns-resolver (dataplane|host)
```

32.77 IPFIX Exporter Mode

32.77.1 Enter IPFIX Exporter Mode

```
tnsr(config)# ipfix exporter <name>
tnsr(config-ipfix-exporter)#
```

32.77.2 IPFIX Exporter Mode Commands

```
tnsr(config-ipfix-exporter)# [no] checksum (true|false)
tnsr(config-ipfix-exporter)# [no] collector <ip4-addr> port <port>
tnsr(config-ipfix-exporter)# [no] pmtu <mtu:68-1450>
tnsr(config-ipfix-exporter)# [no] source <ip4-addr>
tnsr(config-ipfix-exporter)# [no] template-interval <sec>
tnsr(config-ipfix-exporter)# [no] vrf <vrf-name>
```

32.77.3 Remove IPFIX Exporter Configuration

```
tnsr(config)# no ipfix exporter <name>
```

32.78 IPFIX Observation Point Mode

32.78.1 Enter IPFIX Observation Point Mode

```
tnsr(config)# ipfix observation-point <name>  
tnsr(config-ipfix-obs-pt)#
```

32.78.2 IPFIX Observation Point Mode Commands

```
tnsr(config-ipfix-obs-pt)# direction (both|egress|ingress)  
tnsr(config-ipfix-obs-pt)# interface <if-name>
```

32.78.3 Remove IPFIX Observation Point Configuration

```
tnsr(config)# no ipfix observation-point <name>
```

32.79 IPFIX Selection Process Mode

32.79.1 Enter IPFIX Selection Process Mode

```
tnsr(config)# ipfix selection-process <name>  
tnsr(config-ipfix-sel-proc)#
```

32.79.2 IPFIX Selection Process Mode Commands

```
tnsr(config-ipfix-sel-proc)# selector (all|ipv4|ipv6)
```

32.79.3 Remove IPFIX Selection Process Configuration

```
tnsr(config)# no ipfix selection-process <name>
```

32.80 RESTCONF mode

32.80.1 Enter RESTCONF mode

```
tnsr(config)# restconf
tnsr(config-restconf)#
```

32.80.2 RESTCONF Mode Commands

```
tnsr(config-restconf)# enable (true|false)
tnsr(config-restconf)# global authentication-type (client-certificate|user)
tnsr(config-restconf)# global server-ca-cert-path <ca-name>
tnsr(config-restconf)# global server-certificate <cert-name>
tnsr(config-restconf)# global server-key <key-name>
tnsr(config-restconf)# server (host|dataplane) <ip-address> <port> (true|false)
```

32.81 WireGuard Mode

32.81.1 Enter WireGuard Mode

```
tnsr(config)# interface wireguard <instance>
tnsr(config-wireguard)#
```

32.81.2 WireGuard Mode Commands

```
tnsr(config-wireguard)# description <desc>
tnsr(config-wireguard)# peer <peer-id>
tnsr(config-wireguard)# port <port-value>
tnsr(config-wireguard)# private-key base64 <key>
tnsr(config-wireguard)# private-key generate
tnsr(config-wireguard)# source-address <ip-addr>
```

32.82 WireGuard Peer Mode

32.82.1 Enter WireGuard Peer Mode

```
tnsr(config-wireguard)# peer <peer-id>
tnsr(config-wireguard-peer)#
```

32.82.2 WireGuard Peer Mode Commands

```
tnsr(config-wireguard-peer)# allowed-prefix <prefix>
tnsr(config-wireguard-peer)# description <desc>
tnsr(config-wireguard-peer)# endpoint-address <endpoint-addr>
tnsr(config-wireguard-peer)# keep-alive <interval>
tnsr(config-wireguard-peer)# public-key base64 <key>
tnsr(config-wireguard-peer)# route-table <table-name>
```

32.83 Tunnel Next Hop Mode

32.83.1 Enter Tunnel Next Hop Mode

```
tnsr(config)# [no] tunnel next-hops <interface>
```

32.83.2 Tunnel Next Hop Mode Commands

```
tnsr(config-tunnel-nh-if)# [no] ipv4-tunnel-destination <inner-address> ipv4-next-hop-
↪address <outer-address>
tnsr(config-tunnel-nh-if)# [no] ipv6-tunnel-destination <inner-address> ipv6-next-hop-
↪address <outer-address>
```


API ENDPOINTS

In addition to the CLI, there are a variety of ways to configure TNSR, including a RESTful API.

33.1 YANG Data Models

The sets of functions and procedures used to manipulate the TNSR configuration are generated from the [RFC 7950](#) data models defined in the [TNSR YANG models](#).

33.2 RESTCONF API

TNSR can be controlled via a [RESTCONF API](#). Reference material, code examples, and more on the RESTCONF API may be found in the [TNSR API Documentation](#).

To activate and configure the RESTCONF service on TNSR, see [RESTCONF Server](#).

See also:

For a complete RESTCONF service configuration example, see [RESTCONF Service Setup with Certificate-Based Authentication and NACM](#).

For information about troubleshooting errors from the RESTCONF service, see [RESTCONF API Errors](#).

NETGATE TNSR RELEASES

- *TNSR 22.06 Release Notes*
- *TNSR 22.02 Release Notes*
- *TNSR 21.07 Release Notes*
 - *TNSR 21.07.1 Release Notes*
- *TNSR 21.03 Release Notes*
 - *TNSR 21.03.1 Release Notes*
- *TNSR 20.10 Release Notes*
 - *TNSR 20.10.1 Release Notes*
- *TNSR 20.08 Release Notes*
- *TNSR 20.02 Release Notes*
 - *TNSR 20.02.1 Release Notes*
 - *TNSR 20.02.2 Release Notes*
- *TNSR 19.12 Release Notes*
- *TNSR 19.08 Release Notes*
- *TNSR 19.05 Release Notes*
- *TNSR 19.02 Release Notes*
 - *TNSR 19.02.1 Release Notes*
- *TNSR 18.11 Release Notes*
- *TNSR 18.08 Release Notes*
- *TNSR 18.05 Release Notes*
- *TNSR 0.1.0 Release Notes*

34.1 TNSR 22.06 Release Notes

34.1.1 About the TNSR 22.06 Release

This is a regularly scheduled TNSR software release including new features and bug fixes.

Upgrade Notes

For the update to work properly, the owner of the TNSR update certificate may need to be manually changed to the `_apt` user.

See *Certificate File Permissions* for details.

General

Warning: Any interface that will contain an IPv6 address **must** have an MTU of 1280 or higher. This includes both the default MTU and MTU values set on interfaces directly. Currently input validation does not prevent the user from configuring a smaller MTU, but doing so will cause IPv6 to fail.

- Added support for *WireGuard* VPN tunnel interfaces.

Note: At this time WireGuard only supports static address configurations with a single peer per tunnel. This limits it to primarily typical site-to-site connections and not mobile/remote access style use cases.

- Added IPFIX flow reporting support, which allows monitoring general traffic flows. Previously IPFIX could only monitor NAT translations.
- TNSR software no longer automatically whitelists interfaces in the dataplane.

Warning: All interfaces must now manually be defined using `dataplane dpdk dev <id> network` as described in *Setup NICs in Dataplane*.

- The `show route` CLI output has been optimized in several ways in this release, including:
 - The output is now sorted numerically by address instead of using a string comparison. This differs from previous releases but results in a more logical ordering of entries. For example, in previous versions route address components would be ordered “14, 17, 2, 25” where now they are “2, 14, 17, 25”.
 - Rather than gathering all route content and paginating the output, the function now only fetches a page worth of data at a time. This greatly increases the speed of displaying route data when the route table contains a large volume of routes.
 - The cached route data for display is updated for the first page, but not for later pages to ensure the data is consistent for route tables managed by dynamic routing functions.
- IPsec tunnels can now be enabled or disabled explicitly without removing the other IPsec configuration. Existing tunnels are automatically enabled during the upgrade process, but new tunnels are disabled by default.

See *Enable/Disable IPsec Tunnels* for details.

Changes

Changes in TNSR software version 22.06

CLI

- Added: Use paged version of `show route` by default [7535]
- Fixed: CLI command for disabled configuration history is not generated [7554]
- Fixed: Output of `show route` does not account for wrapped lines when paginating based on display size [7593]
- Fixed: CLI route table mode only offers IPv4 prefix choices in a new table [7924]

DHCP Server

- Changed: Update kea from upstream [7057]
- Fixed: Cannot show `keactrl` configuration file from TNSR [8064]

DNS

- Added: Support multiple address entries for a hostname in DNS local zone configuration [1385]
- Fixed: Multiple boolean attributes in Unbound cannot be disabled, use inconsistent CLI command forms [7749]

Dataplane

- Changed: Update VPP from upstream [7545]
- Changed: Remove automatic whitelisting of interface devices in dataplane `startup.conf` [7588]
- Changed: Remove support for deprecated DPDK settings [7629]
- Fixed: Memory leak in IPFIX leads to VPP crash dump SIGSEGV then ABRT [7810]
- Added: Allow dataplane to use all available system cores [7822]
- Fixed: Cannot start VPP with more than four workers [8210]

General

- Changed: Add package logs to `tnsr-diag` archive [7667]

Host

- Added: A `dp-exec` equivalent to reach the host namespace from the dataplane namespace [5024]
- Fixed: User `dns-resolver` configuration values for host namespace in `resolv.conf` are overwritten by `systemd-resolved` on Ubuntu [7517]

IPsec

- Fixed: IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Added: Enable/Disable option for IPsec tunnels [3720]
- Fixed: Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]
- Changed: `davici`: Update to 1.4 [7577]
- Changed: Update `strongswan` to 5.9.5 [7701]

Interfaces

- Fixed: Most SNMP interface counters for received traffic return zero on LACP bonds [7407]
- Fixed: Duplex is not reported correctly in TNSR 22.02 [7819]

NAT

- Fixed: CLI `show nat sessions` command displays no output in some cases [7685]
- Fixed: VPP crashes during NAT handoff between worker threads [8150]

Operating System

- Changed: Update to Ubuntu 20.04.4 LTS [7591]
- Changed: Install HWE kernel to KVM, VMware images [7710]
- Added: Allow coredumps larger than 2GB by default [7959]

PKI

- Fixed: Deprecate support for generating certificates with insecure MD5 and SHA1 hashes [2403]
- Added: Add support for Subject Alternative Name (SAN) entries in PKI signing requests [4748]
- Fixed: PKI certificate and key entry fails if content has leading whitespace [6800]

Routing

- Added: Order IP routes by the numeric value of the prefix address rather than the string representation [4340]
- Added: Include route table description in `show route` output [4731]
- Fixed: Invalid IPv6 routes are shown when searching by prefix [5033]
- Fixed: TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- Fixed: Unable to establish eBGP connection via NAT outside interface in endpoint-independent mode [7268]
- Added: Display a flag to indicate that a route path link is down in `show route` output [7534]

SNMP / IPFIX / Prometheus

- Fixed: Prometheus exporter crashes with SIGABRT when the FIB contains a large number of routes [6973]
- Added: IPfix flow reporting [7683]

Static Routes

- Fixed: Static routes resolved via subinterfaces do not re-appear after disabling/enabling related main interface [7604]

Updates

- Fixed: `netgate-dpdk-kmods` package for interface driver modules may require manual reinstall after kernel upgrade [5353]

clixon

- Fixed: Cannot interrupt applications running under dataplane/host shell in CLI [7729]
- Fixed: Error when re-entering `rest` description expansions with multiple words [7751]
- Fixed: Problem processing xpath with multiple `="%s"` clauses [7784]
- Fixed: Using `unique` in YANG validation is not working properly [7786]

Known Issues

Known Issues in TNSR software version 22.06

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]

BFD

- Unable to setup delayed option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- TNSR cannot commit configuration candidate database loaded from a file if it contains a BFD session for an interface that does not exist [7150]

Bridge

- Bridge domain ARP entries cannot be displayed via CLI [2378]
- Bridge domain ARP entries cannot be removed via CLI [2380]
- Bridge domain mac-age value cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups are not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup configuration database does not fully remove the active configuration [3723]
- Specifying interface to traceroute requires root privileges [5376]
- Input validation of unbound message cache slabs value does not work as expected [5472]
- CLI and RESTCONF behavior are different for no bgp default ipv4-unicast [6303]
- RIP information does not contain a legend for kernel routes [7230]
- Value of “Last Used” field in output of show nat sessions verbose is expressed in seconds since VPP startup [8277]

DHCP Client

- Default gateway received via DHCP is not placed to the routing table when the interface uses a custom VRF [7254]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 Kea `config-file` output shows VPP TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to setup a custom DHCP option with certain data types in the record [5299]
- DHCP daemon does not generate coredumps [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- Cannot create `rx-queues` for interfaces on KVM and VirtualBox [3674]
- Static routes with an interface as the next hop using `resolve-via-attached` appear to break dataplane ARP [5259]
- TNSR on AWS does not pass traffic when using the `uio_pci_generic` driver [7015]
- Multiple large routing table insertions crash VPP [8286]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to specify TNSR interface as a source in `ping` and `traceroute` commands via REST [5605]
- Startup entry is not created in configuration history log [7400]
- Cannot commit a candidate configuration database if a `tap` interface is present [7458]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]
- `dns-resolver` configured for host namespace remains in system after removing from TNSR [7830]
- `dns-resolver` configuration values for host namespace remain in `resolv.conf` after restarting TNSR [7975]

IPsec

- Buffer exhaustion with TCP/UDP when using c62x QAT device prevents traffic from passing [6711]
- CLI requires setting integrity algorithm on IPsec tunnel using AES-GCM when a PRF should be sufficient [6926]
- IPsec daemon does not support using non-default VRF entries [7266]
- Cannot disable IPsec `dpd-interval` option [8012]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts before the installation can complete [3182]
- TNSR installer fails if interfaces are configured with IP addresses but have no Internet connectivity [7807]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Unable to create subinterface with `dot1q` any tag [2652]
- Subinterface settings aren't applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- Reassembly timeout is not working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when `max-reassemblies` is set to 1 [3384]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Errors indicate TNSR is attempting to assign a MAC address to IPsec `ipipX` interfaces [6285]
- Link state in X553 1GbE card does not change to down when disabling interface in TNSR [6849]
- Interfaces using KVM virtio drivers use names which do not match link speed [6909]
- L3 packets can be sent from bridged interfaces [6975]
- Unable to setup DPDK `uio_pci_generic` driver on XG-1541 [6981]
- Unable to setup DPDK `vfio-pci` driver on XG-1537 [6985]
- Unable to setup DPDK `vfio-pci` driver on various environments [6989]
- TAP instance `tcpdump` method only captures received packets [7137]
- Unable to delete a non-existent multicast-interface from VXLAN tunnel configuration [7278]
- Pings between IPIP interfaces become intermittent when BGP is applied to them [7392]
- Interface IP address is shown in IPv4 route table instead of associated subnet [7511]
- Setting a new MTU value does not affect the MRU for IPv6 packets [8245]

- Validation does not prevent setting interface MTU below 1280 when an IPv6 address is configured [8246]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- Full IP reassembly does not work with MAP [3386]
- MAP-T adds bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on any port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Packets not destined to a NAT pool are dropped when NAT simple mode is configured with out2in-dpo option [4927]
- Full IPv4 reassembly doesn't work with NAT endpoint-independent mode [5476]
- Cannot increase NAT Sessions per thread past ~1e6 [6550]
- Dataplane SIGSEGV crash and backtrace when exceeding NAT session limit [6551]
- Expired NAT sessions become active again when increasing the timeout value [7090]
- NAT sessions do not expire in endpoint-independent mode [7098]
- Cannot commit a clean candidate configuration database if NAT static mapping is configured [7286]
- Unable to establish NAT hairpin connection [8014]
- NAT in endpoint-dependent mode drops packets when it cannot identify the correct worker thread [8262]

NTP

- NTP does not properly handle IPv6 restrictions [4626]
- Delay in CLI display of NTP configuration when NTP has `noquery` set [6818]
- Interfaces in the TNSR NTP configuration are not validated when generating the NTP daemon configuration [7153]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]
- RESTConf `route-state` response does not contain actual state data [7115]
- RESTConf dataplane service does not work on interfaces in a non-default VRF [7265]
- History version count does not match the count of REST configuration requests if they are sent without a delay [7440]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- `ttl-security hops` value can be set when `ebgp-multihop` is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when `route-server-client` option is configured [2940]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]

- Unable to delete OSPF3 config for an interface [3481]
- Change made to a prefix-list used in a OSPF3 route-map doesn't affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Reverting to the startup configuration doesn't restore packet forwarding for BGP over IPsec prefixes [5321]
- RIP route-map-filter option does not filter routes [5910]
- Output of `show route` takes about a minute to begin displaying very large route tables (~1,000,000 routes) [6380]
- Unable to disable IPv4 AF without BGP service restart [6393]
- BGP failover logs "Failed to delete neighbor" error from `linux-cp` [6400]
- OSPF virtual-link authentication does not work [6601]
- Unable to remove OSPF virtual-link configuration [6962]
- OSPF can announce interfaces from other VRFs on initial configuration [7002]
- Cannot add a static recursive route [7010]
- VPP crashes on applying custom VRF to loopback interface used in OSPF [7056]
- Creating route-map, prefix-list, or access-list entries takes longer than expected [7068]
- Cannot disable logging of adjacency changes for OSPF6 if detail option is set [7097]
- Routes that exactly overlap an interface link route are accepted by CLI but are problematic [7101]
- OSPF neighbor adjacency is established in wrong VRF in VirtualBox [7144]
- Interfaces in the TNSR RIP configuration are not validated when generating the FRR RIP daemon configuration [7155]
- Interfaces in TNSR route-map entries are not validated when generating the FRR daemon configurations [7156]
- Interfaces in the TNSR OSPF configuration are not validated when generating the FRR OSPF daemon configuration [7177]
- Interfaces in the TNSR BGP configuration are not validated when generating the FRR BGP daemon configuration [7218]
- Dynamic routing protocols lose static routes after link they resolve through goes down and then comes up [7357]
- OSPF logging for some options does not work if logging level is set explicitly [7411]
- BGP debug option `updates in <peer>` does not filter messages for selected peer [7476]
- BGP session does not become active after interface goes down and recovers [7501]
- OSPF6 continues to redistribute connected/kernel routes resolved via interface with linkdown status [7624]
- BGP address family neighbor option `maximum-prefix restart` does not work correctly [7709]
- Malfunction of BGP process after entering `maximum-prefix restart` without the basic `maximum-prefix limit` command [7748]
- OSPF6 does not advertise loopback address to another area if the loopback is configured first [7757]

- Cannot set BGP `unsuppress-map` option for IPv6 neighbor [7760]
- Extended BGP community lists do not work as expected [7772]
- Routes remain in table after interface with VRRP configured is marked down until dataplane is restarted [7790]
- OSPF stops working after configuring `mtu-ignore` option on an interface [8085]
- RPC error message when using `exact prefix match` in `show route table` command for non-existent route [8088]
- Routes do not match by `route-map` if match criteria is set to `ip next-hop ...` [8148]

SNMP / IPFIX / Prometheus

- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- SNMP does not work on interfaces in a non-default VRF [7261]

SPAN

- Span config disappears/appears when repeatedly restarting dataplane [6526]
- Incorrect error message when requesting SPAN info from a missing interface [7209]
- SPAN mirroring can not be disabled [7560]
- SPAN does not work correctly for outbound packets on VLAN subinterface [7801]

Static Routes

- Static route description is not showing up in `show` commands or REST state data [5478]
- Static route overwrites kernel route in the operating system routing table [7215]
- Transit traffic goes to an interface with inactive link when there is another (active) path [8041]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]
- VxLAN with multicast destination does not pass traffic [6491]
- GRE interface configuration remains in running config after changing GRE tunnel ID [7050]
- Configuring option `route-table` in a WireGuard peer does not affect `next-hop` lookup of the endpoint address [8070]
- Only the first peer in a WireGuard instance functions properly [8106]
- VPP processes packets received on disabled tunnel interfaces [8111]
- Incorrect UDP checksum of IPv6 WireGuard packets [8163]
- WireGuard tunnel interfaces with incorrect tunnel next-hops ping each other [8256]

clixon

- log_upgrade does not print cxobj paths correctly in tnsr-upgrade.log [4747]
- clixon_backend exhausts memory while displaying high amount of routes [5226]
- Configuration upgrade does not run when loading configuration via history [6968]
- Unable to set up a password that starts and finishes with a double quotation mark [7571]
- Unable to set up a password that contains a backslash symbol [7572]

34.2 TNSR 22.02 Release Notes

34.2.1 About The TNSR 22.02 Release

This is a regularly scheduled TNSR release including new features and bug fixes.

Operating System Change

Due to major changes in the development, support, and licensing models of CentOS 8 and RHEL 8, TNSR 22.02 has been re-engineered to run under an Ubuntu Linux LTS release. Currently this is Ubuntu Server 20.04.

TNSR only supports Ubuntu as of TNSR 22.02.

Migrating from TNSR on CentOS to TNSR on Ubuntu requires backing up the TNSR configuration, reinstalling using Ubuntu-based installation media, and then restoring the configuration and related files. In most cases the TNSR configuration will work as-is without adjustments when moving from one base to the other.

Warning: Ubuntu 20.04 uses a Linux 5.x kernel by default where CentOS used a 3.x or 4.x kernel depending on the version. As such, virtual environments such as KVM, ESXi, Proxmox, and so on may require adjusting guest OS parameters to reflect the change in base OS type and/or kernel version.

I40E VRRP Source Pruning Requirement

Devices participating in VRRP on TNSR which use the I40E poll mode driver must have source pruning manually disabled. These interfaces include members of the Intel X710/XL710 Family. On previous versions of TNSR this was handled automatically, however, the upstream dataplane behavior changed since the previous release.

The commands to disable source pruning are not present until the router is running TNSR software version 22.02. Thus, the configuration changes must be performed after an upgrade to, or fresh installation of, TNSR software version 22.02.

For details on how to disable source pruning, see [Disable Source Pruning](#).

General

- This version adds new validation on DHCP server option definition record types and data. During the upgrade process TNSR attempts to make existing invalid entries conform to the new constraints, but certain combinations of existing invalid options may require manual intervention.

To avoid potential problems with upgrading DHCP option type definition lists, ensure they are less than 63 characters in length before upgrading. Alternately, consider removing DHCP option type definitions and data before upgrade and then add them back after completing the upgrade.

If the DHCP server process is not running after upgrading to TNSR software version 22.02, manually inspect the DHCP option definitions and correct any remaining inconsistencies in record types and data.

Changes

ACLs

- Fixed: ACLs applied to a bridged loopback interface do not block traffic [6248]

BFD

- Fixed: Bidirectional Forwarding Detection sessions spontaneously vanish [5313]
- Fixed: BFD `desired-min-tx` option does not work until the dataplane is restarted [6953]
- Fixed: BFD `detect-multiplier` is reset after setting other options on a running session [6955]
- Fixed: BFD key change requires dataplane restart to activate [7007]

CLI

- Fixed: Bridge domain configuration `rewrite` parameter does not work [6613]
- Fixed: Generated CLI commands contain `nacm enable` command at the beginning [6785]
- Changed: Fix typo in NACM `CLISPEC` command [6824]
- Fixed: Interrupt after running ping causes CLI to exit [6882]
- Fixed: Wrong CLI commands generated for NACM `access-operations` [6967]
- Changed: Change CLI from using CDATA tags to standard XML escaping [7089]
- Added: Display local routes for interface addresses in `show route` output [7282]

DHCP Server

- Changed: Unable to show Kea leases when the DHCP lease database is large [6870]
- Fixed: Make leaf “severity” mandatory in Kea logging YANG [6896]
- Fixed: Kea DHCP4 daemon opens stderr and leaves it open [6897]
- Changed: Refactor DHCP tests slightly [6917]
- Fixed: Unable to apply just created a custom DHCP option without exiting from DHCP server configuration context [6923]

- Fixed: Can change DHCP custom option type to one incompatible with the configured value [6941]
- Fixed: Can delete DHCP custom option definition without deletion of configured its option data [6942]
- Fixed: CLI reject attempts to apply DHCP option with empty data [6944]
- Fixed: Unable to redefine DHCP server options with a single CLI transaction [6945]
- Fixed: Kea fails to validate option-data inside of subnet4 and subnet4/pools [6948]
- Fixed: DHCP Server sometimes can't bind to a properly configured interface [6958]
- Fixed: Crash in `clixon-backend` when DHCP option configuration contains invalid data [6969]
- Fixed: DHCP server sends incorrect data for options defined as `tuple` type [6970]
- Fixed: DHCP options can be deleted when used by subnet/pool if there are multiple subnets/pools [7027]

Dataplane

- Fixed: VPP service does not start if an interface name uses a reserved keyword [3234]
- Changed: Resynchronize VPP `linux-nl` with kernel after netlink socket overflow [6630]
- Changed: TNSR 22.02 VPP update [6784]
- Added: Add support for DPDK per-device `devargs` in VPP `startup.conf` [7032]
- Fixed: Remove dataplane scheduler policy and priority commands as they are not compatible with the Ubuntu kernel [7298]

General

- Added: Configuration rollback timer to automatically revert potentially disruptive changes [2161]
- Added: Configuration database history additional features [6608]
- Changed: Improve core dump handling [6786]
- Added: Enable configuration history by default [7142]
- Fixed: Cannot commit a candidate database that removes a subinterface with an ACL rule [7311]

Host

- Changed: Remove base64 encoding from package management RPC reply data [7382]

Interfaces

- Fixed: Configuration of host interface address clears TNSR TAP interface configuration [2640]
- Fixed: Unable to set a TAP object as part of a host bridge [4427]
- Fixed: RESTCONF `interfaces-state` response contains `"host-namespace": "(nil)"` value in `tap-table`, when the namespace is specified as `host` [4867]
- Fixed: VLAN interfaces do not show VLAN ID in output of `show interface` [6326]
- Fixed: Missing interface prevents configuration backend daemon from starting [6874]

- Fixed: Memory leaks while applying ACLs to an interface [6995]
- Fixed: Subinterface does not come back up after dataplane restart [7045]
- Fixed: Cannot create a TAP interface with certain index values [7083]
- Fixed: TNSR fails to start when the configuration contains a static route with an implicit interface that is not available [7134]
- Fixed: VLAN subinterface cannot be deleted if bonded parent interface is deleted [7322]
- Fixed: 2.5 Gbit/s interfaces such as `igc` show as 2 Gbit/s in interface properties [7403]

NAT

- Fixed: Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- Fixed: Default NAT translation limits may be undersized [5464]
- Fixed: Packet forwarding over an IPsec tunnel fails after enabling UDP encapsulation in IKEv1 mode [6490]
- Fixed: Cannot disable NAT if an inside/outside NAT role was removed from an interface [6553]
- Fixed: Crash in `clixon-backend` when a VRF is removed and re-added for NAT static translation [6554]
- Fixed: Cannot apply a VRF to an interface if the VRF was removed by applying clean candidate database [6561]
- Fixed: Unable to remove NAT static mappings from the running configuration if the interface on the mapping does not exist [7148]

NTP

- Changed: Remove the “present” hack in the NTP YANG data model. [4360]

Operating System

- Changed: Stop logging failures to read files under `/proc` [6748]
- Fixed: `tnsr-diag` only captures one day of system log content [7301]

Routing

- Fixed: BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Fixed: CLI allows creation of invalid prefix lists [3603]
- Added: Unable to configure metric type for OSPFv3 external routes via TNSR CLI [3775]
- Changed: Update `libvppmgmt` FIB path structures [4330]
- Fixed: FRR prefix list synchronization lost after dataplane restart [4456]
- Fixed: Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Fixed: Neighbor events not logged as expected by FRR [4971]
- Fixed: Static routes in custom VRFs are not available to FRR [4975]
- Fixed: TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]

- Fixed: BGP routes remain in route table after BGP session drops, even when TNSR interface is marked down [5325]
- Fixed: Neighbors do not exchange routes when using OSPF over VRF-lite [5338]
- Fixed: BGP command to show routes from neighbors returns an error instead of expected data [5835]
- Fixed: BGP shows its capabilities as advertised when configured with the `dont-capability-negotiate` option [6035]
- Fixed: VRF is not removed after loading and committing candidate configuration [6449]
- Fixed: Setting an OSPF virtual-link parameter removes all other configured parameters [6595]
- Fixed: Unable to set a value less than 3s for the OSPF retransmit interval [6833]
- Fixed: Unable to set a transmit delay for the OSPF6 interface [6834]
- Added: BGP option for `log-neighbor-changes` [6883]
- Fixed: OSPF status commands do not work for custom VRFs [7001]
- Fixed: Static routes without an interface in the next hop are not added back to the operating system routing table after disable/enable of an interface [7091]
- Fixed: Unable to apply BGP updates `prefix debug` option using CLI [7212]
- Added: Implement IPv4 prefix for the BGP debug `bestpath` option [7263]
- Fixed: Cannot create multiple BGP debug updates options using CLI [7269]
- Fixed: Loopback interfaces do not get assigned to the correct VRF in OSPF route table [7288]
- Fixed: VRF is not removed from VPP if it contains a static route [7302]
- Fixed: Deleted static routes are not removed from a VRF if an interface is attached to the VRF after the route was created [7309]
- Fixed: BGP `no option debug keepalive` command removes all configured debug options [7416]
- Fixed: BGP `no option debug bestpath` command does not work as expected [7417]

SNMP / IPFIX / Prometheus

- Fixed: Interface name-to-index mappings are not available in Prometheus exporter output [5618]
- Fixed: SNMP query for `ifDescr` returns unexpected Hex-STRING type data or incorrect STRING contents [6403]
- Fixed: SNMP does not work on IPv6 [6589]
- Fixed: SNMP services start at system boot when SNMP is not configured [6841]
- Fixed: TNSR fails to respond to SNMP requests after dataplane restart [7213]

Static Routes

- Fixed: Cannot remove a static route from the CLI if its interface is missing [7154]
- Fixed: A route with implicitly defined interface remains in a VRF after removal of the interface from that VRF [7272]

Tunnel Protocols

- Fixed: Unable to modify multiple GRE tunnel settings in a single operation [2698]

Updates

- Changed: Deprecate `tnsr-db-update` script [7374]

VRRP

- Fixed: Lower-priority VRRP interface flaps with “ip nat outside” enabled [6807]
- Fixed: VRRP advertisements dropped on a subinterface in a non-default VRF [7169]
- Fixed: Spurious VRRP state transitions can occur with worker threads [7402]

clixon

- Fixed: TNSR CLI treats “#” character as comment delimiter, ignores input after [5237]
- Fixed: TNSR does not validate username when creating a user [5238]
- Fixed: Crash with SEGFault in `clixon_backend` when it cannot parse XML from `config_db` [6627]
- Fixed: Upgrade code does not validate DHCP data in older configurations [7151]
- Fixed: Inconsistent presence of namespaces in TNSR RPC replies [7275]
- Fixed: clixon does not validate implicit choice cases in an RPC input parameter [7461]

Known Issues

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]

BFD

- Unable to setup `delayed` option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- TNSR cannot commit configuration candidate database loaded from a file if it contains a BFD session for an interface that does not exist [7150]

Bridge

- Bridge domain ARP entries cannot be displayed via CLI [2378]
- Bridge domain ARP entries cannot be removed via CLI [2380]
- Bridge domain `mac-age` value cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups are not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup configuration database does not fully remove the active configuration [3723]
- Specifying interface to traceroute requires root privileges [5376]
- Input validation of `unbound message cache slabs` value does not work as expected [5472]
- CLI and RESTCONF behavior are different for `no bgp default ipv4-unicast` [6303]
- RIP information does not contain a legend for kernel routes [7230]
- CLI command for disabled configuration history is not generated [7554]

DHCP Client

- Default gateway received via DHCP is not placed to the routing table when the interface uses a custom VRF [7254]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 Kea `config-file` output shows VPP TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to setup a custom DHCP option with certain data types in the record [5299]
- DHCP daemon does not generate coredumps [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- Static routes with an interface as the next hop using `resolve-via-attached` appear to break dataplane ARP [5259]
- VPP crashes on Azure when configured with option `default-data-size 1024` [6007]
- TNSR on AWS does not pass traffic when using the `uio_pci_generic` driver [7015]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to specify TNSR interface as a source in ping and traceroute commands via REST [5605]
- Startup entry is not created in configuration history log [7400]
- Cannot commit a candidate configuration database if a tap interface is present [7458]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]
- TNSR CLI host interface configuration does not update pre-existing OS interface configuration [6728]
- User-defined log files need rotation or other size limit mechanism [6977]
- User `dns-resolver` configuration values for host namespace in `resolv.conf` are overwritten by `systemd-resolved` on Ubuntu [7517]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]
- Buffer exhaustion with TCP/UDP when using c62x QAT device prevents traffic from passing [6711]
- CLI requires setting integrity algorithm on IPsec tunnel using AES-GCM when a PRF should be sufficient [6926]
- IPsec tunnel cannot be established in a non-default VRF [7266]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts in before the installation can complete [3182]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- Reassembly timeout is not working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when `max-reassemblies` is set to 1 [3384]
- TX queues utilized based off RX queue count [3624]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Errors indicate TNSR is attempting to assign a MAC address to IPsec `ipipX` interfaces [6285]
- Link state in X553 1GbE card does not change to down when disabling interface in TNSR [6849]
- Interfaces using KVM `virtio` drivers use names which do not match link speed [6909]
- L3 packets can be sent from bridged interfaces [6975]
- Unable to setup DPDK `uio_pci_generic` driver on XG-1541 [6981]
- Unable to setup DPDK `vfio-pci` driver on XG-1537 [6985]
- Unable to setup DPDK `vfio-pci` driver on various environments [6989]
- TAP instance `tcpdump` method only captures received packets [7137]
- Unable to delete a non-existent multicast-interface from VXLAN tunnel configuration [7278]

- Pings between IPIP interfaces become intermittent when BGP is applied to them [7392]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- Full IP reassembly does not work with MAP [3386]
- MAP-T adds bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on “any” port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Packets that aren’t destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- Full IPv4 reassembly doesn’t work with NAT endpoint-independent mode [5476]
- Cannot increase NAT Sessions per thread past ~1e6 [6550]
- Dataplane SIGSEGV crash and backtrace when exceeding NAT session limit [6551]
- Expired NAT sessions become active again when increasing the timeout value [7090]
- NAT sessions do not expire in endpoint-independent mode [7098]
- Cannot commit a clean candidate configuration database if NAT static mapping is configured [7286]

NTP

- NTP does not properly handle IPv6 restrictions [4626]
- Delay in CLI display of NTP configuration when NTP has noquery set [6818]
- Interfaces in the TNSR NTP configuration are not validated when generating the NTP daemon configuration [7153]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

PKI

- PKI certificate and key entry fails if content has leading whitespace [6800]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]
- RESTConf `route-state` response does not contain actual state data [7115]
- RESTConf dataplane service does not work on interfaces in a non-default VRF [7265]
- History version count does not match the count of REST configuration requests if they are sent without a delay [7440]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- `ttl-security hops` value can be set when `ebgp-multihop` is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- `extended-nexthop capability` isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when `route-server-client` option is configured [2940]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- Change made to a prefix-list used in a OSPF3 route-map doesn’t affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]

- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- Reverting to the startup configuration doesn't restore packet forwarding for BGP over IPsec prefixes [5321]
- RIP `route-map-filter` option does not filter routes [5910]
- Output of `show route` takes about a minute to begin displaying very large route tables (~1,000,000 routes) [6380]
- Unable to disable IPv4 AF without BGP service restart [6393]
- BGP failover logs "Failed to delete neighbor" error from `linux-cp` [6400]
- OSPF virtual-link authentication does not work [6601]
- Unable to remove OSPF `virtual-link` configuration [6962]
- OSPF can announce interfaces from other VRFs on initial configuration [7002]
- Cannot add a static recursive route [7010]
- VPP crashes on applying custom VRF to loopback interface used in OSPF [7056]
- Creating `route-map`, `prefix-list`, or `access-list` entries takes longer than expected [7068]
- Cannot disable logging of adjacency changes for OSPF6 if `detail` option is set [7097]
- Routes that exactly overlap an interface link route are accepted by CLI but are problematic [7101]
- OSPF neighbor adjacency is established in wrong VRF in VirtualBox [7144]
- Interfaces in the TNSR RIP configuration are not validated when generating the FRR RIP daemon configuration [7155]
- Interfaces in TNSR `route-map` entries are not validated when generating the FRR daemon configurations [7156]
- Interfaces in the TNSR OSPF configuration are not validated when generating the FRR OSPF daemon configuration [7177]
- Interfaces in the TNSR BGP configuration are not validated when generating the FRR BGP daemon configuration [7218]
- Router services do not work properly on interfaces in a non-default VRF [7229]
- Unable to establish eBGP connection via NAT outside interface in endpoint-independent mode [7268]
- Dynamic routing protocols lose static routes after link they resolve through goes down and then comes up [7357]
- OSPF logging for some options does not work if logging level is set explicitly [7411]
- BGP debug option `updates in <peer>` does not filter messages for selected peer [7476]
- BGP session does not become active after interface goes down and recovers [7501]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- Prometheus exporter crashes with SIGABRT when the FIB contains a large number of routes [6973]
- SNMP does not work on interfaces in a non-default VRF [7261]
- Most SNMP interface counters for received traffic return zero on LACP bonds [7407]

SPAN

- Span config disappears/appears when repeatedly restarting dataplane [6526]
- Incorrect error message when requesting SPAN info from a missing interface [7209]
- SPAN mirroring can not be disabled [7560]

Static Routes

- Static route description is not showing up in show commands or REST state data [5478]
- Static route overwrites kernel route in the operating system routing table [7215]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]
- VxLAN with multicast destination does not pass traffic [6491]
- GRE interface configuration remains in running config after changing GRE tunnel ID [7050]

Updates

- Update scripts may fail on some systems [5342]
- `netgate-dpdk-kmods` package for interface driver modules may require manual reinstall after kernel upgrade [5353]

clixon

- log_upgrade does not print cxobj paths correctly in tnsr-upgrade.log [4747]
- clixon_backend exhausts memory while displaying high amount of routes [5226]
- CLI closes when performing commands after restarting TNSR [5974]
- Duplicate attribute created when upgrading TNSR 20.10 NAT configuration to 21.03.1-1 from CLI [6531]
- Configuration upgrade does not run when loading configuration via history [6968]
- Unable to set up a password that starts and finishes with a double quotation mark [7571]
- Unable to set up a password that contains a backslash symbol [7572]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]

34.3 TNSR 21.07.1 Release Notes

34.3.1 About This Release

This is a maintenance release for TNSR software version 21.07 with bug fixes.

Changes

Dataplane

- Fixed: Multiple worker threads may result in dataplane SIGSEGV crash and backtrace when processing ICMP errors [6587]

Packaging

- Changed: Build DPDK with optimization enabled for improved PMD performance [6781]

Routing

- Fixed: Static route commands in output of `show configuration running cli` are ordered incorrectly [6733]

VRRP

- Fixed: CLI crashes during some VRRP track interface changes [6715]
- Fixed: Interface configuration is missing from `show configuration running cli` when an interface is configured for VRRP [6727]
- Fixed: Unable to remove interface from IPv6 VRRP tracking [6764]

Known Issues

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]
- ACLs applied to a bridged loopback interface do not block traffic [6248]

BFD

- Unable to setup `delayed` option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- Bidirectional Forwarding Detection sessions spontaneously vanish [5313]

Bridge

- Bridge domain ARP entries cannot be displayed via CLI [2378]
- Bridge domain ARP entries cannot be removed via CLI [2380]
- Bridge domain `mac-age` value cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups are not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup configuration database does not fully remove the active configuration [3723]
- Specifying interface to `traceroute` requires root privileges [5376]
- Input validation of `unbound message cache slabs` value does not work as expected [5472]
- CLI and RESTCONF behavior are different for `no bgp default ipv4-unicast` [6303]
- Bridge domain configuration `rewrite` parameter does not work [6613]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 kea config-file output shows “vpp” TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to setup a custom DHCP option with certain data types in the record [5299]
- DHCP daemon does not generate coredumps [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- Using interface routes appears to break dataplane ARP [5259]
- VPP crashes with SIGSEGV at faulting address 0x0 or 0x1c [5695]
- VPP crashes on Azure when configured with option `default-data-size 1024` [6007]
- Periodic dataplane SIGSEGV crash and backtrace [6574]
- Dataplane SIGABRT crash and backtrace [6580]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to specify TNSR interface as a source in ping and traceroute commands via REST [5605]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]
- Improve setting host interface address in TNSR CLI [6728]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]
- Buffer exhaustion with TCP when using c62x QAT device [6711]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- Reassembly timeout is not working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when max-reassemblies is set to 1 [3384]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- RESTCONF interfaces-state response contains "host-namespace": "(nil)" value in tap-table, when the namespace is specified as host [4867]
- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Errors indicate TNSR is attempting to assign a MAC address to IPsec ipipX interfaces [6285]
- VLAN interfaces do not show VLAN ID in output of show interface [6326]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- Full IP reassembly does not work with MAP [3386]
- MAP-T adds bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on “any” port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- Packets that aren’t destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- Default NAT translation limits may be undersized [5464]
- Full IPv4 reassembly doesn’t work with NAT endpoint-independent mode [5476]
- Cannot increase NAT Sessions per thread past ~1e6 [6550]
- Dataplane SIGSEGV crash and backtrace when exceeding NAT session limit [6551]
- Cannot disable NAT if an inside/outside NAT role was removed from an interface [6553]
- Clixon backend crash if VRF is removed and re-added for NAT static translation [6554]
- Cannot apply VRF to interface if it was removed by applying clean candidate DB [6561]

NTP

- NTP does not properly handle IPv6 restrictions [4626]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- CLI allows creation of invalid prefix lists [3603]
- Error occurs when using “match ipv6 address <acl_name>” in route-map configuration [3619]
- Change made to a prefix-list used in a OSPF3 route-map doesn’t affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]

- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Reevaluate the FRR logging settings [4971]
- Static routes in custom VRFs are not available to FRR [4975]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]
- Reverting to the startup configuration doesn't restore packet forwarding for BGP over IPsec prefixes [5321]
- Neighbors do not exchange routes when using OSPF over VRF-lite [5338]
- BGP command to show routes from neighbors returns an error instead of expected data [5835]
- RIP `route-map-filter` option does not get added to FRR configuration [5910]
- BGP shows its capabilities as advertised when configured with the `dont-capability-negotiate` option [6035]
- Output of `show route` takes about a minute to begin displaying very large route tables (~1,000,000 routes) [6380]
- Unable to disable IPv4 AF without BGP service restart [6393]
- BGP failover logs "Failed to delete neighbor" error from `linux-cp` [6400]
- VRF is not removed after loading and committing candidate configuration [6449]
- Setting an OSPF virtual-link parameter removes all other configured parameters [6595]
- OSPF virtual-link authentication does not work [6601]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- Interface name-to-index mappings not available in prometheus exporter output [5618]
- SNMP query for `ifDescr` returns unexpected Hex-STRING type data or incorrect STRING contents [6403]
- SNMP does not work on IPv6 [6589]

SPAN

- Span config disappears/appears when repeatedly restarting dataplane [6526]

Static Routes

- Static route description is not showing up in show commands or REST state data [5478]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]
- VxLAN with multicast destination does not pass traffic [6491]

Updates

- Update scripts may fail on some systems [5342]

VRRP

- VRRP cannot change the MAC address on ixgbevf interfaces [4551]
- Cannot configure VRRP tracking for an unconfigured interface [6760]

clixon

- log_upgrade does not print cxobj paths correctly in tnsr-upgrade.log [4747]
- clixon_backend exhausts memory while displaying high amount of routes [5226]
- TNSR CLI treats “#” character as comment delimiter, ignores input after [5237]
- TNSR does not validate username when creating a user [5238]
- CLI closes when performing commands after restarting TNSR [5974]
- Duplicate attribute created when upgrading TNSR 20.10 NAT configuration to 21.03.1-1 from CLI [6531]
- Crash with SEGFAULT in clixon_backend when it cannot parse XML from config_db [6627]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]

34.4 TNSR 21.07 Release Notes

34.4.1 About This Release

This is a regularly scheduled TNSR release including new features and bug fixes.

General

- The default behavior of VMware VMXNET3 interfaces has changed from previous releases. These interfaces are no longer automatically whitelisted, and must be manually setup in the dataplane as described in [Setup NICs in Dataplane](#).

For a smoother upgrade experience, configure the interfaces in the dataplane before starting the upgrade process.

If the interfaces have already been configured in the dataplane, no action is necessary.

Changes

CLI

- Fixed: Terminal page length not respected in cli-gen output routines which handle paging [3397]
- Fixed: Wrong CLI commands generated for ACL MACIP config [5815]
- Fixed: CLI auto-completion prints extremely long lines on serial console session [5816]
- Fixed: Wrong CLI commands generated for FRR features [5840]
- Fixed: Wrong CLI commands generated for NAT static mapping to interface [5842]
- Fixed: Wrong CLI commands generated for IP virtual reassembly [5866]
- Fixed: Wrong CLI commands generated for host interface [5867]
- Fixed: Wrong CLI commands generated for DSLite [5868]
- Fixed: Wrong CLI commands generated for BGP [5869]
- Fixed: CLI may generate configuration for VRRP that cannot be applied [5870]
- Fixed: CLI commands are not generated for DNS server [5878]
- Fixed: Wrong CLI commands generated for GRE [5880]
- Fixed: Wrong CLI commands generated for VXLAN [5881]
- Fixed: Wrong CLI commands generated for host ACL [5884]
- Fixed: Wrong CLI commands generated for MAP [5885]
- Fixed: Wrong CLI commands generated for static routing next hop [5886]
- Fixed: Wrong CLI commands generated for NAT translation outer port [5911]

- Fixed: Wrong CLI commands generated for IPv6 static routing [5912]
- Fixed: CLI commands are not generated for RESTconf configuration [5953]
- Fixed: IPv6 prefix-lists cannot be configured in the CLI [6080]
- Fixed: Cannot remove snmp group/model via CLI [6122]
- Fixed: Command description for route-map outbound direction is the same as for inbound [6376]
- Fixed: Missing CLI commands for `cfgfile` dataplane configuration [6453]

DHCP Server

- Fixed: Default DHCP server settings allow lease file to grow without bounds [5414]
- Fixed: DHCP server stops issuing leases after dataplane restart [5426]

Dataplane

- Fixed: VPP crashes in AWS if main heap size is set in VPP config [5754]
- Added: `igc` 2.5G Ethernet interface support [6524]
- Fixed: Netlink message processing stops after socket overflow [6552]

General

- Added: Maintain configuration database change history in a local git repo [485]

Interfaces

- Added: TCP MSS Clamping [3920]
- Added: Allow configuration of maximum fragments to be reassembled per packet [5141]
- Fixed: Cannot set bridge BVI option on an interface after initial setup [5628]
- Fixed: Commit failed error when setting values for IP reassembly options [5683]
- Fixed: IP reassembly `full ipv4 max-reassembly-length` value cannot be removed [5967]

NAT

- Fixed: NAT forwarding does not work in deterministic and simple modes [4604]
- Fixed: NAT forwarding option does not work with multiple worker threads [5327]
- Changed: Deprecate support for DS-Lite [5959]
- Fixed: Endpoint-dependent NAT mode remains enabled after clean candidate configuration database is committed [5972]

Packaging

- Changed: Update VPP from upstream [5829]
- Changed: Update strongSwan to 5.9.2 [5830]
- Changed: Update FRR to 7.5.1 [5831]

Routing

- Added: Omit broadcast and other special automatic route table entries from default `show route` output [4339]
- Fixed: Orphaned VRF entries are not removed when loading and committing candidate configuration [5507]
- Fixed: Route-map rules cannot match `ipv6` access lists [6428]

SNMP / IPFIX / Prometheus

- Fixed: SNMP daemon does not return `Counter64` 64-bit octet values [5272]
- Fixed: SNMP subagent startup takes a long time [5696]

VRRP

- Fixed: VRRP VR on interface in non-default VRF does not transition to backup state [6562]

clixon

- Fixed: CLI exits when `expand_dbvar()` is passed an invalid path [6025]

Known Issues

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]
- ACLs applied to a bridged loopback interface do not block traffic [6248]

BFD

- Unable to setup `delayed` option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- Bidirectional Forwarding Detection sessions spontaneously vanish [5313]

Bridge

- Bridge domain ARP entries cannot be displayed via CLI [2378]
- Bridge domain ARP entries cannot be removed via CLI [2380]
- Bridge domain mac-age value cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups are not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup configuration database does not fully remove the active configuration [3723]
- Specifying interface to traceroute requires root privileges [5376]
- Input validation of unbound message `cache slabs` value does not work as expected [5472]
- CLI and RESTCONF behavior are different for `no bgp default ipv4-unicast` [6303]
- Bridge domain configuration `rewrite` parameter does not work [6613]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 kea config-file output shows “vpp” TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to setup a custom DHCP option with certain data types in the record [5299]
- DHCP daemon does not generate coredumps [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- Using interface routes appears to break dataplane ARP [5259]
- VPP crashes with SIGSEGV at faulting address 0x0 or 0x1c [5695]
- VPP crashes on Azure when configured with option `default-data-size 1024` [6007]
- Periodic dataplane SIGSEGV crash and backtrace [6574]

- Dataplane SIGABRT crash and backtrace [6580]
- Multiple worker threads may result in dataplane SIGSEGV crash and backtrace [6587]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to specify TNSR interface as a source in ping and traceroute commands via REST [5605]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- Reassembly timeout is not working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when `max-reassemblies` is set to 1 [3384]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]

- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- RESTCONF `interfaces-state` response contains "host-namespace": "(nil)" value in tap-table, when the namespace is specified as host [4867]
- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Errors indicate TNSR is attempting to assign a MAC address to IPsec `ipipX` interfaces [6285]
- VLAN interfaces do not show VLAN ID in output of `show interface` [6326]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with `ttl=2` from inbound interface [2849]
- Full IP reassembly does not work with MAP [3386]
- MAP-T adds bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- Deterministic NAT mode prevents local clients from communicating with local services on TNSR [4356]
- Deterministic NAT mappings in the configuration database prevent the dataplane from starting when switching to endpoint-dependent mode [4371]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on "any" port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- Packets that aren't destined to NAT pool are dropped when NAT simple mode with `out2in-dpo` option is configured [4927]
- Default NAT translation limits may be undersized [5464]
- Full IPv4 reassembly doesn't work with NAT endpoint-independent mode [5476]
- Packet forwarding over an IPsec tunnel fails after enabling UDP encapsulation in IKEv1 mode [6490]

- Cannot increase NAT Sessions per thread past ~1e6 [6550]
- Dataplane SIGSEGV crash and backtrace when exceeding NAT session limit [6551]
- Clixon backend crash if VRF is removed and re-added for NAT static translation [6554]
- Cannot apply VRF to interface if it was removed by applying clean candidate DB [6561]

NTP

- NTP does not properly handle IPv6 restrictions [4626]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]

- Unable to delete OSPF3 config for an interface [3481]
- Error occurs when using “match ipv6 address <acl_name>” in route-map configuration [3619]
- Change made to a prefix-list used in a OSPF3 route-map doesn’t affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Reevaluate the FRR logging settings [4971]
- Static routes in custom VRFs are not available to FRR [4975]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]
- Reverting to the startup configuration doesn’t restore packet forwarding for BGP over IPsec prefixes [5321]
- Neighbors do not exchange routes when using OSPF over VRF-lite [5338]
- BGP command to show routes from neighbors returns an error instead of expected data [5835]
- RIP route-map-filter option does not get added to FRR configuration [5910]
- BGP shows its capabilities as advertised when configured with the dont-capability-negotiate option [6035]
- Output of show route takes about a minute to begin displaying very large route tables (~1,000,000 routes) [6380]
- Unable to disable IPv4 AF without BGP service restart [6393]
- BGP failover logs “Failed to delete neighbor” error from linux-cp [6400]
- VRF is not removed after loading and committing candidate configuration [6449]
- Setting an OSPF virtual-link parameter removes all other configured parameters [6595]
- OSPF virtual-link authentication does not work [6601]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- Interface name-to-index mappings not available in prometheus exporter output [5618]
- SNMP query for `ifDescr` returns unexpected Hex-STRING type data or incorrect STRING contents [6403]
- SNMP does not work on IPv6 [6589]

SPAN

- Span config disappears/appears when repeatedly restarting dataplane [6526]

Static Routes

- Static route description is not showing up in show commands or REST state data [5478]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]
- VxLAN with multicast destination does not pass traffic [6491]

Updates

- Update scripts may fail on some systems [5342]

VRRP

- VRRP cannot change the MAC address on `ixgbevf` interfaces [4551]

clixon

- Clixon allows invalid prefix lists [3603]
- `log_upgrade` does not print `cxobj` paths correctly in `tnsr-upgrade.log` [4747]
- `clixon_backend` exhausts memory while displaying high amount of routes [5226]
- TNSR CLI treats “#” character as comment delimiter, ignores input after [5237]
- TNSR does not validate username when creating a user [5238]
- CLI closes when performing commands after restarting TNSR [5974]

- Duplicate attribute created when upgrading TNSR 20.10 NAT configuration to 21.03.1-1 from CLI [6531]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]

34.5 TNSR 21.03.1 Release Notes

34.5.1 About This Release

This is a maintenance release for TNSR software version 21.03 with bug fixes.

Warning: For more information on changes in TNSR 21.03, see *TNSR 21.03 Release Notes*.

Changes

Interfaces

- Fixed: Running obsolete interface command to delete route table causes CLI to exit [5876]
- Fixed: Admin status is not set correctly for disabled VLAN subinterfaces [5956]

NAT

- Fixed: NAT hairpinning results in VPP crash due to SEGV [5302]

Neighbor / ARP / NDP

- Fixed: Spurious replies sent to neighbor solicitations for addresses in the neighbor table [5989]

Routing

- Added: Allow BGP IPv4 unicast route propagation to be disabled by default [4399]

SNMP / IPFIX / Prometheus

- Fixed: SNMP results are returned at approximately 3 per second [4670]

Known Issues

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]
- ACLs applied to a bridged loopback interface do not block traffic [6248]

BFD

- Unable to setup “delayed” option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- Bidirectional Forwarding Detection sessions spontaneously vanish [5313]

Bridge

- Bridge domain ARP entries not displayed via CLI [2378]
- Bridge domain ARP entry cannot be removed via CLI [2380]
- Bridge domain mac-age cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup_db does not fully remove the active configuration [3723]
- Specifying Interface to traceroute requires root privileges [5376]
- Fix unbound ‘message cache slabs’ CLI weirdness [5472]
- Wrong CLI command generated for ACL MACIP config [5815]
- Wrong CLI commands generated for NAT translation outer port [5911]
- IPv6 prefix-lists cannot be configured in the CLI [6080]
- BGP peer group remote-as configuration value is missing from `show conf run cli` output [6123]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 kea config-file output shows “vpp” TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to set up a custom DHCP option with certain data types in the record [5299]
- Default kea settings allow lease file to grow without bounds [5414]
- DHCP/kea stops issuing leases after dataplane restart [5426]
- DHCP/kea coredump isn’t generated [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- Using interface routes appears to breaks dataplane ARP [5259]
- VPP crashes with SIGSEGV at faulting address 0x0 or 0x1c [5695]
- VPP crashes on Azure when configured with option `default-data-size 1024` [6007]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to configure packet trace [5261]
- Unable to specify TNSR interface as a source in ping and traceroute commands via REST [5605]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]
- Installer python exception [5556]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- RESTCONF interfaces-state response contains “host-namespace”: “(nil)” value in tap-table, when the namespace is specified as “host” [4867]
- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Cannot set bridge BVI option on an interface after initial setup [5628]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- VPP fails on DS-Lite AFTR router when packets from B4 are being received before pool is configured [3024]
- Clixon service fails when deleting dslite-ce role [3030]
- Reassembly timeout isn’t working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]

- Second fragment of a packet is not virtually reassembled when max-reassemblies is set to 1 [3384]
- Full IP reassembly does not work with MAP [3386]
- MAP-T: bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- Deterministic NAT mode prevents local clients from communicating with local services on TNSR [4356]
- Deterministic NAT mappings in the configuration database prevent the dataplane from starting when switching to endpoint-dependent mode [4371]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on “any” port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Deterministic NAT users experience sluggish performance and lag on video calls [4492]
- Unable to verify NAT sessions in deterministic mode [4562]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- NAT forwarding does not work in deterministic and simple modes [4604]
- Packets that aren’t destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- NAT forwarding option does not work with multiple worker threads [5327]
- Default NAT translation limits may be undersized [5464]
- Full IPv4 reassembly doesn’t work with NAT endpoint-independent mode [5476]
- Endpoint-dependent NAT mode remains enabled after clean candidate configuration database is committed [5972]

NTP

- NTP does not properly handle IPv6 restrictions [4626]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- CLI shows that only IPv4 prefix is available within prefix-list sequence configuration [2689]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- Error occurs when using “match ipv6 address <acl_name>” in route-map configuration [3619]
- Change made to a prefix-list used in a OSPF3 route-map doesn’t affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Reevaluate the FRR logging settings [4971]
- Static routes in custom VRFs are not available to FRR [4975]

- Invalid IPv6 routes are shown when searching by prefix [5033]
- CLI description in prefix-list definition misleading [5065]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]
- Reverting to the startup configuration doesn't restore packet forwarding for BGP over IPsec prefixes [5321]
- Neighbors do not exchange routes when using OSPF over VRF-lite [5338]
- BGP command to show routes from neighbors returns an error instead of expected data [5835]
- RIP route-map-filter option does not get added to FRR configuration [5910]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- Interface name-to-index mappings not available in prometheus exporter output [5618]

Static Routes

- Static route next-hop options stack when updated, but only one works [5326]
- Static route description is not showing up in show commands or REST state data [5478]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]

Updates

- Update scripts may fail on some systems [5342]

VRRP

- VRRP cannot change the MAC address on ixgbevf interfaces [4551]

clixon

- Clixon allows invalid prefix lists [3603]
- log_upgrade does not print cxobj paths correctly in tnsr-upgrade.log [4747]
- clixon_backend exhausts memory while displaying high amount of routes [5226]
- TNSR CLI treats “#” character as comment delimiter, ignores input after [5237]
- TNSR does not validate username when creating a user [5238]
- CLI closes when performing commands after restarting TNSR [5974]
- CLI exits when `expand_dbvar()` is passed an invalid path [6025]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]

34.6 TNSR 21.03 Release Notes

34.6.1 About This Release

This is a regularly scheduled TNSR release including new features and bug fixes.

General

This release introduces significant changes in NAT behavior. Most NAT configuration commands have changed syntax or behavior. For example, default NAT behaviors have changed, and the procedure to change global configuration options for NAT is different. Review the [NAT documentation](#) in detail.

Warning: The deterministic NAT feature, which was deprecated in previous releases, has now been completely removed.

Changes

ACLs

- Fixed: Output ACLs do not work with directly connected IP addresses [2057]

CLI

- Added: Option to show configuration contents as a set of CLI commands [3655]
- Changed: Remove redundant `shell` command to allow `show` commands to be abbreviated as `sh` [5269]
- Fixed: TNSR CLI stores less lines in command history than configured [5270]
- Fixed: Clixon crashes on executing various commands with ampersand symbol [5363]
- Fixed: CLI errors when configuring some OSPF6 options [5656]

DHCP Server

- Fixed: CLI incorrectly offers option to delete mac-address from DHCP host reservations [5203]
- Fixed: Prevent using the same MAC address on more than one DHCP host reservation in the same subnet [5205]

DNS

- Fixed: Previous DNS resolver settings remain active after resetting TNSR configuration [5398]
- Fixed: DNS resolver only uses the last search domain [5400]
- Fixed: Cannot configure local static zone with empty name using the CLI [5459]

Dataplane

- Fixed: VPP service crashes on attempt to connect to Azure TNSR VM or perform a REST request [3850]
- Added: Whitelist/configure individual VMbus/NetVSC devices in VPP [5095]
- Changed: Set default MTU to 1500 [5136]
- Added: VPP startup configuration to enable DPDK telemetry thread [5143]
- Changed: Increase default buffers-per-numa startup setting for dataplane [5246]
- Changed: Update VPP from upstream [5258]

General

- Added: Include more output in diagnostic tool [4676]
- Added: Configuration candidate load/save command support for saved configuration `*_db` files [4766]
- Fixed: Unable to specify TNSR interface as a source in ping and traceroute commands via CLI [5262]
- Fixed: Ping and traceroute commands do not respect TTL value [5263]
- Fixed: Traceroute command does not respect timeout value [5271]

Host Netfilter

- Fixed: Sequence numbers displayed in state data for host ACLs do not match the configuration database [4789]

IPsec

- Changed: Enable asynchronous cryptography infrastructure in VPP [5093]

Interfaces

- Fixed: Unable to create multiple QinQ subinterfaces with the same outer VLAN tag [2659]
- Fixed: Jumbo frames do not pass on VMXNET3 adapters [4891]
- Fixed: Conflicting IP addresses remain on interfaces after VRF deletion [5035]

NAT

- Fixed: NAT interfaces drop packets that do not match existing NAT sessions or static NAT mappings [1979]
- Fixed: VPP service fails when receiving a packet if NAT simple mode is configured with `static-mapping-only` option [4610]
- Fixed: Ping to outside NAT interface produces a NAT session when forwarding is disabled [4960]
- Changed: Deprecate support for deterministic NAT [5533]

RESTCONF

- Fixed: Unable to ping remote host using hostname via REST [5492]

Routing

- Fixed: Large burst of BGP routes can overload netlink socket buffer, leading to routes missing from FIB [5229]
- Fixed: Unable to verify RIP information when RIP is configured for a VRF [5255]
- Fixed: VPP crashes when passing certain UDP packets via IPsec tunnel on Azure [5560]
- Fixed: Custom VRFs do not pass traffic as expected [5601]

SNMP / IPFIX / Prometheus

- Fixed: RESTCONF returns an incorrect response code when removing IPFIX destinationIPaddress [5045]
- Added: Allow Prometheus port in default Host ACLs [5356]

VRRP

- Fixed: VRRP remains in dual master state on bare metal and VMWare/Virtualization platforms using Intel XL710 and X710 network interfaces [5713]

httpd

- Fixed: HTTP server retains previous configuration when restarting without saving [2453]

Known Issues

ACLs

- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]

BFD

- Unable to setup “delayed” option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]
- Bidirectional Forwarding Detection sessions spontaneously vanish [5313]

Bridge

- Bridge domain ARP entries not displayed via CLI [2378]
- Bridge domain ARP entry cannot be removed via CLI [2380]
- Bridge domain mac-age cannot be removed via CLI [2381]
- Bridge domains and split-horizon groups not functioning properly [5500]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup_db does not fully remove the active configuration [3723]
- Specifying Interface to traceroute requires root privileges [5376]
- Fix unbound ‘message cache slabs’ CLI weirdness [5472]
- Wrong CLI command generated for ACL MACIP config [5815]
- CLI auto-completion prints extremely long lines on serial console session [5816]

DHCP Server

- CLI offers to delete mandatory variable in DHCP server subnet configuration [5240]
- DHCP4 kea config-file output shows “vpp” TAP interface names in its configuration instead of TNSR interface names [5264]
- Unable to set up a custom DHCP option with certain data types in the record [5299]
- Default kea settings allow lease file to grow without bounds [5414]
- DHCP/kea stops issuing leases after dataplane restart [5426]
- DHCP/kea coredump isn’t generated [5583]

DNS

- `show system` output does not contain DNS resolver parameters [5397]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- Using interface routes appears to breaks dataplane ARP [5259]
- VPP crashes with SIGSEGV at faulting address 0x0 or 0x1c [5695]
- VPP crashes in AWS if main heap size is set in VPP config [5754]

General

- Non-root users cannot access the FRR log file [4826]
- Unable to configure packet trace [5261]
- VRF isn’t removed after loading and committing of candidate configuration [5507]
- Unable to specify TNSR interface as a source in ping and traceroute commands via REST [5605]
- Commit failed error when setting values for IP reassembly options [5683]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]
- Packets exceeding 2020 bytes cannot be received on IPsec interface [5224]

Installation

- When installing TNSR via iDRAC virtual media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]
- Installer python exception [5556]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- RESTCONF interfaces-state response contains “host-namespace”: “(nil)” value in tap-table, when the namespace is specified as “host” [4867]
- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]
- XG-1541 link speed auto-negotiation incorrect with direct connected interfaces [5323]
- Cannot set bridge BVI option on an interface after initial setup [5628]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- VPP fails on DS-Lite AFTR router when packets from B4 are being received before pool is configured [3024]
- Clixon service fails when deleting dslite-ce role [3030]
- Reassembly timeout isn't working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when max-reassemblies is set to 1 [3384]
- Full IP reassembly does not work with MAP [3386]
- MAP-T: bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- Deterministic NAT mode prevents local clients from communicating with local services on TNSR [4356]
- Deterministic NAT mappings in the configuration database prevent the dataplane from starting when switching to endpoint-dependent mode [4371]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on "any" port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Deterministic NAT users experience sluggish performance and lag on video calls [4492]
- Unable to verify NAT sessions in deterministic mode [4562]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- NAT forwarding does not work in deterministic and simple modes [4604]
- Packets that aren't destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- NAT hairpinning results in VPP crash due to SEGV [5302]
- NAT forwarding option does not work with multiple worker threads [5327]
- Default NAT translation limits may be undersized [5464]
- Full IPv4 reassembly doesn't work with NAT endpoint-independent mode [5476]

NTP

- NTP does not properly handle IPv6 restrictions [4626]
- NTP should allow 'iburst' on "pool" entries [5796]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF "pretty-printed" JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]
- Response of `/restconf/data/` and `/restconf/data/netgate-interface:interfaces-state/` does not include any of `*-table` [5399]
- RESTCONF allows configuring dataplane options for non-existent devices [5748]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- CLI shows that only IPv4 prefix is available within prefix-list sequence configuration [2689]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP "timeout" timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn't being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn't working without service restart [2873]
- BGP next-hop attribute aren't being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- Error occurs when using "match ipv6 address <acl_name>" in route-map configuration [3619]
- Change made to a prefix-list used in a OSPF3 route-map doesn't affect redistributed routes [3644]

- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- Cannot disable IPv4 in BGP [4399]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Reevaluate the FRR logging settings [4971]
- Static routes in custom VRFs are not available to FRR [4975]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- CLI description in prefix-list definition misleading [5065]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]
- Reverting to the startup configuration doesn't restore packet forwarding for BGP over IPsec prefixes [5321]
- BGP routes remain in route table after BGP session drops, even when TNSR interface is marked down [5325]
- Neighbors do not exchange routes when using OSPF over VRF-lite [5338]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- SNMP results are returned at approximately 3 per second [4670]
- Configuring IPFIX collector address to directly connected host in Azure causes continuous VPP crash [5117]
- Octet Counter64 OIDs missing from SNMP [5272]
- Prometheus filters with non-alphanumeric characters can cause HTTP requests to fail [5467]
- Prometheus filters containing spaces cannot be removed [5470]
- Interface name-to-index mappings not available in prometheus exporter output [5618]
- SNMP subagent startup takes a long time [5696]

Static Routes

- Static route next-hop options stack when updated, but only one works [5326]
- Static route description is not showing up in show commands or REST state data [5478]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]

Updates

- Update scripts may fail on some systems [5342]

VRRP

- VRRP cannot change the MAC address on ixgbevf interfaces [4551]

YANG

- Fix dataplane YANG [5412]
- Fix interface YANG [5424]
- Fix lldp YANG issues [5428]
- Fix macip YANG issues [5430]
- Fix nat map-e/t YANG issues [5431]
- Fix route-table YANG issues [5450]
- Fix prometheus YANG issues [5451]
- Fix vxlan YANG issues [5456]
- Fix unbound YANG issues [5473]
- Fix host/system YANG issues [5474]
- Fix NTP YANG issues [5501]
- Fix SNMP YANG issues [5515]
- Fix ipsec YANG issues [5516]
- Fix Kea DHCP4 YANG issues [5523]
- Fix FRR YANG issues in netgate-frr.yang [5537]
- Fix BGP YANG issues [5566]
- Fix OSPF YANG issues [5567]
- Fix OSPF6 YANG issues [5568]

clixon

- Clixon allows invalid prefix lists [3603]
- log_upgrade does not print exobj paths correctly in tnsr-upgrade.log [4747]
- clixon_backend exhausts memory while displaying high amount of routes [5226]
- TNSR CLI treats “#” character as comment delimiter, ignores input after [5237]
- TNSR does not validate username when creating a user [5238]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]

34.7 TNSR 20.10.1 Release Notes

34.7.1 About This Release

This is a maintenance release for TNSR software version 20.10 with bug fixes.

Warning: For more information on changes in TNSR 20.10, including important information about upgrading from versions prior to TNSR 20.10, see [TNSR 20.10 Release Notes](#).

Warning: TNSR Home+Lab installations cannot be updated. Reinstall with TNSR Business or install a new version of TNSR Home+Lab. See [Configuration Backups](#) for information on backing up and restoring configurations.

Note: TNSR Home+Lab users can keep running their existing version and update only the operating system components as needed.

All versions of TNSR, including Home+Lab, can update the operating system even without the TNSR update certificate in place. Only TNSR-related packages require authentication to update.

Changes

DHCP Server

- Fixed: Unable to set value for a custom DHCP option [4917]
- Fixed: DHCP Server client reservations cannot be removed [5166]

Dataplane

- Changed: Remove IP heap startup configuration and add main heap configuration [5163]
- Changed: Fix VPP default interface names for DPDK-managed Mellanox ports [5164]
- Fixed: Dataplane per-node-counters option cannot be enabled [5168]

SNMP / IPFIX / Prometheus

- Fixed: IPFIX NAT logging reports internal FIB index instead of VRF ID [5067]
- Fixed: IPFIX sends an incorrect value in NAT Quota Exceeded event [5135]
- Fixed: Configuration changes stop Prometheus feed [5181]

Known Issues

ACLs

- Output ACLs do not work with directly connected IP addresses [2057]
- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]

BFD

- Unable to setup “delayed” option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]

Bridge

- Bridge domain ARP entries not displayed via CLI [2378]
- Bridge domain ARP entry cannot be removed via CLI [2380]
- Bridge domain mac-age cannot be removed via CLI [2381]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup_db does not fully remove the active configuration [3723]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- VPP service crashes on attempt to connect to Azure TNSR VM or perform a REST request [3850]

DHCP Server

- CLI incorrectly offers option to delete mac-address from DHCP host reservations [5203]

General

- Non-root users cannot access the FRR log file [4826]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]

Host Netfilter

- Sequence numbers displayed in state data for host ACLs do not match the configuration database [4789]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]

Installation

- When installing TNSR via iDRAC Virtual Media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]

Interfaces

- Packets do not pass through VLAN subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q “any” tag [2652]
- Subinterface settings aren’t applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- RESTCONF interfaces-state response contains “host-namespace”: “(nil)” value in tap-table, when the namespace is specified as “host” [4867]
- Jumbo frames do not pass on vmxnet3 adapters [4891]
- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Conflicting IP addresses remain on interfaces after VRF deletion [5035]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- NAT interfaces drop packets that do not match existing NAT sessions or static NAT mappings [1979]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- VPP fails on DS-Lite AFTR router when packets from B4 are being received before pool is configured [3024]
- Clixon service fails when deleting dslite-ce role [3030]
- Reassembly timeout isn’t working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when max-reassemblies is set to 1 [3384]
- Full IP reassembly does not work with MAP [3386]
- MAP-T: bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]

- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- Deterministic NAT mode prevents local clients from communicating with local services on TNSR [4356]
- Deterministic NAT mappings in the configuration database prevent the dataplane from starting when switching to endpoint-dependent mode [4371]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on “any” port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Deterministic NAT users experience sluggish performance and lag on video calls [4492]
- Unable to verify NAT sessions in deterministic mode [4562]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- NAT forwarding does not work in deterministic and simple modes [4604]
- VPP service fails on receiving packet when NAT simple mode along with static-mapping-only option is configured [4610]
- Packets that aren’t destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- Ping to outside NAT interface produces a NAT session when forwarding is disabled [4960]

NTP

- NTP does not properly handle IPv6 restrictions [4626]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- CLI shows that only IPv4 prefix is available within prefix-list sequence configuration [2689]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn’t being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn’t working without service restart [2873]
- BGP next-hop attribute aren’t being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- Error occurs when using “match ipv6 address <acl_name>” in route-map configuration [3619]
- Change made to a prefix-list used in a OSPF3 route-map doesn’t affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- Cannot disable IPv4 in BGP [4399]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Static routes in custom VRFs are not available to FRR [4975]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- SNMP results are returned at approximately 3 per second [4670]
- RESTCONF returns an incorrect response code when removing IPFIX destinationIPAddress [5045]
- Configuring IPFIX collector address to directly connected host in Azure causes continuous VPP crash [5117]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]
- TNSR IPv6 interface address does not appear in traceroute when next-hop is IPsec tunnel interface [5178]

VRRP

- VRRP cannot change the MAC address on ixgbevf interfaces [4551]

clixon

- Clixon allows invalid prefix lists [3603]
- log_upgrade does not print cxobj paths correctly in tnsr-upgrade.log [4747]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]
- HTTP server retains its configuration after restarting TNSR services [2453]

34.8 TNSR 20.10 Release Notes

34.8.1 About This Release

This is a regularly scheduled TNSR release including new features and bug fixes.

For information on updating to TNSR 20.10, see [Updates and Packages](#).

Warning: TNSR Home+Lab installations cannot be updated. Reinstall with TNSR Business or install a new version of TNSR Home+Lab. See [Configuration Backups](#) for information on backing up and restoring configurations.

Note: TNSR Home+Lab users can keep running their existing version and update only the operating system components as needed.

All versions of TNSR, including Home+Lab, can update the operating system even without the TNSR update certificate in place. Only TNSR-related packages require authentication to update.

General

- The Deterministic NAT feature has been deprecated and will be removed in the next version of TNSR.
- Mellanox interface names may change when upgrading to TNSR 20.10 due to changes in the driver. The best practice to work around such issues is to migrate to custom interface names before upgrading (*Customizing Interface Names*).

Changes

CLI

- Fixed: Typo in BGP server command deprecation message [4812]
- Fixed: BGP RFC 4893 32-bit ASNs are treated as signed instead of unsigned [4882]
- Fixed: Incorrect behavior of the timeout option in the ping command [4951]

DHCP Server

- Added: Input validation/error checking for DHCP Server configuration [1811]
- Fixed: Need input validation for dhcp [3722]
- Fixed: Unable to remove DHCP Server valid-lifetime option [4991]

Dataplane

- Added: Print warning in CLI when changes are made which require a dataplane restart to take effect [4405]
- Added: Support blacklist of individual PCI devices in startup.conf DPDK settings [4801]
- Added: Update VPP [4839]
- Fixed: Mellanox ports are detached from driver when VPP starts up [5071]

Host Netfilter

- Fixed: Host ACL rule with ICMP type and code configured matches ICMP code only, not ICMP type [4879]
- Fixed: Incorrect representation of ICMP code in 'show host ruleset' command [4880]
- Fixed: ICMPv6 type and code are not displayed by 'show host acl' command [4919]

Interfaces

- Fixed: Full reassembly cannot be disabled on an interface [3360]
- Fixed: Cannot restore TNSR configuration database containing named interfaces [3913]
- Fixed: Unable to use IP addresses from the same subnet on interfaces in different VRFs [4934]
- Fixed: VRF can be deleted while in use by interfaces [4945]
- Added: Interval parameter for ping command [4986]

Memif

- Changed: Use server/client for memif role names [4780]

NACM

- Fixed: NACM configurations are read-only by default; empty configurations cannot be changed [4767]
- Fixed: Cannot create NACM rules with XML paths via RESTCONF [4804]

NAT

- Fixed: ICMP fragments are not reassembled on Inside NAT interfaces [2733]
- Fixed: VPP service fails if NAT concurrent-reassemblies is set to 1 and several fragments arrive on an outside NAT interface [2739]
- Fixed: Implicit shallow virtual reassembly on an interface breaks packet flow when reassembly is set to full and IP reassembly is enabled on the interface [3380]
- Fixed: Maximum amount of per-user NAT sessions is not limited by the max-translations-per-user value [4606]
- Added: Increase Deterministic NAT Session Limits [4920]
- Changed: Add deterministic NAT deprecation warnings [4953]

NTP

- Fixed: Unable to retrieve NTP state via RESTCONF [4370]

RESTCONF

- Fixed: RESTCONF interface-state response does not contain TAP table [4467]
- Fixed: libssl 1.1 support on centos 7 [4617]

Routing

- Fixed: BGP status summary for IPv6 does not generate output if the address family is not specified when configuring BGP for IPv6 [2967]
- Fixed: Deletion of route-map does not update related BGP routes [3875]
- Fixed: Value of route-reuse is displayed as XML within BGP configuration output [4486]
- Fixed: Using interface name as BGP update-source does not work [4896]
- Fixed: BGP can only be configured for a single VRF [4987]
- Fixed: Removing a VRF attached to IPFIX causes errors in the latter [4995]

SNMP / IPFIX / Prometheus

- Added: IPFIX / Netflow [4365]
- Added: Options for Prometheus Exporter enable/disable state [4627]
- Changed: Allow Prometheus Exporter to operate in host and dataplane namespaces [4890]

Tunnel Protocols

- Changed: Add VXLAN multicast/interface validation checks [599]
- Fixed: IPv6 packets are marked as truncated while forwarding over IPv6 GRE tunnel [4921]

VRRP

- Fixed: VRRP misbehaves with NAT on the interface [2419]
- Fixed: VRRP accept mode does not work fully with host services [4869]
- Fixed: VRRP virtual routers will only work for one address family [4910]

YANG

- Fixed: Unable to augment udpExporter container from [ietf-ipfix-psamp@2012-09-05.yang](#) [4962]

clixon

- Fixed: Ambiguous error message when making an invalid IKEv2 lifetime change [3243]
- Fixed: clixon_backend fails after tnsr-db-update on config upgrading from 19.12-2 to 20.02-2 [3524]
- Fixed: Unable to commit changes after backend restart if configuration contains unknown tag [4724]

Known Issues

ACLs

- Output ACLs do not work with directly connected IP addresses [2057]
- DHCP responses blocked by TNSR input ACLs since reflect on output ACLs does not work for DHCP requests [3570]

BFD

- Unable to setup “delayed” option for an existing BFD session via REST [2709]
- IPv6 session is not restored when virtual direct link gets disabled/enabled [4916]

Bridge

- Bridge domain ARP entries not displayed via CLI [2378]
- Bridge domain ARP entry cannot be removed via CLI [2380]
- Bridge domain mac-age cannot be removed via CLI [2381]

CLI

- CLI does not always return from a shell prompt [2651]
- Deleting the startup_db does not fully remove the active configuration [3723]

DHCP Server

- Unable to set value for a custom DHCP option [4917]

Dataplane

- RESTCONF query fails to TNSR interface with >1 worker thread when NAT is active [2031]
- Binary API times out in some dual NUMA environments [2383]
- Link state is always up when using e1000 network drivers [2831]
- VPP service does not start if an interface name uses a reserved keyword [3234]
- Cannot create rx-queues for interfaces on KVM and VirtualBox [3674]
- DPDK does not work with Mellanox ConnectX-3 drivers [3781]
- VPP service crashes on attempt to connect to Azure TNSR VM or perform a REST request [3850]

General

- Non-root users cannot access the FRR log file [4826]

Host

- Cannot remove an IP address assigned to a host interface during the installation process via TNSR CLI [3013]
- Cannot configure the default gateway for host namespace via TNSR CLI [3702]
- VRF interface for a custom route table persists in the operating system after restarting services [4866]

Host Netfilter

- Sequence numbers displayed in state data for host ACLs do not match the configuration database [4789]

IPsec

- IPsec tunnels take much longer than expected to be marked down when connectivity to the peer is interrupted [3533]

Installation

- When installing TNSR via iDRAC Virtual Media redirector the text installer screensaver starts in before the installation can complete [3182]
- Software selection in the installer changes after network configuration [3834]

Interfaces

- [VLAN] Packets don't pass through subinterface after subinterface configuration has been modified [1612]
- VLAN subinterfaces do not work with virtio network drivers on KVM [2189]
- Unable to set IPv6 link-local address on an interface [2394]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
- Unable to create subinterface with dot1q "any" tag [2652]
- Unable to create multiple QinQ subinterfaces with the same outer VLAN tag [2659]
- Subinterface settings aren't applied on change without restarting dataplane [2696]
- Invalid routes remain in table when next-hop IP address is no longer directly connected [3161]
- TX queues utilized based off RX queue count [3624]
- Unable to set a TAP object as part of a host bridge [4427]
- Unable to delete a MAC address explicitly set for the TNSR side of a TAP interface [4433]
- [TAP] interfaces-state response contains "host-namespace": "(nil)" value in tap-table, when the namespace is specified as "host" [4867]
- Jumbo frames do not pass on vmxnet3 adapters [4891]

- Interface subnet routes are left within VRF route table after detaching interface from that VRF [4949]
- Interface subnet IPv6 route is left within default route table after attaching interface to a custom VRF [4950]
- Conflicting IP addresses remain on interfaces after VRF deletion [5035]
- Restoring a configuration database with named interfaces requires loading, restarting the dataplane, then loading again [5144]

Memif

- Unable to connect to memif interface using default socket [4448]

NAT

- Twice-NAT does not work [1023]
- NAT interfaces drop packets that do not match existing NAT sessions or static NAT mappings [1979]
- 1:1 NAT drops packets with ttl=2 from inbound interface [2849]
- VPP fails on DS-Lite AFTR router when packets from B4 are being received before pool is configured [3024]
- Clixon service fails when deleting dslite-ce role [3030]
- Reassembly timeout isn't working when full IP reassembly is configured [3269]
- Shallow virtual reassembly cannot be disabled when it is implicitly enabled by other features [3361]
- Second fragment of a packet is not virtually reassembled when max-reassemblies is set to 1 [3384]
- Full IP reassembly does not work with MAP [3386]
- MAP-T: bogus zeroes when translating short IPv4 to IPv6 [3460]
- NAT pool route table option only available when specifying a range [3628]
- Packets larger than 2034 bytes are dropped when performing IPv4 to IPv6 MAP translation [3742]
- MAP-T domain usage causes IPv6 traffic class value to always be copied from IPv4 ToS value [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- MAP does not relay IPv6 ICMP error messages to IPv4 [3809]
- Deterministic NAT mode prevents local clients from communicating with local services on TNSR [4356]
- Deterministic NAT mappings in the configuration database prevent the dataplane from starting when switching to endpoint-dependent mode [4371]
- NAT static mappings for ICMP do not work [4373]
- NAT static mappings for TCP/UDP protocol on "any" port result in translation for port 0 instead [4384]
- NAT static mappings assume external port 0 when port is omitted [4432]
- Deterministic NAT users experience sluggish performance and lag on video calls [4492]
- Unable to verify NAT sessions in deterministic mode [4562]
- Default NAT session timeouts do not work in endpoint-dependent mode [4600]
- NAT forwarding does not work in deterministic and simple modes [4604]

- VPP service fails on receiving packet when NAT simple mode along with static-mapping-only option is configured [4610]
- Packets that aren't destined to NAT pool are dropped when NAT simple mode with out2in-dpo option is configured [4927]
- Ping to outside NAT interface produces a NAT session when forwarding is disabled [4960]

NTP

- NTP does not properly handle IPv6 restrictions [4626]

Neighbor / ARP / NDP

- Packet loss during ARP transactions [2868]
- The MAC address of a static IPv6 neighbor cannot be changed [4454]

RESTCONF

- Adding a user via RESTCONF requires a password even when providing an ssh key [2875]
- RESTCONF “pretty-printed” JSON contains incorrect indentation [3521]
- OSPF interfaces are not validated when configured via RESTCONF [3528]
- Cannot change GRE tunnel type to or from ERSPAN via RESTCONF [4353]

Routing

- Changing default metric for OSPF server does not result in update on other routers [2586]
- CLI shows that only IPv4 prefix is available within prefix-list sequence configuration [2689]
- OSPF RIB is not updated when the ABR type is changed between standard and shortcut [2699]
- BGP updates for new prefixes ignore the advertisement-interval value and are sent every 60 seconds [2757]
- RIP “timeout” timer does not work [2796]
- ttl-security hops value can be set when ebgp-multihop is already configured [2832]
- BGP session soft reset option does not work for IPv6 peers [2833]
- extended-nexthop capability isn't being negotiated between IPv6 BGP peers [2850]
- Unable to verify received prefix-list entries via CLI when using ORF capability [2864]
- BGP network backdoor feature isn't working without service restart [2873]
- BGP next-hop attribute aren't being sent unmodified to the eBGP peer when route-server-client option is configured [2940]
- BGP listen range option disappears from active FRR configuration after restarting BGP [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to delete OSPF3 config for an interface [3481]
- Error occurs when using “match ipv6 address <acl_name>” in route-map configuration [3619]

- Change made to a prefix-list used in a OSPF3 route-map doesn't affect redistributed routes [3644]
- TNSR does not prevent creating static routes for directly connected networks [3813]
- OSPF conditional default route injection does not work [3846]
- Unable to verify received routes when high number of routes received via BGP [3918]
- Cannot disable IPv4 in BGP [4399]
- FRR prefix list synchronization lost after dataplane restart [4456]
- TNSR allows OSPF network type for a loopback interface, which is rejected by FRR [4800]
- Unable to set a custom path for the FRR log file [4825]
- Unable to verify BGP session information when BGP is configured for the non-default VRF [4966]
- Static routes in custom VRFs are not available to FRR [4975]
- Invalid IPv6 routes are shown when searching by prefix [5033]
- TNSR responds to IPv6 Router Solicitation messages with default Router Advertisement when not configured to do so [5097]
- TNSR resolves output interface via default routing table when VRF static route is configured without interface name [5134]

SNMP / IPFIX / Prometheus

- SNMP does not accept changes made using a write community [2567]
- Restarting SNMP daemon causes NMS software to report a device reboot [3901]
- SNMP results are returned at approximately 3 per second [4670]
- RESTCONF returns an incorrect response code when removing IPFIX destinationIPAddress [5045]
- IPFIX NAT logging reports internal FIB index instead of VRF ID [5067]
- Configuring IPFIX collector address to directly connected host in Azure causes continuous VPP crash [5117]
- IPFIX sends an incorrect value in NAT Quota Exceeded event [5135]

Tunnel Protocols

- Changes to an existing VXLAN tunnel configuration do not apply until the dataplane is restarted [1778]
- Unable to modify GRE tunnel settings [2698]

VRRP

- VRRP cannot change the MAC address on ixgbevf interfaces [4551]

clixon

- Clixon allows invalid prefix lists [3603]
- log_upgrade does not print cobj paths correctly in tnsr-upgrade.log [4747]

httpd

- Clients receive an SSL certificate error when querying the HTTPS server if it uses a certificate with an MD5 digest [2403]
- HTTP server retains its configuration after restarting TNSR services [2453]

34.9 TNSR 20.08 Release Notes

34.9.1 About This Release

This is a regularly scheduled TNSR release including new features and bug fixes.

Warning: While Netgate has tested common update scenarios, updating in-place from previous versions of TNSR may not work in all installations.

Installing TNSR 20.08 directly and then restoring the TNSR configuration data is a safer approach. However, that method requires physical access or equivalent out-of-band access and is potentially more time consuming. See *Upgrading by Redeploying TNSR* for details.

Significant Architectural Changes

Network Namespaces

TNSR version 20.08 introduces network namespaces which provide isolation between host OS and dataplane networking environments. The `dataplane` namespace is for the networking environment managed by TNSR, and the `host` namespace is for the networking environment managed by the host operating system. This is a significant shift in behavior for various areas of TNSR. [3744]

See also:

See *Networking Namespaces* for more information on namespaces and how they operate. See *Default Namespaces* for information on how various areas of TNSR behave with namespaces by default.

Dataplane/Router Integration

TNSR version 20.08 also shifts from the VPP dataplane router plugin to the new `linux-cp` plugin. These plugins enable daemons such as FRR and strongSwan to work together with the dataplane to manage routing and perform necessary tasks. [3617]

The combination of `linux-cp` and isolated namespaces provides increased security and numerous user experience improvements.

Virtual Routing and Forwarding

TNSR 20.08 also adds Virtual Routing and Forwarding (VRF) support. Previous versions of TNSR supported multiple routing tables which could be used to direct traffic on various interfaces, but that function has been replaced with a VRF implementation which provides more features, such as integration with dynamic routing. Existing non-default routing tables are automatically converted to VRF entries on upgrade.

Warning: Implementing this feature has resulted in significant CLI syntax changes for static and dynamic routing functions. Consult the documentation for any routing features currently in use for more details, along with the [CLI Command Reference](#)

See also:

See [Virtual Routing and Forwarding](#) for more details.

General

- Updated CentOS to 8.2 [4499]
- Updated VPP to 20.01-1621 [3649]
- Updated FRR 7.3.1 [2953]
- Updated strongSwan to 5.8.4 [3935]
- Updated clixon to 4.5.0
- Updated Kea to 1.7.7 [3934]
- Package management changed from yum to dnf [4637]
- Fixed VMXNET3 interface initialization with a single RX queue for TNSR instances on VMware configured for VM Hardware Compatibility with ESX 6.7 (VM Version 14 or later) [2576]
- Added dmidecode and lshw as dependencies of tnsr-diag [3613]
- Added tnsrctl utility to control TNSR services from the shell [4654]

Configuration Changes

- Static routes no longer require an interface name. TNSR can now resolve the next hop properly by IP address alone.
- Static route next-hop interfaces, if present, must be correct in TNSR 20.08 configurations.

Warning: Previous versions of TNSR may have allowed a route to be defined for an interface and next hop gateway which did not match (e.g. The interface does not share a subnet with the gateway). These invalid route combinations are now rejected, which may result in an error loading the configuration after the upgrade. Ensure static route next-hop interfaces are correct, or removed, before upgrading to TNSR 20.08.

- Dynamic routing configuration changed in various ways when [Virtual Routing and Forwarding](#) support was added.
- Configurations with multiple routing tables are automatically migrated to VRFs when the configuration is upgraded. This may result in name changes to route tables as the names for VRF entries have tighter restrictions. For example, names longer than 15 characters will be shortened and invalid characters will be replaced [4793]

- If the configuration database fails to load, a failsafe database is loaded instead of exiting with an error [3833]
- The default names for interfaces using the `ixgbe` PMD may change on upgrade. Previous versions of the `ixgbe` PMD in DPDK erroneously indicated 10 Gbit/s capabilities in all devices, even if the devices were not capable of that speed. TNSR 20.08 includes a new version of DPDK with a corrected driver which now properly reflects the speed capability of the port in the interface name.

Warning: Affected hardware which has ports without 10Gbit/s capability, such as the Netgate SG-5100, will change interface names when upgrading to TNSR 20.08. For example, names will change from `TenGigabitEthernetX/Y/Z` to their true speed, `GigabitEthernetX/Y/Z`. The configuration database will need manual adjustments to use the correct names. This does not affect configurations using custom interface names. For assistance, please contact [Netgate TAC](#).

ACLs

- Added ACL sequence numbers to `show interface access-lists` output [4355]
- Fixed incomplete output when viewing IPv6 ACLs [4791]

Bridge

- Fixed spurious error messages when deleting a bridge domain with ARP entries [3559]

CLI

- Fixed issues which caused excessive delays when displaying the contents of large route tables [3899]
- Fixed issues which caused excessive memory consumption when displaying the contents of large route tables [3889]
- Improved handling of configuration changes so they are only applied when necessary [3832]
- Fixed issues displaying command output containing non-XML-safe data [3785]
- Added CLI commands to initiate a reboot of the TNSR device [3396]
- Improved handling of unknown elements in the configuration database, so that errors may be corrected in the CLI rather than by editing the configuration [4638]
- Fixed an issue where the CLI could crash when typing `?` in a description field [4734]

Dataplane

- Fixed handling of UIO driver changes such that they are now reflected properly on interfaces which are already in use [3209]
- Added configuration option to set a default Ethernet MTU in the dataplane [4397]
- Fixed a problem where removing all CPU settings left an empty `<cpu/>` tag in the configuration [3936]
- Added validation to prevent configuring `workers` and `corelist` or `coremask` at the same time [3849]
- Fixed explicit assignment of core 0 [3630]

Warning: Read *CPU Workers and Affinity* for important information on core 0 behavior and usage.

- Removed dependency relationship between the `vpp` and `clixon-backend` services in `systemd` to prevent a dataplane issue from making the CLI unusable, so that the CLI may be used to correct the problem. [3828, 3040]

Note: When starting services manually, the `vpp` service must now be manually started before `clixon-backend`. This change has been reflected throughout the documentation. If any scripts or shell aliases on a TNSR install manage services directly, they should be updated accordingly.

- Initialization of dataplane DPDK cryptographic devices changed so that placement of devices on queue pairs is optimized for better performance [4788, 2267]
- Added commands to configure dataplane logging behavior [4640]
- Added commands to configure DPDK Logging level [4680]
- Added commands to configure DPDK transmit checksum offloading of TCP/UDP for network devices [4680]
- Added commands to configure DPDK decimal interface name behavior [4680]
- Added commands to configure DPDK default interface parameters [4680]

DHCP

- Changed DHCP lease database output to use human-readable dates [4394]
- Added RESTCONF query to retrieve DHCP leases [4375]
- Improved DHCP option removal validation to prevent invalid commands [2667]
- Changed how the DHCP server daemon is launched so that it will recover after a clixon-backend failure [4489]

Diagnostics

- Changed `ping` and `traceroute` so they can run in either the host or dataplane namespace [3747]

DNS

- Added commands to configure DNS resolution behavior host and dataplane namespaces (*System DNS Resolution Behavior*) [3754]

GRE

- Fixed validation failure at startup when using a non-default routing table on a GRE interface [4732]

Host

- Fixed issues which prevented displaying complete information for host interfaces [4351]
- Removed unnecessary host ACLs (nftables) for dataplane services [3753]
- Added commands to display host ACLs (`show host acl`) [1565]
- Fixed incorrect validation error when matching via port range in host ACLs [4746]
- Fixed DHCP client on host interface giving up if a response is not received in a timely manner (Service = Failed) [3015]

Interfaces

- Changed Interface DHCP clients to use Linux `dhclient` instead of the native dataplane (VPP) DHCP client [4464]
- Allowed unattached or preconfigured interfaces to remain in the configuration database, to prevent the configuration from failing to load in situations where interfaces may have changed. [3829]

This way administrations can utilize the CLI to correct these situations, rather than requiring them to edit the configuration database directly.
- Added support for configuring L3 interface MTU values (IPv4, IPv6) [3426]
- Fixed assignment of RX queues to specific workers [3025]
- Fixed issues with deleting memif sockets after they have been removed from memif entries [3661]
- Improved error messages generated when attempting to create a memif with a socket which is already in use [3637]
- Fixed incorrect memif role in state data [4453]
- Added TNSR interface names to Linux kernel interfaces as aliases [4425]
- Improved validation of loopback interface names [3615]
- Fixed adding a DHCP client hostname to an existing DHCP client [2557]
- Fixed re-enabling loopback interfaces breaking packet forwarding until the dataplane was restarted [2828]
- Fixed IPv6 addresses on IPsec or GRE interfaces not displaying in `show` command output [2425]

IPsec

- Fixed session establishment behavior of IPsec tunnels which were removed and then added back [1313]
- Fixed issues with SA ordering preventing IPsec traffic from passing if both endpoints attempted to establish a tunnel at the same time [2391]
- Fixed validation when deleting configuration for IPsec tunnels [3456]
- Added support for using an FQDN as the remote address for an IPsec tunnel [4401]
- Eliminated excess logging when DPDK decrypts ESP [4366]
- Improved error messages presented to the user when attempting to create invalid IKE authentication or identity configurations [3885]
- Added IPsec SA statistics counters [3883]
- Added support for IPsec NAT-T (UDP Encapsulation) [3496]

- Fixed issues with IPsec tunnels being initiated from host interfaces in certain circumstances [3451]
- Fixed improper IPsec tunnel initialization when using a hostname for the remote address of the tunnel [4726]
- Changed how IPsec `ipip` interfaces are initialized so they are no longer automatically enabled when an IPsec tunnel is established [4481]

As a consequence, `ipip` interfaces for IPsec tunnels must now be manually enabled when created.

Installations of TNSR upgraded from previous versions will have the `ipip` interfaces enabled automatically during the configuration upgrade process.

- Fixed IPsec packet padding. In previous versions, IPsec packets could contain an invalid 15th byte of padding, which led to such packets being dropped by peers. Only affected packets which contained 15 bytes of padding [4796]

LACP

- Fixed synchronization of MAC addresses between the dataplane and host tap interfaces when a bond interface does not have a MAC address explicitly configured [2126]

LLDP

- Fixed validation of LLDP parameter values [3459]

MAP

- Fixed generation of ICMPv6 unreachable messages when a packet fails to match a MAP domain on a MAP BR [1869]
- Fixed pre-resolve with MAP-T mode [1871]
- Fixed handling of initial fragment of UDP and ICMP6 packets on MAP-T border routers when it receives fragments from an IPv6 network [3412]
- Fixed a spurious console error when querying MAP data via RESTCONF [4524]
- Improved handling of “Packet Too Big” ICMP replies when packets exceed the MTU inside MAP [2987]
- Improved handling of “Hop Limit Expires” ICMP replies when packets expire outside of the MAP-T domain [2986]
- Improved handling of “Hop Limit Expires” ICMP replies when packets expire at the MAP BR [2984]
- Improved handling of “TTL Expires” ICMP replies when packets expire in MAP domain [2985]
- Improved handling of “TCP or UDP Packet Outside Allowed Port Range” which now sends ICMP Type 1, Code 5 replies when the source port on a packet is outside of the allowed range [2985]

NACM

- Fixed default parameters rule for NACM node access-operation and module which now work without explicit settings [2514]
- Added NACM support for access restrictions based on path [3523]

NAT

- Added validation to prevent the use of deterministic nat with incompatible options, such as a pool of IP addresses for NAT [3257]
- Fixed dataplane usage of NAT timeouts per protocol [4598]
- Fixed handling of icmp protocol in NAT rules [3924]

Warning: Static NAT rules which had local and remote port incorrectly set to 0 would NAT any protocol rather than only being restricted to the protocol on the rule. On upgrade, that behavior will be retained for Non-ICMP rules but the rule will be altered to correctly reflect the protocol of the rule as any. Inspect all static NAT rules after upgrade and correct any rules which do not match their intended configuration.

- Improved behavior of NAT session scavenging [3488]
- Fixed a dataplane crash when NAT forwarding is enabled in combination with multiple worker threads [3860, 3627]

Neighbors

- Added validation to prevent configuring neighbors on ipip and gre interfaces which are L3 only [4505, 4552]

Note: Neighbor entries on these interfaces are removed from the configuration database automatically when upgrading the configuration.

- Fixed display of IPv6 neighbors [3884]
- Added age of neighbor entries to state data [3454, 3241]
- Fixed a problem where replacing a dynamic neighbor entry with a static neighbor entry would not properly reflect the change [3807]

NTP

- Fixed deletion of NTP server default restriction list entries [3413]

RESTCONF

- Improved RESTCONF responses for leaf nodes with a value of an empty string ("") which now conform to RFC 7951. [3450]
 - Empty values of yang type `empty` are encoded as: `{"x": [null]}`
 - Empty string values are encoded as: `{"x": ""}` (changed from `null` in clixon 4.0 and `[null]` in clixon 4.3)
 - Empty containers are encoded as: `{"x": {}}`
 - Empty elements in `unknown/anydata/anyxml` encoded as: `{"x": {}}` (changed from `{"x": null}`)
- Fixed RESTCONF responses containing IETF error types such as `application errors` so they no longer contain unexpected additional `rpc-error` JSON keys [3455]
- Fixed deleting ACL rule via RESTCONF [2841]
- Removed unnecessary system state file operations when performing RESTCONF queries [4469]
- Added RESTCONF query to enumerate network and crypto devices available to the dataplane [3463]
- Added validation to prevent invalid usage of unspecified list entries [3457]
- Fixed a memory leak when querying `/restconf/data` repeatedly [4507]
- Fixed missing interface data when querying `/restconf/data` [4507]
- Fixed adding MACIP rule via RESTCONF [2844]

Services

- Added commands to separately configure management service instances for host and dataplane namespaces (*TNSR Service Namespaces*) [3752]
- Modified services which support the dataplane to run in the dataplane namespace [3746]

SNMP

- Fixed spurious `cache expired` errors from SNMP in messages log [4426]
- Added support for enabling coredumps from the SNMP daemon [3879]
- Corrected value of `sysObjectID` to reflect the *Netgate OID* [3946]

Static Routing

- Fixed handling of packets when an output interface configured in the routing table is disabled when there are other usable paths to the same destination present [3359]
- Added validation to prevent specifying an invalid weight of `0` on static route next hops [4595]
- Moved static route next-hop preference to a per-route priority to align with what is supported by host OS routing tables [4479]
- Added route lookup function to show `route` which locates the route TNSR will use to reach a given destination [535]
- Fixed IPv6 packet loss observed between TNSR instances [2382]

Dynamic Routing

- Fixed configuration of dynamic routing debug logging via TNSR CLI [3199, 3939]

Note: Use an absolute path to a log file with the `log file` command, not a relative path. The file must be writable by the `frr` user.

BGP

- Fixed BGP `maximum-path` option for eBGP and iBGP so they can now be configured simultaneously [2879]
- Fixed `clixon-backend` loading a BGP configuration with 150k advertised prefixes [2784]
- Fixed CLI configuration of BGP IPv4/IPv6 multicast address family [3038]
- Fixed CLI configuration of BGP dampening values [3057]
- Fixed CLI configuration of BGP `write-quanta` values [3087]
- Fixed CLI configuration of BGP confederation identifiers [3210]
- Fixed restoration of static routes after failing over to a BGP route [3543]
- Added method to specify multiple communities in a single route map [3718]
- Fixed missing routes when running BGP over IPsec [3610]
- Moved BGP option `enforce-first-as` from BGP router to BGP neighbor to match the updated location expected by FRR [4520]
- Fixed an issue with BGP connections not being re-established after a dataplane restart [4406]
- Fixed incorrectly duplicated `next-hop` entries for multipath routes received via BGP [2935]
- Fixed IPv6 BGP session establishing over IPsec or GRE [2429]

OSPF

- Fixed OSPF `default-information originate` so that it works with static route `0.0.0.0/0` as default route [2477]
- Fixed handling of changes in redistributed kernel routes triggering addition/removal of corresponding OSPF Type-5 LSAs [2389]
- Fixed OSPF ignoring interface MTU changes [4442]
- Fixed route map configuration to filter redistributed routes into OSPFv3 [3618]
- Fixed routing information in the forwarding table not being updated correctly when a static route which overlaps a route received via OSPF was removed [2320]

RIP

- Fixed CLI tab completion displaying incorrect choices when deleting RIP offset lists [3395]
- Fixed key-chain string not being applied in the routing daemon if configured after RIP was enabled [2878]

Updates

- Added a command to clear the package cache [3530]
- Added a command to reinstall a package [2976]
- Added parameter expansion to package commands [3529]

VRRP

- Fixed backup processing of priority 255 advertisements [3782]

VXLAN

- Fixed VXLAN and OSPF compatibility issues with configuration ordering [2511]

34.9.2 Known Limitations

Configuration

- Restoring a configuration with named interfaces may fail [3913]
Workaround: Configure interface names and restart the dataplane, then restore the configuration.
- Removing the startup configuration may retain some active settings, including custom interface names, users added to the operating system, and PKI files [3723]
- Configurations from TNSR 19.12 or before with BGP may fail to upgrade properly [3593]

ACLs

- ACLs used with `access-list output` do not work on traffic sent to directly connected hosts [2057]

BFD

- Unable to set delayed option on an existing BFD session [2709]

CLI

- CLI does not return from shell in certain situations [2651]

Dataplane

- Systems with multiple CPU sockets using NUMA may experience dataplane issues at startup or when the dataplane is restarted manually [2383]
- CLI does not prevent the user from configuring a custom interface name which uses reserved keywords which may cause the dataplane to fail (e.g. `span`) [3234]
- Dataplane may crash on Azure when IPsec peer restarts while an IPsec tunnel is connected [4790]
- Dataplane service crashes on attempt to connect to Azure TNSR VM or perform a REST request [3850]
- CLI does not prevent a dataplane configuration not supported by certain virtual environments [3674]
Workaround: Enable the desired behavior in the host before attempting to use it in TNSR.
- DPDK does not function with Mellanox ConnectX-3 drivers [3781]

GRE

- Unable to modify GRE tunnel settings [2698]

Host ACLs

- Sequence numbers displayed in host ACL state data do not match configured values [4789]

Host Interfaces

- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
Workaround: Remove and reconfigure the TAP interface.
- Cannot remove an IP address assigned to a host interface during the installation process from within the TNSR CLI [3013]
- Cannot add default gateway or other routes to host routing table from the TNSR CLI [3702]

HTTP Server

- HTTP server retains old configuration after TNSR services restart [2453]
- SSL certificate error when the HTTP server is configured with a certificate that uses md5 digest [2403]

Installer

- TNSR Install over OOB Management GUI may appear to fail due to the screen saver activating before installation is completed. [3182]

This affects installation using a console such as iDRAC Virtual Media redirector.

Workarounds: Press `tab` when the screensaver activates. Alternately, use vFlash instead of iDRAC for better performance.

Interfaces

- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- Chelsio interfaces crash the dataplane [1896]
- VLAN subinterfaces may not work under KVM using virtio drivers [2189]
- An IPv6 link-local address cannot manually be configured on an interface [2394]
- Bridge domain ARP entries are not displayed in the CLI [2378]
- Bridge domain ARP entries cannot be removed from the CLI [2380]
- Bridge domain MAC age cannot be removed from the CLI [2381]
- Link state always reported as “up” when using `e1000` network drivers [2831]
- Subinterface settings are not applied on change without restarting dataplane [2696]
- Unable to create multiple IP QinQ subinterfaces with the same outer vlan tag [2659]
- Unable to create a subinterface with `dot1q any` [2652]
- Full reassembly may not disable on an interface once enabled when using `no ip reassembly enable` [3360]

Workaround: Remove both the reassembly enable and type configuration on the interface:

```
tnsr(config-interface)# no ip reassembly enable
tnsr(config-interface)# no ip reassembly type
```

- Unable to set tap object as part of host bridge [4427]
- Unable to delete MAC address explicitly set for the TNSR side of tap interface [4433]
- Unable to connect to memif interface using default socket [4448]

IPsec

- Attempting to change IKE `lifetime` for an existing tunnel to a value lower than the lifetime of a child entry results in an unintuitive error message [3243]
- IPsec tunnels take longer than expected to go down after a failure [3533]

LACP

- There may be a 10-15 second delay with ARP resolution after configuring an LACP bond [2867]

LLDP

- All LLDP interface parameters must be configured at the same time. [3462]
- When LLDP parameters change, TNSR requires a dataplane restart for the new settings to take effect. [3486]

MAP

- Full ip reassembly does not work with MAP [3386]
- Ethernet padding is incorrectly copied from IPv4 to IPv6 frames when translated by MAP [3460]
- Packets larger than 2034 bytes are dropped when IP4 to IP6 MAP translation is performed [3742]
- IPv6 traffic class value is always copied from IPv4 ToS value regardless of configuration when MAP-T domain is used [3774]
- TCP MSS value is not applied to IPv4 packets when IPv6 to IPv4 decapsulation is performed on MAP-E BR [3783]
- IPv6 ICMP error messages are not relayed to IPv4 through MAP [3809]

NAT

- `twice-nat` does not work [1023]
- NAT forwarding fails with more than one worker thread [2031]
Note: This also affects connectivity to services on TNSR, such as RESTCONF, when the client is not on a directly connected network.
- Router with 1:1 NAT will drop packets with `ttl=2` from input interface [2849]
- VPP service fails if NAT `concurrent-reassemblies` is set to 1 and several fragments arriving to the NAT outside interface [2739]
- ICMP fragments arriving to NAT Inside interface aren't being reassembled by NAT reassembly function [2733]
- Dataplane fails on DS-Lite AFTR router when packets from B4 are received before pool is configured [3024]
Workaround: Configure the DS-Lite pool `**before**` the `aftr` endpoint.
- DS-Lite CE configuration is not fully removed when deleted via CLI, which may leave TNSR with an invalid configuration database which cannot start [3030]
- Reassembly timeout does not work when full IP reassembly is configured with NAT [3269]
- Shallow Virtual Reassembly cannot be disabled when it is enabled implicitly by other features such as NAT and MAP [3361]
- Shallow Virtual Reassembly may fail when configured explicitly after it is implicitly enabled by other features such as NAT and MAP [3362]
- Re-enabling full IP reassembly on an interface which has implicit shallow virtual reassembly enabled breaks the packet flow [3379]

- Setting reassembly type `full` and then enabling ip reassembly on an interface which has implicit shallow virtual reassembly enabled breaks packet flow [3380]
- Second fragment of a packet is not being virtually reassembled when `max-reassemblies` counter for shallow virtual reassembly is set to 1 [3384]
- Route table option for NAT pools is only available when using an address range [3628]
- Services on TNSR cannot be reached through the dataplane namespace when Deterministic NAT is active [4356, 4604]
- CLI produces an error due to incompatible NAT options when switching away from deterministic NAT mode without first removing deterministic NAT options [4371]
- Deterministic NAT may have performance issues in certain environments [4492]
- NAT session list is empty when Deterministic NAT is active [4562]
- Default NAT session timeout values are not respected in Endpoint-dependent NAT mode [4600]
- Static NAT translations for ICMP do not forward packets [4373]
- Static NAT translations for TCP or UDP with port `any` do not forward packets [4373]
- Static NAT entries which omit the external port show port `0` instead, which is an invalid value [4432]
- Per-user NAT session limits (`max-translations-per-user`) are not respected [4606]
- VPP service fails on receiving packet when NAT simple mode along with `static-mapping-only` option is configured [4610]

Neighbor / ARP / NDP

- Packet loss during ARP transaction immediately after Dataplane restart or interface disable/enable [2868]
- The MAC address of an IPv6 neighbor cannot be changed in-place [4454]
Workaround: Remove the neighbor and add it with the new MAC address.

NTP

- NTP state data is not available via RESTCONF [4370]
- NTP does not properly handle IPv6 restrictions [4626]

RESTCONF

- Adding a user via RESTCONF requires a password even when key is provided [2875]
- RESTCONF JSON response first level indent is 4 spaces, should be 2 [3521]
- RESTCONF does not validate existence of OSPF interfaces [3528]
- Unable to change GRE tunnel type to or from `erspan` via RESTCONF [4353]
- RESTCONF response for `interface-state` does not contain `tap` table [4467]

Dynamic Routing

- CLI shows that only IPv4 prefix is available within `prefix-list` sequence configuration [2689]
- CLI crash when using `match ipv6 address <acl_name>` in route-map configuration [3619]
- CLI allows creating invalid prefix list entries which are rejected by FRR [3603]
Workaround: Carefully craft entries with correct lower and upper bounds.
- Route preferences may not be respected if dynamic and static routes overlap [3811]
- Prefix list synchronization lost after dataplane restart [4456]

BGP

- BGP network `backdoor` feature does not work without service restart [2873]
- Unable to verify received prefix-list entries via CLI when ORF capability is used [2864]
- `extended-nexthop` capability is not being negotiated between IPv6 BGP peers [2850]
- BGP session soft reset option does not work for IPv6 peers [2833]
Workaround: Reset the connection without soft option.
- `ttl-security hops` value can be set when `ebgp-multihop` is already configured (the options are mutually exclusive) [2832]
- BGP updates for new prefixes are sent every 60 seconds despite configured `advertisement-interval` value [2757]
- IPv4 BGP summary command returns results for both IPv4 and IPv6 [3270]
- BGP `next-hop` attributes are not sent unmodified to an eBGP peer when `route-server-client` option is configured [2940]
- `show route dynamic bgp ipv6 summary` command will not show any information if address family is not specified when configuring BGP for IPv6 [2967]
Workaround: Set the address family when configuring BGP. Alternately, due to [3270], IPv6 information is current visible in `show route dynamic bgp ipv4 summary`, so use that command instead.
- BGP listen range option disappears from the active dynamic routing daemon configuration after restarting BGP service [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to verify received routes when a large number of routes is received via BGP [3918]
- `route-reuse` value is displayed as XML config within BGP configuration output [4486]
- Deletion of route-map does not update related BGP routes without restarting BGP [3875]
- Cannot Disable IPv4 Protocol in BGP [4399]

OSPF

- The OSPF RIB is not updated when the ABR type changes from standard to shortcut, and vice versa [2699]
- Changing the default metric for OSPF server does not result in update on other routers [2586]
- The CLI does not prevent setting a network type for loopback interfaces in OSPF, which is not a valid action [4800]
- Change made to a prefix-list used in an OSPF3 route-map does not affect redistributed routes [3644]
- OSPF conditional default route injection does not work [3846]

OSPF6

- When deleting an OSPF6 interface via RESTCONF, it may remain active in the OSPF6 daemon despite being removed from the TNSR configuration [3481]

RIP

- RIP timeout value is not respected [2796]

SNMP

- There are no changes when using “write” community [2567]
- SNMP does not return a response for `hrSystemUptime.0` which may cause an NMS to report a reboot when the dataplane and/or SNMP service is restarted [3901]
- Large SNMP results are returned slowly [4670]

VRRP

- VRRP does not function on an outside NAT interface with a priority of 255 [2419]
Workaround: Set the `priority` of the VR address on the primary router to a value less than 255 yet higher than that of other routers. Enable Accept Mode on the VR address if the VR address will be used by services on TNSR.
- VRRP does not function with `ixgbevf` PMD (Intel 82599ES in SR-IOV Virtual Function mode) [4551]

VXLAN

- Changes to a VXLAN interface do not apply until the dataplane is restarted [1778]

34.9.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.10 TNSR 20.02.2 Release Notes

34.10.1 About This Release

This is a maintenance release for TNSR software version 20.02 with bug fixes specific to the Azure platform. This version is only published on Azure.

Warning: For more information on changes in TNSR 20.02, including important information about upgrading from versions prior to TNSR 20.02, see [TNSR 20.02 Release Notes](#).

General

- Fixed potential delays in initial connectivity for new Azure instances [3729]
- Fixed issues with the default startup configuration on new Azure instances [3699]

Interfaces

- Changed interface names on Azure to be prefixed with `VirtualFunctionEthernet` instead of using the speed and type, to improve consistency and reduce the likelihood of interface names changing unexpectedly [3728]
- Fixed issues with Azure instances attaching to the wrong devices [3660, 3727]
- Fixed issues with Azure instances failing to attach to any interfaces [3668]
- Fixed incorrect default MTU on Azure [3730]

34.11 TNSR 20.02.1 Release Notes

34.11.1 About This Release

This is a maintenance release for TNSR software version 20.02 with bug fixes.

Warning: For more information on changes in TNSR 20.02, including important information about upgrading from versions prior to TNSR 20.02, see [TNSR 20.02 Release Notes](#).

Dataplane

- Fixed backend crash when setting dataplane stat segment heap size [3598]
- Fixed validation during deletion/change of custom interface names [3461]

BGP

- Fixed static route restoration after failing over to a BGP route [3543]

IPsec

- Fixed interface validation during deletion of IPsec tunnel configuration [3456]

34.12 TNSR 20.02 Release Notes

34.12.1 About This Release

This is a regularly scheduled TNSR release including new features and bug fixes.

Warning: *TNSR 20.02.1* contains additional fixes for problems found in TNSR 20.02 and users should upgrade to that version instead.

The *TNSR 20.02.2* release corrects problems specific to Azure and is only available on that platform.

General

- Updated DPDK to 19.11 [2968]
- Updated VPP to 20.01 [2970]
- Updated strongswan to 5.8.2 [2964]
- Updated clixon to 4.3.2 [2570]
- Yang module version data is now stored in the configuration database [3022]
- Added support for *Shallow Virtual Reassembly* [2954]
 - This replaces manual reassembly configuration for NAT and MAP with *global reassembly configuration parameters*.
 - The old reassembly options under NAT and MAP must be removed from the configuration database. This change can be made automatically by *the configuration database update script* [3019, 3021].
- Added a *diagnostic information utility* for use when submitting support requests [2769]

Configuration Changes

Several areas of the configuration were changed. These changes must either be made manually or see [Updating the Configuration Database](#) for information on how to automatically update the configuration using a script included in this update.

- IPsec interfaces in the dataplane changed from `ipsec<N>` to `ipip<N>` and all references in the configuration must be updated to follow that change [2970]

This change can be made automatically by [the configuration database update script](#) [2972]

ACLs

- Fixed issues with accessing very large ACLs (100K rules) repeatedly [2558]

Azure

- Fixed network connectivity issues on Azure [2952]

Dataplane

- Fixed dataplane auto pinning of worker threads to cores not following expected conventions [2846]
- Fixed dataplane reporting incorrect physical core ID for main thread [2845]
- Added QAT crypto Virtual Functions (VF) to VPP `startup.conf` when `{corelist,coremask}-workers` is set and a crypto Physical Function (PF) is white listed [3248]
- Fixed potential situations where DPDK driver sections may not have been written to the dataplane startup configuration [3160]
- Added dataplane DPDK `iova-mode` configuration options [3416]
- The default dataplane UIO driver has been changed to `igb_uio` instead of using automatic driver selection [3414]
- Fixed issues with loading the `vfio-pci` driver at boot time [2686]

DHCP

- Added methods to view the current DHCP lease database via CLI and RESTCONF [2241]
- Added the ability for the DHCP server to use new custom option definitions rather than only redefining existing options with custom values [2934]

Interfaces

- Added options to assign per-interface RX queues to specific worker threads [2018]
- Fixed issues on XG-1537 and other systems with X552 NICs where if one of the **SFP+** (not copper) interfaces did not have an active link when the dataplane restarted, the interface would remain down when the link was reconnected. [2965]
- SPAN interfaces may now utilize [VXLAN interfaces](#) as destinations. [1027]

IPsec

- Fixed a dataplane and clixon crash due to large packets attempting to pass over IPsec. [2902]

Though the crash has been solved, packets larger than the `default-data-size` buffer value in the dataplane will fail to pass. To pass large IPsec packets, increase this buffer size. For example:

```
tnsr(config)# dataplane buffers default-data-size 16384
tnsr(config)# service dataplane restart
```

NAT

- Fixed incompatibility with NAT outside interfaces with output feature enabled being configured as a DHCP client [2914]
- Increased the default maximum NAT translations per user from **100** to **10240** [2752]

MAP

- Improved dataplane MAP-T RFC compliance [2977]
 - Fixed MAP-T IPv4 to IPv6 echo request not being translated correctly [2978]
 - Fixed MAP-T IPv4 to IPv6 echo reply not being translated correctly [2979]
 - Fixed MAP-T IPv6 to IPv4 echo request not being translated correctly [2980]
 - Fixed MAP-T IPv4 to IPv6 MTU Exceeded, DF flag set being handled incorrectly [2982]
 - Fixed MAP-T IPv4 to IPv6 TTL Expires at BR being handled incorrectly [2983]
 - Fixed MAP-T handling of spoofed IPv4 source prefix IPv6 to IPv4 [3053]
- Fixed an issue where MAP BR encapsulated/translated only the last fragment when it received fragmented packets from an IPv4 network [1887]
- Fixed fragmentation of IPv4 packets being performed regardless of configured MAP fragmentation behavior in MAP-T mode [1826]

Neighbors

- Fixed ARP responses for VPP outside interfaces responding incorrectly from the Host OS interface when both are connected to the same layer 2 [2266, 3314]
- Fixed issues with ARP table contents not being expired over time [3200]

QAT

- Added the capability to configure QAT VF entries passed to a virtual machine from the hypervisor [3250]

RESTCONF

- Added support for PATCH method in RESTCONF for API [1109]
- RESTCONF responses for leaf nodes with a value of an empty string ("") have changed, but still may not contain the expected encoded JSON output. [3450]

Previous versions of TNSR with clixon 4.0 or earlier returned the value as `null`, while clixon 4.3 now returns `[null]`. Per [RFC 7951](#), the previous behavior was incorrect. While the new behavior is closer to that mentioned in RFC 7951 section 6.9, the behavior described there is for `empty` type nodes, not `string` type. The intended behavior for empty strings is not yet clearly defined in RFC 7951.

This behavior is likely to change in future releases as the specification is refined.

Dynamic Routing

- Removed a redundant BGP command `enforce-multihop` which is identical to `disable-connected-check`.
 - Configuration database entries for `enforce-multihop` must be removed or changed to `disable-connected-check`. This change can be made automatically by *the configuration database update script* [3004]
- Fixed configuration of `distance` values for BGP address families via CLI [2869]
- Added validation to prevent configuring a `route-map` with a sequence number of 0 [2876]
- Removed incorrect `route-reflector-client` BGP option for eBGP peer from CLI [2936]
- Fixed setting multiple `attribute-unchanged` values via CLI [2941]
- Fixed setting `attribute-unchanged` BGP option without specifying a value [2942]
- Fixed setting `route-map` as a value for `unsuppress-map` via CLI [2944]
- Fixed disabling `send-community` BGP option in the CLI [2945]
- Fixed disabling `client-to-client reflection` BGP option in the CLI [2946]
- Fixed issue with displaying a large amount of received or advertised BGP prefixes taking a long time [2778]

SNMP

- Fixed SNMP configuration changes requiring a service restart [2568]

34.12.2 Known Limitations

General

- TNSR instances on VMWare configured for VM Hardware Compatibility with ESX 6.7 (VM Version 14 or later) cannot initialize their VMXNET3 interfaces unless there are 2 or more RX queues due to an upstream DPDK issue [2576]
 - Workaround 1: Create the VM with VM version 13 (ESX 6.5) and do not upgrade its compatibility level until this issue is resolved.
 - Workaround 2: Configure a `num-rx-queues` value of at least 2 for each VMXNET3 interface in the DPDK settings for the device(s) (*DPDK Configuration*) and restart the dataplane.

ACLs

- ACLs used with `access-list output` do not work on traffic sent to directly connected hosts [2057]

BFD

- Unable to set delayed option on an existing BFD session [2709]

CLI

- CLI does not return from shell in certain situations [2651]

Dataplane

- Systems with multiple CPU sockets using NUMA may experience dataplane issues at startup or when the dataplane is restarted manually [2383]
- CLI does not prevent the user from configuring a custom interface name which uses reserved keywords which may cause the dataplane to fail (e.g. `span`) [3234]
- UIO driver changes are not reflected on interfaces which are already in use [3209]
Workaround: Reboot the TNSR device.
- Setting dataplane stat segment heap size causes backend to crash [3598]
- Deletion/change of custom interface names is not validated properly [3461]

DHCP

- Unable to delete all DHCP server options at once from CLI [2667]

GRE

- Unable to modify GRE tunnel settings [2698]

Host Interfaces

- Configuration of host OS interface clears TNSR TAP interface configuration [2640]
Workaround: Remove and reconfigure the TAP interface.
- DHCP on Host Interface stops trying DHCP if a response is not received in a timely manner (Service = Failed) [3015]
Workaround: Set `PERSISTENT_DHCLIENT=1` in `/etc/sysconfig/network-scripts/ifcfg-<name>` for the affected host interface.
- Cannot remove an IP address assigned to a host interface during the installation process from within the TNSR CLI [3013]

HTTP Server

- HTTP server retains old configuration after TNSR services restart [2453]
- SSL certificate error when the HTTP server is configured with a certificate that uses md5 digest [2403]

Installer

- TNSR Install over OOB Management GUI may appear to fail due to the screen saver activating before installation is completed.

This affects installation using a console such as iDRAC Virtual Media redirector.

Workarounds: Press `tab` when the screensaver activates. Alternately, use vFlash instead of iDRAC for better performance.

Interfaces

- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- Chelsio interfaces crash the dataplane [1896]
- VLAN subinterfaces may not work under KVM using virtio drivers [2189]
- An IPv6 link-local address cannot manually be configured on an interface [2394]
- IPv6 addresses on IPsec or GRE interfaces may not be displayed in `show` command output [2425]
- Bridge domain ARP entries are not displayed in the CLI [2378]
- Bridge domain ARP entries cannot be removed from the CLI [2380]
- Bridge domain MAC age cannot be removed from the CLI [2381]
- Link state always reported as “up” when using `e1000` network drivers [2831]
- `vmxnet3` RSS fails to initialize, cannot pass packets [2576]

Workaround: Set dataplane `dpdk dev <device id> network num-rx-queues 2` in the TNSR CLI and restart the dataplane.

- Cannot add a DHCP client hostname to an existing DHCP client [2557]
Workaround: Remove the dhcp client from the interface and then re-add it with the hostname.
- Re-enabling loopback interface breaks packet forwarding until the dataplane is restarted [2828]
- Subinterface settings are not applied on change without restarting dataplane [2696]
- Unable to create multiple IP QinQ subinterfaces with the same outer vlan tag [2659]
- Unable to create a subinterface with `dot1q any` [2652]
- Full reassembly may not disable on an interface once enabled when using `no ip reassembly enable` [3360]

Workaround: Remove both the reassembly enable and type configuration on the interface:

```
tnsr(config-interface)# no ip reassembly enable
tnsr(config-interface)# no ip reassembly type
```

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]
- An SA ordering issue may prevent IPsec traffic from passing if both endpoints attempt to establish a tunnel at the same time [2391]
- Attempting to change IKE `lifetime` for an existing tunnel to a value lower than the lifetime of a child entry results in an unintuitive error message [3243]
- Deletion of IPsec tunnel configuration is not validated properly [3456]

LACP

- If a bond interface does not have a MAC address explicitly configured, the MAC address may become out of sync between the dataplane and host tap interfaces [2126]
Workaround: The MAC address will be synchronized when the interface status changes (up or down), so disable and enable the interface or restart the dataplane.
- There may be a 10-15 second delay with ARP resolution after configuring an LACP bond [2867]

LLDP

- All LLDP interface parameters must be configured at the same time. [3462]
- When LLDP parameters change, TNSR requires a dataplane restart for the new settings to take effect. [3486]
- LLDP parameter values are not validated by the CLI or RESTCONF and invalid values are rejected by the dataplane directly [3459]

MAP

- MAP-T BR cannot translate IPv4 ICMP echo reply to IPv6 [1749]
- MAP BR does not send ICMPv6 unreachable messages when a packet fails to match a MAP domain [1869]
- Pre-resolve does not work when MAP-T mode is used [1871]
- Full ip reassembly does not work with MAP [3386]
- ICMP6 echo request packets are being dropped on MAP-T BR when MAP domain with non-zero PSID offset is used [3401]
- Initial fragment of UDP and ICMP6 packets is dropped on MAP-T border router when it receives fragments from an IPv6 network [3412]
- Ethernet padding is incorrectly copied from IPv4 to IPv6 frames when translated by MAP [3460]

NACM

- Default parameters rule for NACM node `access-operation` and `module` does not work without explicit settings [2514]

NAT

- `twice-nat` does not work [1023]
- NAT forwarding is not working for `in2out` direction [1039]
- NAT forwarding fails with more than one worker thread [2031]
Note: This also affects connectivity to services on TNSR, such as RESTCONF, when the client is not on a directly connected network.
- Router with 1:1 NAT will drop packets with `ttl=2` from input interface [2849]
- VPP service fails if NAT `concurrent-reassemblies` is set to 1 and several fragments arriving to the NAT outside interface [2739]
- ICMP fragments arriving to NAT Inside interface aren't being reassembled by NAT reassembly function [2733]
- Dataplane fails on DS-Lite AFTR router when packets from B4 are received before pool is configured [3024]
Workaround: Configure the DS-Lite pool `**before**` the `aftr` endpoint.
- DS-Lite CE configuration is not fully removed when deleted via CLI, which may leave TNSR with an invalid configuration database which cannot start [3030]
- Deterministic nat option is not compatible with a pool of IP addresses [3257]
- Reassembly timeout does not work when full IP reassembly is configured with NAT [3269]
- Shallow Virtual Reassembly cannot be disabled when it is enabled implicitly by other features such as NAT and MAP [3361]
- Shallow Virtual Reassembly may fail when configured explicitly after it is implicitly enabled by other features such as NAT and MAP [3362]
- Re-enabling full IP reassembly on an interface which has implicit shallow virtual reassembly enabled breaks the packet flow [3379]
- Setting reassembly type `full` and then enabling ip reassembly on an interface which has implicit shallow virtual reassembly enabled breaks packet flow [3380]
- Second fragment of a packet is not being virtually reassembled when `max-reassemblies` counter for shallow virtual reassembly is set to 1 [3384]

Neighbor / ARP / NDP

- Packet loss during ARP transaction immediately after Dataplane restart or interface disable/enable [2868]

NTP

- NTP server default restriction list cannot be deleted in CLI [3413]

RESTCONF

- RESTCONF responses for leaf nodes with a value of an empty string ("") may not contain the expected encoded JSON output. [3450]

See *RESTCONF* earlier in this document for more details.

- RESTCONF responses containing certain IETF error types such as `application` errors may contain an extra JSON key, `rpc-error`, in the `error` list. RESTCONF users should accommodate this extra key, if present, when parsing IETF error messages. [3455]
- Incorrect BGP configuration is generated when IPv6 address family is configured via REST [2915]
- Adding a user via RESTCONF requires a password even when key is provided [2875]
- Adding MACIP rule via RESTCONF fails [2844]
- Cannot rename an ACL via RESTCONF [2843]
- Deleting ACL rule via RESTCONF crashes Clixon [2841]

Static Routing

- IPv6 packet loss may be observed between TNSR instances [2382]
- TNSR drops packets when an output interface configured in the routing table is disabled, even when other usable paths are present to the same destination [3359]

Dynamic Routing

- CLI shows that only IPv4 prefix is available within `prefix-list` sequence configuration [2689]

BGP

- An IPv6 BGP session cannot be established over IPsec or GRE [2429]
- BGP `maximum-path` option for eBGP and iBGP can not be configured simultaneously [2879]
- BGP network `backdoor` feature does not work without service restart [2873]
- Unable to verify received prefix-list entries via CLI when ORF capability is used [2864]
- `extended-nexthop` capability is not being negotiated between IPv6 BGP peers [2850]
- BGP session soft reset option does not work for IPv6 peers [2833]

Workaround: Reset the connection without soft option.

- `ttl-security hops` value can be set when `ebgp-multihop` is already configured (the options are mutually exclusive) [2832]
- `clixon-backend` fails when loading BGP config with 150k advertised prefixes [2784]
- BGP updates for new prefixes are sent every 60 seconds despite configured `advertisement-interval` value [2757]

- TNSR installs additional duplicated `next-hop` entries for multipath routes received via BGP [2935]
- IPv4 BGP summary command returns results for both IPv4 and IPv6 [3270]
- BGP `next-hop` attributes are not sent unmodified to an eBGP peer when `route-server-client` option is configured [2940]
- `show route dynamic bgp ipv6 summary` command will not show any information if address family is not specified when configuring BGP for IPv6 [2967]

Workaround: Set the address family when configuring BGP. Alternately, due to [3270], IPv6 information is current visible in `show route dynamic bgp ipv4 summary`, so use that command instead.

- Unable to configure BGP IPv4/IPv6 multicast address family using CLI [3038]
Workaround: Configure this feature via RESTCONF
- BGP listen range option disappears from the active dynamic routing daemon configuration after restarting BGP service [3043]
- Unable to verify dynamic BGP peer information from TNSR CLI [3044]
- Unable to configure BGP dampening values via TNSR CLI [3057]
- Unable to configure BGP `write-quanta` value via TNSR CLI [3087]
- Unable to configure BGP debug logging via TNSR CLI [3199]
- Unable to configure BGP confederation identifier via TNSR CLI [3210]
- Static routes may not be restored correctly after failing over to a BGP route [3543]

OSPF

- OSPF `default-information originate` does not work with static route `0.0.0.0/0` as default route [2477]
- Changing redistributed kernel routes does not trigger addition/removal of corresponding OSPF Type-5 LSAs [2389]
- Routing information in the forwarding table is not updated correctly when removing a static route which overlaps a route received via OSPF [2320]
- The OSPF RIB is not updated when the ABR type changes from standard to shortcut, and vice versa [2699]
- Changing the default metric for OSPF server does not result in update on other routers [2586]

OSPF6

- IPv6 routes in the OSPF6 database may not appear in the OSPF RIB until the service is restarted [2891]
- When deleting an OSPF6 interface via RESTCONF, it may remain active in the OSPF6 daemon despite being removed from the TNSR configuration [3481]

RIP

- key-chain string is not applied in the routing daemon if configured after RIP is enabled [2878]
Workaround: Disable and enable RIP after making the change.
- RIP timeout value is not respected [2796]

SNMP

- There are no changes when using “write” community [2567]

VRRP

- VRRP does not function on an outside NAT interface with a priority of 255 [2419]
Workaround: Set the priority of the VR address on the primary router to a value less than 255 yet higher than that of other routers. Enable Accept Mode on the VR address if the VR address will be used by services on TNSR.

VXLAN

- Changes to a VXLAN interface do not apply until the dataplane is restarted [1778]
- VXLAN and OSPF may not work properly if OSPF is configured after VXLAN in the dataplane [2511]

34.12.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.13 TNSR 19.12 Release Notes

34.13.1 About This Release

General

- Updated to CentOS 7.7 [2638]

ACL

- Fixed a backend crash when requesting a non-existent ACL via RESTCONF [2613]
- Fixed a backend crash when displaying an ACL with a description in the CLI [2606]

BFD

- Integrated BFD implementation with dynamic routing protocol daemons [2106, 2131]
- Removed redundant BFD configuration parameters from routing daemon configuration, configure options directly in BFD instead [2578]

Counters

- Fixed an issue with invalid interface counter data at first boot. [2572]
- Fixed an issue with multicast counter output containing unicast counter data [2526]

Dataplane

- Fixed error message displayed when attempting to assign more than the available number of CPU cores [2625]
- Enhanced the CPU corelist-workers command to accept ranges of cores [1943]
- Fixed an issue where the value of `ip reassembly max-reassemblies` was ignored if `ip reassembly expire-walk-interval` was also set [2561]
- Added commands to configure dataplane network device receive and transmit descriptors [2020]

DHCP

- Added commands to define custom DHCP options [2774]
- Fixed an error when running `service dhcp reload` [2666]

Host ACLs

- Changed default host ACL ruleset to allow IPv6 traceroute [2627]

Interfaces

- Fixed display of tag rewriting configuration in `show interface` output [2807]
- Fixed IPv6 addresses not being reapplied to an interface when it was disabled and later re-enabled [2648]
- Fixed use of renamed interfaces with bonding [2740]
- Fixed adding interfaces to a bond when they previously had been configured with an IP address [2654]
- Fixed an issue where data may fail to pass through a bond interface after changing its settings [1603]

IPsec

- Fixed an issue with RESTCONF IPsec status data returning every value as a string type [2642]
- Improved IPsec to be thread-safe with multiple workers [1334, 2084]

MAP

- Fixed an issue where IPv6 packets were not translated to IPv4 for MAP domain rules where PSID offset and length are specified [2808]
- Fixed an issue where changing MAP behavior from translate to encapsulate required restarting the dataplane [1779]
- Fixed TCP MSS value not being applied to encapsulated packets in MAP-E mode [1816]

NAT

- Fixed an issue with `show nat deterministic-mappings` returning IPv6 data instead of IPv4 [2887]
- Fixed issues with `show nat sessions` not returning results via RESTCONF or the CLI [2746, 2251]
- Added commands to adjust values of NAT hash buckets and memory [1762, 2611]
- Increased the maximum value of `max-translations-per-user` to 262144 [2612]
- Fixed NAT and ACL permit+reflect rules not working when configured together [2262]

Routing

- Fixed an issue with adding routes to the same destination via different next-hop routers [2407]

Dynamic Routing

- Fixed an issue preventing OS-level interface events/status from being recognized by FRR daemons [2755]
- Fixed an issue with creating `access-list` entries for IPv6 prefixes using the CLI [2624]
- Fixed an issue with creating route map `match peer` entries for IPv6 addresses using the CLI [2623]

BGP

- Fixed setting the `solo` option for BGP neighbors [2826]
- Fixed setting the `maximum-paths` BGP option via CLI [2822]
- Fixed setting the `table-map` filter BGP option via CLI [2821]
- Fixed setting the `route-map` option for BGP `network` entries via CLI [2820]
- Fixed setting the `backdoor` option for BGP `network` entries via CLI [2819]
- Fixed the `show route dynamic bgp ipv4 network` command so it does not require a full prefix with mask length [2773]
- Fixed an issue where setting a new BGP `update-delay` timer did not override the previous `peer-wait` value [2772]

- Fixed input validation of the BGP `update-delay` value so it cannot be set larger than `peer-wait` [2771]
- Fixed an issue where BGP would fail to install a received IPv6 route into the routing table [2650]

OSPF

- Added `detail` modifier to `show route dynamic ospf neighbor` which displays more detailed OSPF neighbor information [2742]
- Fixed an issue where an OSPF LSA was not added to the LSDB if there was a dead LSA for same route present [2626]
- Fixed an issue where OSPF did not send LSA-5 messages to a backbone area if an NSSA area session was already established [2559]
- Fixed setting the timer `throttle lsa` value for OSPF in the CLI [2555]

OSPF6

- Added support for OSPFv3 (Also known as OSPF6) to handle OSPF for IPv6 [2517]
 - OSPF6 is now also allowed in the default host ACL ruleset [2668]

RIP

- Added support for RIP (v2 and v1) [2498]
 - RIP is now also allowed in the default host ACL ruleset (UDP port 520) [2657]

SNMP

- Fixed `ifOutUcastPkts` returning value of `rx-bytes` instead of `tx-bytes` [2584]

VRRP

- Added commands to configure interface tracking for VRRP and display its status [2521]
- Fixed an issue where multiple VRs with the same VR ID on a hardware interface (via subinterfaces) could interfere with each other [2865]
- Fixed an issue where a VRRP VR only removes the virtual MAC from an interface when transitioning from master to backup [2842]
- Fixed an issue with using VRRP on bond interfaces [2829]
- Fixed an issue with incorrect VRRP VR behavior with priority 255 and accept mode enabled [2816]
- Added input validation to prevent conflicting VRRP and NAT configurations [2799]
- Fixed an issue where VRRP may fail to add a virtual IP address [2706]

Configuration Changes

Several areas of the configuration were changed. These changes must either be made manually or see [Updating the Configuration Database](#) for information on how to automatically update the configuration using a script included in this update.

- **netgate-bgp**
 - Configuration under `/route-config/dynamic/bgp/routers/router:`
 - * `update-delay-peer-wait` had a constraint added. Its value must be less than or equal to `../update-delay-updates`
 - * `address-families/ipv4/unicast/multiple-path-maximums` was renamed to `multiple-path-maximums` to correct a spelling error
 - * `address-families/ipv6/unicast/multiple-path-maximums` was renamed to `multiple-path-maximums` to correct a spelling error
 - * `neighbors/neighbor/bidirectional-forwarding-detection` did not have any effect on BGP so it was removed.
- **netgate-ospf**
 - Type definitions
 - * Enumerated type `ospf-route-out` had several values removed which are not supported. This type was used in `/route-config/dynamic/ospf/routers/router/distribute-list/out/route-out`
- **netgate-snmp**
 - Type definitions
 - * Enumerated type `snmp-security-level` had several values removed which are not supported. This type is used in `/snmp-config/snmp-access-control/access/access-entry/security-level`
 - * Enumerated type `snmp-security-model` had several values removed which are not supported. This type is used in `/snmp-config/snmp-access-control/access/access-entry/security-model` and `/snmp-config/snmp-access-control/group/group-entry/security-model`
 - * Enumerated type `snmp-context-match` had several values removed which are not supported. This type is used in `/snmp-config/snmp-access-control/access/access-entry/prefix`
- **netgate-ip**
 - Renamed `/ip` to `ip-config` – This only contains IP reassembly settings.

34.13.2 Known Limitations

Upgrade Issues

Warning: Due to a build dependency issue with `librtnl` in TNSR 19.12, installations of TNSR 19.08 upgraded to TNSR 19.12 will not end up with a functional copy of `librtnl`. This library must be linked against the current version of VPP. Since VPP had a version change between 19.08 and 19.12, but the version number of `librtnl` did not change, it is not reinstalled on upgrade with an appropriately relinked copy.

To resolve this problem, manually reinstall the `librtnl` package using a shell prompt:

```
$ sudo yum reinstall librtnl
```

This may also be run from within TNSR by using the `shell` command, for example:

```
tnsr# shell sudo yum reinstall librtnl
```

This problem has been fixed so it will not recur for TNSR 20.02 or later releases which will carry the TNSR version on these packages to ensure they match appropriately. Installations of TNSR versions prior to 19.08 can safely upgrade to 19.12 without encountering this issue as there was a version change in `librtnl` after that time.

Symptoms of this problem include:

- Sporadic VPP and configuration backend crashes.
- VPP failing to forward packets as expected.
- Configured services (e.g. BGP, IPsec, DNS) not functioning correctly due to host stack connectivity being impaired.

Azure

Warning: The TNSR 19.12 release is not compatible with Azure. Instances of TNSR 19.08 running on Azure should not be upgraded until the next release (TNSR 20.02).

ACLs

- ACLs used with `access-list` output do not work on traffic sent to directly connected hosts [2057]
- Accessing very large (100K rules) ACLs repeatedly results in a Clixon crash [2558]

BFD

- Unable to set `delayed` option on an existing BFD session [2709]

CLI

- CLI does not return from shell in certain situations [2651]

Dataplane

- Dataplane auto pinning of worker threads to cores does not follow expected convention [2846]
- Dataplane reports incorrect physical core ID for main thread [2845]
- Systems with multiple CPU sockets using NUMA may experience dataplane issues at startup or when the dataplane is restarted manually [2383]

DHCP

- Unable to delete all DHCP server options at once from CLI [2667]

GRE

- Unable to modify GRE tunnel settings [2698]

HTTP Server / RESTCONF

- HTTP server retains old configuration after TNSR services restart [2453]
- SSL certificate error when the HTTP server is configured with a certificate that uses md5 digest [2403]

Interfaces

- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- Chelsio interfaces crash the dataplane [1896]
- VLAN subinterfaces may not work under KVM using virtio drivers [2189]
- An IPv6 link-local address cannot manually be configured on an interface [2394]
- IPv6 addresses on IPsec or GRE interfaces may not be displayed in `show` command output [2425]
- Bridge domain ARP entries are not displayed in the CLI [2378]
- Bridge domain ARP entries cannot be removed from the CLI [2380]
- Bridge domain MAC age cannot be removed from the CLI [2381]
- Link state always reported as “up” when using `e1000` network drivers [2831]
- `vmxnet3` RSS fails to initialize, cannot pass packets [2576]

Workaround: Set `dataplane dpdk dev <device id> network num-rx-queues 2` in the TNSR CLI and restart the dataplane.

- Cannot add a DHCP client hostname to an existing DHCP client [2557]
Workaround: Remove the dhcp client from the interface and then re-add it with the hostname.
- Re-enabling loopback interface breaks packet forwarding until the dataplane is restarted [2828]
- Subinterface settings are not applied on change without restarting dataplane [2696]
- Unable to create multiple IP QinQ subinterfaces with the same outer vlan tag [2659]
- Configuration of host OS interface clears TNSR TAP interface configuration [2640]

Workaround: Remove and reconfigure the TAP interface.

- On the XG-1537 and other systems with X552 NICs, if one of the **SFP+** (not copper) interfaces does not have an active link when the dataplane is restarted, and presumably during startup, the interface remains down when the link is reconnected. The link lights come on as though the interface is working and the opposing interface shows the correct link state and speed. This has been confirmed with LR and SR SFP+ modules.

If an affected interface has an active link when the dataplane is started, the link can later change to be down/up or removed/reconnected without issue.

Workaround: Restart the dataplane once the links are active.

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]
- An SA ordering issue may prevent IPsec traffic from passing if both endpoints attempt to establish a tunnel at the same time [2391]
- Large packets over IPsec crash VPP and clixon-backend [2902]

Workaround: Increase the `default-data-size` buffer size to 16384 and restart the dataplane.

```
tnsr(config)# dataplane buffers default-data-size 16384
tnsr(config)# service dataplane restart
```

MAP

- MAP-T BR cannot translate IPv4 ICMP echo reply to IPv6 [1749]
- Fragmentation of IPv4 packets is performed regardless of configured MAP fragmentation behavior when MAT-T mode is used [1826]
- MAP BR does not send ICMPv6 unreachable messages when a packet fails to match a MAP domain [1869]
- Pre-resolve does not work when MAP-T mode is used [1871]
- MAP BR encapsulates/translate only last fragment when receiving fragmented packets from IPv4 network [1887]

NACM

- Default parameters rule for NACM node `access-operation` and `module` does not work without explicit settings [2514]

NAT

- `twice-nat` does not work [1023]
- NAT forwarding is not working for `in2out` direction [1039]
- DS-Lite is not functional; B4 router sends encapsulated IPv4-in-IPv6 packets, but AFTR replies with an error [1626]
- NAT forwarding fails with more than one worker thread [2031]

Note: This also affects connectivity to services on TNSR, such as RESTCONF, when the client is not on a directly connected network.
- Router with 1:1 NAT will drop packets with `ttl=2` from input interface [2849]
- VPP service fails if NAT `concurrent-reassemblies` is set to 1 and several fragments arriving to the NAT outside interface [2739]
- ICMP fragments arriving to NAT Inside interface aren't being reassembled by NAT reassembly function [2733]

Neighbor / ARP / NDP

- Packet loss during ARP transaction immediately after Dataplane restart or interface disable/enable [2868]

RESTCONF

- Incorrect BGP configuration is generated when IPv6 address family is configured via REST [2915]
- Adding a user via RESTCONF requires a password even when key is provided [2875]
- Adding MACIP rule via RESTCONF fails [2844]
- Cannot rename an ACL via RESTCONF [2843]
- Deleting ACL rule via RESTCONF crashes Clixon [2841]

Routing

- IPv6 packet loss may be observed between TNSR instances [2382]

Dynamic Routing

- CLI shows that only IPv4 prefix is available within `prefix-list` sequence configuration [2689]
- `route-map` with sequence number 0 can be configured in the CLI but cannot be used [2876]

BGP

- An IPv6 BGP session cannot be established over IPsec or GRE [2429]
- BGP `maximum-path` option for eBGP and iBGP can not be configured simultaneously [2879]
- BGP network backdoor feature does not work without service restart [2873]
- Unable to configure BGP distance values via CLI [2869]
- Unable to verify received prefix-list entries via CLI when ORF capability is used [2864]
- `extended-nexthop` capability is not being negotiated between IPv6 BGP peers [2850]
- BGP session soft reset option does not work for IPv6 peers [2833]
Workaround: Reset the connection without soft option.
- `ttl-security hops` value can be set when `ebgp-multihop` is already configured (the options are mutually exclusive) [2832]
- `clixon-backend` fails when loading BGP config with 150k advertised prefixes [2784]
- Displaying a large amount of received or advertised BGP prefixes takes a long time [2778]
- BGP updates for new prefixes are sent every 60 seconds despite configured `advertisement-interval` value [2757]
- TNSR installs additional duplicated `next-hop` entries for multipath routes received via BGP [2935]

OSPF

- OSPF `default-information originate` does not work with static route `0.0.0.0/0` as default route [2477]
- Changing redistributed kernel routes does not trigger addition/removal of corresponding OSPF Type-5 LSAs [2389]
- Routing information in the forwarding table is not updated correctly when removing a static route which overlaps a route received via OSPF [2320]
- The OSPF RIB is not updated when the ABR type changes from standard to shortcut, and vice versa [2699]
- Changing the default metric for OSPF server does not result in update on other routers [2586]

OSPF6

- IPv6 routes in the OSPF6 database may not appear in the OSPF RIB until the service is restarted [2891]

RIP

- `key-chain` string is not applied in the routing daemon if configured after RIP is enabled [2878]
Workaround: Disable and enable RIP after making the change.

SNMP

- SNMP configuration change requires a service restart [2568]
- There are no changes when using “write” community [2567]

VRRP

- VRRP does not function on an outside NAT interface with a priority of 255 [2419]
Workaround: Set the `priority` of the VR address on the primary router to a value less than 255 yet higher than that of other routers. Enable Accept Mode on the VR address if the VR address will be used by services on TNSR.

VXLAN

- Changes to a VXLAN interface do not apply until the dataplane is restarted [1778]
- VXLAN and OSPF may not work properly if OSPF is configured after VXLAN in the dataplane [2511]

34.13.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.14 TNSR 19.08 Release Notes

34.14.1 About This Release

Note: TNSR 19.08.1 installation images are identical to 19.08 except that they have the most recent (as of the time it was built) set of updates from CentOS applied instead of the base release version of CentOS 7.6.1810.

There is no need to reinstall 19.08 to reach 19.08.1 using these images as running an update from 19.08 will result in the same, or even newer, CentOS packages.

General

- Fixed removal of SSH authorized-keys entries from user entries in the OS when they are removed from TNSR users [1162]
- Cleaned up extraneous logging messages from the configuration backend [2230]

ACL

- Fixed manual selection of ACL protocol value `0`, and renamed it to any [2134]
- Fixed setting type and code values for ICMP ACLs [2325, 2426]
- Fixed issues with removing the protocol value from an ACL rule [2252, 2307]
- Expanded TNSR ACL rule protocol choices to any protocol, specified by number [2224]
- Improved performance and display of large ACL rulesets (e.g. 10,000+ ACLs) [2139]

BFD

- Fixed editing unused BFD keys [1891]
- Fixed the BFD delayed option [1885]
- Added validation to prevent changing the BFD interface, local address, or peer address since this is not allowed by the dataplane. [1549]
- Fixed administratively disabling BFD via CLI [1883]

CLI

- Improved handling of resizing terminal dimensions [2214]
- Added options to enable and disable command history as well as to set the history size to a given value [2011]

Counters

- Added verbose counter information to `show interface [<if-name>] counters` output [2413]
- Removed redundant `show counters` command [2377]

Dataplane

- Improved memory handling with large ACL rule sets [2442]
- Added dataplane configuration option for `num-crypto-mbufs` [2160]
- Added dataplane configuration options for buffer parameters [2399]
- Fixed `service dataplane restart` potentially causing `clixon_backend` to lose its configuration [1383]

DHCP

- Removed invalid * DHCP logging category [1307]
- Fixed DHCP reservation required value validation so entries cannot be created without a MAC address [1530]

DNS

- Removed invalid `allow_setrd` value from `Unbound access-control` command [1747]
- Fixed handling of local zone hostname and domain when forming A/AAAA and PTR entries [1384]
- Added `outgoing-interface` command to `config-unbound` mode to control how TNSR will originate DNS requests to upstream DNS servers [1884]

GRE

- Fixed routing IPv6 inner traffic over IPv4 outer GRE tunnel [2424]

Host ACLs

- Expanded Host ACL rule protocol choices to any protocol, specified by number [2227]
- Fixed host ACL ICMP rule matching [2217, 2226]
- Fixed duplication of rules in the nftables ruleset when the dataplane restarts [2207]

HTTP Server / RESTCONF

- Fixed handling of the HTTP daemon configuration file when the service is not enabled in TNSR [1153]
- Added new default index and error pages to the HTTP daemon [1531]

Interfaces

- Fixed loopback interfaces responding to ICMP echo requests when in the down state [850]
- Added commands to enable and configure IP reassembly [1302, 1277]
- Changed `show interface` subcommands to be more consistent with other areas of the CLI [2376]

Note: Only one output-limiting keyword may now be specified, and several keywords were renamed to match their corresponding configuration parameters.

- Added the ability to remove a MAC address from an interface, which will return the MAC address back to the native address after a dataplane restart [2310]
- Fixed a clixon crash while executing `show interface lacp` [2438]
- Fixed MAC address change propagation from dataplane to host tap interfaces [1502]
- Fixed QinQ VLAN termination [1550]
- Added `no mtu interface` command to remove the MTU setting and revert to the default value [2021]

IPsec

- Fixed IPv6 traffic traversing an IPv4 IKEv2 IPsec tunnel [2422]
- Fixed IPsec Child SA failures with AES-GCM combined with DPDK cryptodevs (QAT or aesni vdev) [2309]
- Fixed IPsec tunnels with a Child SA using MD5 integrity failing to establish [2505]
- Fixed IPsec tunnels with a Child SA using 3DES encryption failing to establish [2476]
- Added elliptic curve DH group 31 (curve25519, 256 bit) to IPsec proposal choices [2179]

MAP

- Added input validation to enforce MAP `ip6-src-prefix` values [2087]

NACM

- Added improved error messages showing failed paths when access is denied by NACM [2443]
- Changes to interface-related validation now require that users with access to configure interface-related items must also be able to get `/interfaces-state/interface` to read the interface list [2443]

NAT

- Added commands to manage NAT session timeout values [2232]
- Fixed issues with static NAT mappings with defined ports occasionally leading to a clixon-backend crash when restarting [1103]
- Added input validation to prevent deterministic NAT crashes in the dataplane due to incorrect user configuration [1856]

NTP

- Fixed NTP configuration generated for `restrict` lists [1705]

RESTCONF

- Improved information returned in queries for `netgate-system:system-state` [2324]
- Fixed malformed requests causing the API to return unexpected errors for a few seconds while it restarts [2079]

Routing

- Improved handling of route table display with large route tables [506]
- Improved output of `show route table` [2229]
- Fixed handling and display of IPv6 static neighbors [2005]
- Fixed FIB lookup option for static routes [1280]
- Fixed creating static routes with the same next-hop ID in multiple routing tables [2510]

Dynamic Routing

Warning: Commands for BGP and related dynamic routing functionality have been restructured so everything is under `route dynamic`. Changes are extensive and the documentation has been updated to reflect the new commands.

- Added support for OSPF [1895]
- Length of BGP neighbor passwords is now limited to 63 characters [1454]
- Fixed removal of IPv6 next-hop peer address from a route map [2304]
- Fixed BGP advertisement of connected routes after interface status changes [746, 2409]
- Changed BGP status commands for `summary`, `neighbors`, and `network` to require an address family [2367]
- Fixed handling of BGP debug commands [2385]
- Fixed handling of BGP `maximum-prefix` configuration parameter [859]
- Fixed session handling when `maximum-prefix-limit` is exceeded [858]
- Fixed handling of IPv6 static routes in the dynamic routing manager (zebra) [2279]
- Cleaned up commands for unsupported dynamic routing features [2312]

- Fixed handling of BGP `import-check` [781]
- Fixed handling of routes from `aggregate-address` via `next-hop 0.0.0.0` [832]
- Eliminated unnecessary restarts of the dynamic routing daemons when making changes [1758]
- Fixed positive relative metric adjustments in route-maps [2493]
- Fixed displaying specific IPv6 BGP networks by address [2479]
- Fixed configuring a BGP IPv6 aggregate address with summary-only option [2509]

SNMP

- Support for SNMP monitoring has been added, see *Simple Network Management Protocol* for implementation details [2286]

Updates

- Fixed handling of `igb_uio` module during an upgrade which also updates the kernel [2216]

VRRP

- Support for VRRP has been added, see *Virtual Router Redundancy Protocol* for implementation details and limitations [1894]

VXLAN

- Fixed configuration of alternate VXLAN encapsulation routing tables [1872]

34.14.2 Known Limitations

Updates

- The UIO drivers may not be present in the correct directory after a kernel upgrade. Since the UIO drivers are kernel-specific, they must be rebuilt after any change in the kernel [2216].

To work around this issue, force a reinstall of the DPDK package which will rebuild the UIO drivers and place them in the appropriate location for the updated kernel:

```
$ sudo yum -y reinstall dpdk
```

This procedure will not be necessary when upgrading to future releases from 19.08.

ACLs

- ACLs used with `access-list output` do not work on traffic sent to directly connected hosts [2057]

BFD

- BFD does not integrate with BGP [2106]

BGP

- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]

Counters

- At first boot, interface counter data may be invalid. [2572]
Workaround: Restart the dataplane to correct this problem until next reboot.

Hardware

- Systems with multiple CPU sockets using NUMA may experience dataplane issues at startup or when the dataplane is restarted manually [2383]

HTTP Server / RESTCONF

- HTTP server retains old configuration after TNSR services restart [2453]
- SSL certificate error when the HTTP server is configured with a certificate that uses md5 digest [2403]

Interfaces

- Non-LACP bond interfaces may experience packet drops when a bond member interface is down [1603]
- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- Chelsio interfaces crash the dataplane [1896]
- VLAN subinterfaces may not work under KVM using virtio drivers [2189]
- An IPv6 link-local address cannot manually be configured on an interface [2394]
- IPv6 addresses on IPsec or GRE interfaces may not be displayed in `show` command output [2425]
- Bridge domain ARP entries are not displayed in the CLI [2378]
- Bridge domain ARP entries cannot be removed from the CLI [2380]
- Bridge domain MAC age cannot be removed from the CLI [2381]

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]
- An SA ordering issue may prevent IPsec traffic from passing if both endpoints attempt to establish a tunnel at the same time [2391]

MAP

- MAP-T BR cannot translate IPv4 ICMP echo reply to IPv6 [1749]
- MAP behavior cannot be changed from translate to encapsulate without restarting the dataplane [1779]
- TCP MSS value is not applied to encapsulated packets when MAP-E mode is used [1816]
- Fragmentation of IPv4 packets is performed regardless of configured MAP fragmentation behavior when MAT-T mode is used [1826]
- MAP BR does not send ICMPv6 unreachable messages when a packet fails to match a MAP domain [1869]
- Pre-resolve does not work when MAP-T mode is used [1871]
- MAP BR encapsulates/translate only last fragment when receiving fragmented packets from IPv4 network [1887]

NACM

- Default parameters rule for NACM node `access-operation` and `module` does not work without explicit settings [2514]

NAT

- `twice-nat` does not work [1023]
- NAT forwarding is not working for `in2out` direction [1039]
- DS-Lite is not functional; B4 router sends encapsulated IPv4-in-IPv6 packets, but AFTR replies with an error [1626]
- NAT forwarding fails with more than one worker thread [2031]

Note: This also affects connectivity to services on TNSR, such as RESTCONF, when the client is not on a directly connected network.

- Connections to and from the TNSR host are included in NAT sessions when connecting through an interface with `ip nat outside` [1892] [1979]
- NAT and ACL `permit+reflect` rules do not work together [2262]

Routing

- Deleting a non-empty route table fails with an error and the table remains in the configuration, but it cannot be changed afterward [1241]

Workaround: Remove all routes from the table before deleting. Alternately, copy the running configuration to startup and restart TNSR, which will make the route table appear again so the routes and then the table can be removed.

- Cannot add multiple routes to the same destination using different next hops [2407]

Dynamic Routing

- An IPv6 BGP session cannot be established over IPsec or GRE [2429]
- iBGP router advertises redistributed static IPv6 routes with next-hop value set to link-local address [2478]
- OSPF `default-information originate` does not work with static route `0.0.0.0/0` as default route [2477]
- Changing redistributed kernel routes does not trigger addition/removal of corresponding OSPF Type-5 LSAs [2389]
- Routing information in the forwarding table is not updated correctly when removing a static route which overlaps a route received via OSPF [2320]

VRRP

- VRRP does not function on an outside NAT interface [2419]

VXLAN

- Changes to a VXLAN interface do not apply until the dataplane is restarted [1778]
- VXLAN and OSPF may not work properly if OSPF is configured after VXLAN in the dataplane [2511]

34.14.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.15 TNSR 19.05 Release Notes

34.15.1 About This Release

General

- Added support for QAT C62x crypto devices [1718]
- Added service management RPCs to data model [1715]

ACL

- Fixed creating an ACL using only a description [1558]
- Fixed creating an empty ACL [1735]
- Fixed creating an ACL rule with a destination port [1796]

BGP

- IPv6 BGP neighbors get entered as `peer-groups` only in `bgpd.conf` [1190]
- Removed deprecated `neighbor <peer> interface <if> BGP` command [2113]
- Restructured BGP address family configuration to accommodate IPv4 and IPv6 [2049]
- Removed option to create a new neighbor inside address family mode [2194]
- Removed `route-map set metric` options for +/- rtt and +/- metric as they were not supported as users expected in FRR [2191]

CLI

- `[no] shutdown` style syntax has been removed. Use `enable` and `disable`, or `no enable` [1652]
- Fixed paging issues in output that could lead to incorrect or missing output after certain actions taken with multi-page output (e.g. pressing `q` or `Enter` at a `More` prompt) [1774, 1773]
- The CLI now stores command history between sessions (*Command History*) [514, 1949]
- Standardized commands to enabled coredumps for services, and added support for coredumps from ike, unbound, http, and ntp (*Diagnosing Service Issues*) [1831]
- Fixed `ping` so it can work with IPv6 source addresses [2004]
- Improved CLI performance when working with large lists [2127]
- Increased timeout for `package` commands to allow longer processes to finish completely, such as upgrades [1768]

Dataplane

- Fixed writing default values to the dataplane configuration when no dataplane options are set in the configuration [1982]
- Fixed dataplane crashes when using NAT with forwarding enabled with certain packet combinations when the protocol is not ICMP, TCP, or UDP [1998]
- Mellanox support: Added option to disable multi-segment buffers in the dataplane [2022]
- Fixed an error when configuring a dataplane crypto device without first configuring the UIO driver [1812]
- Added worker thread and core affinity options [1675]
- Added an option to set custom interface names for dataplane interfaces [2062]
- Added commands to configure dataplane statistics segment options [2199]

DHCP

- The DHCP server can now function when an interface is configured as a DHCP client [1801]
- DHCP server no longer uses link-local interface IP addresses (169.254.0.x) as a source address for DHCP packets or as a DHCP Server Identifier [1222]
- Removed incorrect references to the `netgate-interface` module from the DHCP server CLI specification API paths [1810]
- Removed redundant `ipv4` forms of DHCP-related commands [1557]

Host ACLs

- Added support for Host ACLs to control traffic to host OS interfaces using `nftables` [1651]

HTTP Server / RESTCONF

- `nginx` now behaves as expected with `authentication type none` and TLS [1086]

Warning: This mode is intended only for testing, not production use.

- Fixed RESTCONF `get of /restconf/data/` so it properly returns state data [1534]

Installer

- Improved consistency in post-install login procedures across all TNSR platforms [2013]
- Fixed installation issues on hardware that has an eMMC device, such as the SG-5100 [2048]
- Fixed the default NACM configuration when installing from ISO [2133]
- Added Infiniband/rdma packages to the default installation [2201]

Interfaces

- An interface can now be deleted if has had an ACL or MACIP applied [1177, 1178]
- MACIP ACLs no longer remain in the interface configuration after being removed [1179]
- Bond interfaces in LACP mode no longer send LACPDUs when configured for passive mode [1614]
- VLAN tag rewrite settings have been relocated to interfaces, as they do not require a subinterface [1344]
- VXLAN validation now properly reflects that a VXLAN entry requires a VNI [1821]
- GRE and VXLAN now create interfaces on the host [1999]
- Fixed display of link speeds for 40G and 100G interfaces [1867]
- Removed unused “Admin status” field from state information for host interfaces [1864]
- Fixed interface counters for Mellanox interfaces [2039]
- Fixed interface counters for IPsec interfaces [2075]
- VLAN tag-rewrite attributes are now included in `show interface` output [1654]

- Changed `show interfaces` to output interfaces in a consistent order [2046]
- Fixed a problem with neighbor location (ARP/NA) when VLAN tags are present [1326]
- Fixed default handling of VMXNET3 interfaces [1703]

IPsec

- Added support for the 3DES encryption algorithm in IPsec proposals [1444]

NACM

- NACM now supports all access operations and module restrictions (*Managing NACM Rules*) [1809]
- The method to manually disable NACM has changed. *Regaining Access if Locked Out by NACM* has been updated to reflect the new method [1750, 1752]

NAT

- DS-Lite B4 endpoint is now shown in the output of `show dslite` [1625]
- NAT sessions may now be queried with `show nat sessions [verbose]` (*View NAT Sessions*) [975, 1456]
- Fixed issues with NAT and multiple worker threads [1844]
- NAT mode deletion is now properly respected in VPP startup configuration after TNSR services restart [1017]
- Fixed incorrect NAT static mappings being added when a new rule differed from an existing rule only by the `port-local` value [1100]

34.15.2 Known Limitations

Updates

- The UIO drivers may not be present in the correct directory after a kernel upgrade. Since the UIO drivers are kernel-specific, they must be rebuilt after any change in the kernel [2216]

To work around this issue, force a reinstall of the DPDK package which will rebuild the UIO drivers and place them in the appropriate location for the updated kernel:

```
$ sudo yum -y reinstall dpdk
```

ACLs

- ACLs used with `access-list` output do not work on traffic sent to directly connected hosts [2057]

BFD

- Attempting to change a BFD local/peer address fails [1549]
- BFD cannot be administratively disabled via CLI [1883]
- The BFD `delayed` option does not work [1885]
- An unused BFD `conf-key` cannot be modified [1891]
- BFD does not integrate with BGP [2106]

BGP

- TNSR does not send BGP updates without restarting service with `redistribute from connected` option [746]
- Route with `aggregate-address` via next-hop `0.0.0.0` does not appear in TNSR route table [832]
- BGP sessions may fail to establish or rapidly reconnect when receiving more prefixes than defined by `maximum-prefix limit` [858]
- The `maximum-prefix restart` command does not work [859]
- TNSR installs multiple paths for received routes even though support for multiple paths is not enabled [885]
Workaround: Run `systemctl reset-failed frr` from the shell to clear the error which will allow the BGP service to start again.
- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]
- BGP `import-check` feature does not work [781]
- Logs may include spurious BGP message `binary API client 'route_daemon' died` which do not affect BGP routing [1714]

CLI

- `show route table` causes the backend to die with large numbers of routes in the table [506]
For example, this crash happens with a full BGP feed.
- Using `service dataplane restart` can cause `clixon_backend` to lose its configuration [1383]
- Large lists (e.g. 10,000+ ACLs) can cause significant delays in related CLI operations [2139]

DHCP

- Adding a DHCP reservation without a MAC address causes Kea to fail and the entry cannot be removed [1530]
Workaround: A MAC address is required for DHCP reservations, so always enter a MAC address when creating an entry.
- Configuring Kea to log all names with `*` does not work [1307]
Workaround: Configure each name separately instead of using a wildcard.

DNS

- Local zone FQDN handling for forward (A) and reverse (PTR) data is inconsistent, only allowing one or the other to work as expected for a given FQDN [1384]
- Using the `allow_setrd` attribute for `access-control` entries causes unbound to fail [1747]
- Unbound requires a default route in the host OS to resolve [1884]

Host ACLs

- Host ACL entries are duplicated after a dataplane restart [2207]

HTTP Server / RESTCONF

- HTTP server runs even though it's not configured to run after TNSR services restart [1153]
Workaround: Manually stop the `nginx` service using `systemctl`.
- RESTCONF query replies may contain CDATA tags in JSON [1463]
- Adding an ACL rule entry via RESTCONF may appear to add a duplicate ACL [1238]

Interfaces

- Loopback interface responds to ICMP echo from an outside host even when in a *Down* state [850]
- Non-LACP bond interfaces may experience packet drops when a bond member interface is down [1603]
- MAC address changes on dataplane interfaces are not reflected on the host tap interface until the dataplane is restarted [1502] Workaround: Restart the dataplane after changing an interface MAC address.
- Bond interface MAC addresses do not match their host tap interface unless a MAC address is explicitly set at creation [1502]
Workaround: Set the MAC address when creating the bond interface.
- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- QinQ VLAN termination is not working [1550]
- Chelsio interfaces crash the dataplane [1896]
- VLAN subinterfaces may not work under KVM using virtio drivers [2189]

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]

MAP

- MAP-T BR cannot translate IPv4 ICMP echo reply to IPv6 [1749]
- MAP security check configuration differs between the dataplane and CLI [1777]
- MAP behavior cannot be changed from translate to encapsulate without restarting the dataplane [1779]
- TCP MSS value is not applied to encapsulated packets when MAP-E mode is used [1816]
- Fragmentation of IPv4 packets is performed regardless of configured MAP fragmentation behavior when MAT-T mode is used [1826]
- MAP BR does not send ICMPv6 unreachable messages when a packet fails to match a MAP domain [1869]
- Pre-resolve does not work when MAP-T mode is used [1871]
- MAP BR encapsulates/translate only last fragment when receiving fragmented packets from IPv4 network [1887]

NACM

- Permitted default read and write operations cannot be executed if default exec policy is set to deny [1158]

NAT

- `twice-nat` does not work [1023]
- NAT forwarding is not working for `in2out` direction [1039]
- NAT static mapping with defined ports leads to `clixon-backend` crash after restart [1103]
- DS-Lite is not functional; B4 router sends encapsulated IPv4-in-IPv6 packets, but AFTR replies with an error [1626]
- NAT forwarding fails with more than one worker thread [2031]

Note: This also affects connectivity to services on TNSR, such as RESTCONF, when the client is not on a directly connected network.

- Deterministic NAT crashes the dataplane [1856]
- Connections to and from the TNSR host are included in NAT sessions when connecting through an interface with `ip nat outside` [1892] [1979]

Neighbors

- IPv6 static neighbors entries do not work [2005]

NTP

- NTP restrictions for prefixes do not work [1705]

RESTCONF

- A malformed request may cause the API to return unexpected errors for a few seconds while it restarts [2079]

Routing

- Deleting a non-empty route table fails with an error and the table remains in the configuration, but it cannot be changed afterward [1241]

Workaround: Remove all routes from the table before deleting. Alternately, copy the running configuration to startup and restart TNSR, which will make the route table appear again so the routes and then the table can be removed.

User Management

- When deleting a user key from the running configuration it is not removed from the user's `authorized_keys` file [1162]

Workaround: Manually edit the `authorized_keys` file for the user and remove the key.

VXLAN

- Changes to a VXLAN interface do not apply until the dataplane is restarted [1778]
- Alternate VXLAN encapsulation routing tables cannot be configured [1872]

34.15.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.16 TNSR 19.02.1 Release Notes

34.16.1 About This Release

This is a maintenance release for TNSR software version 19.02 with bug fixes and Azure support.

See also:

For more information on changes in TNSR version 19.02, see *[TNSR 19.02 Release Notes](#)*.

General

- TNSR is now supported on Azure [974]

NAT

- Fixed a problem with removing MAP entries after restarting TNSR [1653]

34.16.2 Known Limitations

ACL

- Attempting to create an ACL containing only a description fails [1558]

Workaround: Define one or more rules on the ACL.

BFD

- Attempting to change a BFD local/peer address fails [1549]

BGP

- TNSR does not send BGP updates without restarting service with `redistribute from connected` option [746]
- Route with `aggregate-address` via next-hop `0.0.0.0` does not appear in TNSR route table [832]
- BGP sessions may fail to establish or rapidly reconnect when receiving more prefixes than defined by `maximum-prefix limit` [858]
- The `maximum-prefix restart` command does not work [859]
- TNSR installs multiple paths for received routes even though support for multiple paths is not enabled [885]
Workaround: Run `systemctl reset-failed frr` from the shell to clear the error which will allow the BGP service to start again.
- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]
- IPv6 BGP neighbors get entered as `peer-groups` only in `bgpd.conf` [1190]
- BGP `import-check` feature does not work [781]

CLI

- `show route table` causes the backend to die with large numbers of routes in the table [506]
For example, this crash happens with a full BGP feed.
- Using `service dataplane restart` can cause `clixon_backend` to lose its configuration [1383]

DHCP

- The DHCP server does not function if an interface is configured as a DHCP client [1801]
Corrected in the next release under development (19.05).
- DHCP server uses default VPP interface IP address (169.254.0.x) as a source address for DHCP packets and as a DHCP Server Identifier [1222]
- Adding a DHCP reservation without a MAC address causes Kea to fail and the entry cannot be removed [1530]
Workaround: A MAC address is required for DHCP reservations, so always enter a MAC address when creating an entry.
- Configuring Kea to log all names with * does not work [1307]
Workaround: Configure each name separately instead of using a wildcard.

DNS

- Local zone FQDN handling for forward (A) and reverse (PTR) data is inconsistent, only allowing one or the other to work as expected for a given FQDN [1384]

HTTP Server / RESTCONF

- `nginx` does not behave as expected with `authentication type none` and TLS [1086]
This mode is primarily for testing and not production use.
Workaround: Use password or certificate-based authentication for RESTCONF.
- HTTP server runs even though it's not configured to run after TNSR services restart [1153]
Workaround: Manually stop the `nginx` service using `systemctl`.
- RESTCONF get of `/restconf/data/` does not properly return state data [1534]
- RESTCONF query replies may contain CDATA tags in JSON [1463]
- Adding an ACL rule entry via RESTCONF may appear to add a duplicate ACL [1238]

Interfaces

- Loopback interface responds to ICMP echo from an outside host even when in a *Down* state [850]
- Unable to delete an interface if has had an ACL or MACIP applied [1177, 1178]
Workaround: Remove the entire ACL or MACIP entry. Then, the interface may be removed.
- MACIP ACL remains in the interface configuration after being removed [1179]
- Bond interfaces in LACP mode will send LACPDUs even when configured for passive mode [1614]
- Non-LACP bond interfaces may experience packet drops when a bond member interface is down [1603]
- MAC address change on tap interfaces may not be reflected in the dataplane until the dataplane is restarted [1502]
Workaround: Restart the dataplane after changing an interface MAC address.
- MAC address change on bond interfaces may not be reflected in the dataplane until the dataplane is restarted [1502]
Workaround: Set the MAC address when creating the bond interface.

- VLAN tag rewrite settings are only available in subinterfaces [1344]
- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- QinQ VLAN termination is not working [1550]
- ARP replies received from another host on a VLAN subinterface are not processed correctly [1326]

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]

NACM

- Permitted default read and write operations cannot be executed if default exec policy is set to `deny` [1158]

NAT

- `twice-nat` does not work [1023]
- NAT mode is not deleted from VPP startup configuration after TNSR services restart [1017]
- NAT forwarding is not working for `in2out` direction [1039]
- NAT static mappings are not added as expected when only the `port-local` value differs [1100]
- NAT static mapping with defined ports leads to `clixon-backend` crash after restart [1103]
- DS-Lite is not functional; B4 router sends encapsulated IPv4-in-IPv6 packets, but AFTR replies with an error [1626]
- DS-Lite B4 endpoint is not shown by `show dslite` command [1625]
- Unable to view a list of NAT sessions [975, 1456]

Routing

- Deleting a non-empty route table fails with an error and the table remains in the configuration, but it cannot be changed afterward [1241]

Workaround: Remove all routes from the table before deleting. Alternately, copy the running configuration to startup and restart TNSR, which will make the route table appear again so the routes and then the table can be removed.

User Management

- When deleting a user key from the running configuration it is not removed from the user's `authorized_keys` file [1162]

Workaround: Manually edit the `authorized_keys` file for the user and remove the key.

34.16.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.17 TNSR 19.02 Release Notes

34.17.1 About This Release

Warning: A number of commands were reorganized with this release, more information will be noted below in individual sections. If a command that worked in a previous release is no longer present, it has most likely been changed to a more logical and consistent location.

Warning: RESTCONF queries now require a namespace in the format of `module:name` where only the name was required in previous versions. To locate the correct `module:name` combination, see [API Endpoints](#).

General

- The data models have been updated with more consistent naming and locations
- Introduced a YANG `id` type for `name` fields [1318]
- Miscellaneous code cleanup and refactoring for stability and performance improvements [1516] [1571]
- Updated to CentOS 7.6 [1335]
- Updated build to use gcc 7 [1147]
- Fixed a potential crash when listing packages [1312]
- Improved handling of package versions to better handle situations where a dependency update requires reinstalling related packages [950]

BGP

- BGP commands reorganized under `route dynamic` for configuration and `show route dynamic` for status. See [Commands](#) and [Border Gateway Protocol](#). [1369]
- FRR updated to 6.0.x

CLI

- The configuration database commands have been reorganized under `configuration` for making changes, such as `copy`, and under `show configuration` for viewing the contents of a configuration. See [Commands](#) and [Configuration Database](#). [1347]
- Fixed `system location` text handling when the value contains whitespace [1584]

Dataplane

- Updated DPDK `igb_uio` module to v19.02 [842]

DHCP Server

- Updated Kea to 1.4.0-P1 [1239]

DNS

- Fixed removal of `access-control` entries in the CLI [1417]

Host

- Fixed inconsistent behavior of `host interface` commands [1611]
- Added a default set of `nftables` rules to limit inbound traffic to the host [476]

Interfaces

- Several interface-related configuration commands have been moved under the `interface` command for better consistency. These include: `bridge`, `loopback`, `memif`, `subif`, and `tap`. See [Commands](#) and [Types of Interfaces](#) [1336]
- Added support for [Bonding Interfaces](#) for link aggregation and redundancy, including support for LACP [1025]
- Fixed display of a single TAP interface [1554]
- Fixed state data returned from a GET request for `/netgate-interface:interfaces-state/interface` [1553]
- Corrected validation of `memif` socket ID to exclude `0` which is reserved, and enforce a maximum of `4294967294` [1527]
- Corrected validation of bridge domain ID to exclude `0` which is reserved, and enforce a maximum of `16777215` [1526]
- Fixed handling of non-default routing tables assigned to interfaces at startup [1518]
- Removed unused container `/interfaces-config/interface/tunnel` from data model [1427]
- Fixed `subif` commands `outer-dot1q any` and `outer-dot1ad any` [1552] [1352]
- Fixed subinterfaces failing after changing configuration [1346]
- Removed the `untagged` command from `subif` as it was non-functional and unnecessary (use the parent interface for untagged traffic) [1345]

NAT

- Added support for *MAP-T and MAP-E BR* [1399]

RESTCONF

Warning: RESTCONF queries now require a namespace in the format of `module:name` where only the name was required in previous versions. To locate the correct `module:name` combination, see *API Endpoints*.

- Fixed RESTCONF calls for RPCs returning error 400 despite succeeding [1511]

Routing

- Fixed removing a route table reporting failure when the operation succeeded [1515]

34.17.2 Known Limitations

ACL

- Attempting to create an ACL containing only a description fails [1558]

Workaround: Define one or more rules on the ACL.

BFD

- Attempting to change a BFD local/peer address fails [1549]

BGP

- TNSR does not send BGP updates without restarting service with `redistribute from connected` option [746]
- Route with `aggregate-address` via `next-hop 0.0.0.0` does not appear in TNSR route table [832]
- BGP sessions may fail to establish or rapidly reconnect when receiving more prefixes than defined by `maximum-prefix limit` [858]
- The `maximum-prefix restart` command does not work [859]
- TNSR installs multiple paths for received routes even though support for multiple paths is not enabled [885]
Workaround: Run `systemctl reset-failed frr` from the shell to clear the error which will allow the BGP service to start again.
- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]
- IPv6 BGP neighbors get entered as `peer-groups` only in `bgpd.conf` [1190]
- BGP `import-check` feature does not work [781]

CLI

- `show route table` causes the backend to die with large numbers of routes in the table [506]
For example, this crash happens with a full BGP feed.
- Using `service dataplane restart` can cause `clixon_backend` to lose its configuration [1383]

DHCP

- DHCP server uses default VPP interface IP address (169.254.0.x) as a source address for DHCP packets and as a DHCP Server Identifier [1222]
- Adding a DHCP reservation without a MAC address causes Kea to fail and the entry cannot be removed [1530]
Workaround: A MAC address is required for DHCP reservations, so always enter a MAC address when creating an entry.
- Configuring Kea to log all names with `*` does not work [1307]
Workaround: Configure each name separately instead of using a wildcard.

DNS

- Local zone FQDN handling for forward (A) and reverse (PTR) data is inconsistent, only allowing one or the other to work as expected for a given FQDN [1384]

HTTP Server / RESTCONF

- `nginx` does not behave as expected with `authentication type none` and TLS [1086]
This mode is primarily for testing and not production use.
Workaround: Use password or certificate-based authentication for RESTCONF.
- HTTP server runs even though it's not configured to run after TNSR services restart [1153]
Workaround: Manually stop the `nginx` service using `systemctl`.
- RESTCONF get of `/restconf/data/` does not properly return state data [1534]
- RESTCONF query replies may contain CDATA tags in JSON [1463]
- Adding an ACL rule entry via RESTCONF may appear to add a duplicate ACL [1238]

Interfaces

- Loopback interface responds to ICMP echo from an outside host even when in a *Down* state [850]
- Unable to delete an interface if has had an ACL or MACIP applied [1177, 1178]
Workaround: Remove the entire ACL or MACIP entry. Then, the interface may be removed.
- MACIP ACL remains in the interface configuration after being removed [1179]
- Bond interfaces in LACP mode will send LACPDU's even when configured for passive mode [1614]
- Non-LACP bond interfaces may experience packet drops when a bond member interface is down [1603]

- MAC address change on tap interfaces may not be reflected in the dataplane until the dataplane is restarted [1502]
Workaround: Restart the dataplane after changing an interface MAC address.
- MAC address change on bond interfaces may not be reflected in the dataplane until the dataplane is restarted [1502]
Workaround: Set the MAC address when creating the bond interface.
- VLAN tag rewrite settings are only available in subinterfaces [1344]
- Packets do not pass through a subinterface after the subinterface configuration has been modified [1612]
- QinQ VLAN termination is not working [1550]
- ARP replies received from another host on a VLAN subinterface are not processed correctly [1326]

IPsec

- An IPsec tunnel which was removed and then added back in may take longer than expected to establish [1313]

NACM

- Permitted default read and write operations cannot be executed if default exec policy is set to **deny** [1158]

NAT

- **twice-nat** does not work [1023]
- NAT mode is not deleted from VPP startup configuration after TNSR services restart [1017]
- NAT forwarding is not working for **in2out** direction [1039]
- NAT static mappings are not added as expected when only the **port-local** value differs [1100]
- NAT static mapping with defined ports leads to **clixon-backend** crash after restart [1103]
- DS-Lite is not functional; B4 router sends encapsulated IPv4-in-IPv6 packets, but AFTR replies with an error [1626]
- DS-Lite B4 endpoint is not shown by **show dslite** command [1625]
- Unable to view a list of NAT sessions [975, 1456]

Routing

- Deleting a non-empty route table fails with an error and the table remains in the configuration, but it cannot be changed afterward [1241]
Workaround: Remove all routes from the table before deleting. Alternately, copy the running configuration to startup and restart TNSR, which will make the route table appear again so the routes and then the table can be removed.

User Management

- When deleting a user key from the running configuration it is not removed from the user's `authorized_keys` file [1162]

Workaround: Manually edit the `authorized_keys` file for the user and remove the key.

34.17.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.18 TNSR 18.11 Release Notes

34.18.1 About This Release

Access Lists (ACLs)

- Added a description field to ACL rule entries [1195]
- Fixed issues with numerical sorting of ACL entries in `show output` [1255]
- Fixed issues with order of installed ACL rules in the dataplane with large sequence numbers [1270]

Authentication & Access Control

- Removed users from the TNSR configuration so they are stored/managed directly in the host operating system, which eliminates any chance to be out of sync [1067]
- Fixed issues with deleting NACM rule lists [1137]

BGP

- Fixed an issue where the BGP service could not restart more than three times in a row [902]
- Added `bgp clear` command to clear active BGP sessions [923]

Bridge

- Fixed a problem where the TNSR CLI incorrectly allowed multiple bridge interfaces to have `bvi` set [984]

CLI

- Fixed a problem where applied `dataplane` commands were not immediately present in the running configuration database until another change was made [1099]
- Fixed a problem where the candidate configuration database could not be emptied with the `clear` command [1066]

Hardware & Installation

- Added an ISO image to install TNSR on supported hardware [1364]
- Added support for VMware installations [1026]
- Added support for Mellanox network adapters [1268]

Interfaces

- Fixed interface link speed displaying incorrectly in CLI and RESTCONF [672]
- Fixed issues with duplicate entries being generated in the dataplane interface configuration [1243]

Host

- Added the ability to configure host OS management interfaces in the CLI [260, 261, 262]
- Fixed issues with `ping` command parameter parsing [1133]
- Fixed issues specifying a source address with `ping` [1134]

IPsec

- Fixed issues with IPsec tunnels failing to establish after a dataplane restart [1138]

NAT

- Changed the default NAT mode to `endpoint-dependent` [1079]
- Fixed creating a `twice-nat` pool [972]
- Fixed creating `out-to-in-only` static mappings [976]
- Fixed NAT reassembly for ICMP packets [990]
- Fixed fragment limitations for NAT reassembly [1065]
- Added support for deterministic NAT [360]

NTP

- Fixed issues with the `ntp restrict` command [1163]

RESTCONF

- Fixed validation when submitting invalid MAC addresses via RESTCONF [1197]
- Fixed validation when submitting invalid IP addresses via RESTCONF [1199]

VLAN/Subinterfaces

- Fixed issues where daemons such as Kea and `ntpd` did not correctly form configuration file references to subinterface names [1150]
- Fixed issues with clients on subinterface networks from receiving return traffic that passes through TNSR [1152]

The upstream VPP issue causing this has been fixed, but an additional source of problems in this area is that the `dot1q` setting for a subinterface must use `exact-match` to communicate properly with hosts on the VLAN. Ensure subinterfaces are configured to use this property.

34.18.2 Known Limitations

Authentication & Access Control

BGP

- TNSR does not send BGP updates without restarting service with `redistribute from connected` option [746]
- Route with `aggregate-address` via next-hop `0.0.0.0` does not appear in TNSR route table [832]
- BGP sessions may fail to establish or rapidly reconnect when receiving more prefixes than defined by `maximum-prefix limit` [858]
- The `maximum-prefix restart` command does not work [859]
- TNSR installs multiple paths for received routes even though support for multiple paths is not enabled [885]

Workaround: Run `systemctl reset-failed frr` from the shell to clear the error which will allow the BGP service to start again.

- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]
- IPv6 BGP neighbors get entered as `peer-groups` only in `bgpd.conf` [1190]
- `peer-group` attribute `remote-as` does not get into FRR `bgpd.conf` [1272]

CLI

- `show route table` causes the backend to die with large numbers of routes in the table [506]

For example, this crash happens with a full BGP feed.

DHCP

- A single IP address can be set in a pool range, but the DHCP daemon requires a start/end IP address or a prefix [1208]

Workaround: Configure a pool with a start and end address or prefix.

- DHCP server uses default VPP interface IP address (169.254.0.x) as a source address for DHCP packets and as a DHCP Server Identifier [1222]
- Unable to delete DHCPv4 options specified within the pool configuration [1267]

HTTP Server / RESTCONF

- `nginx` does not behave as expected with `authentication type none` and TLS [1086]

This mode is primarily for testing and not production use.

Workaround: Use password or certificate-based authentication for RESTCONF.

- HTTP server runs even though it's not configured to run after TNSR services restart [1153]

Workaround: Manually stop the `nginx` service using `systemctl`.

Interfaces

- Loopback interface responds to ICMP echo from an outside host even when in a *Down* state [850]
- Unable to delete an interface if has had an ACL or MACIP applied [1177, 1178]
Workaround: Remove the entire ACL or MACIP entry. Then, the interface may be removed.
- MACIP ACL remains in the interface configuration after being removed [1179]

NAT

- `twice-nat` does not work [1023]
- NAT mode is not deleted from VPP startup configuration after TNSR services restart [1017]
- NAT forwarding is not working for `in2out` direction [1039]
- NAT static mappings are not added as expected when only the `port-local` value differs [1100]
- NAT static mapping with defined ports leads to `clixon-backend` crash after restart [1103]
- PAT dynamic sessions limited to 100 entries per address [1303]

This is the default limit per user in VPP and will be configurable in the next release.

Routing

- Deleting a non-empty route table fails with an error and the table remains in the configuration, but it cannot be changed afterward [1241]

Workaround: Remove all routes from the table before deleting. Alternately, copy the running configuration to startup and restart TNSR, which will make the route table appear again so the routes and then the table can be removed.

User Management

- When deleting a user key from the running configuration it is not removed from the user's `authorized_keys` file [1162]

Workaround: Manually edit the `authorized_keys` file for the user and remove the key.

34.18.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.19 TNSR 18.08 Release Notes

34.19.1 About This Release

Authentication & Access Control

- Added support for NETCONF Access Control Model (NACM) management.

NACM provides group-based controls to selectively allow command access for users. Users are authenticated by other means (e.g. RESTCONF certificates or users, CLI user) and then mapped to groups based on username.

- Added default configurations for NACM for different platforms [891]

These default rules allow members of group `admin` to have unlimited access and sets the default values to `deny`. It includes the users `tnsr` and `root` in the group `admin`.

Warning: TNSR Does not prevent a user from changing the rules in a way that would cut off all access.

- Changed password management to allow changing passwords for users in the host OS as well as for TNSR users [1091]

BGP

- Added explicit sequence numbering to BGP AS Path statements to support multiple patterns in a single AS Path [898]
- Added `show bgp network A.B.C.D` command to display detailed information about BGP routes [922]

CLI

- Added `enable` and `disable` commands to be used in favor of `no shutdown/shutdown` [938]
- Fixed CLI issues with data encoding that could lead to XML Parsing errors [887]

DHCP

- Improved support and control for DHCP server ([Kea](#)) management [490, 738, 1037, 1045]
- Added explicit `enable/disable` for DHCP Server daemon [1053]
- Added logging support to the DHCP Server [907]

DNS Resolver

- Added support for management of a DNS Resolver ([Unbound](#)) [492, 1072, 1093, 1094]

Hardware & Installation

- Added support for installation on Xeon D, C3000 SoCs [961]
- Added configuration packages for Netgate hardware that can run TNSR [1056]
- Fixed a Layer 2 connectivity issue with certain Intel 10G fiber configurations due to a timeout waiting for link [509]

IPsec

- Added QAT cryptographic acceleration enabled for IPsec [912, 940]
This acceleration works with QAT CPIC cards as well as C62X, C3XXX, and D15XX QAT devices.
- Fixed an issue where an IPsec Child SA would disappear after an IKEv1 Security Association re-authenticates [628]

NAT

- Fixed creating a NAT pool for custom route tables in the CLI [1055]
- Fixed handling of the NAT reassembly timeout value [1000]
- Added support for `output feature NAT` [867, 897]
- Fixed an error when changing static NAT command boolean properties [703]

- Addressed NAT issues which prevent the TNSR host OS network services from working on `nat` outside interfaces [616]

This can only work in `endpoint-dependent` NAT mode, which can be enabled as follows:

```
dataplane nat endpoint-dependent
service dataplane restart
```

This may become the default NAT mode in future TNSR releases [1079]

NTP

- Added support for NTP server (ntp.org) management [847, 939, 948, 952]

PKI (Certificates)

- Added support to the PKI CLI for managing certificate authority (CA) entries as well as certificate signing [930]

RESTCONF

- Added commands for `RESTCONF` management and authentication (HTTP server, [nginx](http://nginx.org)) [933]
- Added support to `RESTCONF` for certificate-based authentication [937]

When using certificates to authenticate, the common name (CN) part of the subject is used as the username.

- Added PAM support for HTTP authentication to the HTTP server [934]

34.19.2 Known Limitations

Authentication & Access Control

- Unable to delete a user from the CLI after TNSR services restart [1067]

BGP

- TNSR does not send BGP updates without restarting service with `redistribute from connected` option [746]
- Route with `aggregate-address` via next-hop `0.0.0.0` does not appear in TNSR route table [832]
- BGP sessions may fail to establish or rapidly reconnect when receiving more prefixes than defined by `maximum-prefix limit` [858]
- The `maximum-prefix restart` command does not work [859]
- TNSR installs multiple paths for received routes even though support for multiple paths is not enabled [885]
- Unable to restart BGP service more than three times in a row [902]

Workaround: Run `systemctl reset-failed frr` from the shell to clear the error which will allow the BGP service to start again.

- Changing `update-source` from an IP address to `loop1` allows a session to establish but remote prefixes do not appear in the FIB until reboot [1104]

Bridge

- TNSR CLI allows multiple bridge interfaces to have `bvi set` [984]

Only the first interface set with `bvi` will work properly.

Workaround: Only set `bvi` on a single interface.

CLI

- Applied `dataplane` commands are not immediately present in the running configuration database until another change is made [1099]
- The candidate configuration database cannot be emptied with the `clear` command [1066]
- `show route table` causes the backend to die with large numbers of routes in the table [506]

For example, this crash happens with a full BGP feed.

RESTCONF

- `nginx` does not behave as expected with `authentication type none` [1086]

This mode is primarily for testing and not production use.

Workaround: Use password or certificate-based authentication for RESTCONF.

Interfaces

- Interface link speed displayed incorrectly in CLI and RESTCONF [672]
- Loopback interface responds to ICMP echo from an outside host even when in a *Down* state [850]

NAT

- Unable to create a `twice-nat` pool [972] or `twice-nat` not working [1023]

`twice-nat` can only work in `endpoint-dependent` NAT mode, which can be enabled as follows:

```
dataplane nat endpoint-dependent
service dataplane restart
```

- Unable to create `out-to-in-only` static mapping [976]

`out-to-in-only` can only work in `endpoint-dependent` NAT mode, which can be enabled as follows:

```
dataplane nat endpoint-dependent
service dataplane restart
```

- NAT Reassembly is not working for ICMP packets [990]
- Fragment limitation for NAT reassembly is not working [1065]
- NAT mode is not deleted from VPP startup configuration after TNSR services restart [1017]
- NAT forwarding is not working for `in2out` direction [1039]
- NAT static mappings are not added as expected when only the `port-local` value differs [1100]

- NAT static mapping with defined ports leads to clixon-backend crash after restart [1103]

VLAN/Subinterfaces

- Daemons such as Kea and ntpd do not correctly form configuration file references to subinterface names [1150]
- A VPP issue is preventing clients on subinterface networks from receiving return traffic that passes through TNSR [1152]
 - These clients can communicate to TNSR, but not to hosts on other interfaces or subinterfaces.
 - Other interface types work properly

34.19.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.20 TNSR 18.05 Release Notes

34.20.1 About This Release

This is the first public release of the TNSR product.

34.20.2 Known Limitations

- Loopback with IPv6 address will not respond to IPv6 pings [295]
 - **Workaround:** none.
- Linux route rules for the router-plugin/tap-inject are not cleaned up [477]

If the dataplane crashes, route rules added to the host system network stack are not cleaned up when it restarts.

 - **Workaround:** none.
- Deleting in-use prefix-list fails [483]

If you attempt to delete an in-use prefix list, the command will fail, but the configuration is left in an inconsistent state.

 - **Workaround:** remove the use of the prefix list prior to deleting it.
- DHCP Server Issues [490][739]

There are multiple issues with the DHCP Server, it's use is not recommended at this time.

 - **Workaround:** none.
- The command “show route table” causes backend crash [506]

A large route table (> 50k routes) can cause the “show route table” command to crash the backend process.

 - **Workaround:** Use “vppctl show ip fib” from a shell or vtysh to view route tables when a large number of routes have been added.

- RPC error when input includes “<” character [612]

Using the “<” character as input to the CLI can cause an RPC error. The error is properly detected, reported, and handled in the known cases. This affects all cases where there is free-form input.

- **Workaround:** Do not use the “<” character.

- Enabling NAT on an outside interface disables services on that interface [616]

If you configure NAT on an outside interface, then that interface cannot provide services (like DHCP, ssh, etc.).

- **Workaround:** none

- SLAAC is not supported in dataplane, but host stack interfaces have it enabled [618]

- **Workaround:** none.

- Child SAs can disappear after an IKEv1 SA reauth [628]

- **Workaround:** none.

- Interface speed and duplex show as unknown [672]

The link speed and duplex indicators (visible with the “show interface” command) can display as “unknown”.

- **Workaround:** Use the “vppctl show interface” command from an OS shell.

- Unable to change DHCP client hostname option [706]

The DHCP Client hostname can not be changed.

- **Workaround:** none.

- Data plane restart breaks RESTCONF [741]

If you restart the data plane, the RESTCONF service loses its connection and does not reestablish it.

- **Workaround:** Restart the data plane via the CLI, which does not have the same issue.

- RESTCONF RPC output is invalid JSON [745]

Some RPCs return multiple line output and the new line characters are not handled properly resulting in the inability of a JSON parser to process the output.

- **Workaround:** none.

- BGP updates not being sent when “redistribute from connected” option specified [746]

Routes from connected routers are not propagated when the redistribute from connected option is set.

- **Workaround:** none. You can temporarily resolve the problem by resetting the BGP service.

- BGP import-check feature does not work [781]

If the import-check option is set and then BGP is configured to advertise an unreachable network then the network is still advertised.

- **Workaround:** none.

- Unable to create a default route when more than one loopback interface exists [824]

- **Workaround:** none.

- Unable to create a second static NAT translation on a loopback interface [831]

- **Workaround:** none.

- Route with aggregate-address via next-hop 0.0.0.0 doesn't appear in routing table [832]

- **Workaround:** none.

- Loopback interface can be ping from an outside host even when marked down [850]
 - **Workaround:** none.
- BGP session constantly flapping when receiving more prefixes than defined in `maximum-prefix limit` command [858]
 - **Workaround:** none.
- BGP `maximum-prefix restart` option doesn't work [859]
 - **Workaround:** none.
- No warning message in CLI when BGP `maximum-prefix` option is configured [860]

If the maximum number of prefixes is exceeded, there is no indication to a user that this has occurred.

 - **Workaround:** none.
- Unable to set BGP warning-only option for `maximum-prefix` option [861]
 - **Workaround:** none.

34.20.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

34.21 TNSR 0.1.0 Release Notes

34.21.1 About This Release

The TNSR 0.1.0 Release is the first release of the Netgate TNSR product. As there is no previous release of the TNSR products, there can be no changes relative to a previous version. Everything is new!

This release constitutes an early, evaluation version of the product.

34.21.2 Known Limitations

BGP Routes

While BGP may be configured, started, and run, reports of it not recording and displaying the learned BGP routes using the TNSR command “show routes” have been reported.

A possible work-around appears to be to stop, and then restart the BGP daemon using:

```
tnsr# service bgp stop
tnsr# service bgp start
```

BGP route-map and prefix-list Entries

TNSR route-maps and prefix-lists may be configured, and subsequently passed along to the underlying FRR configuration. TNSR will also allow removal of route-maps or prefix-lists from its configuration. However, they are not removed from the underlying FRR configuration.

A possible work-around is to manually remove them from the underlying FRR configuration using `vytysh` directly.

DHCP Server

The DHCP server does not support any form of Options yet.

The “`server dhcp stop dhcp4`” will not effectively terminate the Kea IPv4 DHCP server. A work-around is to run some form of “`sudo killall kea-dhcp4`” from a shell prompt.

34.21.3 Reporting Issues

For issues, please contact the Netgate Support staff.

- Send email to support@netgate.com
- Phone: 512.646.4100 (Support is Option 2)

LICENSING

The Netgate TNSR product uses a combination of Open Source and proprietary software subject to several different licenses.

The following list shows each Open Source component along with its license.

35.1 Apache 2.0 License

A copy of the Apache 2.0 License is found at <https://www.apache.org/licenses>.

The full text of the Apache 2.0 license is included below.

Apache License
Version 2.0, January 2004
<http://www.apache.org/licenses/>

TERMS AND CONDITIONS FOR USE, REPRODUCTION, AND DISTRIBUTION

1. Definitions.

"License" shall mean the terms and conditions for use, reproduction, and distribution as defined by Sections 1 through 9 of this document.

"Licensor" shall mean the copyright owner or entity authorized by the copyright owner that is granting the License.

"Legal Entity" shall mean the union of the acting entity and all other entities that control, are controlled by, or are under common control with that entity. For the purposes of this definition, "control" means (i) the power, direct or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (ii) ownership of fifty percent (50%) or more of the outstanding shares, or (iii) beneficial ownership of such entity.

"You" (or "Your") shall mean an individual or Legal Entity exercising permissions granted by this License.

"Source" form shall mean the preferred form for making modifications, including but not limited to software source code, documentation source, and configuration files.

(continues on next page)

(continued from previous page)

"Object" form shall mean any form resulting from mechanical transformation or translation of a Source form, including but not limited to compiled object code, generated documentation, and conversions to other media types.

"Work" shall mean the work of authorship, whether in Source or Object form, made available under the License, as indicated by a copyright notice that is included in or attached to the work (an example is provided in the Appendix below).

"Derivative Works" shall mean any work, whether in Source or Object form, that is based on (or derived from) the Work and for which the editorial revisions, annotations, elaborations, or other modifications represent, as a whole, an original work of authorship. For the purposes of this License, Derivative Works shall not include works that remain separable from, or merely link (or bind by name) to the interfaces of, the Work and Derivative Works thereof.

"Contribution" shall mean any work of authorship, including the original version of the Work and any modifications or additions to that Work or Derivative Works thereof, that is intentionally submitted to Licensor for inclusion in the Work by the copyright owner or by an individual or Legal Entity authorized to submit on behalf of the copyright owner. For the purposes of this definition, "submitted" means any form of electronic, verbal, or written communication sent to the Licensor or its representatives, including but not limited to communication on electronic mailing lists, source code control systems, and issue tracking systems that are managed by, or on behalf of, the Licensor for the purpose of discussing and improving the Work, but excluding communication that is conspicuously marked or otherwise designated in writing by the copyright owner as "Not a Contribution."

"Contributor" shall mean Licensor and any individual or Legal Entity on behalf of whom a Contribution has been received by Licensor and subsequently incorporated within the Work.

2. Grant of Copyright License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable copyright license to reproduce, prepare Derivative Works of, publicly display, publicly perform, sublicense, and distribute the Work and such Derivative Works in Source or Object form.
3. Grant of Patent License. Subject to the terms and conditions of this License, each Contributor hereby grants to You a perpetual, worldwide, non-exclusive, no-charge, royalty-free, irrevocable (except as stated in this section) patent license to make, have made, use, offer to sell, sell, import, and otherwise transfer the Work, where such license applies only to those patent claims licensable by such Contributor that are necessarily infringed by their Contribution(s) alone or by combination of their Contribution(s) with the Work to which such Contribution(s) was submitted. If You

(continues on next page)

(continued from previous page)

institute patent litigation against any entity (including a cross-claim or counterclaim in a lawsuit) alleging that the Work or a Contribution incorporated within the Work constitutes direct or contributory patent infringement, then any patent licenses granted to You under this License for that Work shall terminate as of the date such litigation is filed.

4. Redistribution. You may reproduce and distribute copies of the Work or Derivative Works thereof in any medium, with or without modifications, and in Source or Object form, provided that You meet the following conditions:
 - (a) You must give any other recipients of the Work or Derivative Works a copy of this License; and
 - (b) You must cause any modified files to carry prominent notices stating that You changed the files; and
 - (c) You must retain, in the Source form of any Derivative Works that You distribute, all copyright, patent, trademark, and attribution notices from the Source form of the Work, excluding those notices that do not pertain to any part of the Derivative Works; and
 - (d) If the Work includes a "NOTICE" text file as part of its distribution, then any Derivative Works that You distribute must include a readable copy of the attribution notices contained within such NOTICE file, excluding those notices that do not pertain to any part of the Derivative Works, in at least one of the following places: within a NOTICE text file distributed as part of the Derivative Works; within the Source form or documentation, if provided along with the Derivative Works; or, within a display generated by the Derivative Works, if and wherever such third-party notices normally appear. The contents of the NOTICE file are for informational purposes only and do not modify the License. You may add Your own attribution notices within Derivative Works that You distribute, alongside or as an addendum to the NOTICE text from the Work, provided that such additional attribution notices cannot be construed as modifying the License.

You may add Your own copyright statement to Your modifications and may provide additional or different license terms and conditions for use, reproduction, or distribution of Your modifications, or for any such Derivative Works as a whole, provided Your use, reproduction, and distribution of the Work otherwise complies with the conditions stated in this License.

5. Submission of Contributions. Unless You explicitly state otherwise, any Contribution intentionally submitted for inclusion in the Work by You to the Licensor shall be under the terms and conditions of this License, without any additional terms or conditions.

(continues on next page)

(continued from previous page)

Notwithstanding the above, nothing herein shall supersede or modify the terms of any separate license agreement you may have executed with Licensor regarding such Contributions.

6. Trademarks. This License does not grant permission to use the trade names, trademarks, service marks, or product names of the Licensor, except as required for reasonable and customary use in describing the origin of the Work and reproducing the content of the NOTICE file.
7. Disclaimer of Warranty. Unless required by applicable law or agreed to in writing, Licensor provides the Work (and each Contributor provides its Contributions) on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied, including, without limitation, any warranties or conditions of TITLE, NON-INFRINGEMENT, MERCHANTABILITY, or FITNESS FOR A PARTICULAR PURPOSE. You are solely responsible for determining the appropriateness of using or redistributing the Work and assume any risks associated with Your exercise of permissions under this License.
8. Limitation of Liability. In no event and under no legal theory, whether in tort (including negligence), contract, or otherwise, unless required by applicable law (such as deliberate and grossly negligent acts) or agreed to in writing, shall any Contributor be liable to You for damages, including any direct, indirect, special, incidental, or consequential damages of any character arising as a result of this License or out of the use or inability to use the Work (including but not limited to damages for loss of goodwill, work stoppage, computer failure or malfunction, or any and all other commercial damages or losses), even if such Contributor has been advised of the possibility of such damages.
9. Accepting Warranty or Additional Liability. While redistributing the Work or Derivative Works thereof, You may choose to offer, and charge a fee for, acceptance of support, warranty, indemnity, or other liability obligations and/or rights consistent with this License. However, in accepting such obligations, You may act only on Your own behalf and on Your sole responsibility, not on behalf of any other Contributor, and only if You agree to indemnify, defend, and hold each Contributor harmless for any liability incurred by, or claims asserted against, such Contributor by reason of your accepting any such warranty or additional liability.

END OF TERMS AND CONDITIONS

APPENDIX: How to apply the Apache License to your work.

To apply the Apache License to your work, attach the following boilerplate notice, with the fields enclosed by brackets "[]" replaced with your own identifying information. (Don't include the brackets!) The text should be enclosed in the appropriate comment syntax for the file format. We also recommend that a file or class name and description of purpose be included on the

(continues on next page)

(continued from previous page)

same "printed page" as the copyright notice for easier identification within third-party archives.

Copyright [yyyy] [name of copyright owner]

Licensed under the Apache License, Version 2.0 (the "License");
you may not use this file except in compliance with the License.
You may obtain a copy of the License at

<http://www.apache.org/licenses/LICENSE-2.0>

Unless required by applicable law or agreed to in writing, software distributed under the License is distributed on an "AS IS" BASIS, WITHOUT WARRANTIES OR CONDITIONS OF ANY KIND, either express or implied. See the License for the specific language governing permissions and limitations under the License.

35.2 BSD 3-Clause License

A copy of the BSD 3-Clause License template is found at <https://opensource.org/licenses/BSD-3-Clause>.

The full text of the license as used by unbound is included below.

Copyright (c) 2007, NLnet Labs. All rights reserved.

This software is open source.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.

Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.

Neither the name of the NLNET LABS nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING

(continues on next page)

(continued from previous page)

NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

35.3 GPLv2.0 License

A copy of the GPLv2 License is found at <https://www.gnu.org/licenses/old-licenses/gpl-2.0.txt>.

The full text of the GPLv2 license is included below.

GNU GENERAL PUBLIC LICENSE Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.,
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

(continues on next page)

(continued from previous page)

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

(continues on next page)

(continued from previous page)

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
- b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium

(continues on next page)

(continued from previous page)

customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues),

(continues on next page)

(continued from previous page)

conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free

(continues on next page)

(continued from previous page)

programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version.

This program is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of

(continues on next page)

(continued from previous page)

MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more details.

You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA.

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate parts of the General Public License. Of course, the commands you use may be called something other than `show w' and `show c'; they could even be mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

35.4 libgit2 GPLv2 License

The libgit2 library uses a variation of GPLv2 with a linking exception. This is copied from <https://raw.githubusercontent.com/libgit2/libgit2/main/COPYING>

libgit2 is Copyright (C) the libgit2 contributors,
unless otherwise stated. See the AUTHORS file for details.

Note that the only valid version of the GPL as far as this project is concerned is `_this_` particular version of the license (ie v2, not v2.2 or v3.x or whatever), unless explicitly otherwise stated.

(continues on next page)

(continued from previous page)

LINKING EXCEPTION

In addition to the permissions in the GNU General Public License, the authors give you unlimited permission to link the compiled version of this library into combinations with other programs, and to distribute those combinations without any restriction coming from the use of this file. (The General Public License restrictions do apply in other respects; for example, they cover modification of the file, and distribution when not linked into a combined executable.)

GNU GENERAL PUBLIC LICENSE Version 2, June 1991

Copyright (C) 1989, 1991 Free Software Foundation, Inc.
59 Temple Place, Suite 330, Boston, MA 02111-1307 USA
Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

Preamble

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

(continues on next page)

(continued from previous page)

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

GNU GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program). Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

(continues on next page)

(continued from previous page)

2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
- b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:

- a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

(continues on next page)

(continued from previous page)

b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,

c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

4. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.

6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein.

(continues on next page)

(continued from previous page)

You are not responsible for enforcing compliance by third parties to this License.

7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

9. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free

(continues on next page)

(continued from previous page)

Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

10. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

11. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

12. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Programs

If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms.

To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

<one line to give the program's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>

This program is free software; you can redistribute it and/or modify it under the terms of the GNU General Public License as published by

(continues on next page)

(continued from previous page)

the Free Software Foundation; either version 2 of the License, or
(at your option) any later version.

This program is distributed in the hope that it will be useful,
but WITHOUT ANY WARRANTY; without even the implied warranty of
MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the
GNU General Public License for more details.

You should have received a copy of the GNU General Public License
along with this program; if not, write to the Free Software
Foundation, Inc., 59 Temple Place, Suite 330, Boston, MA 02111-1307 USA

Also add information on how to contact you by electronic and paper mail.

If the program is interactive, make it output a short notice like this
when it starts in an interactive mode:

```
Gnomovision version 69, Copyright (C) year name of author
Gnomovision comes with ABSOLUTELY NO WARRANTY; for details type `show w'.
This is free software, and you are welcome to redistribute it
under certain conditions; type `show c' for details.
```

The hypothetical commands `show w' and `show c' should show the appropriate
parts of the General Public License. Of course, the commands you use may
be called something other than `show w' and `show c'; they could even be
mouse-clicks or menu items--whatever suits your program.

You should also get your employer (if you work as a programmer) or your
school, if any, to sign a "copyright disclaimer" for the program, if
necessary. Here is a sample; alter the names:

```
Yoyodyne, Inc., hereby disclaims all copyright interest in the program
`Gnomovision' (which makes passes at compilers) written by James Hacker.
```

```
<signature of Ty Coon>, 1 April 1989
Ty Coon, President of Vice
```

This General Public License does not permit incorporating your program into
proprietary programs. If your program is a subroutine library, you may
consider it more useful to permit linking proprietary applications with the
library. If this is what you want to do, use the GNU Library General
Public License instead of this License.

35.5 LGPLv2.1 License

A copy of the LGPLv2.1 License is found at <https://www.gnu.org/licenses/lgpl-2.1.txt> .

The full text of the LGPLv2.1 license is included below.

GNU LESSER GENERAL PUBLIC LICENSE
Version 2.1, February 1999

Copyright (C) 1991, 1999 Free Software Foundation, Inc.
51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA
Everyone is permitted to copy and distribute verbatim copies
of this license document, but changing it is not allowed.

[This is the first released version of the Lesser GPL. It also counts
as the successor of the GNU Library Public License, version 2, hence
the version number 2.1.]

Preamble

The licenses for most software are designed to take away your
freedom to share and change it. By contrast, the GNU General Public
Licenses are intended to guarantee your freedom to share and change
free software--to make sure the software is free for all its users.

This license, the Lesser General Public License, applies to some
specially designated software packages--typically libraries--of the
Free Software Foundation and other authors who decide to use it. You
can use it too, but we suggest you first think carefully about whether
this license or the ordinary General Public License is the better
strategy to use in any particular case, based on the explanations below.

When we speak of free software, we are referring to freedom of use,
not price. Our General Public Licenses are designed to make sure that
you have the freedom to distribute copies of free software (and charge
for this service if you wish); that you receive source code or can get
it if you want it; that you can change the software and use pieces of
it in new free programs; and that you are informed that you can do
these things.

To protect your rights, we need to make restrictions that forbid
distributors to deny you these rights or to ask you to surrender these
rights. These restrictions translate to certain responsibilities for
you if you distribute copies of the library or if you modify it.

For example, if you distribute copies of the library, whether gratis
or for a fee, you must give the recipients all the rights that we gave
you. You must make sure that they, too, receive or can get the source
code. If you link other code with the library, you must provide
complete object files to the recipients, so that they can relink them
with the library after making changes to the library and recompiling
it. And you must show them these terms so they know their rights.

(continues on next page)

(continued from previous page)

We protect your rights with a two-step method: (1) we copyright the library, and (2) we offer you this license, which gives you legal permission to copy, distribute and/or modify the library.

To protect each distributor, we want to make it very clear that there is no warranty for the free library. Also, if the library is modified by someone else and passed on, the recipients should know that what they have is not the original version, so that the original author's reputation will not be affected by problems that might be introduced by others.

Finally, software patents pose a constant threat to the existence of any free program. We wish to make sure that a company cannot effectively restrict the users of a free program by obtaining a restrictive license from a patent holder. Therefore, we insist that any patent license obtained for a version of the library must be consistent with the full freedom of use specified in this license.

Most GNU software, including some libraries, is covered by the ordinary GNU General Public License. This license, the GNU Lesser General Public License, applies to certain designated libraries, and is quite different from the ordinary General Public License. We use this license for certain libraries in order to permit linking those libraries into non-free programs.

When a program is linked with a library, whether statically or using a shared library, the combination of the two is legally speaking a combined work, a derivative of the original library. The ordinary General Public License therefore permits such linking only if the entire combination fits its criteria of freedom. The Lesser General Public License permits more lax criteria for linking other code with the library.

We call this license the "Lesser" General Public License because it does Less to protect the user's freedom than the ordinary General Public License. It also provides other free software developers Less of an advantage over competing non-free programs. These disadvantages are the reason we use the ordinary General Public License for many libraries. However, the Lesser license provides advantages in certain special circumstances.

For example, on rare occasions, there may be a special need to encourage the widest possible use of a certain library, so that it becomes a de-facto standard. To achieve this, non-free programs must be allowed to use the library. A more frequent case is that a free library does the same job as widely used non-free libraries. In this case, there is little to gain by limiting the free library to free software only, so we use the Lesser General Public License.

In other cases, permission to use a particular library in non-free programs enables a greater number of people to use a large body of free software. For example, permission to use the GNU C Library in

(continues on next page)

(continued from previous page)

non-free programs enables many more people to use the whole GNU operating system, as well as its variant, the GNU/Linux operating system.

Although the Lesser General Public License is Less protective of the users' freedom, it does ensure that the user of a program that is linked with the Library has the freedom and the wherewithal to run that program using a modified version of the Library.

The precise terms and conditions for copying, distribution and modification follow. Pay close attention to the difference between a "work based on the library" and a "work that uses the library". The former contains code derived from the library, whereas the latter must be combined with the library in order to run.

GNU LESSER GENERAL PUBLIC LICENSE
TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

0. This License Agreement applies to any software library or other program which contains a notice placed by the copyright holder or other authorized party saying it may be distributed under the terms of this Lesser General Public License (also called "this License"). Each licensee is addressed as "you".

A "library" means a collection of software functions and/or data prepared so as to be conveniently linked with application programs (which use some of those functions and data) to form executables.

The "Library", below, refers to any such software library or work which has been distributed under these terms. A "work based on the Library" means either the Library or any derivative work under copyright law: that is to say, a work containing the Library or a portion of it, either verbatim or with modifications and/or translated straightforwardly into another language. (Hereinafter, translation is included without limitation in the term "modification".)

"Source code" for a work means the preferred form of the work for making modifications to it. For a library, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the library.

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running a program using the Library is not restricted, and output from such a program is covered only if its contents constitute a work based on the Library (independent of the use of the Library in a tool for writing it). Whether that is true depends on what the Library does and what the program that uses the Library does.

1. You may copy and distribute verbatim copies of the Library's complete source code as you receive it, in any medium, provided that

(continues on next page)

(continued from previous page)

you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and distribute a copy of this License along with the Library.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

2. You may modify your copy or copies of the Library or any portion of it, thus forming a work based on the Library, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:

- a) The modified work must itself be a software library.
- b) You must cause the files modified to carry prominent notices stating that you changed the files and the date of any change.
- c) You must cause the whole of the work to be licensed at no charge to all third parties under the terms of this License.
- d) If a facility in the modified Library refers to a function or a table of data to be supplied by an application program that uses the facility, other than as an argument passed when the facility is invoked, then you must make a good faith effort to ensure that, in the event an application does not supply such function or table, the facility still operates, and performs whatever part of its purpose remains meaningful.

(For example, a function in a library to compute square roots has a purpose that is entirely well-defined independent of the application. Therefore, Subsection 2d requires that any application-supplied function or table used by this function must be optional: if the application does not supply it, the square root function must still compute square roots.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Library, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Library, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or

(continues on next page)

(continued from previous page)

collective works based on the Library.

In addition, mere aggregation of another work not based on the Library with the Library (or with a work based on the Library) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may opt to apply the terms of the ordinary GNU General Public License instead of this License to a given copy of the Library. To do this, you must alter all the notices that refer to this License, so that they refer to the ordinary GNU General Public License, version 2, instead of to this License. (If a newer version than version 2 of the ordinary GNU General Public License has appeared, then you can specify that version instead if you wish.) Do not make any other change in these notices.

Once this change is made in a given copy, it is irreversible for that copy, so the ordinary GNU General Public License applies to all subsequent copies and derivative works made from that copy.

This option is useful when you wish to copy part of the code of the Library into a program that is not a library.

4. You may copy and distribute the Library (or a portion or derivative of it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange.

If distribution of object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place satisfies the requirement to distribute the source code, even though third parties are not compelled to copy the source along with the object code.

5. A program that contains no derivative of any portion of the Library, but is designed to work with the Library by being compiled or linked with it, is called a "work that uses the Library". Such a work, in isolation, is not a derivative work of the Library, and therefore falls outside the scope of this License.

However, linking a "work that uses the Library" with the Library creates an executable that is a derivative of the Library (because it contains portions of the Library), rather than a "work that uses the library". The executable is therefore covered by this License. Section 6 states terms for distribution of such executables.

When a "work that uses the Library" uses material from a header file that is part of the Library, the object code for the work may be a derivative work of the Library even though the source code is not. Whether this is true is especially significant if the work can be

(continues on next page)

(continued from previous page)

linked without the Library, or if the work is itself a library. The threshold for this to be true is not precisely defined by law.

If such an object file uses only numerical parameters, data structure layouts and accessors, and small macros and small inline functions (ten lines or less in length), then the use of the object file is unrestricted, regardless of whether it is legally a derivative work. (Executables containing this object code plus portions of the Library will still fall under Section 6.)

Otherwise, if the work is a derivative of the Library, you may distribute the object code for the work under the terms of Section 6. Any executables containing that work also fall under Section 6, whether or not they are linked directly with the Library itself.

6. As an exception to the Sections above, you may also combine or link a "work that uses the Library" with the Library to produce a work containing portions of the Library, and distribute that work under terms of your choice, provided that the terms permit modification of the work for the customer's own use and reverse engineering for debugging such modifications.

You must give prominent notice with each copy of the work that the Library is used in it and that the Library and its use are covered by this License. You must supply a copy of this License. If the work during execution displays copyright notices, you must include the copyright notice for the Library among them, as well as a reference directing the user to the copy of this License. Also, you must do one of these things:

a) Accompany the work with the complete corresponding machine-readable source code for the Library including whatever changes were used in the work (which must be distributed under Sections 1 and 2 above); and, if the work is an executable linked with the Library, with the complete machine-readable "work that uses the Library", as object code and/or source code, so that the user can modify the Library and then relink to produce a modified executable containing the modified Library. (It is understood that the user who changes the contents of definitions files in the Library will not necessarily be able to recompile the application to use the modified definitions.)

b) Use a suitable shared library mechanism for linking with the Library. A suitable mechanism is one that (1) uses at run time a copy of the library already present on the user's computer system, rather than copying library functions into the executable, and (2) will operate properly with a modified version of the library, if the user installs one, as long as the modified version is interface-compatible with the version that the work was made with.

c) Accompany the work with a written offer, valid for at least three years, to give the same user the materials

(continues on next page)

(continued from previous page)

specified in Subsection 6a, above, for a charge no more than the cost of performing this distribution.

d) If distribution of the work is made by offering access to copy from a designated place, offer equivalent access to copy the above specified materials from the same place.

e) Verify that the user has already received a copy of these materials or that you have already sent this user a copy.

For an executable, the required form of the "work that uses the Library" must include any data and utility programs needed for reproducing the executable from it. However, as a special exception, the materials to be distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable.

It may happen that this requirement contradicts the license restrictions of other proprietary libraries that do not normally accompany the operating system. Such a contradiction means you cannot use both them and the Library together in an executable that you distribute.

7. You may place library facilities that are a work based on the Library side-by-side in a single library together with other library facilities not covered by this License, and distribute such a combined library, provided that the separate distribution of the work based on the Library and of the other library facilities is otherwise permitted, and provided that you do these two things:

a) Accompany the combined library with a copy of the same work based on the Library, uncombined with any other library facilities. This must be distributed under the terms of the Sections above.

b) Give prominent notice with the combined library of the fact that part of it is a work based on the Library, and explaining where to find the accompanying uncombined form of the same work.

8. You may not copy, modify, sublicense, link with, or distribute the Library except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense, link with, or distribute the Library is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.

9. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Library or its derivative works. These actions are

(continues on next page)

(continued from previous page)

prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Library (or any work based on the Library), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Library or works based on it.

10. Each time you redistribute the Library (or any work based on the Library), the recipient automatically receives a license from the original licensor to copy, distribute, link with or modify the Library subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties with this License.

11. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Library at all. For example, if a patent license would not permit royalty-free redistribution of the Library by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Library.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply, and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

12. If the distribution and/or use of the Library is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Library under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

(continues on next page)

(continued from previous page)

13. The Free Software Foundation may publish revised and/or new versions of the Lesser General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Library specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Library does not specify a license version number, you may choose any version ever published by the Free Software Foundation.

14. If you wish to incorporate parts of the Library into other free programs whose distribution conditions are incompatible with these, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

15. BECAUSE THE LIBRARY IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE LIBRARY, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE LIBRARY "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE LIBRARY IS WITH YOU. SHOULD THE LIBRARY PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.

16. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE LIBRARY AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE LIBRARY (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE LIBRARY TO OPERATE WITH ANY OTHER SOFTWARE), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS

How to Apply These Terms to Your New Libraries

If you develop a new library, and you want it to be of the greatest possible use to the public, we recommend making it free software that

(continues on next page)

(continued from previous page)

everyone can redistribute and change. You can do so by permitting redistribution under these terms (or, alternatively, under the terms of the ordinary General Public License).

To apply these terms, attach the following notices to the library. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the "copyright" line and a pointer to where the full notice is found.

```
<one line to give the library's name and a brief idea of what it does.>
Copyright (C) <year> <name of author>
```

This library is free software; you can redistribute it and/or modify it under the terms of the GNU Lesser General Public License as published by the Free Software Foundation; either version 2.1 of the License, or (at your option) any later version.

This library is distributed in the hope that it will be useful, but WITHOUT ANY WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU Lesser General Public License for more details.

You should have received a copy of the GNU Lesser General Public License along with this library; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301 USA

Also add information on how to contact you by electronic and paper mail.

You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the library, if necessary. Here is a sample; alter the names:

Yoyodyne, Inc., hereby disclaims all copyright interest in the library `Frob' (a library for tweaking knobs) written by James Random Hacker.

<signature of Ty Coon>, 1 April 1990
Ty Coon, President of Vice

That's all there is to it!

35.6 MIT License

A copy of the MIT License template is found at <https://opensource.org/licenses/MIT>.

The full text of the license as used by CURL is included below.

Copyright (c) 1996 - 2018, Daniel Stenberg, <daniel@haxx.se>, and many contributors, see the THANKS file.

All rights reserved.

(continues on next page)

(continued from previous page)

Permission to use, copy, modify, and distribute this software for any purpose with or without fee is hereby granted, provided that the above copyright notice and this permission notice appear in all copies.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE AUTHORS OR COPYRIGHT HOLDERS BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF OR IN CONNECTION WITH THE SOFTWARE OR THE USE OR OTHER DEALINGS IN THE SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

35.7 Mozilla Public License 2.0 (MPL-2.0)

A copy of the Mozilla Public License 2.0 (MPL-2.0) template is found at <https://opensource.org/licenses/MPL-2.0>.

Mozilla Public License Version 2.0

=====

1. Definitions

1.1. "Contributor"

means each individual or legal entity that creates, contributes to the creation of, or owns Covered Software.

1.2. "Contributor Version"

means the combination of the Contributions of others (if any) used by a Contributor and that particular Contributor's Contribution.

1.3. "Contribution"

means Covered Software of a particular Contributor.

1.4. "Covered Software"

means Source Code Form to which the initial Contributor has attached the notice in Exhibit A, the Executable Form of such Source Code Form, and Modifications of such Source Code Form, in each case including portions thereof.

1.5. "Incompatible With Secondary Licenses"

means

(a) that the initial Contributor has attached the notice described in Exhibit B to the Covered Software; or

(continues on next page)

(continued from previous page)

(b) that the Covered Software was made available under the terms of version 1.1 or earlier of the License, but not also under the terms of a Secondary License.

1.6. "Executable Form"

means any form of the work other than Source Code Form.

1.7. "Larger Work"

means a work that combines Covered Software with other material, in a separate file or files, that is not Covered Software.

1.8. "License"

means this document.

1.9. "Licensable"

means having the right to grant, to the maximum extent possible, whether at the time of the initial grant or subsequently, any and all of the rights conveyed by this License.

1.10. "Modifications"

means any of the following:

(a) any file in Source Code Form that results from an addition to, deletion from, or modification of the contents of Covered Software; or

(b) any new file in Source Code Form that contains any Covered Software.

1.11. "Patent Claims" of a Contributor

means any patent claim(s), including without limitation, method, process, and apparatus claims, in any patent Licensable by such Contributor that would be infringed, but for the grant of the License, by the making, using, selling, offering for sale, having made, import, or transfer of either its Contributions or its Contributor Version.

1.12. "Secondary License"

means either the GNU General Public License, Version 2.0, the GNU Lesser General Public License, Version 2.1, the GNU Affero General Public License, Version 3.0, or any later versions of those licenses.

1.13. "Source Code Form"

means the form of the work preferred for making modifications.

1.14. "You" (or "Your")

means an individual or a legal entity exercising rights under this License. For legal entities, "You" includes any entity that controls, is controlled by, or is under common control with You. For purposes of this definition, "control" means (a) the power, direct

(continues on next page)

(continued from previous page)

or indirect, to cause the direction or management of such entity, whether by contract or otherwise, or (b) ownership of more than fifty percent (50%) of the outstanding shares or beneficial ownership of such entity.

2. License Grants and Conditions

2.1. Grants

Each Contributor hereby grants You a world-wide, royalty-free, non-exclusive license:

- (a) under intellectual property rights (other than patent or trademark) Licensable by such Contributor to use, reproduce, make available, modify, display, perform, distribute, and otherwise exploit its Contributions, either on an unmodified basis, with Modifications, or as part of a Larger Work; and
- (b) under Patent Claims of such Contributor to make, use, sell, offer for sale, have made, import, and otherwise transfer either its Contributions or its Contributor Version.

2.2. Effective Date

The licenses granted in Section 2.1 with respect to any Contribution become effective for each Contribution on the date the Contributor first distributes such Contribution.

2.3. Limitations on Grant Scope

The licenses granted in this Section 2 are the only rights granted under this License. No additional rights or licenses will be implied from the distribution or licensing of Covered Software under this License. Notwithstanding Section 2.1(b) above, no patent license is granted by a Contributor:

- (a) for any code that a Contributor has removed from Covered Software; or
- (b) for infringements caused by: (i) Your and any other third party's modifications of Covered Software, or (ii) the combination of its Contributions with other software (except as part of its Contributor Version); or
- (c) under Patent Claims infringed by Covered Software in the absence of its Contributions.

This License does not grant any rights in the trademarks, service marks, or logos of any Contributor (except as may be necessary to comply with the notice requirements in Section 3.4).

(continues on next page)

(continued from previous page)

2.4. Subsequent Licenses

No Contributor makes additional grants as a result of Your choice to distribute the Covered Software under a subsequent version of this License (see Section 10.2) or under the terms of a Secondary License (if permitted under the terms of Section 3.3).

2.5. Representation

Each Contributor represents that the Contributor believes its Contributions are its original creation(s) or it has sufficient rights to grant the rights to its Contributions conveyed by this License.

2.6. Fair Use

This License is not intended to limit any rights You have under applicable copyright doctrines of fair use, fair dealing, or other equivalents.

2.7. Conditions

Sections 3.1, 3.2, 3.3, and 3.4 are conditions of the licenses granted in Section 2.1.

3. Responsibilities

3.1. Distribution of Source Form

All distribution of Covered Software in Source Code Form, including any Modifications that You create or to which You contribute, must be under the terms of this License. You must inform recipients that the Source Code Form of the Covered Software is governed by the terms of this License, and how they can obtain a copy of this License. You may not attempt to alter or restrict the recipients' rights in the Source Code Form.

3.2. Distribution of Executable Form

If You distribute Covered Software in Executable Form then:

- (a) such Covered Software must also be made available in Source Code Form, as described in Section 3.1, and You must inform recipients of the Executable Form how they can obtain a copy of such Source Code Form by reasonable means in a timely manner, at a charge no more than the cost of distribution to the recipient; and
- (b) You may distribute such Executable Form under the terms of this License, or sublicense it under different terms, provided that the license for the Executable Form does not attempt to limit or alter the recipients' rights in the Source Code Form under this License.

(continues on next page)

(continued from previous page)

3.3. Distribution of a Larger Work

You may create and distribute a Larger Work under terms of Your choice, provided that You also comply with the requirements of this License for the Covered Software. If the Larger Work is a combination of Covered Software with a work governed by one or more Secondary Licenses, and the Covered Software is not Incompatible With Secondary Licenses, this License permits You to additionally distribute such Covered Software under the terms of such Secondary License(s), so that the recipient of the Larger Work may, at their option, further distribute the Covered Software under the terms of either this License or such Secondary License(s).

3.4. Notices

You may not remove or alter the substance of any license notices (including copyright notices, patent notices, disclaimers of warranty, or limitations of liability) contained within the Source Code Form of the Covered Software, except that You may alter any license notices to the extent required to remedy known factual inaccuracies.

3.5. Application of Additional Terms

You may choose to offer, and to charge a fee for, warranty, support, indemnity or liability obligations to one or more recipients of Covered Software. However, You may do so only on Your own behalf, and not on behalf of any Contributor. You must make it absolutely clear that any such warranty, support, indemnity, or liability obligation is offered by You alone, and You hereby agree to indemnify every Contributor for any liability incurred by such Contributor as a result of warranty, support, indemnity or liability terms You offer. You may include additional disclaimers of warranty and limitations of liability specific to any jurisdiction.

4. Inability to Comply Due to Statute or Regulation

If it is impossible for You to comply with any of the terms of this License with respect to some or all of the Covered Software due to statute, judicial order, or regulation then You must: (a) comply with the terms of this License to the maximum extent possible; and (b) describe the limitations and the code they affect. Such description must be placed in a text file included with all distributions of the Covered Software under this License. Except to the extent prohibited by statute or regulation, such description must be sufficiently detailed for a recipient of ordinary skill to be able to understand it.

5. Termination

5.1. The rights granted under this License will terminate automatically if You fail to comply with any of its terms. However, if You become

(continues on next page)

(continued from previous page)

compliant, then the rights granted under this License from a particular Contributor are reinstated (a) provisionally, unless and until such Contributor explicitly and finally terminates Your grants, and (b) on an ongoing basis, if such Contributor fails to notify You of the non-compliance by some reasonable means prior to 60 days after You have come back into compliance. Moreover, Your grants from a particular Contributor are reinstated on an ongoing basis if such Contributor notifies You of the non-compliance by some reasonable means, this is the first time You have received notice of non-compliance with this License from such Contributor, and You become compliant prior to 30 days after Your receipt of the notice.

5.2. If You initiate litigation against any entity by asserting a patent infringement claim (excluding declaratory judgment actions, counter-claims, and cross-claims) alleging that a Contributor Version directly or indirectly infringes any patent, then the rights granted to You by any and all Contributors for the Covered Software under Section 2.1 of this License shall terminate.

5.3. In the event of termination under Sections 5.1 or 5.2 above, all end user license agreements (excluding distributors and resellers) which have been validly granted by You or Your distributors under this License prior to termination shall survive termination.

```
*****
*                                                                 *
* 6. Disclaimer of Warranty                                       *
* -----                                                        *
*                                                                 *
* Covered Software is provided under this License on an "as is"  *
* basis, without warranty of any kind, either expressed, implied, or *
* statutory, including, without limitation, warranties that the  *
* Covered Software is free of defects, merchantable, fit for a   *
* particular purpose or non-infringing. The entire risk as to the *
* quality and performance of the Covered Software is with You.   *
* Should any Covered Software prove defective in any respect, You *
* (not any Contributor) assume the cost of any necessary servicing, *
* repair, or correction. This disclaimer of warranty constitutes an *
* essential part of this License. No use of any Covered Software is *
* authorized under this License except under this disclaimer.     *
*                                                                 *
*****
```

```
*****
*                                                                 *
* 7. Limitation of Liability                                       *
* -----                                                        *
*                                                                 *
* Under no circumstances and under no legal theory, whether tort *
* (including negligence), contract, or otherwise, shall any      *
* Contributor, or anyone who distributes Covered Software as     *
* permitted above, be liable to You for any direct, indirect,     *
*                                                                 *
*****
```

(continues on next page)

(continued from previous page)

* special, incidental, or consequential damages of any character
* including, without limitation, damages for lost profits, loss of
* goodwill, work stoppage, computer failure or malfunction, or any
* and all other commercial damages or losses, even if such party
* shall have been informed of the possibility of such damages. This
* limitation of liability shall not apply to liability for death or
* personal injury resulting from such party's negligence to the
* extent applicable law prohibits such limitation. Some
* jurisdictions do not allow the exclusion or limitation of
* incidental or consequential damages, so this exclusion and
* limitation may not apply to You.

8. Litigation

Any litigation relating to this License may be brought only in the courts of a jurisdiction where the defendant maintains its principal place of business and such litigation shall be governed by laws of that jurisdiction, without reference to its conflict-of-law provisions. Nothing in this Section shall prevent a party's ability to bring cross-claims or counter-claims.

9. Miscellaneous

This License represents the complete agreement concerning the subject matter hereof. If any provision of this License is held to be unenforceable, such provision shall be reformed only to the extent necessary to make it enforceable. Any law or regulation which provides that the language of a contract shall be construed against the drafter shall not be used to construe this License against a Contributor.

10. Versions of the License

10.1. New Versions

Mozilla Foundation is the license steward. Except as provided in Section 10.3, no one other than the license steward has the right to modify or publish new versions of this License. Each version will be given a distinguishing version number.

10.2. Effect of New Versions

You may distribute the Covered Software under the terms of the version of the License under which You originally received the Covered Software, or under the terms of any subsequent version published by the license steward.

10.3. Modified Versions

(continues on next page)

(continued from previous page)

If you create software not governed by this License, and you want to create a new license for such software, you may create and use a modified version of this License if you rename the license and remove any references to the name of the license steward (except to note that such modified license differs from this License).

10.4. Distributing Source Code Form that is Incompatible With Secondary Licenses

If You choose to distribute Source Code Form that is Incompatible With Secondary Licenses under the terms of this version of the License, the notice described in Exhibit B of this License must be attached.

Exhibit A - Source Code Form License Notice

This Source Code Form is subject to the terms of the Mozilla Public License, v. 2.0. If a copy of the MPL was not distributed with this file, You can obtain one at <http://mozilla.org/MPL/2.0/>.

If it is not possible or desirable to put the notice in a particular file, then You may include the notice in a location (such as a LICENSE file in a relevant directory) where a recipient would be likely to look for such a notice.

You may add additional accurate notices of copyright ownership.

Exhibit B - "Incompatible With Secondary Licenses" Notice

This Source Code Form is "Incompatible With Secondary Licenses", as defined by the Mozilla Public License, v. 2.0.

35.8 Net SNMP License

The net-snmp repository is used governed by several licenses collectively listed as the Net SNMP License. It is found at <http://www.net-snmp.org/about/license.html>.

Its full text is included below.

Various copyrights apply to this package, listed in various separate parts below. Please make sure that you read all the parts.

----- Part 1: CMU/UCD copyright notice: (BSD like) -----

Copyright 1989, 1991, 1992 by Carnegie Mellon University

Derivative Work - 1996, 1998-2000

Copyright 1996, 1998-2000 The Regents of the University of California

(continues on next page)

(continued from previous page)

All Rights Reserved

Permission to use, copy, modify and distribute this software and its documentation for any purpose and without fee is hereby granted, provided that the above copyright notice appears in all copies and that both that copyright notice and this permission notice appear in supporting documentation, and that the name of CMU and The Regents of the University of California not be used in advertising or publicity pertaining to distribution of the software without specific written permission.

CMU AND THE REGENTS OF THE UNIVERSITY OF CALIFORNIA DISCLAIM ALL WARRANTIES WITH REGARD TO THIS SOFTWARE, INCLUDING ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS. IN NO EVENT SHALL CMU OR THE REGENTS OF THE UNIVERSITY OF CALIFORNIA BE LIABLE FOR ANY SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES OR ANY DAMAGES WHATSOEVER RESULTING FROM THE LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

----- Part 2: Networks Associates Technology, Inc copyright notice (BSD) -----

Copyright (c) 2001-2003, Networks Associates Technology, Inc
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the Networks Associates Technology, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF

(continues on next page)

(continued from previous page)

ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 3: Cambridge Broadband Ltd. copyright notice (BSD) -----

Portions of this code are copyright (c) 2001-2003, Cambridge Broadband Ltd.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * The name of Cambridge Broadband Ltd. may not be used to endorse or
promote products derived from this software without specific prior
written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER ``AS IS'' AND ANY
EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE
LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF
SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE
OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN
IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 4: Sun Microsystems, Inc. copyright notice (BSD) -----

Copyright © 2003 Sun Microsystems, Inc., 4150 Network Circle, Santa Clara,
California 95054, U.S.A. All rights reserved.

Use is subject to license terms below.

This distribution may include materials developed by third parties.

Sun, Sun Microsystems, the Sun logo and Solaris are trademarks or registered
trademarks of Sun Microsystems, Inc. in the U.S. and other countries.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.

(continues on next page)

(continued from previous page)

- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of the Sun Microsystems, Inc. nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 5: Sparta, Inc copyright notice (BSD) -----

Copyright (c) 2003-2009, Sparta, Inc
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of Sparta, Inc nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

(continues on next page)

(continued from previous page)

----- Part 6: Cisco/BUPTNIC copyright notice (BSD) -----

Copyright (c) 2004, Cisco, Inc and Information Network
Center of Beijing University of Posts and Telecommunications.
All rights reserved.

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * Neither the name of Cisco, Inc, Beijing University of Posts and
Telecommunications, nor the names of their contributors may
be used to endorse or promote products derived from this software
without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS
IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO,
THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR
CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL,
EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO,
PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS;
OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY,
WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR
OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF
ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 7: Fabasoft R&D Software GmbH & Co KG copyright notice (BSD) -----

Copyright (c) Fabasoft R&D Software GmbH & Co KG, 2003
oss@fabasoft.com
Author: Bernhard Penz

Redistribution and use in source and binary forms, with or without
modification, are permitted provided that the following conditions are met:

- * Redistributions of source code must retain the above copyright notice,
this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright
notice, this list of conditions and the following disclaimer in the
documentation and/or other materials provided with the distribution.
- * The name of Fabasoft R&D Software GmbH & Co KG or any of its subsidiaries,
brand or product names may not be used to endorse or promote products
derived from this software without specific prior written permission.

(continues on next page)

(continued from previous page)

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDER ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDER BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 8: Apple Inc. copyright notice (BSD) -----

Copyright (c) 2007 Apple Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. Neither the name of Apple Inc. ("Apple") nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY APPLE AND ITS CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL APPLE OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

----- Part 9: ScienceLogic, LLC copyright notice (BSD) -----

Copyright (c) 2009, ScienceLogic, LLC
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

(continues on next page)

(continued from previous page)

- * Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- * Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- * Neither the name of ScienceLogic, LLC nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS ``AS IS'' AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT HOLDERS OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

35.9 NTP License

The ntp.org NTP daemon uses a custom open source license known as the NTP License.

A copy of the NTP License template is found at <https://opensource.org/licenses/NTP>.

The full text of the license as used by NTP is included below.

The following copyright notice applies to all files collectively called the Network Time Protocol Version 4 Distribution. Unless specifically declared otherwise in an individual file, this entire notice applies as if the text was explicitly included in the file.

```
*****
*
* Copyright (c) University of Delaware 1992-2015
*
* Permission to use, copy, modify, and distribute this software and
* its documentation for any purpose with or without fee is hereby
* granted, provided that the above copyright notice appears in all
* copies and that both the copyright notice and this permission
* notice appear in supporting documentation, and that the name
* University of Delaware not be used in advertising or publicity
* pertaining to distribution of the software without specific,
* written prior permission. The University of Delaware makes no
* representations about the suitability this software for any
```

(continues on next page)

(continued from previous page)

```
* purpose. It is provided "as is" without express or implied
* warranty.
*
*****
```

Content starting in 2011 from Harlan Stenn, Danny Mayer, and Martin Burnicki is:

```
*****
*
* Copyright (c) Network Time Foundation 2011-2015
*
* All Rights Reserved
*
* Redistribution and use in source and binary forms, with or without
* modification, are permitted provided that the following conditions
* are met:
* 1. Redistributions of source code must retain the above copyright
* notice, this list of conditions and the following disclaimer.
* 2. Redistributions in binary form must reproduce the above
* copyright notice, this list of conditions and the following
* disclaimer in the documentation and/or other materials provided
* with the distribution.
*
* THIS SOFTWARE IS PROVIDED BY THE AUTHORS ``AS IS'' AND ANY EXPRESS
* OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED
* WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
* ARE DISCLAIMED. IN NO EVENT SHALL THE AUTHORS OR CONTRIBUTORS BE
* LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR
* CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT
* OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR
* BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF
* LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT
* (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE
* USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH
* DAMAGE.
*****
```

35.10 Joint OpenSSL and SSLeay License

OpenSSL 1.1.1, 1.1.0, 1.0.2, and all prior releases are covered by the joint OpenSSL and SSLeay License as noted at <https://www.openssl.org/source/license.html>

The full text of the joint OpenSSL and SSLeay license is included below, and is also available at <https://www.openssl.org/source/license-openssl-ssleay.txt>

LICENSE ISSUES

=====

The OpenSSL toolkit stays under a double license, i.e. both the conditions of the OpenSSL License and the original SSLeay license apply to the toolkit. See below for the actual license texts.

(continues on next page)

(continued from previous page)

OpenSSL License

```

-----

/* =====
 * Copyright (c) 1998-2018 The OpenSSL Project. All rights reserved.
 *
 * Redistribution and use in source and binary forms, with or without
 * modification, are permitted provided that the following conditions
 * are met:
 *
 * 1. Redistributions of source code must retain the above copyright
 * notice, this list of conditions and the following disclaimer.
 *
 * 2. Redistributions in binary form must reproduce the above copyright
 * notice, this list of conditions and the following disclaimer in
 * the documentation and/or other materials provided with the
 * distribution.
 *
 * 3. All advertising materials mentioning features or use of this
 * software must display the following acknowledgment:
 * "This product includes software developed by the OpenSSL Project
 * for use in the OpenSSL Toolkit. (http://www.openssl.org/)"
 *
 * 4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to
 * endorse or promote products derived from this software without
 * prior written permission. For written permission, please contact
 * openssl-core@openssl.org.
 *
 * 5. Products derived from this software may not be called "OpenSSL"
 * nor may "OpenSSL" appear in their names without prior written
 * permission of the OpenSSL Project.
 *
 * 6. Redistributions of any form whatsoever must retain the following
 * acknowledgment:
 * "This product includes software developed by the OpenSSL Project
 * for use in the OpenSSL Toolkit (http://www.openssl.org/)"
 *
 * THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS'' AND ANY
 * EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR
 * PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR
 * ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL,
 * SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT
 * NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES;
 * LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
 * HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT,
 * STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE)
 * ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED
 * OF THE POSSIBILITY OF SUCH DAMAGE.
 * =====
 *

```

(continues on next page)

(continued from previous page)

```
* This product includes cryptographic software written by Eric Young
* (eay@cryptsoft.com).  This product includes software written by Tim
* Hudson (tjh@cryptsoft.com).
*
*/
```

Original SSLeay License

```
-----
/* Copyright (C) 1995-1998 Eric Young (eay@cryptsoft.com)
 * All rights reserved.
 *
 * This package is an SSL implementation written
 * by Eric Young (eay@cryptsoft.com).
 * The implementation was written so as to conform with Netscapes SSL.
 *
 * This library is free for commercial and non-commercial use as long as
 * the following conditions are aheared to.  The following conditions
 * apply to all code found in this distribution, be it the RC4, RSA,
 * lhash, DES, etc., code; not just the SSL code.  The SSL documentation
 * included with this distribution is covered by the same copyright terms
 * except that the holder is Tim Hudson (tjh@cryptsoft.com).
 *
 * Copyright remains Eric Young's, and as such any Copyright notices in
 * the code are not to be removed.
 * If this package is used in a product, Eric Young should be given attribution
 * as the author of the parts of the library used.
 * This can be in the form of a textual message at program startup or
 * in documentation (online or textual) provided with the package.
 *
 * Redistribution and use in source and binary forms, with or without
 * modification, are permitted provided that the following conditions
 * are met:
 * 1. Redistributions of source code must retain the copyright
 *    notice, this list of conditions and the following disclaimer.
 * 2. Redistributions in binary form must reproduce the above copyright
 *    notice, this list of conditions and the following disclaimer in the
 *    documentation and/or other materials provided with the distribution.
 * 3. All advertising materials mentioning features or use of this software
 *    must display the following acknowledgement:
 *    "This product includes cryptographic software written by
 *     Eric Young (eay@cryptsoft.com)"
 *    The word 'cryptographic' can be left out if the rouines from the library
 *    being used are not cryptographic related :-).
 * 4. If you include any Windows specific code (or a derivative thereof) from
 *    the apps directory (application code) you must include an acknowledgement:
 *    "This product includes software written by Tim Hudson (tjh@cryptsoft.com)"
 *
 * THIS SOFTWARE IS PROVIDED BY ERIC YOUNG ``AS IS'' AND
 * ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE
 * IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE
 * ARE DISCLAIMED.  IN NO EVENT SHALL THE AUTHOR OR CONTRIBUTORS BE LIABLE
```

(continues on next page)

(continued from previous page)

```

* FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL
* DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS
* OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION)
* HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT
* LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY
* OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF
* SUCH DAMAGE.
*
* The licence and distribution terms for any publically available version or
* derivative of this code cannot be changed. i.e. this code cannot simply be
* copied and put under another distribution licence
* [including the GNU Public Licence.]
*/

```

Table 1: Table of Open Source Licenses Used

| Software | License |
|--------------------------|-------------------------------------|
| Ubuntu | Intellectual property rights policy |
| Linux kernel and modules | GPLv2 |
| cligen | Apache 2.0 |
| clixon | Apache 2.0 |
| curl | MIT |
| davici | LGPLv2.1 |
| frr | GPLv2 |
| kea | MPL 2.0 |
| libgit2 | GPLv2+linking |
| libnl | LGPLv2.1 |
| net-snmp | Net SNMP |
| ntp | NTP License |
| openssl | OpenSSL/SSLeay |
| strongswan | GPLv2 |
| unbound | BSD 3-clause |
| VPP | Apache 2.0 |

GPL-licensed code modified for use in TNSR is available in source form:

Table 2: Table of Modified Open Source Repositories

| Package | Repository Location |
|------------------------------|---|
| frr | http://github.com/netgate/frr |
| strongswan | http://github.com/netgate/strongswan |
| Hyper-V Linux kernel modules | https://github.com/netgate/uio_hv_generic |

GLOSSARY OF TERMS

Brief explanations of terms used throughout the TNSR documentation. In-depth descriptions are typically provided upon first usage.

ACL

An acronym for Access Control List.

ARP

An acronym for Address Resolution Protocol.

ASN

An acronym for Autonomous System Number.

BFD

Bidirectional Forwarding Detection (BFD) is used to detect faults between two routers across a link, even if the physical link does not support failure detection.

BGP

An acronym for Border Gateway Protocol.

CA

An acronym for Certificate Authority.

CPE

An acronym for Customer Premise Equipment.

DMZ

An acronym for Demilitarized Zone.

DNS

An acronym for Domain Name System.

DPDK

An acronym for Data Plane Developer Kit.

ERSPAN

An acronym for Encapsulated Remote Switched Port Analyzer.

FRR

An acronym for Free Range Routing.

GRE

An acronym for Generic Routing Encapsulation.

HTTP

An acronym for Hypertext Transfer Protocol.

ICMP

An acronym for Internet Control Message Protocol.

IOVA

An acronym for IO Virtual Addresses.

IP

An acronym for Internet Protocol.

ISP

An acronym for Internet Service Provider.

L2

Layer 2 (L2) is the second layer, or data link layer, of the seven-layer OSI model of computer networking.

L3

Layer 3 (L3) is the third layer, or network layer, of the seven-layer OSI model of computer networking.

LAN

An acronym for Local Area Network.

MIB

An acronym for Management Information Base.

MED

An acronym for Multi Exit Discriminator.

MTU

An acronym for Maximum Transmission Unit.

NACM

An acronym for *NETCONF* Access Control Model.

NAT

An acronym for Network Address Translation.

NDP

An acronym for Neighbor Discover Protocol.

NETCONF

Short for Network Configuration Protocol.

NMS

An acronym for Network Monitoring System.

OSPF

An acronym for Open Shortest Path First.

PA

An acronym for Physical Addresses.

PKI

An acronym for Public Key Infrastructure.

QAT

An acronym for Intel®'s QuickAssist Technology.

RDMA

An acronym for Remote Direct Memory Access.

SNMP

An acronym for Simple Network Management Protocol.

SPAN

An acronym for Switch Port Analyzer.

SSH

An acronym for Secure Shell.

TCP

An acronym for Transmission Control Protocol.

TEB

An acronym for Transparent Ethernet Bridging.

TSO

An acronym for TCP Segmentation Offload.

UDP

An acronym for User Datagram Protocol.

UIO

An acronym for Userspace Input/Output.

VA

An acronym for Virtual Address.

VLAN

Short for Virtual *LAN*.

VM

An acronym for Virtual Machine.

VPN

An acronym for Virtual Private Network.

VR

An acronym for Virtual Router.

VRF

Virtual Routing and Forwarding (VRF) is a feature which uses isolated L3 domains with alternate routing tables for specific interfaces and dynamic routing purposes.

VRRP

Virtual Router Redundancy Protocol (VRRP) is a protocol which allows routers to coordinate control of IP addresses between multiple nodes acting as a single “virtual” router cluster.

VXLAN

Short for Virtual Extensible *LAN*.

WAN

An acronym for Wide Area Network.

YANG

Yet Another Next Generation (YANG) is a data modeling language used to model configuration and state data manipulated by *NETCONF*.

Note: Though technically abbreviations read letter by letter are initialisms, not acronyms, this document refers to both as acronyms to be more accessible to readers.

INDEX

A

ACL, 739
ARP, 739
ASN, 739

B

BFD, 739
BGP, 739

C

CA, 739
CPE, 739

D

DMZ, 739
DNS, 739
DPDK, 739

E

ERSPAN, 739

F

FRR, 739

G

GRE, 739

H

HTTP, 739

I

ICMP, 739
IOVA, 740
IP, 740
ISP, 740

L

L2, 740
L3, 740
LAN, 740

M

MED, 740
MIB, 740
MTU, 740

N

NACM, 740
NAT, 740
NDP, 740
NETCONF, 740
NMS, 740

O

OSPF, 740

P

PA, 740
PKI, 740

Q

QAT, 740

R

RDMA, 740

S

SNMP, 740
SPAN, 740
SSH, 741

T

TCP, 741
TEB, 741
TSO, 741

U

UDP, 741
UIO, 741

V

VA, 741

VLAN, [741](#)

VM, [741](#)

VPN, [741](#)

VR, [741](#)

VRF, [741](#)

VRRP, [741](#)

VXLAN, [741](#)

W

WAN, [741](#)

Y

YANG, [741](#)